

# Propagating Wave (1B)

---

Copyright (c) 2011 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Please send corrections (or suggestions) to [youngwlim@hotmail.com](mailto:youngwlim@hotmail.com).

This document was produced by using OpenOffice and Octave.

# Maxwell Equations

$$\nabla \times \mathbf{E} = -\frac{\partial \mu \mathbf{H}}{\partial t} \qquad \nabla \cdot (\epsilon \mathbf{E}) = 0$$

$$\nabla \times \mathbf{H} = +\frac{\partial \epsilon \mathbf{E}}{\partial t} \qquad \nabla \cdot (\mu \mathbf{H}) = 0$$

$$\nabla = \frac{\partial}{\partial x} \mathbf{i}_x + \frac{\partial}{\partial y} \mathbf{i}_y + \frac{\partial}{\partial z} \mathbf{i}_z$$


$$\nabla^2 = \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2}$$

$$\nabla^2 \mathbf{E} = \frac{1}{c^2} \frac{\partial^2 \mathbf{E}}{\partial t^2} \xrightarrow{s(\mathbf{x}, t)} \frac{\partial^2 s}{\partial x^2} + \frac{\partial^2 s}{\partial y^2} + \frac{\partial^2 s}{\partial z^2} = \frac{1}{c^2} \frac{\partial^2 s}{\partial t^2}$$

# Wave Equation in Cartesian Coordinates

$$\begin{aligned} s(x, y, z, t) &= A e^{j(\omega t - k_x x - k_y y - k_z z)} \\ &= f(x)g(x)h(x)p(t) \quad \text{separable} \end{aligned}$$

$$k_x^2 s(x, y, z, t) + k_y^2 s(x, y, z, t) + k_z^2 s(x, y, z, t) = \frac{\omega^2 s(x, y, z, t)}{c^2}$$


$$k_x^2 + k_y^2 + k_z^2 = \frac{\omega^2}{c^2}$$

# Monochrome Plane Wave (1)

$$s(x, y, z, t) = A e^{j(\omega t - k_x x - k_y y - k_z z)}$$

Fixed point  $(x, y, z) = (0, 0, 0)$

$$s(0, 0, 0, t) = A e^{j\omega t} = A \cos \omega t + A \sin \omega t$$

➔ Monochrome Wave

$$s(x, y, z, t) = A e^{j(\omega t - k_x x - k_y y - k_z z)}$$

Fixed time  $t = t_0$

$$s(x, y, z, t_0) = A e^{j(\omega t_0 - [k_x x + k_y y + k_z z])}$$

points  $(x, y, z)$  such that  $k_x x + k_y y + k_z z = C$  ➔ Plane Wave

$$s(x, y, z, t_0) = A e^{j(\omega t_0 - k_x x - k_y y - k_z z)} \text{ has the same value } A e^{j(\omega t_0 - C)}$$

# Monochrome Plane Wave (2)

$$s(x, y, z, t) = Ae^{j(\omega t - k_x x - k_y y - k_z z)} \quad \rightarrow \quad s(\mathbf{x}, t) = Ae^{j(\omega t - \mathbf{k} \cdot \mathbf{x})}$$

planes of constant phase  $\rightarrow \mathbf{k} \cdot \mathbf{x} = C$

If truly a propagating wave


planes of constant phase move by  $\delta \mathbf{x}$

as time advances by  $\delta t$

$$\rightarrow s(\mathbf{x} + \delta \mathbf{x}, t + \delta t) = s(\mathbf{x}, t)$$

$$\rightarrow \omega(t + \delta t) - \mathbf{k} \cdot (\mathbf{x} + \delta \mathbf{x}) = \omega t - \mathbf{k} \cdot \mathbf{x}$$

$$\omega \delta t - \mathbf{k} \cdot \delta \mathbf{x} = 0$$

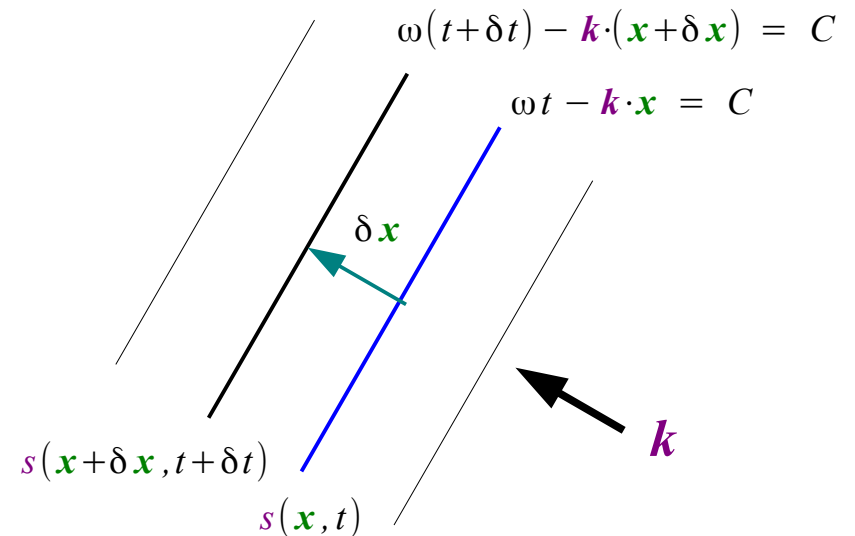

# Monochrome Plane Wave (3)

constant phase



$$\mathbf{k} \cdot \mathbf{x} = C$$

planes of constant phase



perpendicular to  $\mathbf{k}$


Plane Equation

$$\mathbf{n} \cdot (\mathbf{r} - \mathbf{r}_0) = 0$$

Normal Vector

Position vector of a point in the plane

$$\mathbf{k} \cdot \mathbf{x} - C = 0$$

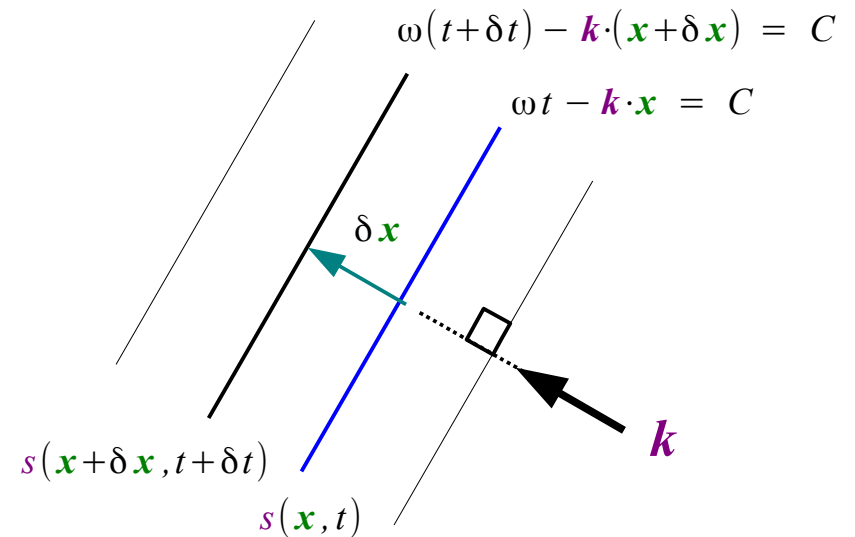

# Monochrome Plane Wave (4)

constant phase



$$\mathbf{k} \cdot \mathbf{x} = C$$

planes of constant phase



perpendicular to  $\mathbf{k}$

If truly a propagating wave

planes of constant phase move by  $\delta \mathbf{x}$   
as time advances by  $\delta t$

$$s(\mathbf{x} + \delta \mathbf{x}, t + \delta t) = s(\mathbf{x}, t)$$



$$\omega \delta t - \mathbf{k} \cdot \delta \mathbf{x} = 0$$

$\delta \mathbf{x}$  in the same direction  $\mathbf{k}$  : minimum  $|\delta \mathbf{x}|$

The direction of propagation  $\xi_0 = \frac{\mathbf{k}}{|\mathbf{k}|}$

in the same direction  $\mathbf{k} \cdot \delta \mathbf{x} = |\mathbf{k}| |\delta \mathbf{x}|$



# Monochrome Plane Wave (5)

constant phase



$$\mathbf{k} \cdot \mathbf{x} = C$$

planes of constant phase



perpendicular to  $\mathbf{k}$

$$s(\mathbf{x} + \delta \mathbf{x}, t + \delta t) = s(\mathbf{x}, t)$$



$$\omega \delta t - \mathbf{k} \cdot \delta \mathbf{x} = 0$$

$\delta \mathbf{x}$  in the same direction  $\mathbf{k}$  : minimum  $|\delta \mathbf{x}|$

The direction of propagation  $\xi_0 = \frac{\mathbf{k}}{|\mathbf{k}|}$

in the same direction  $\mathbf{k} \cdot \delta \mathbf{x} = |\mathbf{k}| |\delta \mathbf{x}|$

$$\omega \delta t = |\mathbf{k}| |\delta \mathbf{x}|$$

$$\frac{\omega}{|\mathbf{k}|} = \frac{|\delta \mathbf{x}|}{\delta t}$$

$$k_x^2 + k_y^2 + k_z^2 = \frac{\omega^2}{c^2}$$

$$k^2 = \frac{\omega^2}{c^2} \quad c = \frac{\omega}{|\mathbf{k}|} \quad c = \frac{|\delta \mathbf{x}|}{\delta t}$$

The speed of propagation of the plane wave

# Wave Number, Angular Frequency

wave number

$$k = \frac{2\pi}{\lambda}$$

How many  $\lambda$  in  $2\pi$  (rad / m)

angular frequency

$$\omega = \frac{2\pi}{T}$$

How many  $T$  in  $2\pi$  (rad / sec)

3-dimensional space

$$\omega \delta t - \mathbf{k} \cdot \delta \mathbf{x} = 0$$

period

wavelength

$$\delta t \equiv T = \frac{2\pi}{\omega}$$

$$\delta x \equiv \lambda = \frac{2\pi}{k}$$

wave number vector

spatial frequency variable

Its magnitude represents the number of cycles (in rad) per meter of length that the monochromatic plane wave exhibits *in the direction of propagation*.

# Wave Number, Angular Frequency

wave number

$$k = \frac{2\pi}{\lambda}$$

How many  $\lambda$  in  $2\pi$  (rad / m)

angular frequency

$$\omega = \frac{2\pi}{T}$$

How many  $T$  in  $2\pi$  (rad / sec)

3-dimensional space

$$\omega \delta t - \mathbf{k} \cdot \delta \mathbf{x} = 0$$

period

wavelength

$$\delta t \equiv T = \frac{2\pi}{\omega}$$

$$\delta x \equiv \lambda = \frac{2\pi}{k}$$

wave number vector

spatial frequency variable

Its magnitude represents the number of cycles (in rad) per meter of length that the monochromatic plane wave exhibits *in the direction of propagation*.

# Wavelength, Frequency

$$s(\mathbf{x}, t) = A e^{j(\omega t - \mathbf{k} \cdot \mathbf{x})} \quad (\omega t - \mathbf{k} \cdot \mathbf{x}) = \omega \left( t - \left( \frac{\mathbf{k}}{\omega} \right) \cdot \mathbf{x} \right)$$

$$s(\mathbf{x}, t) = A e^{j(\omega(t - \boldsymbol{\alpha} \cdot \mathbf{x}))} \quad [\omega(t - \boldsymbol{\alpha} \cdot \mathbf{x})]$$

$$\boldsymbol{\alpha} = \frac{\mathbf{k}}{\omega} \quad \text{Slowness Vector} \quad \frac{\omega}{\mathbf{k}} \quad \text{Speed Vector}$$

$$s(u) = A e^{j(\omega u)}$$

$$s(t - \boldsymbol{\alpha} \cdot \mathbf{x}) = A e^{j(\omega(t - \boldsymbol{\alpha} \cdot \mathbf{x}))} = s(\mathbf{x}, t)$$

# Maxwell Equations

---

$$A(t, t) = A_0 \cos(kx - \omega t)$$

# Maxwell Equations

---

$$A(t, t) = A_0 \cos(kx - \omega t)$$

# Maxwell Equations


---

$$A(t, t) = A_0 \cos(kx - \omega t)$$

# Wavelength, Frequency

$$A_0 \cos(kx - \omega t_0)$$

At the snapshot of the time  $t_0$

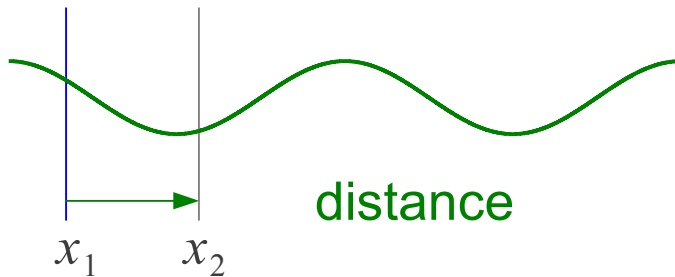

wavelength


$$\lambda = \frac{2\pi}{k}$$

wave number

$$k = \frac{2\pi}{\lambda}$$

$$A_0 \cos(kx_0 - \omega t)$$

At the fixed site of the distance  $x_0$

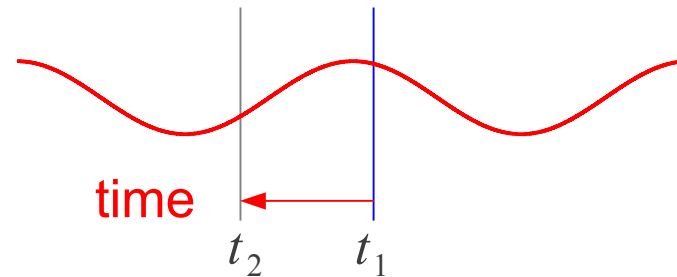

frequency

$$f = \frac{\omega}{2\pi}$$

period

$$T = \frac{2\pi}{\omega}$$

angular frequency

$$\omega = 2\pi f$$

angular frequency


$$\omega = \frac{2\pi}{T}$$



# Wave Number, Angular Frequency

$$A_0 \cos(kx - \omega t_0)$$

At the snapshot of the time  $t_0$

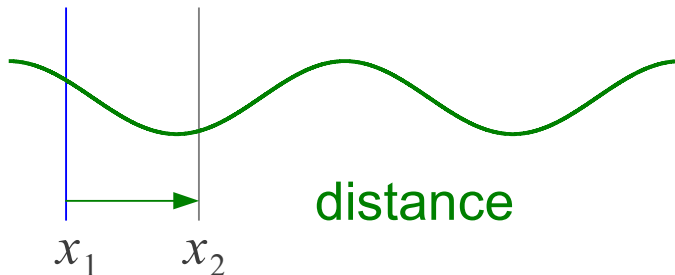


wave number

$$k = \frac{2\pi}{\lambda}$$

*radians per unit distance*

$$A_0 \cos(kx_0 - \omega t)$$

At the fixed site of the distance  $x_0$

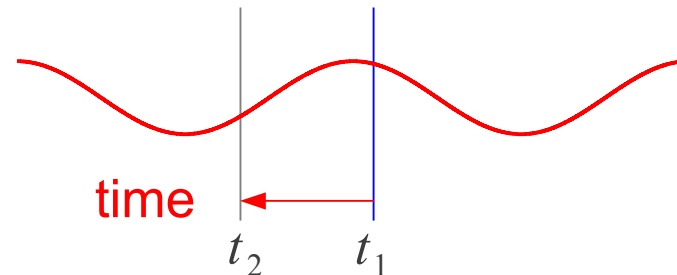

angular frequency

$$\omega = \frac{2\pi}{T}$$

*radians per unit time*

## References

- [1] <http://en.wikipedia.org/>
- [2] J.H. McClellan, et al., Signal Processing First, Pearson Prentice Hall, 2003
- [3] <http://www.mathpages.com/>, Phase, Group, and Signal Velocity
- [4] R. Barlow, [www.hep.man.ac.uk/u/roger/PHYS10302/lecture15.pdf](http://www.hep.man.ac.uk/u/roger/PHYS10302/lecture15.pdf)
- [5] P. Hofmann, [www.philiphofmann.net/book\\_material/notes/groupphasevelocity.pdf](http://www.philiphofmann.net/book_material/notes/groupphasevelocity.pdf)
- [6] D.H. Johnson, et. al., Array Signal Processing: concepts and techniques