

# Anti-aliasing Prefilter (6B)

---

- 
-

Copyright (c) 2012 Young W. Lim.


Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Please send corrections (or suggestions) to [youngwlim@hotmail.com](mailto:youngwlim@hotmail.com).

This document was produced by using OpenOffice and Octave.

# Sampler


## Ideal Sampling

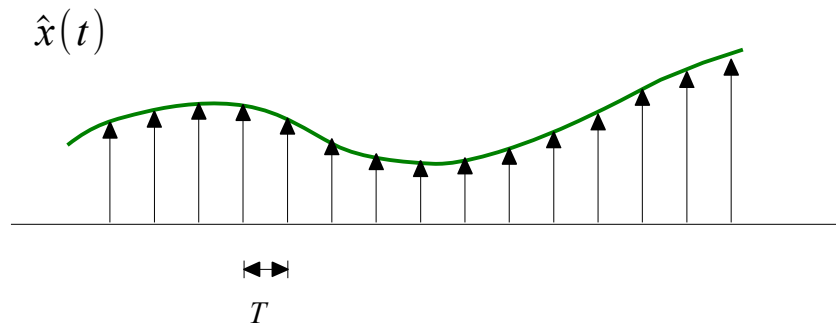

$$\hat{x}(t) = \sum_{n=-\infty}^{+\infty} x(nT) \delta(t-nT)$$



$$\hat{X}(f) = \int_{-\infty}^{+\infty} \hat{x}(t) e^{-j2\pi ft} dt$$

## Practical Sampling

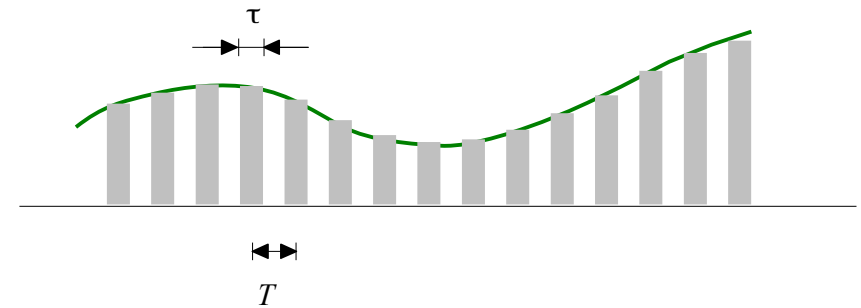

$$\hat{x}(t) \approx \sum_{n=-\infty}^{+\infty} x(nT) p(t-nT)$$

# Zero Order Hold (ZOH)

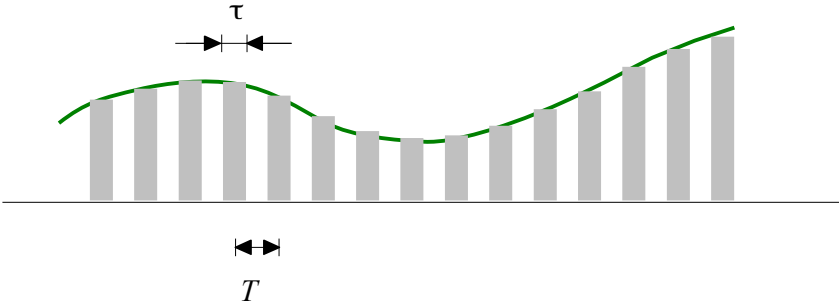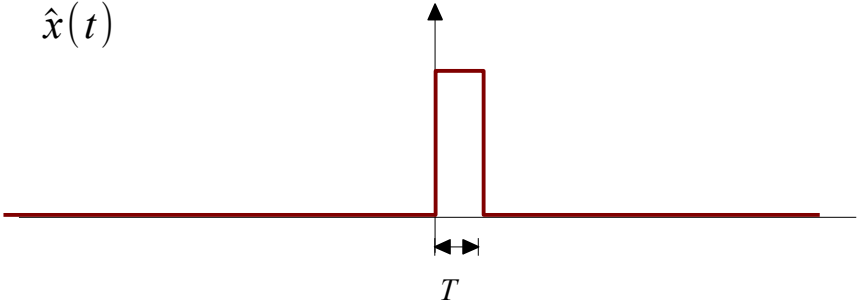

# Square Wave CTFT

## Continuous Time Fourier Series

$$C_k = \frac{1}{T} \int_0^T x(t) e^{-jk\omega_0 t} dt \quad \longleftrightarrow \quad x(t) = \sum_{n=0}^{\infty} C_k e^{+jk\omega_0 t}$$




$$C_k = \frac{1}{T_0} \int_{-T_0/2}^{+T_0/2} x_{T_0}(t) e^{-jk\omega_0 t} dt$$

$$C_k T_0 = \int_{-T_0/2}^{+T_0/2} x_{T_0}(t) e^{-jk\omega_0 t} dt$$

$$= \int_{-T_0/2}^{+T_0/2} e^{-jk\omega_0 t} dt = \left[ \frac{-1}{jk\omega_0} e^{-jk\omega_0 t} \right]_{-T_0/2}^{+T_0/2}$$

$$= \frac{e^{-jk\omega_0 T_0/2} - e^{+jk\omega_0 T_0/2}}{jk\omega_0} = \frac{\sin(k\omega_0 T_0/2)}{k\omega_0/2}$$

$$\omega_0 = \frac{2\pi}{T_0} \quad \text{Fundamental Frequency}$$

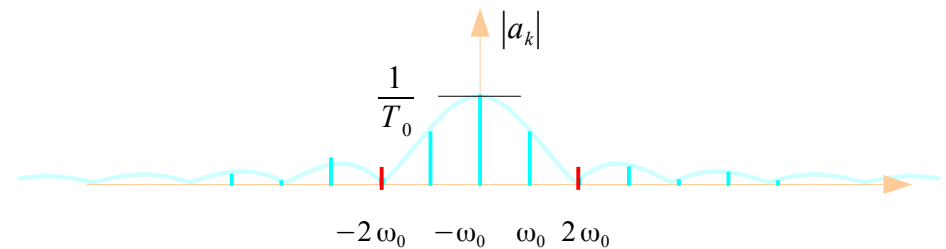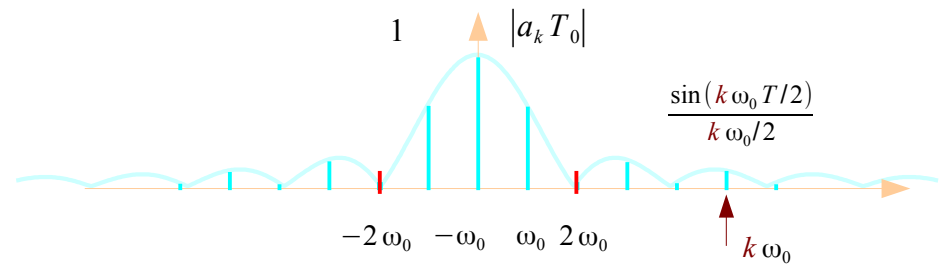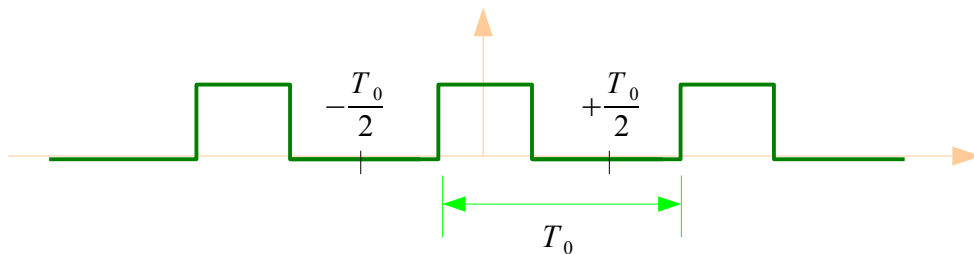


# CTFT and CTFS

## Continuous Time Fourier Transform

## Aperiodic Continuous Time Signal


$$X(j\omega) = \int_{-\infty}^{+\infty} x(t) e^{-j\omega t} dt \quad \longleftrightarrow \quad x(t) = \frac{1}{2\pi} \int_{-\infty}^{+\infty} X(j\omega) e^{+j\omega t} d\omega$$

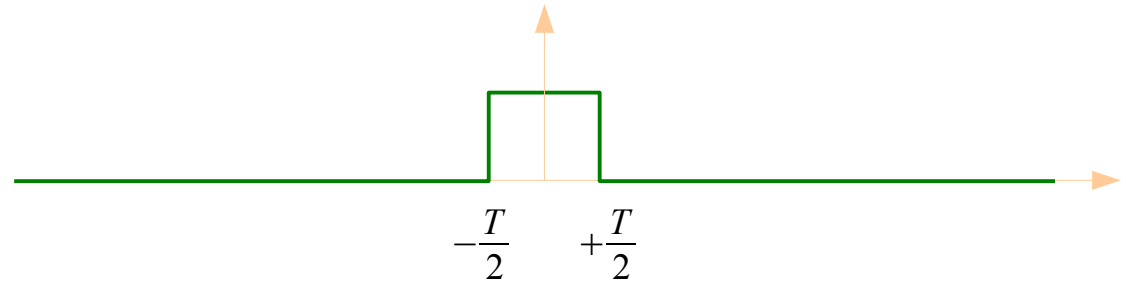

## Continuous Time Fourier Series


## Periodic Continuous Time Signal

$$C_k = \frac{1}{T} \int_0^T x(t) e^{-jk\omega_0 t} dt \quad \longleftrightarrow \quad x(t) = \sum_{n=-\infty}^{\infty} C_k e^{+jk\omega_0 t}$$

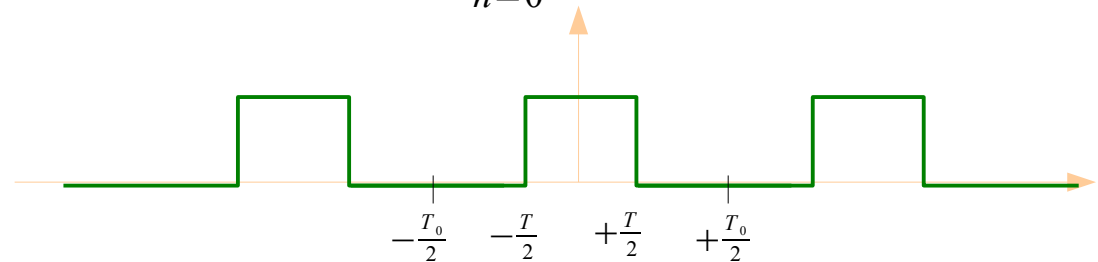


# CTFT ← CTFS

## Aperiodic Continuous Time Signal Continuous Time Fourier Transform

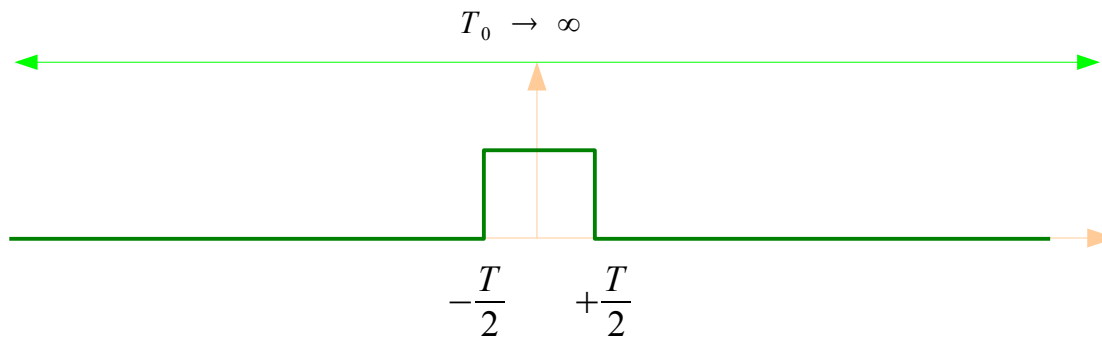

## Periodic Continuous Time Signal Continuous Time Fourier Series

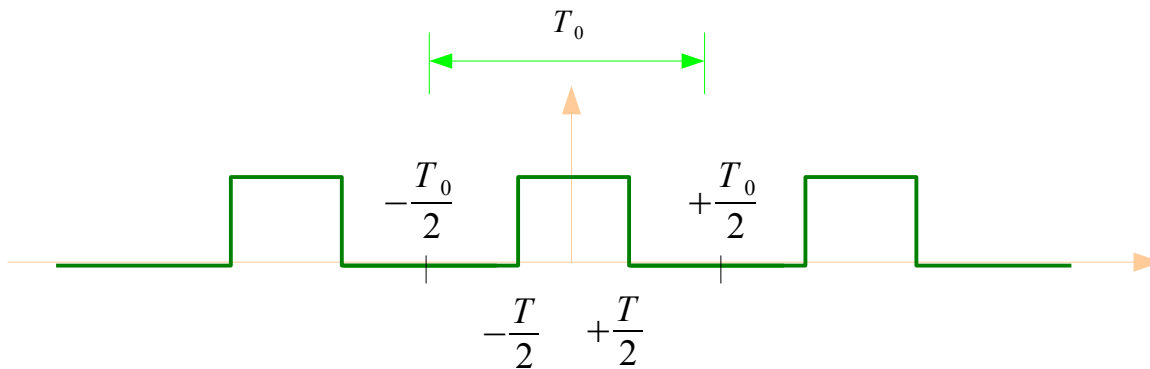







$$x(t)$$

$$\text{As } T_0 \rightarrow \infty, \\ x_{T_0}(t) \rightarrow x(t)$$

$$\omega_0 = \frac{2\pi}{T_0} \rightarrow 0$$

$$x_{T_0}(t) = \sum_{n=-\infty}^{+\infty} x(t - nT_0)$$


# CTFT and CTFS as $T_0 \rightarrow \infty$ ,

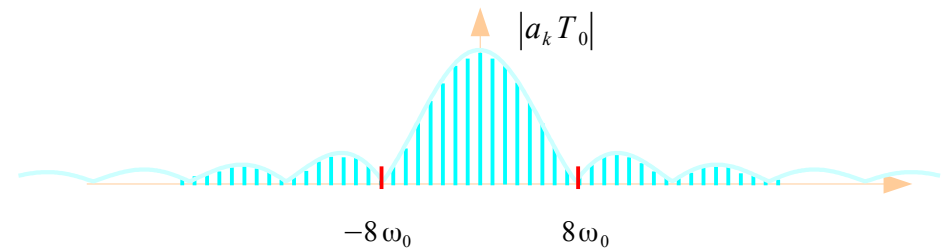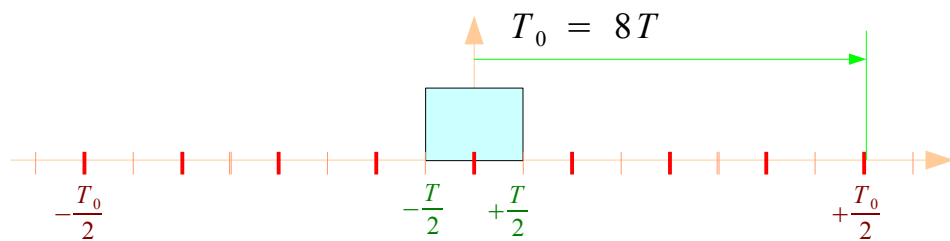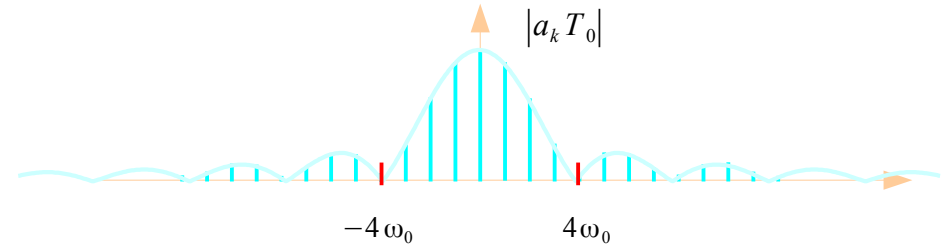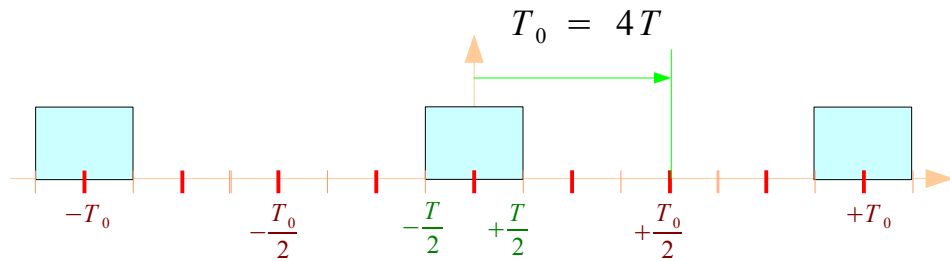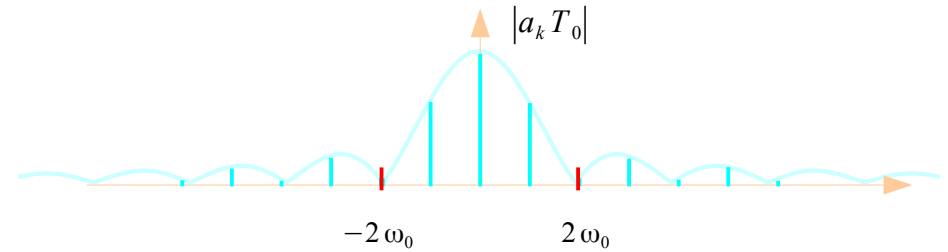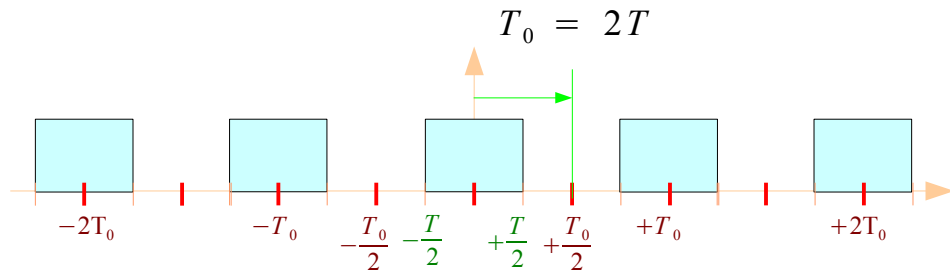




# Sampling (1)


## Ideal Sampling

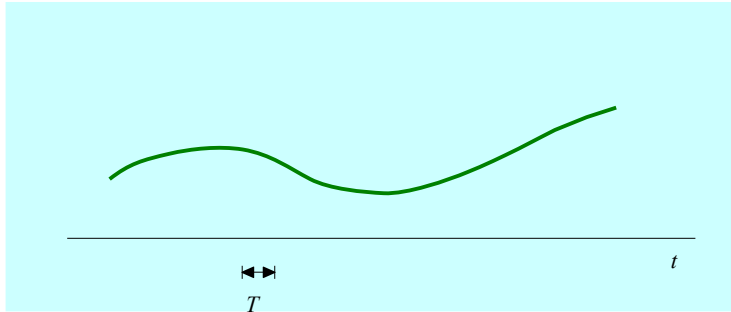


X

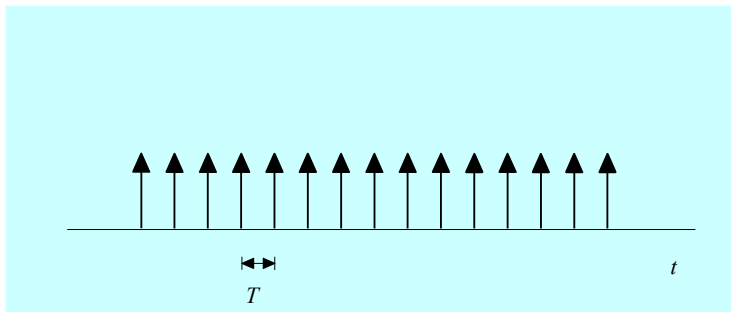


||

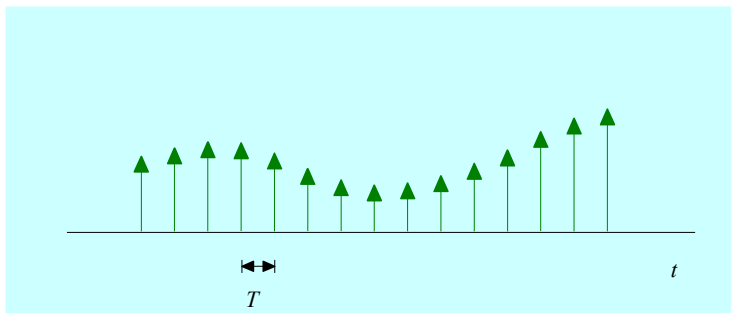


## Practical Sampling

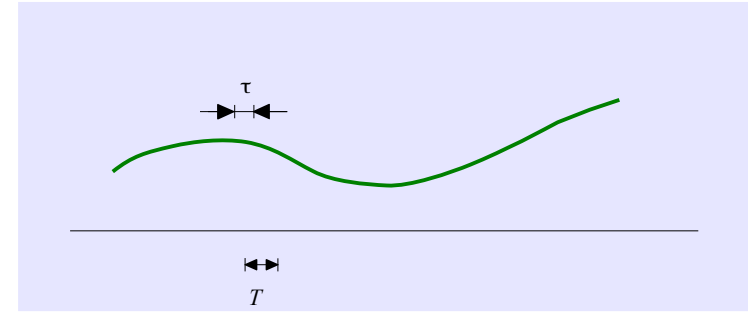

X

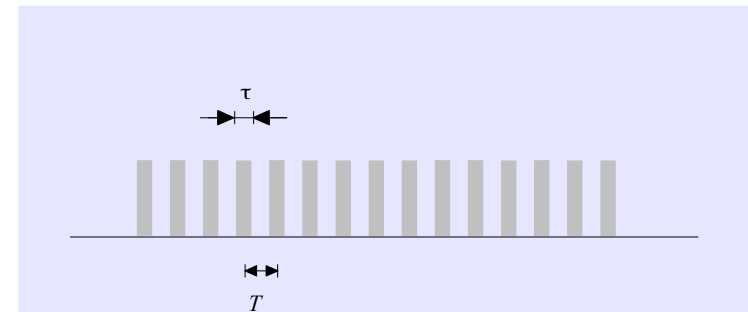


||

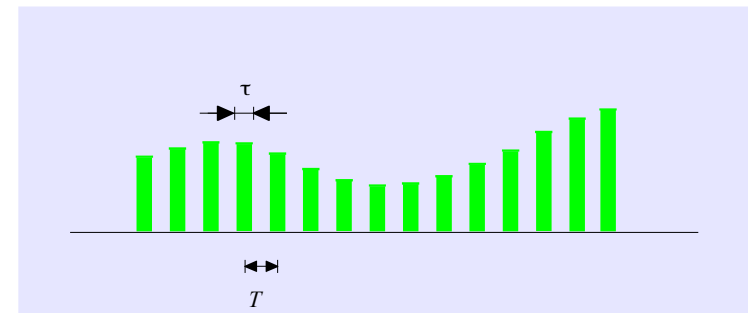


# Sampling (2)


## Ideal Sampling

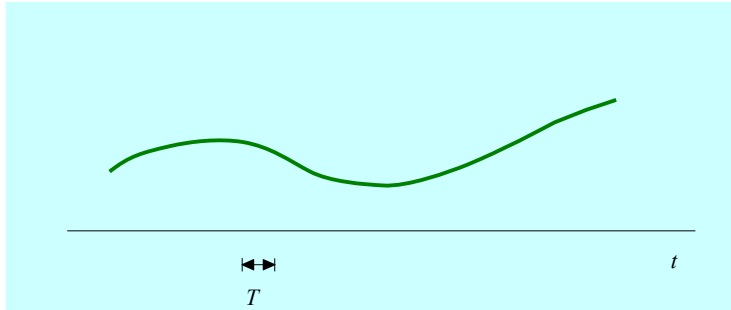


X

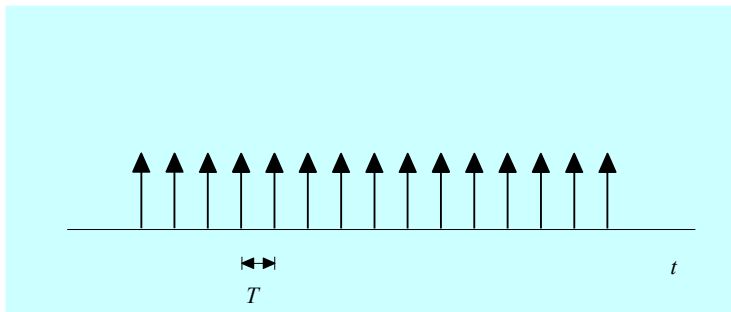


||

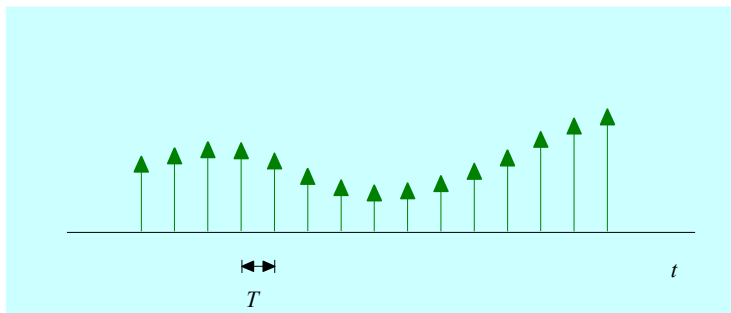


## Frequency Domain

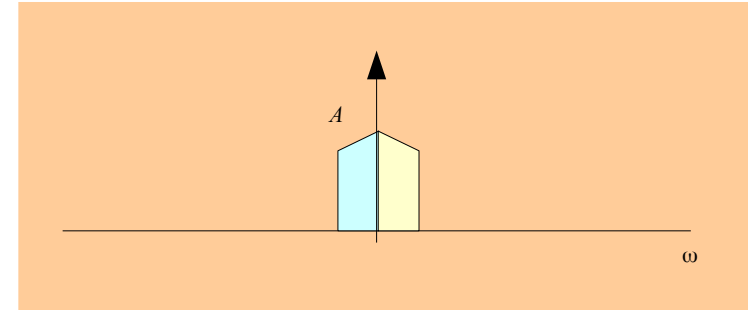

\*

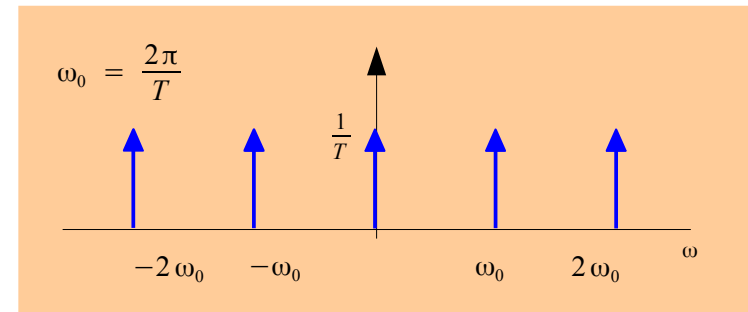


||

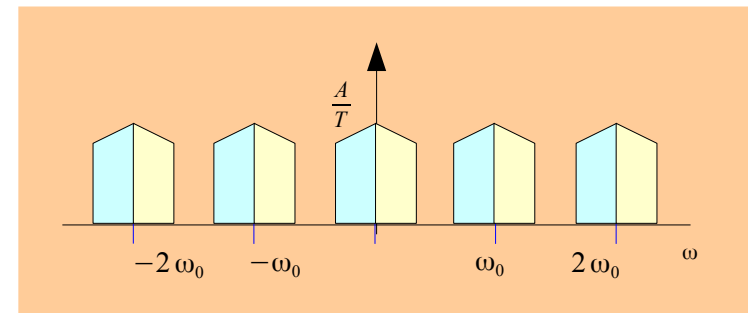


# Sampling (3)


## Practical Sampling

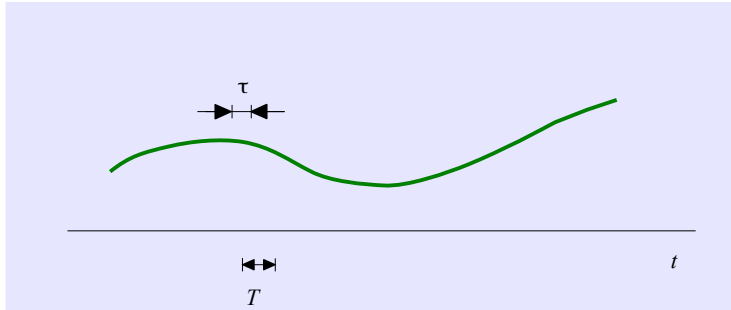


X

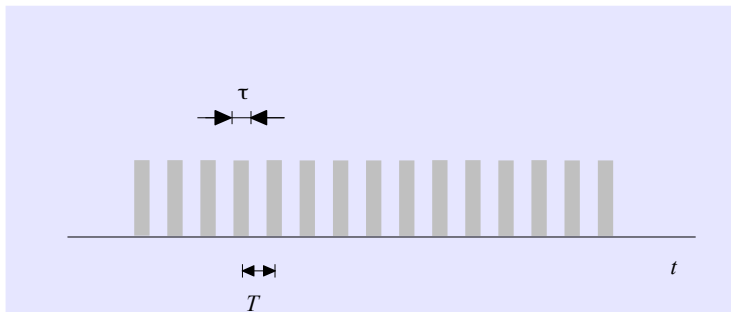


||

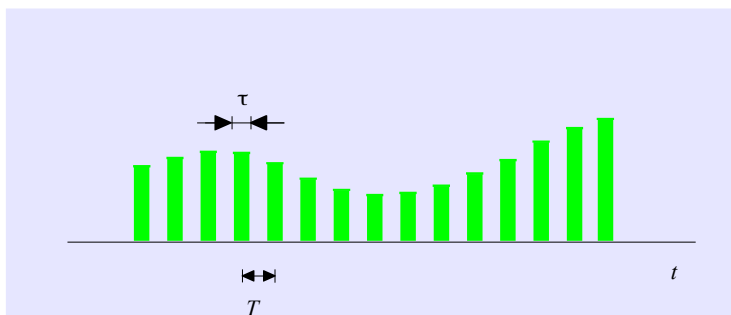


## Frequency Domain

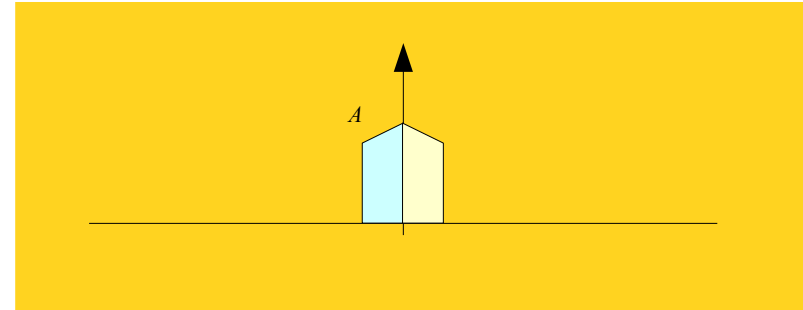


\*

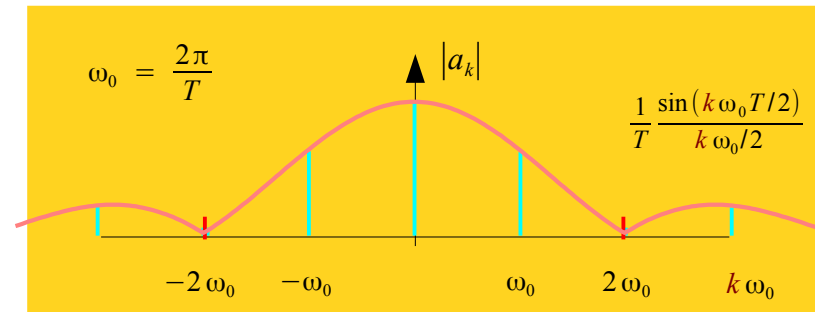

||

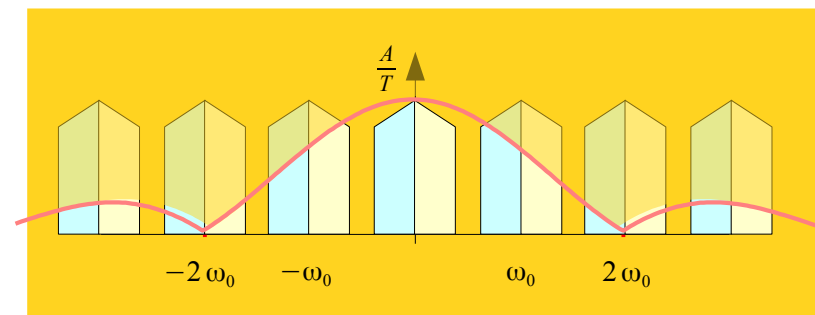

# Discrete Time Fourier Transform

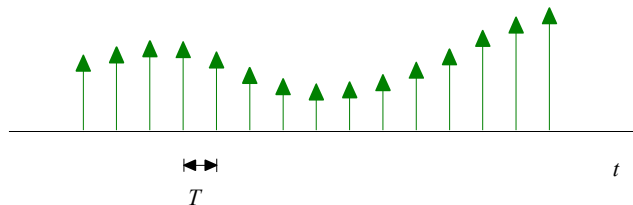


$$\hat{x}(t) = \sum_{n=-\infty}^{+\infty} x(nT) \delta(t-nT)$$

$$x(nT)$$

Normalized Frequency

$$fT = \frac{f}{1/T} = \frac{f}{f_s} = \hat{\omega}$$

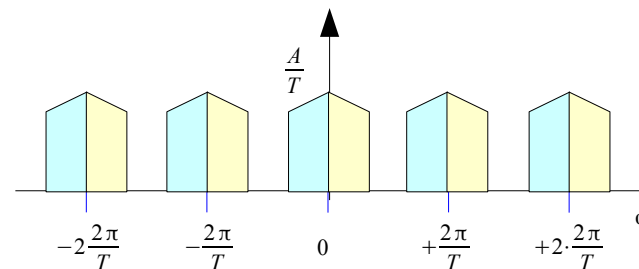

CTFT



$$\begin{aligned} \hat{X}(f) &= \int_{-\infty}^{+\infty} \hat{x}(t) e^{-j2\pi f t} dt \\ &= \int_{-\infty}^{+\infty} \sum_{n=-\infty}^{+\infty} x(nT) \delta(t-nT) e^{-j2\pi f t} dt \\ &= \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi f T n} \end{aligned}$$

DTFT





$$\hat{X}(f) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi f T n}$$

$$\hat{X}(e^{j\hat{\omega}}) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi \hat{\omega} n}$$

# Periodicity in Frequency (1)

$$f_s = \frac{1}{T} \quad 2\pi f_s = \frac{2\pi}{T} = \omega_0$$

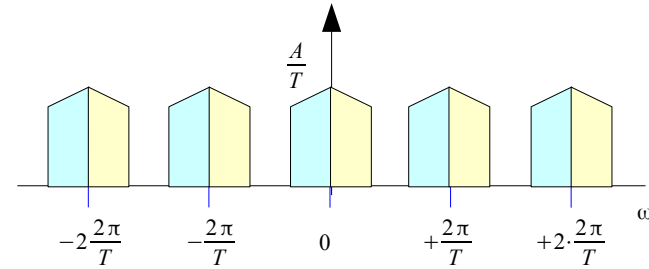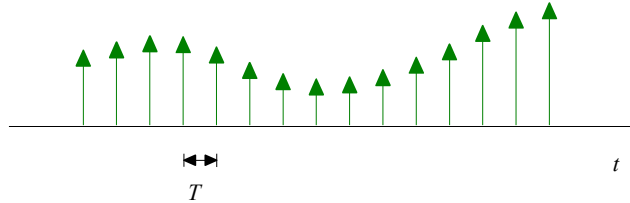

$$x(nT)$$

DTFT



$$\hat{X}(f) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi fTn}$$

$$e^{-j2\pi(f+f_s)Tn} = e^{-j2\pi(f)Tn} \quad \leftarrow f_s T = 1$$

$$\hat{X}(f) = \hat{X}(f + f_s)$$


Period = Sampling Frequency  $f_s$

Normalized Frequency

$$fT = \frac{f}{1/T} = \frac{f}{f_s} = \hat{\omega}$$

$$\hat{X}(e^{j\hat{\omega}}) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi\hat{\omega}n}$$

# Periodicity in Frequency (2)

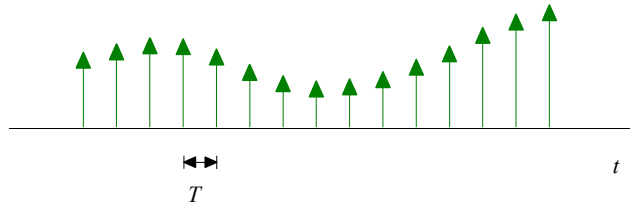


$$f_s = \frac{1}{T} \quad 2\pi f_s = \frac{2\pi}{T} = \omega_0$$

$$\hat{X}(f) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi fTn}$$



Normalized Frequency

$$fT = \frac{f}{1/T} = \frac{f}{f_s} = \hat{\omega}$$

$$\hat{X}(e^{j\hat{\omega}}) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi\hat{\omega}n}$$

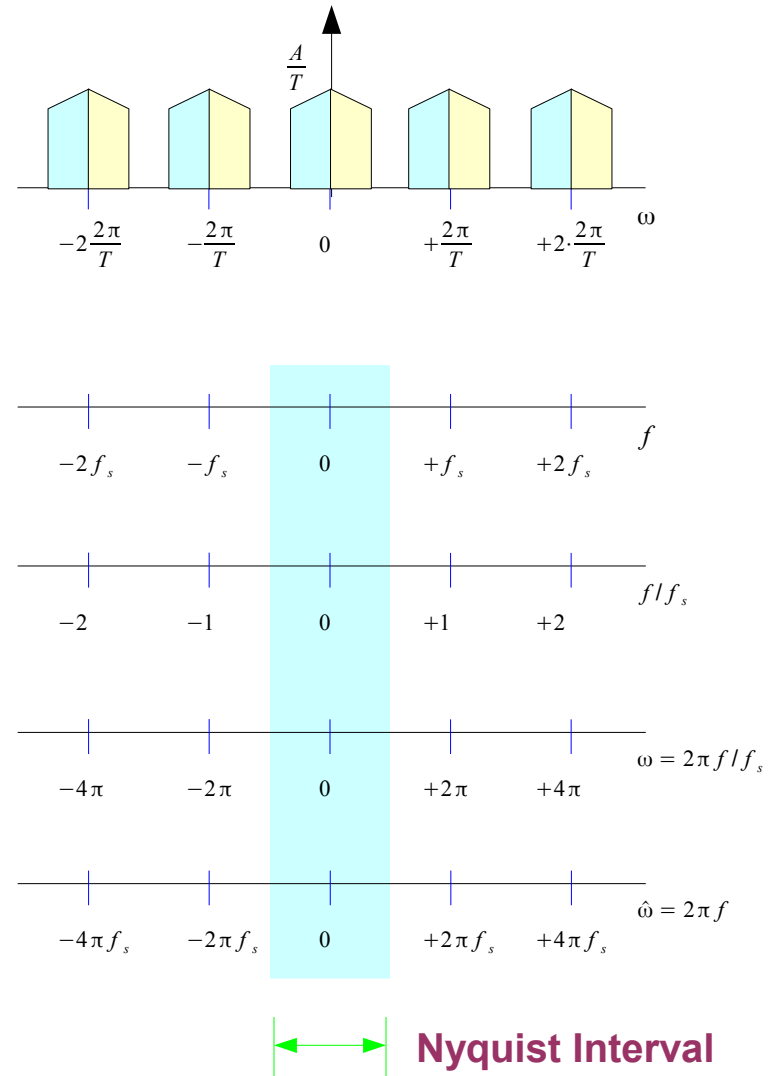

# Fourier Series

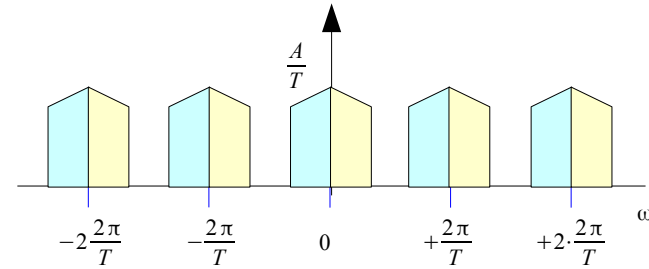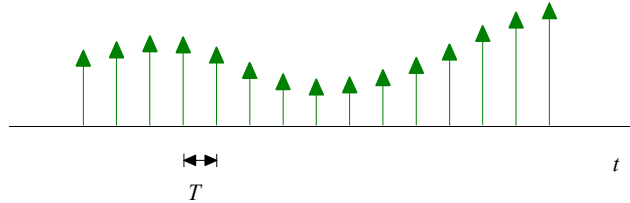

$$\hat{x}(t) = \sum_{n=-\infty}^{+\infty} x(nT) \delta(t-nT)$$

**DTFT**



$$\hat{X}(f) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi fTn}$$

$$x(nT) = \frac{1}{f_s} \int_{+f_s/2}^{-f_s/2} \hat{X}(f) e^{+j2\pi fTn} df$$

**CTFT**



$$\hat{X}(f) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi fTn}$$

$$= \int_{-\pi}^{+\pi} \hat{X}(\omega) e^{+j\omega n} \frac{d\omega}{2\pi}$$


$$\omega = 2\pi f / f_s \quad \frac{df}{f_s} = \frac{d\omega}{2\pi}$$

$\hat{X}(f)$  **Continuous Periodic Function**


$x(nT)$  **Fourier Series Coefficients**

# Numerical Approximation

$$X(f) = \lim_{T \rightarrow 0} T \hat{X}(f)$$

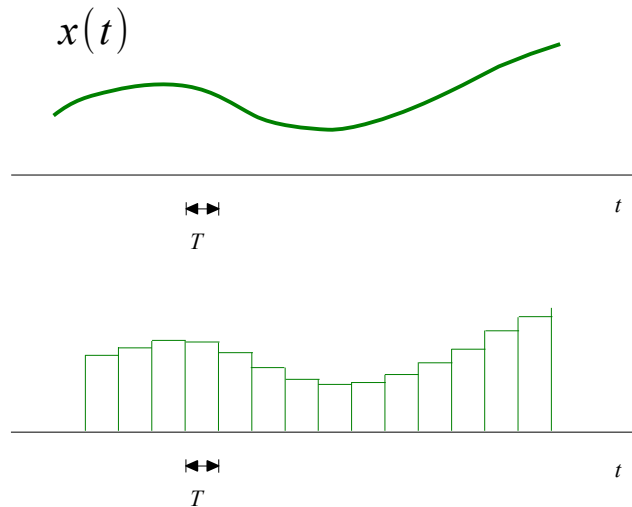



**CTFT**

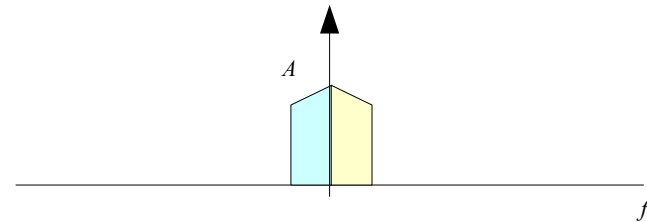

$$X(f) = \int_{-\infty}^{+\infty} x(t) e^{+j2\pi f t} dt$$

$$\approx \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi f T n} \cdot T$$

$$X(f) \approx T \hat{X}(f)$$

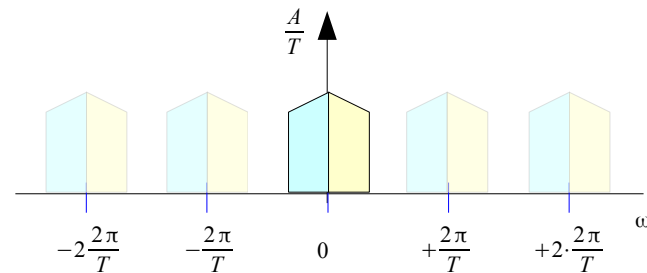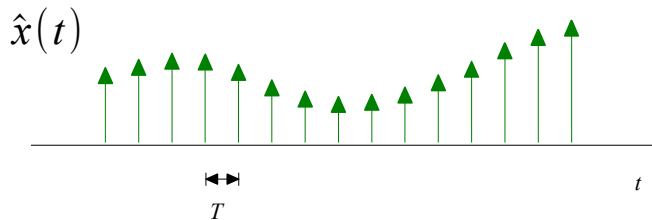

**DTFT**




$$\hat{x}(t) = \sum_{n=-\infty}^{+\infty} x(nT) \delta(t-nT)$$

$$\hat{X}(f) = \sum_{n=-\infty}^{+\infty} x(nT) e^{-j2\pi f T n}$$




# Spectrum Replication (1)


## Ideal Sampling

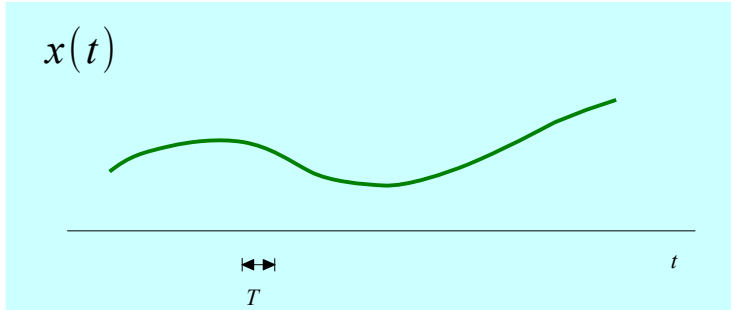

**X**

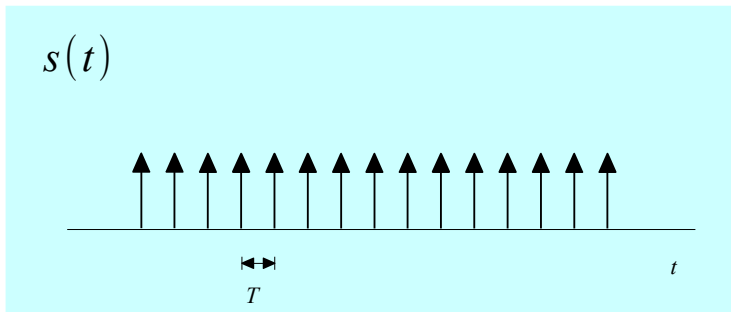

**||**

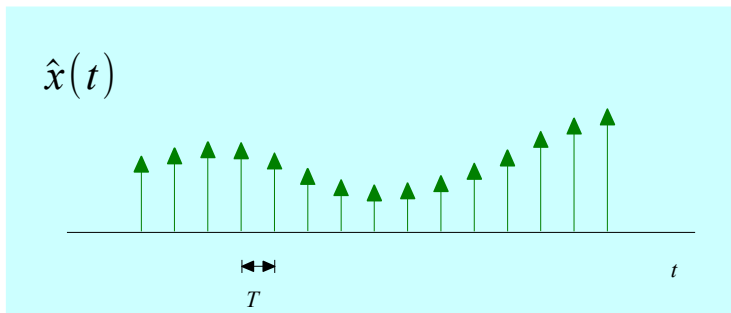

$$\hat{x}(t) = \sum_{n=-\infty}^{+\infty} x(nT) \delta(t-nT)$$

$$\begin{aligned} s(t) &= \sum_{n=-\infty}^{+\infty} \delta(t-nT) \\ &= \frac{1}{T} \sum_{m=-\infty}^{+\infty} e^{+j2\pi m f_s t} \end{aligned}$$

$$\hat{x}(t) = \frac{1}{T} \sum_{n=-\infty}^{+\infty} x(t) e^{+j2\pi m f_s t}$$

Shift Property



$$\hat{X}(f) = \frac{1}{T} \sum_{n=-\infty}^{+\infty} X(f - m f_s)$$

# Spectrum Replication (2)

$$S(f) = \frac{1}{T} \sum_{m=-\infty}^{+\infty} \delta(f - m f_s)$$

## Convolution in Frequency


$$\hat{X}(f) = X(f) * S(f)$$

$$= \int_{-\infty}^{+\infty} X(f - f') S(f') d f'$$


$$= \frac{1}{T} \sum_{m=-\infty}^{+\infty} \int_{-\infty}^{+\infty} X(f - f') \delta(f' - m f_s) d f'$$

$$\hat{X}(f) = \frac{1}{T} \sum_{n=-\infty}^{+\infty} X(f - m f_s)$$


## Frequency Domain


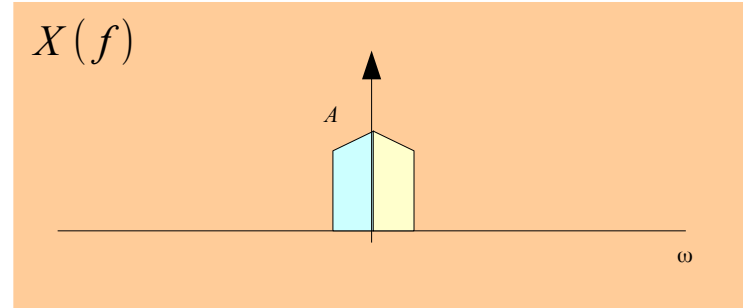


\*

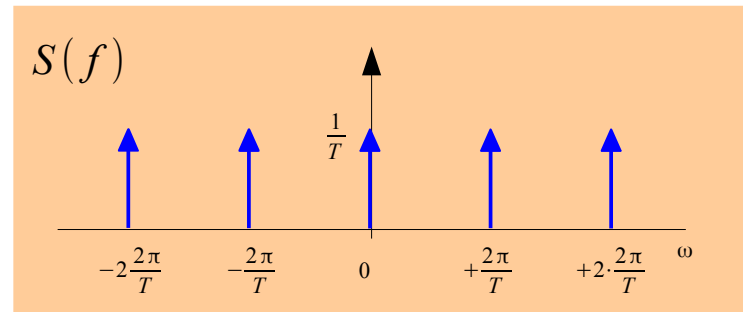

||


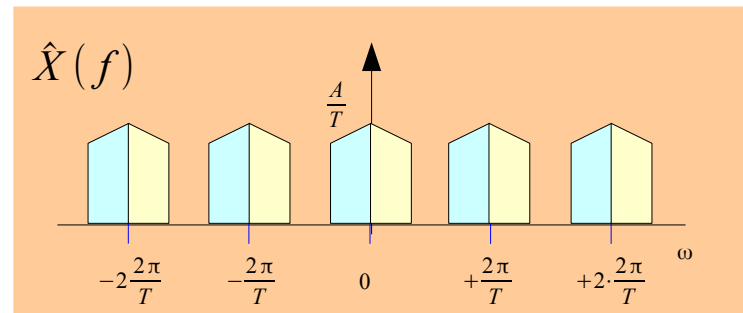


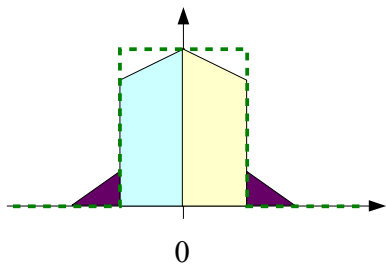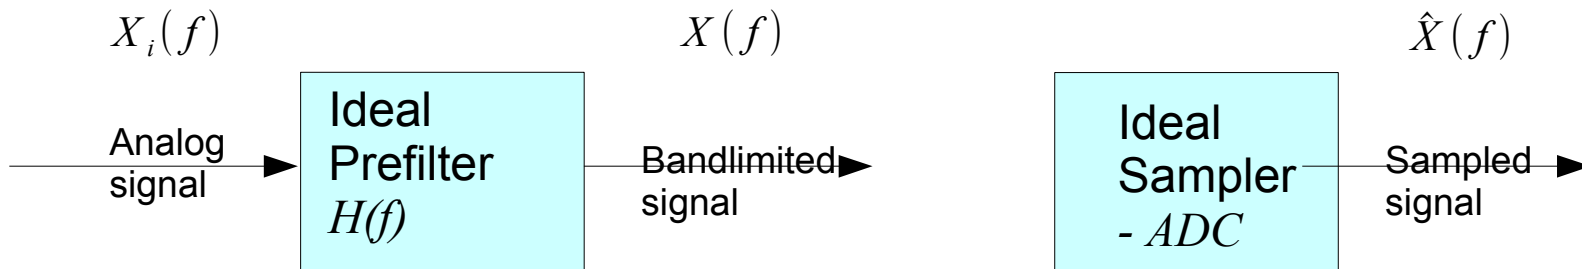

$$\frac{2}{4}f_s$$

$$\frac{3}{4}f_s$$

$$f_s$$

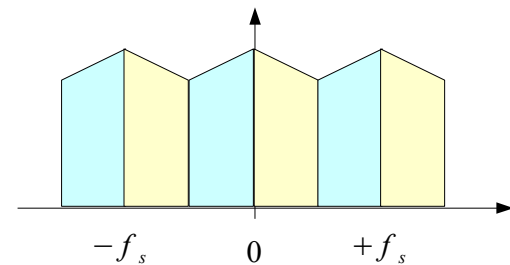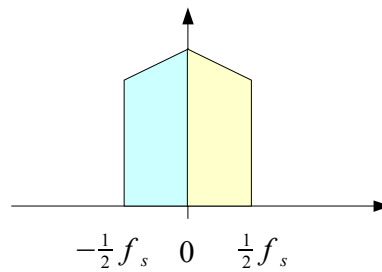





## References

- [1] <http://en.wikipedia.org/>
- [2] J.H. McClellan, et al., Signal Processing First, Pearson Prentice Hall, 2003
- [3] A “graphical interpretation” of the DFT and FFT, by Steve Mann
- [4] R. G. Lyons, Understanding Digital Signal Processing, 1997
- [5] AVR121: Enhancing ADC resolution by oversampling
- [6] S.J. Orfanidis, Introduction to Signal Processing  
[www.ece.rutgers.edu/~orfanidi/intro2sp](http://www.ece.rutgers.edu/~orfanidi/intro2sp)