

IBM System/370

MANAGEMENT SUMMARY

The System/370 has succeeded the System/360 as IBM's current line of medium-to-large-scale computer systems. It now consists of a dozen central processor models designed to handle a broad range of business and scientific applications in both batch and on-line environments. The processors are supported by more than 40 peripheral devices and a uniquely broad array of software facilities. In addition, dozens of independent hardware and software suppliers offer a bewildering variety of equipment and programs that can be used to augment or replace IBM's own products.

Recent IBM announcements have added virtual storage and multiprocessing capabilities to the System/370, increased its suitability for complex data base/data communications (DB/DC) applications, and narrowed the broad gap that previously existed between IBM's System/3 and System/370 computer families.

EVOLUTION OF THE SYSTEM/370

The System/370 got off to a surprisingly low-key start in June 1970, when IBM introduced the large-scale Models 155 and 165. Though they offered significant price/performance improvements without reprogramming to users of the large-scale System/360 computers, Models 155 and 165 encompassed no technological breakthroughs. They retained the System/360 architecture, used conventional core memories, and achieved their impressive performance largely through the use of fast buffer storage units similar to the ones that had previously been used in the System/360 Models 85 and 195. ➤

The System/370 is everybody's standard of comparison for medium-to-large-scale computers. Recent enhancements include virtual storage, multiprocessing, increased main storage capacities, improved data communications facilities, and the innovative Model 125 CPU. The System/370 product line spans a broad range of applications and workloads, at system rentals ranging from about \$8,200 to \$370,000 per month.

CHARACTERISTICS

MANUFACTURER: International Business Machines Corporation, 1133 Westchester Avenue, White Plains, New York 10604.

MODELS: See table on following pages.

DATA FORMATS

BASIC UNIT: 8-bit byte. Each byte can represent 1 alphanumeric character, 2 BCD digits, or 8 binary bits. Two consecutive bytes form a "halfword" of 16 bits, while 4 consecutive bytes form a 32-bit "word."

FIXED-POINT OPERANDS: Can range from 1 to 16 bytes (1 to 31 digits plus sign) in decimal mode; 1 halfword (16 bits) or 1 word (32 bits) in binary mode.

FLOATING-POINT OPERANDS: 1 word, consisting of 24-bit fraction and 7-bit hexadecimal exponent, in "short" format; 2 words, consisting of 56-bit fraction and 7-bit hexadecimal exponent, in "long" format; or 4 words in "extended precision" format. ➤



Enhanced by IBM's February 1973 announcements, the Model 158 Processing Unit now provides up to 4 million bytes of MOS main storage and is available in both uni-processor and dual-processor (MP) configurations. A feature of the Model 158 is its CRT display console with light-pen input. An 8-drive 3330 Disk Storage subsystem is in the background.

IBM System/370
CHARACTERISTICS OF THE SYSTEM/370 PROCESSOR MODELS

	Model 125	Model 135	Model 145	Model 155	Model 155-II	Model 158
SYSTEM CHARACTERISTICS						
Date of introduction	Oct. 1972	March 1971	Sept. 1970	June 1970	Aug. 1972	Aug. 1972
Date of first delivery	April 1973	May 1972	July 1971	Feb. 1971	April 1973	April 1973
Virtual storage capability	Standard	Standard	Standard	No*	Standard	Standard
Number of central processors	1	1	1	1	1	1
Principal operating systems	DOS/VS, DOS	DOS/VS, OS/VS1	DOS/VS, OS/VS1	DOS, OS/MFT, OS/MVT	DOS/VS, OS/VS1, OS/VS2	DOS/VS, OS/VS1, OS/VS2
System rental range, \$/month for typical systems	\$8,200 to \$13,800	\$9,800 to \$22,600	\$17,000 to \$45,000	\$32,000 to \$80,000	Purchase only	\$49,500 to \$85,000
MAIN STORAGE						
Storage type	Semicond. (MOS)	Semicond. (bipolar)	Semicond. (bipolar)	Core	Core	Semicond. (MOS,
Read cycle time, nanoseconds	480	770	540	2070	2070	1035
Write cycle time, nanoseconds	480	935	608	2070	2070	690
Bytes fetched per cycle	2	2 or 4	4 or 8	16	16	8 or 16
Storage interleaving (maximum)	None	None	None	None	None	None
Minimum capacity, bytes	98,304	98,304	163,840	262,144	262,144	524,288
Maximum capacity, bytes	131,072	245,760	1,048,576	2,097,152	2,097,152	4,194,304
Increment size, bytes	32,768	49,152	49,152 to 262,144	131,072 to 524,288	131,072 to 524,288	524,288 or 1,048,576
BUFFER STORAGE						
Cycle time, nanoseconds	—	—	—	115	115	115
Bytes fetched per cycle	—	—	—	2	2	2
Minimum capacity, bytes	None	None	None	8,192	8,192	8,192
Maximum capacity, bytes	None	None	None	8,192	8,192	8,192
PROCESSING UNIT						
Machine cycle time, nanoseconds	480-1440	275-1485	203-315	115	115	115
Add time, microseconds (32-bit binary fields)	9.8	4.21	2.14	0.99	0.99	**
Add time, microseconds (5-digit decimal fields)	46.1	40.92	11.90	4.93	4.93	**
Processing unit features:						
Clock Comparator & CPU Timer	Standard	Optional	Optional	No*	Standard	Standard
Direct Control	Optional	Optional	Optional	Optional	Optional	Optional
Dynamic Address Translation	Standard	Standard	Standard	No*	Standard	Standard
Floating Point	Optional	Optional	Optional	Standard	Standard	Standard
Extended Precision Floating Point	Optional	Optional	Optional	Optional	Optional	Optional
High-Speed Multiply	No	No	No	No	No	No
Integrated 2319 Disk Control	No	Optional	No***	No	No	No
Integrated 3330 Disk Control	Standard	Optional	Optional	No	No	Optional
Integrated 1403 Printer Control	Optional	Optional	No	No	No	No
Integrated Communications Control	Optional	Optional	No	No	No	No
Compatibility features:						
IBM 1401/1440/1460 Compatibility	Optional	Optional	Optional	Optional	Optional	Optional
IBM 1410/7010 Compatibility	No	No	Optional	Optional	Optional	Optional
IBM 7070/7074 Compatibility	No	No	No	Optional	Optional	Optional
IBM 7080, Compatibility	No	No	No	No	No	No
IBM 709/7090/7094 Compatibility	No	No	No	No	No	No
IBM 360/20 Compatibility	Optional	Optional	No	No	No	No
OS/DOS Compatibility	No	Standard	Standard	Optional	Optional	Optional
IBM 1052 & 2311 Compatibility	Optional	No	No	No	No	No
CHANNELS						
No. of Selector Channels	None	0 to 2	1 to 4	None	None	None
No. of Block Multiplexer Channels	None	0 to 2	1 to 4	2 to 5	2 to 5	2 to 5
No. of Byte Multiplexer Channels	0 or 1	1	1	1 or 2	1 or 2	1 or 2
Maximum total I/O data rate, by tes/second	Not spec'd.	2,400,000	5,300,000	5,400,000	5,400,000	Not spec'd.

* Virtual storage capability can be added to a purchased Model 155 through field installation of the Dynamic Address Translation facility, which converts it into a Model 155-II.

** The Model 158's instruction execution rate is typically 20% to 40% faster than that of Model 155.

*** Optionally available for Models GE through I of the 145 Processing Unit, which are no longer in production, but not for new Models H2 through J2.

IBM System/370

CHARACTERISTICS OF THE SYSTEM/370 PROCESSOR MODELS

	Model 158 MP	Model 165	Model 165-II	Model 168	Model 168 MP	Model 195
SYSTEM CHARACTERISTICS						
Date of introduction	Feb. 1973	June 1970	Aug. 1972	Aug. 1972	Feb. 1973	July 1971
Date of first delivery	March 1974	April 1971	Dec. 1973	Aug. 1973	March 1974	2nd qtr. 1973
Virtual storage capability	Standard	No*	Standard	Standard	Standard	No
Number of central processors	2	1	1	1	2	1
Principal operating systems	OS/VS2 Release 2	OS/MFT, OS/MVT	OS/VS1, OS/VS2	OS/VS1, OS/VS2	OS/VS2 Release 2	OS/MVT
System rental range, \$/month for typical systems	\$108,000 to \$200,000	\$70,000 to \$150,000	Purchase only	\$93,000 to \$170,000	\$260,000 to \$370,000	\$190,000 to \$270,000
MAIN STORAGE						
Storage type	Semicond. (MOS)	Core	Core	Semicond. (MOS)	Semicond. (MOS)	Core
Read cycle time, nanoseconds	1035	2000	2000	480	480	756
Write cycle time, nanoseconds	690	2000	2000	480	480	756
Bytes fetched per cycle	8 or 16	8	8	8	8	8
Storage interleaving (maximum)	None	4-way	4-way	4-way	4-way	16-way
Minimum capacity, bytes per system	1,048,576	524,288	524,288	1,048,576	2,097,152	1,048,576
Maximum capacity, bytes per system	8,388,608	3,145,728	3,145,728	8,388,608	16,777,216	4,194,304
Increment size, bytes	524,288 or 1,048,576	524,288 or 1,048,576	524,288 or 1,048,576	1,048,576	1,048,576	1,048,576
BUFFER STORAGE						
Cycle time, nanoseconds	115	80	80	80	80	54
Bytes fetched per cycle	2	4	4	4	4	8
Minimum capacity, bytes	8,192	8,192	8,192	8,192	8,192	32,768
Maximum capacity, bytes	8,192	16,384	16,384	16,384	16,384	32,768
PROCESSING UNIT						
Machine cycle time, nanoseconds	115	80	80	80	80	54
Add time, microseconds (32-bit binary fields)	**	0.16	0.16	***	***	0.054
Add time, microseconds (5-digit decimal fields)	**	1.42	1.42	***	***	Not spec'd.
Processing unit features:						
Clock Comparator & CPU Timer	Standard	No*	Standard	Standard	Standard	No
Direct Control	Optional	Standard	Standard	Standard	Standard	Standard
Dynamic Address Translation	Standard	No*	Standard	Standard	Standard	No
Floating Point	Standard	Standard	Standard	Standard	Standard	Standard
Extended Precision Floating Point	Optional	Standard	Standard	Standard	Standard	Standard
High-Speed Multiply	No	Optional	Optional	Optional	Optional	Standard
Integrated 2319 Disk Control	No	No	No	No	No	No
Integrated 3330 Disk Control	Optional	No	No	Optional	Optional	No
Integrated 1403 Printer Control	No	No	No	No	No	No
Integrated Communications Control	No	No	No	No	No	No
Compatibility features:						
IBM 1401/1440/1460 Compatibility	Optional	No	No	No	No	No
IBM 1410/7010 Compatibility	Optional	No	No	No	No	No
IBM 7070/7074 Compatibility	Optional	Optional	Optional	Optional	Optional	No
IBM 7080, Compatibility	No	Optional	Optional	Optional	Optional	No
IBM 709/7090/7094 Compatibility	No	Optional	Optional	Optional	Optional	No
IBM 360/20 Compatibility	No	No	No	No	No	No
OS/DOS Compatibility	Optional	No	No	No	No	No
IBM 1052 & 2311 Compatibility	No	No	No	No	No	No
CHANNELS						
No. of Selector Channels per system	None	0 to 6	0 to 6	0 to 6	0 to 12	0 to 6
No. of Block Multiplexer Channels	4 to 10	0 to 11	0 to 11	0 to 11	0 to 22	0 to 13
No. of Byte Multiplexer Channels	2 to 4	0 to 2	0 to 2	0 to 2	0 to 4	0 to 2
Maximum total I/O data rate, bytes/second	7,500,000	8,000,000	8,000,000	16,000,000	28,000,000	Not spec'd.

* Virtual storage capability can be added to a purchased Model 165 through field installation of the Dynamic Address Translation facility, which converts it into a Model 165-II.

** The Model 158's instruction execution rate is typically 20% to 40% faster than that of Model 155.

*** The Model 168's instruction execution rate is typically 10% to 30% faster than that of Model 165.

IBM System/370

▷ In September 1970, the nature of the “real System/370” became much clearer when IBM unveiled a truly advanced computer—the medium-scale Model 145. In addition to being the first commercial computer from a major manufacturer to use an all-semiconductor main memory, Model 145 extended the concept of microprogrammed control to a new high in flexibility (which, incidentally, has since been surpassed by the “variable micrologic” of the Burroughs B 1700 Systems).

During 1971, IBM extended the System/370 line both upward and downward by introducing the smaller Model 135 and the ultra-large-scale Model 195. Model 135 is essentially a scaled-down Model 145, enhanced through the availability of integrated control units for a 1403 Printer and up to eight communications lines, while Model 195 is a slightly upgraded version of the earlier System/360 Model 195. Meanwhile, customer deliveries of the early System/370 models began; most of the early users have experienced minimal problems in converting from their System/360's and express a fairly high degree of satisfaction with the System/370 equipment, though many have experienced smaller improvements in throughput than they had anticipated.

By April 1972, IBM had installed more than 2000 System/370's. Yet there was no joy in Armonk. Domestic sales were running well below quotas. Many System/360 users were still resisting IBM's efforts to upgrade them to the System/370; instead, they were squeezing more throughput out of their System/360's by taking advantage of plug-compatible tape and disk drives, add-on main memory, proprietary software, reduced prices on used equipment, etc. Other users, to IBM's horror, had taken advantage of the System/370's improved price/performance to *reduce* their monthly equipment bills while upgrading their throughput. Clearly, it was time to give computer buyers a new—and hopefully irresistible—reason to follow IBM's prescribed upward migration route. At the same time, IBM hoped to make life more difficult for the independent disk drive and main memory suppliers that have been diverting a steadily increasing share of equipment revenues away from IBM's own coffers.

On August 2, 1972—after numerous delays and despite the threat of an injunction sought by Telex Corporation—IBM announced its “direction of the future” for the System/370 line. That direction can be largely summed up in two words: *virtual storage*.

The August 1972 announcements, under the catch-all title “System/370 Advanced Function,” had four principal facets:

- Two new large-scale processors—Models 158 and 168— which have virtual storage capabilities, use low-cost MOS main memories, and offer more proces-

▷ INSTRUCTIONS: 2, 4, or 6 bytes in length, specifying 0, 1, or 2 memory addresses, respectively.

INTERNAL CODE: EBCDIC (Extended Binary-Coded Decimal Interchange Code).

MAIN STORAGE

STORAGE TYPE: See table.

CAPACITY: See table and price list. Note: In a Model 145, the Reloadable Control Storage can be expanded from its standard 32,768 bytes to a maximum of 65,536 bytes, in 2048-byte increments, at the expense of main storage capacity (e.g., if the full 65,536 bytes of RCS is required, the main storage capacity will be reduced by 32,768 bytes).

CYCLE TIME: See table. Note: For Models 155 through 195, the effective main storage speeds are considerably higher than the figures would seem to indicate because of the semiconductor buffer storage (see table), which greatly reduces the number of main storage references required in most applications.

CHECKING: All data paths between the central processor and main storage are parity-checked by byte. When data is stored, an error-correcting code is substituted for the parity bits. (An 8-bit modified Hamming code is appended to each 8-byte “doubleword” of data.) When the data is retrieved, single-bit errors are detected and corrected automatically, and most multiple-bit errors are detected and signalled so that appropriate program action can be taken. (Note: The bit correction facility is not implemented in Model 195.)

STORAGE PROTECTION: The Store and Fetch Protection features, which guard against inadvertent overwriting and/or unauthorized reading of data in specified 2048-byte blocks of storage, are standard in all models.

CENTRAL PROCESSORS

INDEX REGISTERS: Sixteen 32-bit general registers, used for indexing, base addressing, and as accumulators, plus four 64-bit floating-point registers.

INDIRECT ADDRESSING: None.

INSTRUCTION REPERTOIRE: The basic System/370 instruction set consists of all of the instructions that comprise the System/360 “commercial instruction set” (i.e., the standard System/360 set plus the decimal arithmetic instructions), together with from 13 to 27 new instructions.

The basic System/370 instruction set includes complete arithmetic facilities for processing variable-length decimal and fixed-point binary operands, as well as instructions which handle loading, storing, comparing, branching, shifting, editing, radix conversion, code translation, logical operations, packing, and unpacking. In addition, a group of “privileged instructions,” usable only by the operating system, handle input/output and various hardware control functions. Floating-point arithmetic instructions are optional in Models 125, 135, and 145 and standard in the larger models (see table).

The 13 new (non-System/360) instructions in all System/370 processors are: ▷

IBM System/370

➤ sing power in smaller cabinets than the earlier Models 155 and 165.

- Dynamic Address Translation (DAT) hardware, required for the implementation of virtual storage and available as a standard, no-charge feature for Models 135, 145, 158, and 168, and as a high-cost, field-installable option for purchased Model 155 and 165 systems only.
- Four new operating systems—DOS/VS, OS/VS1, OS/VS2, and VM/370—which support the new virtual storage capabilities and are functional extensions of the earlier DOS, OS/MFT, OS/MVT, and CP-67 systems, respectively.
- Integrated disk controls that reduce the cost of using the high-performance 3330 disk drives in Model 135, 145, 158, and 168 systems, plus a redesign of the control logic to permit up to sixteen 3330 drives in a subsystem.

In October 1972, IBM extended the System/370 concepts downward to a somewhat lower price and performance level by introducing the Model 125. Completely upward-compatible with the larger System/370 processors, the Model 125 offers most of the same processing facilities, has the same virtual storage capabilities, and can use the same DOS/VS and/or DOS software. It continues the IBM trends to MOS main memory and toward integrated controllers for nearly all peripheral units, including up to 400 million bytes of high-performance 3330 Series Disk Storage and 22 data communications lines. Moreover, the Model 125 boasts two significant facilities that are not present in the larger Model 135 and 145 systems: a standard operator console with CRT display, and independent "satellite" processors that permit simultaneous instruction processing, input/output processing, and diagnostic/maintenance processing.

On February 1, 1973, IBM unleashed a flurry of announcements that significantly increased the attractiveness of the larger System/370 models, particularly with respect to their suitability for advanced data base/data communications processing. These announcements included:

- Dual-processor versions of the large-scale Model 158 and 168 systems, designated the 158 MP and 168 MP, respectively.
- Doubling of the previous maximum main storage capacities of the Model 158 and 168 processors, to 4 million and 8 million bytes, respectively.
- Five new versions of the Model 145 Processing Unit that offer from 262,144 to 1,048,576 bytes of main storage — twice the previous maximum capacity — at ➤

- Compare Logical Characters Under Mask (CLM)
- Compare Logical Long (CLCL)
- Halt Device*
- Insert Characters under Mask (ICM)
- Load Control (LCTL)*
- Move Long (MVCL)
- Set Clock (SCK)*
- Shift and Round Decimal (SRP)
- Store Channel ID (STIDC)*
- Store Characters under Mask (STCM)
- Store Clock (TCK)
- Store CPU ID (STIDP)*
- Store Control (STCTL)*

*Privileged instruction.

These new instructions facilitate programming and reduce execution times for record blocking and unblocking, long move and compare operations, decimal arithmetic, and various hardware control functions.

In addition, all models with virtual storage capabilities have five new instructions for Dynamic Address Translation:

- Load Read Address
- Reset Reference Bit
- Purge Translation Look-Aside Buffer
- Store Then AND System Mask
- Store Then OR System Mask

Two additional, no-charge instructions are available to support VTAM on Models 125, 135, 145, 155-II, 158, 165-II and 168:

- Compare and Swap
- Compare Double and Swap

Three more no-charge instructions are available to support OS/VS2 Release 2 on Models 145 (IH2 and J2), 155-II, 158, 165-II, and 168:

- Insert PSW Key
- Set PSW Key from Address
- Clear I/O Function

Finally, four new instructions are used by OS/VS2 Release 2 to support the Model 158 and 168 Multiprocessing systems:

- Signal Processor
- Set Prefix
- Store Prefix
- Store CPU Address

INSTRUCTION TIMES: See table for average add times. Average execution times, in microseconds, for some additional representative instructions on Models 125, 135, and 145 in Basic Control mode are as follows:

	Model 125	Model 135	Model 145
Add (32-bit binary):	9.8	4.21	2.14
Multiply (32-bit binary):	143.4	25.52	20.1
Divide (32-bit binary):	243.7	41.92	34.8
Load (32-bit binary):	7.7	3.08	1.69
Store (32-bit binary):	8.2	3.30	1.50
Add (5-digit packed decimal):	46.1	40.92	11.9
Compare (5-digit packed decimal):	44.6	37.57	10.6

IBM System/370

➤ a substantially lower cost per byte than the earlier models. ➤

- OS/VS2 Release 2, an enhanced operating system that supports both "tightly coupled" multiprocessing, in the dual-processor 158 MP and 168 MP systems, and "loosely coupled" multiprocessing, in which multiple System/370 computers operate under the overall control of one of the computers in the complex.
- The 3704 Communications Controller, a smaller version of the programmable 3705 that can handle networks with up to 32 communications lines.
- New features for the 3330 Disk Storage subsystem that provide increased configuration flexibility and permit the use of up to 32 drives in a subsystem.
- New virtual-storage versions of CICS and IMS, IBM's principal Program Products for data base/data communications functions.

IBM's "direction of the future", as reflected in these important announcements of the past year, is bound to have momentous effects upon IBM computer users, IBM's competitors, and the future of the EDP field as a whole. The details and ramifications of the System/370 hardware and software, as it stands today, are discussed in depth in the balance of this report.

VIRTUAL STORAGE

Computer users who attended IBM's August 1972 product announcement or read the associated ads and brochures could easily have concluded that virtual storage is a bold new technique pioneered by IBM. In fact, the concept is more than a decade old and has previously been employed, for better or worse, in dozens of computer systems from numerous manufacturers.

Credit for originating the virtual storage technique, in 1959, is generally given to the developers of the Atlas computer system at Manchester University, England. Since then, the technique has been used in widely publicized computers such as the Burroughs B 6700, the GE (now Honeywell) 645, the RCA (now UNIVAC) 70/46, and IBM's own System/360 Model 67. To date, virtual storage has been used mainly in large expensive computers designed primarily for conversational time-sharing; but RCA anticipated IBM's move nearly two years ago by stressing the advantages of virtual storage for medium-scale computers in typical business data processing environments. Although RCA's marketing efforts were spectacularly unsuccessful, IBM's full-barreled support of the concept makes it clear that virtual storage will be the new way of life for most users of medium and large-scale computers. ➤

	Model 125	Model 135	Model 145
Add (short floating-point):	52.7*	13.73*	5.85*
Multiply (short floating-point):	190.7*	32.24*	16.8*
Divide (short floating-point):	230.4*	49.39*	28.7*
Add (long floating-point):	66.6*	17.73*	7.52*
Multiply (long floating-point):	565.8*	51.32*	45.7*
Divide (long floating-point):	639.2*	79.21*	89.6*

*With optional Floating-Point Instructions.

RELOADABLE CONTROL STORAGE: All System/370 central processor operations are controlled by microprogramming. In the Model 125, the microprograms for the Instruction Processing Unit (IPU), Service Processor (SVP), and Input/Output Processors (IOP's) reside in discrete MOSFET Reloadable Control Storage (RCS) areas, which are separate from main storage. The IPU, SVP and IOP microprograms are loaded into RCS by means of a small read/write disk drive, the Console File, which contains a removable magnetic "diskette." IBM supplies pre-written diskettes containing all the control microprograms and Field Engineering diagnostics required for a specific installation.

The basic IPU microprogram for the Model 125 resides in 12,288 22-bit words of RCS, and one or two additional 4,096-word increments may be added to support optional IPU features. The following table shows the quantities of RCS required to support various combinations of optional features on the Model 125:

	12K Words of RCS		16K Words of RCS		20K Words of RCS	
1401/1440/1460 Compatibility	•		•		•	
System/360 Model 20 Compatibility		•		•		•
Floating Point (including Extended Precision)		•	•	•	•	•
2311 Model 1 Compatibility			•	•	•	•

In the Model 135, 145, and 158 Processing Units, the microprograms reside in a semiconductor memory unit called Reloadable Control Storage (RCS) and are loaded into RCS by means of a small read-only disk unit called the Console File. This unit reads special single-disk cartridges at the rate of 33,000 bits per second. Each cartridge can hold approximately 75,000 bytes. IBM supplies prewritten disk cartridges containing all the control microprograms required for a specific installation.

The Model 135 RCS has a minimum cycle time of 275 nanoseconds, and the time required to execute each microinstruction ranges from 275 to 1430 nanoseconds, depending upon the operation. The basic RCS capacity of 24,576 bytes can be expanded to either 36,864 or 49,152 bytes. Expansion is required when certain optional features or combinations are selected.

Model 135 RCS requirements, in bytes, are as follows:

Basic System Microcode	15,482
Autocall	440
Block Multiplexer Channel	1,568
Clock Computer and CPU Timer	1,400
Direct Control	50
Extended Precision Floating Point	676
Floating Point	1,200
64 Byte Multiplexer Subchannels	1,024
128 Byte Multiplexer Subchannels	2,048
256 Byte Multiplexer Subchannels	4,096

IBM System/370

➤ Virtual storage can be defined as a storage allocation scheme in which the addresses used by a program to identify information are distinguished from the addresses used by the storage system to identify physical storage locations; all program-generated (virtual) addresses are automatically translated to the corresponding physical storage (real) addresses.

As implemented in the System/370, virtual storage permits programmers and operators to work with their computer as if it had up to 16 million bytes of main storage—even though the real main storage capacity may be only a small fraction of that size. The secret, of course, is that only those portions of a program that are actually required at any given time need to be present in main storage. The rest of each program is kept on a disk file, ready to be loaded into main storage when needed.

The Dynamic Address Translation (DAT) facility is the “mapping” mechanism that automatically translates the virtual storage addresses contained in program instructions into real main storage addresses as each instruction is executed. The translation is accomplished by a hardware-implemented table-lookup procedure that accesses tables in main storage which are created and maintained by the operating system.

Virtual storage in the System/370 is divided into fixed-length, consecutively addressed sections called *pages*, which are either 2K or 4K bytes in length, depending upon the operating system. For ease of addressing, the pages are assigned to larger groups of 65K or 1048K bytes, called *segments*. The IBM operating systems generally allocate virtual storage to problem programs in contiguous pages. Real storage is similarly divided into fixed-length sections called *page frames*, which are the same size as the virtual storage pages. The page frames in real storage, unlike the pages in virtual storage, need not be contiguous. The direct-access storage device that holds the virtual storage pages is called *external page storage*, and the ongoing transfer of pages between real storage and external page storage is called *demand paging*, or “swapping.” Demand paging can take place because all instructions and data items are referenced by their virtual storage addresses—regardless of whether or not, at a given time, they are present in real storage.

When an instruction or a data item is referenced by a program, the Dynamic Address Translation facility automatically breaks the virtual storage address into segment number, page number within segment, and position of the instruction or data item with regard to the beginning of the page.

Segment tables and page tables maintained by the operating system indicate whether the needed page is already in real storage. If so, execution of the program continues. If the page is not present in real storage, then paging takes ➤



High-speed peripheral equipment for the Model 125 is currently limited to the 3330 Series Disk Storage drives (left rear), which provide up to 400 million bytes of on-line storage, and the 3410/3411 Magnetic Tape Units (left foreground), which provide data rates of up to 80,000 bytes/second.

➤ 1401/1440/1460 Compatibility	3,492
Integrated Communications Adapter	2,100
2319 Integrated File Adapter	4,652
3330 Integrated File Adapter	10,192
Integrated Printer Adapter	1,300
First or First and Second Selector Channel	1,584
System/360 Model 20 Compatibility	876
3210 Model 1 Adapter	1,494
3215 Adapter	1,930
Synchronous Data Adapter, Type II	3,700
Adapter Base, Type I	1,200
Terminal Adapter, Type I Model II	500
Telegraph Adapter, Type II	200
Terminal Adapter, Type III	2,100

The Model 145 RCS is an extension of the semiconductor main storage. The basic 32K bytes of RCS can be extended to a maximum of 65K bytes at the expense of a corresponding reduction in main storage capacity. This can be done at any time, in 2048-byte increments, by simply changing the value in an address boundary register. In fact, most Model 145 installations are finding it necessary to extend the RCS capacity well beyond the basic 32K bytes. ➤

IBM System/370

▷ place under supervision of the operating system. To speed program execution, the DAT facility includes a *translation lookaside buffer*, which holds the addresses of previously referenced pages located in real storage. If the real storage location of a referenced page is found in this manner, a search of the segment and page tables is not required.

The operating system automatically monitors page usage in main storage to identify inactive pages. These are paged out, when necessary, to meet new demands for main storage space. If a page has been changed during the run of a program, it is written over the former version that exists on external page storage. If a page has not been changed, however, no actual transfer of data needs to take place.

The demand paging process itself places significant demands upon a system's central processor and input/output resources. Indeed, under certain conditions (such as when numerous large programs are being executed concurrently), the paging rate may become so high that little or no productive processing can be accomplished; this situation is called *thrashing*. To guard against thrashing, IBM's virtual storage operating systems continuously monitor the paging rate. Whenever it becomes excessively high, one or more jobs with comparatively low priorities will be deactivated. IBM points out that a high incidence of job deactivation is likely to indicate the need for increased system resources, such as increased real storage capacity or faster paging devices.

The principal benefits of virtual storage are three-fold: (1) reduced programming costs through elimination of the constraints imposed by limited main memory capacity; (2) increased flexibility for processing existing applications and developing new ones; and (3) potentially improved throughput and/or faster response times through more efficient storage allocation. Attractive benefits they are—but, like most good things, they have their price. For most System/370 users, the transition to virtual storage will almost certainly be accompanied by a significant increase in hardware costs. From IBM's point of view, that will be a happy development indeed—and it may well be the principal reason why virtual storage has been adopted as IBM's "direction of the future."

These increased hardware costs are likely to result from any or all of the following factors:

- Additional computational capability may be needed to compensate for the added overhead that is inherent in virtual-mode operation. (IBM currently—and perhaps optimistically—estimates the DAT overhead to be about 5 to 8 percent for typical program mixes.)
- Additional real main storage may be needed to accommodate the virtual-mode operating systems, ▷

▶ Model 145 RCS requirements, in bytes, are as follows:

Basic System Microcode	26,000
16 Byte Multiplexer Subchannels	256
32 Byte Multiplexer Subchannels	512
64 Byte Multiplexer Subchannels	1,024
128 Byte Multiplexer Subchannels	2,048
256 Byte Multiplexer Subchannels	4,096
Selector Channel Block Multiplexer Feature	2,500
16 UCW's for Block Multiplexer Channel (512 max.)	128
2319 Integrated File Adapter	9,760
3210 Model 1 Adapter	3,200
3215 Adapter	3,800
1401/1440/1460 Compatibility	5,200
1401/1440/1460 & 1410/7010 Compatibility	6,000
Floating Point	2,240
Direct Control	80
Clock Comparator and CPU Timer	1,800

DYNAMIC ADDRESS TRANSLATION: This facility, which is now standard in Models 125, 135, 145, 155-II, 158, 165-II, and 168, is the mechanism that translates the virtual storage addresses contained in instructions into real main storage addresses as each instruction is executed. All seven models can address a virtual storage space of 16,777,216 bytes. A two-level address translation process divides the virtual storage space into segments of either 65,536 or 1,048,576 bytes, which are in turn divided into pages of either 2,048 or 4,096 bytes, depending upon the operating system.

Translation between the virtual and real addresses is accomplished by a hardware-implemented table-lookup procedure that accesses tables in main storage which are created and maintained by the operating system. The translation process in Models 135 through 168 is speeded up by a group of high-speed registers which hold recently referenced virtual storage addresses and their real storage equivalents. The Translation Look-aside Buffer (TLB) in Models 155-II, 158, 165-II, and 168 holds up to 128 entries, while the counterpart registers in Models 135 and 145, which are called the Associative Array, hold 8 entries. The translation of addresses contained in the TLB or Associative Array can be accomplished much more rapidly than when references to the page and segment tables in main storage are required.

OPERATIONAL MODES: Models 125, 135, 145, 155-II, 158, 165-II, and 168 can operate in either the Basic Control (BC) or Extended Control (EC) mode. The BC mode maintains general upward compatibility with the System/360 architecture and programming. In the new EC mode, the Program Status Word (PSW) and the layout of the permanently assigned lower main storage area are altered to support Dynamic Address Translation and other new system control functions; therefore, the new virtual-storage-oriented operating systems must be used.

OPTIONAL FEATURES: The table indicates which of the following features are standard or optional in each of the processor models.

The Clock Comparator and CPU Timer feature provides expanded system timing facilities. The Clock Comparator provides a means for causing an interrupt when the standard Time-of Day Clock reaches a program-specified value. The CPU Timer is a binary counter that is decremented every microsecond and causes an interrupt when its value reaches zero. Additional instructions are provided to set and store both the Clock Comparator and the CPU timer. ▶

IBM System/370

- > whose storage residence requirements are considerably larger than those of their real-mode counterparts.
- Additional and/or faster direct-access storage devices, and in most cases a dedicated I/O channel, may well be needed to achieve an adequate level of demand paging performance. (In a simple, batch-mode DOS/VS or OS/VS1 environment, IBM estimates that the paging rate will typically be about 3 to 5 pages per second, which could reasonably be handled by a low-cost 2319 disk drive. But in a complex OS/VS2 or VM/370 environment, the required paging rate can easily exceed 100 pages per second. This rate would considerably exceed the capabilities of a 3330 Disk Storage facility, and would therefore require the use of the grossly overpriced 2305 Fixed-Head Storage Facility.)
- Additional peripheral devices may be required to support a larger number of concurrently active programs. (Under virtual storage, users can expect a slowdown in the execution times for individual jobs, even if the overall throughput of the system increases. Thus, it follows that more programs will need to be sharing the system's resources at any given time.)
- Finally, additional hardware resources of all types may well be needed to support the expanded applications that virtual storage makes possible. Unlike the other four factors cited above, increased costs for this reason will be a happy development from the user's viewpoint—provided the new applications are economically justifiable.

Thus, virtual storage may or may not be a good thing for specific computer installations, depending upon the nature of their current and future workloads. But for IBM itself, there can be little doubt that virtual storage will prove to be a very good thing indeed.

PROCESSOR MODELS

There are now a total of twelve central processor models in the System/370 line. Their characteristics are summarized and compared in the table on pages 70C-491-04b and -04c.

Model 125, the smallest System/370 processor announced to date, was introduced in October 1972. It narrows, but does not completely fill, the surprisingly broad gap that has long existed between IBM's System/3 and System/370 families. (It is expected that IBM will soon announce a still smaller System/370 processor—probably the long-rumored Model 115—to further reduce this product-line gap.)

Distinctive features of the Model 125 include 98K or 131K bytes of MOS main storage, distributed-processor >

- ▶ The Floating-Point Arithmetic feature, a no-cost option, provides instructions to perform floating-point arithmetic operations on both short (1-word) and long (2-word) operands.

The Extended Precision Floating-Point feature provides 7 instructions for performing floating-point arithmetic on 4-word (16-byte) operands that provide a precision of up to 28 hexadecimal or 34 decimal digits. The Floating-Point Arithmetic feature is a prerequisite.

The Direct Control Feature provides six external interrupt lines which are independent of the normal data channels, plus two instructions which provide for single-byte data transfers between an external device and main storage. (The External Signals feature provides similar facilities for the Model 125.)

High-Speed Multiply reduces the time required for long-precision floating-point and fixed-point multiply instructions. For Model 165, the times are reduced from 1.87 to 0.61 microseconds and from 0.78 to 0.42 microseconds, respectively.

The Channel-to-Channel Adapter permits direct communication between two System/370 processors via their standard I/O channels. The adapter occupies one control unit position on each of the two channels it interconnects.

Other processor options are described in the following sections on Compatibility Features, Input/Output Control, and Communications Control.

COMPATIBILITY FEATURES: The System/370 processors can be equipped with extra-cost compatibility features and associated emulator routines that enable them to execute programs written for earlier IBM computers, as listed in the table. These "integrated emulators" enable emulated programs to be processed along with native-mode System/370 programs in a multiprogramming mix under operating system control. In general, their use requires a System/370 with I/O devices equivalent to those of the system to be emulated (plus the devices required by the operating system), and with more core storage capacity and processing power. Only the more common peripheral devices can be emulated.

The OS/DOS Compatibility Feature facilitates DOS-to-OS conversions by making it possible to run DOS programs under control of the Operating System/360 (MFT or MVT). The DOS Emulator runs as a problem program under OS control. It can be multiprogrammed with other OS jobs, and it in turn can use the multiprogramming options of DOS. The DOS Emulator Program, the DOS Supervisor, and up to three DOS processing-program partitions are all executed in a single MFT partition or MVT region of at least 38K bytes; the DOS Emulator Program alone requires 22K to 26K bytes of main storage. IBM states that the internal speed of executing DOS job streams in OS/DOS Compatibility mode on a Model 145 varies from approximately 1.0 to 4.3 times faster than execution of the same job streams under DOS control on a 360/40.

The 1401/1440/1460 Compatibility Feature is a field-installable option which, in combination with special software, enables a System/370 to execute IBM 1401, 1440, or 1460 instructions. Internal speed of a Model 145 in the emulation mode is approximately 4.9 times that of the 1401—and about 10% faster than 1401 emulation ▶

IBM System/370

➤ architecture, an integrated CRT display console, and integrated controllers for a printer, card reader, punch, 80-column MFCM or 96-column MFCU, magnetic tape subsystem, up to 22 communications lines, and up to 400 million bytes of 3330-style disk storage. The Model 125 is fully program-compatible with the larger System/370 processors and offers most of the same facilities, including up to 16 million bytes of virtual storage. The 131K maximum main storage capacity, however, limits the system's software support to DOS/VS or DOS and is likely to be the principal limiting factor on the throughput of most Model 125 installations.

The Model 125 provides approximately two-thirds of the internal processing power of the Model 135 at a substantially lower cost. Monthly rental prices for typical Model 125 systems will range from \$8,207 to \$13,794, with purchase prices ranging from \$377,815 to \$602,620. Customer shipments are scheduled to begin in April 1973, and the supporting DOS/VS software is scheduled for availability in June 1973.

IBM is placing primary marketing emphasis on the Model 125 as the growth system for System/360 Model 22 or 25 users who need to handle increased workloads or add applications. In typical commercial applications, the Model 125 in Basic Control mode delivers approximately 1.3 to 3.0 times the internal speed of a Model 22 and approximately 2.0 to 4.5 times the internal speed of a Model 25. Moreover, a 98K Model 125 system with 200 million bytes of 3330 Series Disk Storage (2 drives) can be rented or purchased for about the same price as a 49K Model 25 system with 29 million bytes of 2311 Disk Storage (4 drives).

The Model 125 enjoys the distinction of being the first IBM system below the "super-computer" class to employ distributed processing techniques. The Model 125 CPU includes an Instruction Processing Unit (IPU), a Service Processor (SVP), and Input/Output Processors (IOP's), all of which can operate independently and simultaneously. The IPU interprets the program instructions and executes the internal operations of the system. The SVP, located in the operator's console, controls the console operations and handles a variety of diagnostic and error-recovery functions. The IOP's control the system's I/O operations in place of conventional input/output channels; the number of IOP's varies with the configuration and features of each Model 125 installation.

Model 135 was introduced in March 1971 and enhanced through the addition of virtual storage capabilities in August 1972. Its distinctive features include 98K to 245K bytes of semiconductor main storage, 24K to 49K bytes of Reloadable Control Storage, integrated control logic for 2319 or 3330 Disk Storage, an integrated control unit for a 1403 Printer, and an Integrated Communications Adapter that provides low-cost control facilities for up to eight data communications lines. The hardware facilities ➤

➤ under CS40 on an IBM 360/40. The associated emulator routines require a minimum of 17K bytes of main storage under DOS and 20K bytes under OS.

The 1401/1440/1460, 1410/7010 Compatibility Feature is a field-installable option that provides the capability to emulate IBM 1410 and 7010 programs in addition to all the facilities of the 1401/1440/1460 Compatibility Feature described above. Internal speed of a Model 145 in the emulation mode is about twice that of the 1410 and two-thirds that of the 7010. The associated emulator routines require a minimum of 28K bytes of main storage under DOS and 22.5K bytes under OS.

The 7070/7074 Compatibility Feature is an option that provides the capability to execute programs written for an IBM 7070 or 7074 system. Internal speed of a Model 165 in the emulation mode is approximately three times that of the 7074, and operation is under OS control.

The 7080 Compatibility Feature provides the capability to execute, under OS control, programs written for an IBM 7080 system. Internal speed of a Model 165 in the emulation mode is approximately twice that of the 7080.

The 709/7090/7094 Compatibility Feature provides the capability to execute, under OS control, programs written for an IBM 709, 7090, 7094, or 7094 II system. Internal speed of a Model 165 in the emulation mode is approximately 1.5 times that of the 7094 II.

The System/360 Model 20 Compatibility Feature enables a Model 125 or 135 to execute, under DOS control, programs written for a System/360 Model 20 card, tape, or disk system. Prerequisites for the emulating Model 135 system are: (1) the I/O devices required by DOS; (2) the I/O devices required to emulate the Model 20 I/O units; (3) sufficient main storage to hold the DOS Supervisor (at least 12K bytes), the emulator routines (8K to 17K), and the emulated Model 20 storage (4K to 32K); and (4) sufficient Reloadable Control Storage to hold the Model 20 Compatibility Feature.

The 1052 and 2311 Model 1 Compatibility Features are no-charge options that make it possible to use DOS, Version 3 or 4, on the Model 125. The 1052 Compatibility Feature (required for both Versions 3 and 4) permits emulation of the 1052 Printer-Keyboards by the 5213 Console Printer and the Model 125's standard console keyboard. The 2311 Model 1 Compatibility Feature (required for DOS Version 3 only) permits emulation of 2311 Model 1 disk files on 3333/3330 disk files connected to the Model 125. A single 3336 Disk Pack can hold the contents of up to eleven 1316 Packs.

CONSOLE INPUT/OUTPUT: A keyboard/display operator console is an integral part of the Model 125 Processing Unit. The console contains a typewriter-style keyboard, a CRT display, a complement of switches and lights, the Service Processor, and the Console File that loads the system's microprograms. The CRT can display sixteen 56-character lines of data. Data can be entered via the keyboard, displayed on the CRT for verification, and then directed into main storage or the CPU registers. Storage or register contents are displayed in hexadecimal notation. The keyboard and CRT can also be used as an inquiry terminal. A 5213 Printer, Model 1, can be connected to the Model 125 console via the Integrated 5213 Printer Attachment. The 5213 produces printed copies of input and output messages displayed on the CRT at a speed of 85 characters per second. Print line length is a ➤

IBM System/370

➤ required to support virtual storage will be field-installed on previously delivered Model 135 Processors at no charge.

Model 135 is designed to serve as an effective upgrade machine for current users of the System/360 Models 25 and 30. For these users, Model 135 provides greatly increased internal speed, memory capacity, and input/output capabilities with little or no need for reprogramming. Model 135 delivers internal processing speeds ranging from 2 to 4.5 times that of the Model 30 for commercial applications and from 3.5 to 7 times that of the Model 30 for scientific applications. As compared with the Model 25, Model 135 offers from 3.5 to 6.5 times the internal speed for commercial applications and from 5.5 to 16 times the internal speed for scientific applications.

Monthly rentals for typical Model 135 configurations range from about \$9,800 to \$22,600, with purchase prices ranging from about \$467,000 to \$1,068,000. Thus, Model 135 is priced between System/360 Models 30 and 40, while its performance substantially exceeds that of the Model 40.

Model 145, which provides roughly twice the internal processing power of the Model 135, was announced in September 1970 and enhanced through the addition of virtual storage in August 1972 and doubled main storage capacity in February 1973. At the time of its introduction, Model 145 was one of the most technologically exciting computers ever to reach the market. It was the first commercial computer from a major manufacturer to use an all-semiconductor main memory. What's more, Model 145's Reloadable Control Storage extended the concept of microprogrammed control to a new high in flexibility, while its integrated disk control logic permitted large-capacity disk pack storage at an unprecedentedly low price.

Model 145 is designed to serve as an effective upgrade machine for current users of the System/360 Models 30 and 40. It offers internal processing speeds 3 to 5 times as fast as the Model 40 and 5 to 11 times as fast as the Model 30, plus main storage capacities of up to 1,048,576 bytes—8 times the maximum capacity of the Model 40 and 16 times that of the Model 30. Model 145 also provides greatly increased I/O capabilities: a standard Byte Multiplexer Channel, up to four Selector or Block Multiplexer Channels, and a maximum system I/O data rate of 5.3 million bytes per second.

Monthly rentals for typical Model 145 configurations range from about \$17,000 to \$45,000, with purchase prices ranging from about \$800,000 to \$2,150,000. Thus, the Model 145 is priced between System/360 Models 40 and 50, while its performance substantially exceeds that of the Model 50. The hardware facilities required for virtual storage will be field-installed on previously delivered Model 145 Processors at no charge.

➤ maximum of 125 characters, spaced 10 to the inch, and vertical spacing is 6 lines per inch.

Users of Model 135, 145, and 155 systems have a choice of two Console Printer-Keyboards. The 3215 uses a matrix printing unit that operates at 85 characters per second. The 3210 prints at 15 characters per second. In Model 145 and 155 systems, an additional 3210 Console Printer-Keyboard can be installed in a remote area (such as the installation's tape library or scheduling room). The 3210 and 3215 are functionally compatible and program-compatible with the earlier 1052 Printer-Keyboard.

Model 158 uses a new operator display console, which is supplied along with the Processing Unit as standard equipment. It contains a CRT display, keyboard, light pen, two Console Files, and microcode control storage. A stand-alone 3213 Printer, rated at 85 characters per second, can be added as an optional hard-copy output unit.

Every Model 165 and 168 system requires a 3066 System Console, which provides a CRT display with 4K buffer, an alphanumeric keyboard, a microfiche maintenance display to facilitate servicing, and a device for reading microprograms from a magnetic disk cartridge into writable control storage.

Every Model 195 system requires a 3060 System Console, which provides a CRT display with 8K buffer, an alphanumeric keyboard, a light pen, and numerous switches and lights.

In addition to these standard console I/O units, other devices such as displays, card readers, punches, and printers can be used to provide additional console functions.

INPUT/OUTPUT CONTROL (MODEL 125)

In place of conventional I/O channels, Model 125 uses internal Input/Output Processors (IOP's) to control its I/O operations. Each IOP is implemented through microprograms in a discrete Reloadable Control Storage area and can access main storage independently. Thus, attached I/O devices can operate concurrently with devices attached to other IOP's and with internal computing. The number of IOP's depends upon the configuration and features of each Model 125 installation.

From two to four 3330 Series Disk Storage drives can be connected directly to a Model 125 Processing Unit. Optional integrated attachment features permit direct connection of any of the following devices; no separate control units or I/O channels are required.

3410/3411 Magnetic Tape Subsystem
3504 Card Reader
3525 Card Punch
2560 Multi-Function Card Machine
5425 Multi-Function Card Unit (96-col.)
1403 Printer, Model 2, 7, or N1
Up to 16 asynchronous and 6 BSC communications lines

The optional Multiplexer Channel permits a wide variety of low-speed I/O devices to be connected to a Model 125. This channel is implemented by a microprogrammed IOP and is functionally similar to the Multiplexer Channels in other System/360 and 370 models. It has 8 control unit positions and 32 subchannels. Eight of the subchannels can be shared (i.e., assigned to an I/O control unit that has up to 16 devices attached). The Multiplexer Channel

IBM System/370

➤ *Model 155*, along with *Model 165*, was part of the original System/370 announcement in June 1970. Designed as a growth system for System/360 Model 40 and 50 users, *Model 155* operates at 3.5 to 4 times the internal speed of the *Model 50*. It offers from 262,144 to 2,097,152 bytes of conventional magnetic core storage—four times the maximum storage capacity available to *Model 50* users. Though *Model 155*'s core cycle time is a surprisingly slow 2.07 microseconds, 16 bytes of information are fetched or stored during each cycle. The 8,192-byte buffer storage, like the central processor, has a 115-nanosecond cycle time. Instruction fetching is overlapped with instruction execution.

Two Block Multiplexer Channels and one Byte Multiplexer Channel are standard in *Model 155*, and up to three more Block Multiplexer Channels and a second Byte Multiplexer Channel can be added. *Model 155* can handle a total I/O data rate of up to 5.4 million bytes per second. Typical system rentals range from about \$32,000 to \$80,000 per month.

Users of rented *Model 155* systems will not be able to make use of the new virtual storage software unless they elect to move up to a *Model 158*. For purchased *Model 155* systems, IBM will field-install the Dynamic Address Translation facility for a cool \$200,000, beginning in April 1973. The DAT facility includes the Extended Control mode, the Clock Comparator and CPU Timer, Program Event Recording, and additional instructions to control the new facilities. A *Model 155* modified in this manner will be designated a *Model 155-II*.

Model 158, introduced in August 1972, effectively supersedes the *Model 155* as the medium-large-scale member of the new lineup of System/370 processors with virtual storage capabilities. *Model 158* also features semiconductor main memory, Reloadable Control Storage, Integrated Storage Controls for up to sixty-four 3330 Disk Storage drives, and a new CRT display console. The 8K buffer storage and 115-nanosecond processor cycle time used in *Model 155* are retained in the newer model. The net result is that *Model 158* executes instructions at a rate 20 to 40 percent faster than a similarly programmed *Model 155*. In February 1973, IBM doubled the maximum main storage capacity of the *Model 158* by announcing two new central processor models with 3 and 4 megabytes.

Monthly rentals for typical *Model 158* configurations range from about \$49,500 to \$85,000, with purchase prices ranging from about \$2,300,000 to \$3,700,000. As compared with *Model 155*, IBM has boosted the CPU price and slashed the cost of main storage for the *Model 158*. Thus, a *Model 158* system with 1 million or fewer bytes of main storage costs more than the corresponding *Model 155* system, while a *Model 158* with 1.5 million or more bytes costs less than its *Model 155* counterpart. Customer shipments are scheduled to begin in April 1973. ➤

➤ is designed to operate primarily in the byte-interleaved mode, which allows multiple low-speed devices on separate subchannels to operate concurrently. It can also operate in burst mode, which allows only one I/O operation at a time, but burst-mode operation of unbuffered devices is not recommended. The maximum I/O data rate for the Multiplexer Channel is 25,000 bytes/second in byte-interleaved mode and 29,000 bytes/second in burst mode.

No Block Multiplexer Channels nor Selector Channels are available for the *Model 125*.

INPUT/OUTPUT CONTROL (MODELS 135-195)

I/O CHANNELS: The System/370 employs three distinct types of I/O channels in Models 135 and above:

- Byte Multiplexer Channels have a single data path that can be shared by a number of simultaneously operating low-to-medium-speed I/O devices (in "multiplex mode") or monopolized by a single faster device (in "burst mode"). In either case, one byte of data at a time is transferred between main storage and an I/O device. These channels are functionally compatible with the System/360 Multiplexer Channels.
- Selector Channels permit high-speed data transfer operations by one peripheral device at a time. The channel remains busy throughout the time a channel program is in operation, even when no data is being transferred.
- Block Multiplexer Channels provide a single data path that can be shared by a number of high-speed peripheral devices which transfer data alternately in burst-mode fashion. While the channel is interleaving blocks of data to and from various devices, it can also control non-data-transfer functions on other devices. These channels can also operate in Selector Channel mode, in which case they are functionally compatible with the System/360 Selector Channels.

The I/O channels are an integral part of the processing unit in Models 135 through 158, whereas Models 165 through 195 use the separately packaged 2860 Selector Channels, 2870 Byte Multiplexer Channels, and/or 2880 Block Multiplexer Channels.

The *Model 135* Processing Unit includes one Byte Multiplexer Channel as standard equipment, and one or two Selector Channels are optional. The Selector Channels can be equipped to operate as Block Multiplexer Channels. The optional Integrated File Adapter, for either 2319 or 3330 Disk Storage, is functionally equivalent to a Selector Channel and disk control unit.

The *Model 135* Byte Multiplexer Channel has 16 standard subchannels, and no-charge options extend the number of subchannels to 64, 128, or 256. A maximum of 8 of the subchannels can be shared (i.e., assigned to an I/O control unit that can have several devices attached). Maximum data transfer rate is approximately 41,000 bytes/second in the multiplex mode and 149,000 bytes/second in the burst mode. Because of the likelihood of overruns, use of the *Model 135* Byte Multiplexer Channel for unbuffered burst-mode devices is not recommended if there is any possibility of the burst-mode device operating concurrently with the integrated File Adapter, the Integrated Communications Adapter, or a Selector Channel. ➤

IBM System/370

➤ *Model 158 MP* is IBM's designation for the dual-processor Model 158 configuration introduced in February 1973. A Model 158 MP system consists of two 3158 MP Processing Units, a 3058 Multisystem Unit, and appropriate peripheral subsystems. The two processors in a system must have the same main storage capacity, which can range from 0.5 to 4 megabytes each, and each processor can have up to 6 I/O channels. Monthly rentals for typical Model 158 MP configurations will range from about \$108,000 to \$200,000, and customer shipments are scheduled to begin in March 1974.

Model 165, introduced in June 1970, was the most powerful System/370 processor until Model 195 joined the family a year later. Designed as an upgrade machine for users of System/360 Models 65 and 75, Model 165 operates at from 2 to 5 times the internal speed of the Model 65 and offers from 524,288 to 3,145,728 bytes of conventional magnetic core storage. Four-way interleaving of 8-byte accesses to core storage, coupled with 8,192 or 16,384 bytes of 80-nanosecond buffer storage, add up to high performance despite a slow 2-microsecond core cycle time. The processor has an 80-nanosecond cycle time, and the fetching and decoding of several instructions is automatically overlapped with the execution of one instruction at a time.

A Model 165 system can include three different types of I/O channels. Up to 6 Selector Channels, 11 Block Multiplexer Channels, and 2 Byte Multiplexer Channels can be installed (though the total number of channels may not exceed 12). Total I/O data rates in excess of 8 million bytes per second can be accommodated. Typical Model 165 system rentals range from about \$70,000 to \$150,000 per month.

Users of purchased Model 165 systems will be able to join the swing to virtual storage through field installation of the Dynamic Address Translation facility—at a cost of \$400,000. Shipment of the Model 165 DAT facility will begin in December 1973, and a system that includes it will be designated a *Model 165-II*. The DAT facility, however, is not available for rented Model 165 systems.

Model 168, announced in August 1972, features virtual storage capabilities, 1,048,576 to 8,388,608 bytes of fast semiconductor main memory, a Dual-Channel I/O bus that handles total I/O data rates of up to 16 million bytes per second, and Integrated Storage Controls for up to sixty-four 3330 Disk Storage drives. Model 168 retains the 8K or 16K bytes of high-speed buffer storage and the 80-nanosecond processor cycle time of the earlier Model 165. The net result is that Model 168 executes instructions at a rate 10 to 30 percent faster than a similarly programmed Model 165.

Monthly rentals for typical Model 168 configurations range from about \$93,000 to \$170,000, with purchase ➤

➤ The Model 135 Selector Channels normally transfer two bytes of data at a time to or from main storage. Maximum data transfer rates are 1,300,000 bytes/second for the first Selector Channel and 1,200,000 bytes/second for the second. The combined data rate for both Selector Channels, however, may not exceed 2,400,000 bytes/second. The Block Multiplexer Channel feature, a no-charge option for Model 135, permits either or both of the Selector Channels to operate as Block Multiplexer Channels. Each Block Multiplexer Channel has 17 subchannels.

The Model 145 Processing Unit includes one Byte Multiplexer Channel and one Selector Channel as standard equipment. Up to three additional Selector Channels can be added, and any or all of the Selector Channels can be equipped to operate as Block Multiplexer Channels. (If the Integrated File Adapter is installed, only one additional Selector Channel can be used.) The Model 145 Byte Multiplexer Channel has 16 standard subchannels. No-charge options permit the number of subchannels to be expanded to 32, 64, 128, or 256.

The Model 145 Selector Channels transfer data to and from main storage on a one-byte-at-a-time basis unless the optional Word Buffer feature is installed; the buffer provides four-byte data transfers on all Selector Channels and permits higher data rates. The maximum Selector Channel data rate is 1.85 million bytes/second with the Word Buffer and 820,000 bytes/second without it. The Block Multiplexer Channel Feature, a no-charge option, permits any or all of the installed Selector Channels to operate as Block Multiplexer Channels.

The original Models GE through I of the Model 145 Processing Unit can be equipped with an Integrated File Adapter (IFA) to control up to eight 2319 Disk Storage drives or with a 3345 Storage and Control Frame, Model 3, 4, or 5, to control up to 32 IBM 3330 Disk Storage drives. The new Models H2 through J2 of the Model 145 Processing Unit can be equipped with an Integrated Storage Control for up to 32 IBM 3330 Disk Storage Drives; neither the IFA nor the 3345 Storage and Control Frame can be used with these models, and 2319 Disk Drives, if used, must be connected via a 2314 Storage Control.

The Model 155 or 155-II Processing Unit includes one Byte Multiplexer Channel and two Block Multiplexer Channels as standard equipment. Up to three more Block Multiplexer Channels and a second Byte Multiplexer Channel (which takes the place of one of the Block Multiplexer Channels) are optional. (Selector Channels are not used with the Model 155). Each Byte Multiplexer Channel provides from 128 to 256 subchannels (depending upon the system's main storage capacity), and 8 of these subchannels can be shared by 2 or more connected I/O devices. Each Block Multiplexer Channel provides 16 shared subchannels and from 96 to 480 nonshared subchannels (depending upon main storage capacity). Each Model 155 Block Multiplexer Channel can accommodate data rates of over 1.5 million bytes per second.

The Model 158 Processing Unit includes one Byte Multiplexer Channel and two Block Multiplexer Channels as standard equipment. Up to three more Block Multiplexer Channels and a second Byte Multiplexer Channel (which takes the place of one of the Block Multiplexer Channels) are optional. (Selector Channels are not used with the Model 158). Each Byte Multiplexer Channel provides 256 nonshared subchannels or 8 shared and 120 nonshared ➤

IBM System/370

▷ prices ranging from about \$4,200,000 to \$7,300,000. As compared with Model 165, IBM has raised the CPU price and reduced the cost of main storage for the Model 168. Thus, a 2-million-byte Model 168 costs more than its Model 165 counterpart, while a 3-million-byte Model 168 costs less. Customer deliveries are scheduled to begin in August 1973.

Model 168 MP is IBM's designation for the dual-processor Model 168 configuration introduced in February 1973. A Model 168 MP system consists of two 3168 MP Processing Units, a 3068 Multisystem Communication Unit, and appropriate peripheral subsystems. Each of the two processors can have from 1 to 8 million bytes of main storage and up to 12 I/O channels. The two processors can have different storage capacities, but IBM recommends that the two systems be configured as symmetrically as possible to increase their availability. Monthly rentals for typical Model 168 MP systems will range from about \$260,000 to \$370,000, and customer shipments are scheduled to begin in March 1974.

Model 195 took its place at the top of the System/370 family in July 1971. The 370/195 "supercomputer" differs from the previously announced 360/195 only in the inclusion of some new features, such as a 250-nanosecond time-of-day clock, additional instructions for processing variable-length fields, and additional control registers. Model 195 delivers roughly 2 to 3 times the internal processing power of the Model 165, depending upon the application. Because of the emphasis upon ultra-high performance in Model 195, there are minor operational differences and incompatibilities with the smaller System/370 processors.

Model 195 includes 1,048,576 to 4,194,304 bytes of core storage with a 756-nanosecond cycle time and 8-way or 16-way interleaving. Other throughput-boosting features include a 32K buffer storage unit with a 54-nanosecond cycle time, an instruction stack, operand stacks, and extensive overlapping of operations in the instruction unit and six execution units. Emphasis is placed upon floating-point arithmetic speeds; a floating-point addition takes only 108 nanoseconds. Model 195 system rentals range from about \$190,000 to \$270,000 per month.

MULTIPROCESSING

Until February 1973, the most noteworthy omission from the impressive System/370 product line was multiprocessing. It was not possible for two or more System/370 processors to share a common bank of main storage—even though this capability is available for the earlier System/360 Model 65 and has long been an important feature of competitive lines from Burroughs, Control Data, Honeywell, and UNIVAC.

IBM has now attacked and obliterated this product-line deficiency with its customary thoroughness. Two funda- ▷

▷ subchannels. Each Block Multiplexer Channel provides 16 shared and 480 nonshared subchannels, and can accommodate data rates of over 1.5 million bytes per second.

A Model 165, 165-II, or 168 system can include a maximum of six 2860 Selector Channels, two 2870 Byte Multiplexer Channels, and/or eleven 2880 Block Multiplexer Channels. The total number of I/O channels is limited to 7 in the basic system and 12 if the Extended Channels feature is installed.

A Model 195 system can include a maximum of six 2860 Selector Channels, two 2870 Byte Multiplexer Channels, and/or thirteen 2880 Block Multiplexer Channels. The total number of I/O channels is limited to 7 in the basic Model 195 system and 14 if the Extended Channels feature is installed.

Each 2860 Selector Channel handles one I/O operation at a time, at a data rate of up to 1.3 million bytes per second.

Each 2870 Byte Multiplexer Channel provides 192 subchannels. Optionally, selector subchannels can be added—up to 4 on the first 2870 in a system, and up to 2 on the second. Each selector subchannel can handle one I/O operation of up to 180,000 bytes per second at a time, concurrently with multiplexed I/O operations on the basic channel. The aggregate data rate for the basic multiplexer channel may not exceed 110,000 bytes per second, and the maximum total data rate for all operations on a 2870 Byte Multiplexer Channel is 670,000 bytes per second.

Each 2880 Block Multiplexer Channel provides up to 56 nonshared subchannels and one shared subchannel. Data is transferred in burst mode, to or from one device at a time, at up to 1.5 million bytes per second. The optional Two-Byte Interface permits a data rate of up to 3.0 million bytes per second.

CONFIGURATION RULES: In general, each System/370 channel can accommodate up to 8 peripheral control units and address as many as 256 devices. Most System/370 peripheral devices can be connected to any of the three types of channels. High-speed tape, disk, and drum units require either a Block Multiplexer or Selector Channel, and card readers, printers, and other low-speed devices are normally connected to a Byte Multiplexer Channel.

MULTIPROCESSING CONFIGURATIONS: A Model 158 MP (Multiprocessing) system consists of two 3158 MP Processing Units, a 3058 Multisystem Unit, and appropriate peripheral subsystems. Each of the two Processing Units in a system must have the same main storage capacity, which can range from 0.5 million to 4 million bytes per Processing Unit. Moreover, each Processing Unit can have up to 6 I/O channels (5 Block Multiplexers and 1 Byte Multiplexer or 4 Block Multiplexers and 2 Byte Multiplexers). The 3058 Multisystem Unit interconnects the two Processing Units and houses a configuration control panel which the operator can use to reconfigure the system.

A Model 168 MP (Multiprocessing) system consists of two 3168 MP Processing Units, a 3068 Multisystem Communication Unit, and appropriate peripheral subsystems. Each of the two Processing Units can have from 1 to 8 million bytes of main storage. The two Processing Units can have different storage capacities in a 168 MP system, but IBM recommends that the two systems be configured as symmetrically as possible for higher availability. Each Processing Unit can have up to 12 I/O channels, including ▷

IBM System/370

➤ mentally different types of System/370 multiprocessing are now supported.

A "tightly coupled" multiprocessing system features two Model 158 or Model 168 Processing Units which share their combined main storage and operate under a single OS/VS2 Release 2 control program; these are the previously described Model 158 MP and 168 MP systems.

A "loosely coupled" multiprocessing complex can consist of up to four uniprocessor or dual-processor "local systems", each accessing only its own main storage and running under its own OS/VS2 or OS/MVT control program, with the overall management and scheduling controlled by a single "global system" utilizing OS/VS2 Release 2 and the new JES3 job entry subsystem.

Both types of multiprocessing offer important benefits in terms of increased system reliability and more flexible utilization of system resources. But users who adopt System/370-style multiprocessing will pay a high price in terms of both equipment costs and software overheads. Even the smallest System/370 multiprocessing configurations are powerful, costly computer systems, and users with hardware budgets below \$100,000 per month can pretty well forget about them. Practical configurations of the Model 158 MP begin at about \$108,000 per month, which is far higher than other well-proven multiprocessor systems such as the Burroughs B 6700, CDC Cyber 70 Series, Honeywell Series 6000, and UNIVAC 1106 and 1110.

SEMICONDUCTOR MAIN STORAGE

When the System/370 Model 145 was unveiled in September 1970, its most newsworthy feature was its "monolithic main memory," which makes use of bipolar LSI (large-scale integration) technology in place of conventional magnetic cores. A Model 145 system can have up to 1048K bytes of main storage plus 32K bytes of Reloadable Control Storage (RCS), all consisting of LSI chips. Cycle times are 540 nanoseconds per 4-byte or 8-byte fetch and 607.5 nanoseconds per 4-byte store.

Model 135 uses the same bipolar memory technology as the Model 145. A Model 135 system can have from 98,304 to 245,760 bytes of main storage in 49,152-byte increments. Cycle times are 770 nanoseconds per 2-byte read and 935 nanoseconds per 2-byte write operation.


A Model 135 or 145 storage array chip is about one-eighth of an inch square and contains 1434 microscopic circuit elements forming 174 interconnected circuits. Each chip holds 128 storage bits and the associated decoding, addressing, and sensing circuitry. Two storage array chips are mounted on a half-inch-square substrate, and two of the substrates are packaged into a 512-bit storage array module. Twenty-four of the modules are then mounted on a storage array card, which is about 3.50 by 4.75 ➤

➤ a maximum of six 2860 Selector Channels, two 2870 Byte Multiplexer Channels, or eleven 2880 Block Multiplexer Channels. The 3068 Multisystem Communication Unit interconnects the two Processing Units and houses a configuration control panel which the operator can use to reconfigure the system. Multiprocessing features must be added to the 3066 Systems Console and the 3067 Power and Coolant Distribution Unit.

SIMULTANEOUS OPERATIONS: Concurrently with computing, a System/370 can control a maximum of one high-speed I/O data transfer operation per Block Multiplexer Channel, one high-speed I/O operation per Selector Channel, one high-speed I/O operation on the Integrated File Adapter or Integrated Storage Control (if installed), and one low-speed I/O operation on each subchannel of a Byte Multiplexer Channel. Alternatively, a Byte Multiplexer Channel can operate in burst mode and handle a single higher-speed I/O operation. Maximum total I/O data rates for all channels are shown in the table.

MASS STORAGE

2305 FIXED-HEAD STORAGE: Provides fast access to comparatively small quantities of information. Each drive unit contains 6 non-removable disks with 12 recording surfaces. A fixed read/write head serves each track. One or two 2305 drive units can be connected to a 2835 Storage Control. A Two-Channel Switch can optionally be added to the 2835. ➤

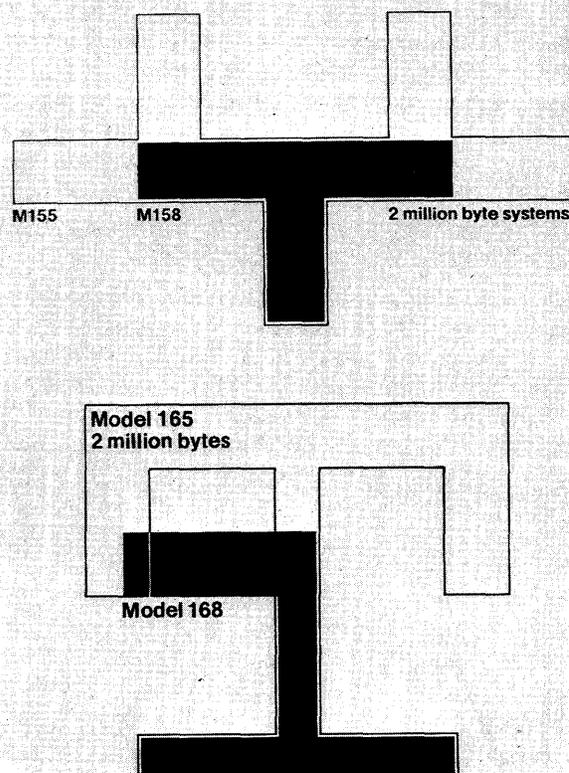

IBM's new MOS main memories result in greatly reduced floor-space requirements. The top illustration shows a 2-million-byte Model 158 CPU (shaded black) superimposed against a Model 155 with the same amount of core storage. Below, a 2-million-byte Model 168 CPU is similarly compared with a Model 165 of equivalent capacity.

IBM System/370

▷ inches in size and holds 12,288 storage bits. Finally, the cards are placed in Basic Storage Modules. Each module is about 13.25 inches long, 5.5 inches deep, and 9 inches wide and contains 48K bytes of storage plus its associated circuitry.

In the new Model 145 Processing Units introduced in February 1973 (Models HG2 through J2), IBM is using new and considerably denser bipolar memory circuits that store 1024 bits in each chip. The more compact circuits substantially reduce the CPU floor-space requirements, enabling up to 1048K bytes of storage to be housed in a Model 145 mainframe that previously held only 262K bytes. The separate 3345 Storage and Control Frame, required with the earlier 393K and 524K Model 145 mainframes, is not used with the new models. Power and air conditioning requirements of the new chips are also substantially lower. The older 128-bit chips, however, will continue to be used for the first 262K bytes of storage in each processor. For capacities in excess of 262K bytes, IBM offers the new, denser Model 145 memory at an incremental purchase price of 46 cents per byte, compared with 96 cents per byte for the original Model 145 memory and 22 cents per byte for the MOS memory used in Models 158 and 168.

In designing the Model 135 and 145 memories, IBM chose bipolar LSI technology over the newer and even more promising MOS (metal-oxide semiconductor) technology because of uncertainty as to whether the necessary degree of quality control could be maintained in the mass production of MOS circuits. Apparently these doubts have now been resolved, because the newer Model 125, 158, and 168 systems all use metal-oxide semiconductor field-effect transistor (MOSFET) main memories.

Like the bipolar memories, MOSFET memories are fabricated on tiny silicon chips which are assembled into compact storage modules. But the MOSFET circuits can be made even smaller. In the Model 158 memories, each one-eighth-inch-square chip holds 1024 bits of storage and the associated circuitry, compared with 128 bits per chip in the bipolar Model 135 memories. The smaller sizes of the Model 168 CPU use the same 1024-bit chips as the Model 158; but the 5, 6, 7, and 8 megabyte models, introduced in February 1973, store 2048 bits in each chip.

The chief advantage of the bipolar LSI technology over MOS is higher potential operating speed—but this is currently achieved at the expense of higher manufacturing cost, higher power consumption, and higher heat dissipation. MOS memories can deliver moderately high speeds along with extremely compact size, low power consumption, and minimal heat dissipation. For most applications, the MOS technique shapes up as the more cost-effective of the two, but manufacturing and quality control problems have caused its commercial acceptance to lag behind that of the bipolar technology. ▷

▶ The 2305 Model 1, usable only with Models 165 and above, stores up to 5.4 million bytes of data. Each of the 384 addressable tracks can hold up to 14,136 bytes. Average access time is 2.5 milliseconds, and data transfer rate is 3.0 million bytes per second.

The 2305 Model 2, usable with Models 145 and above, stores up to 11.2 million bytes of data. Each of the 768 addressable tracks can hold up to 14,660 bytes. Average access time is 5.0 milliseconds, and data transfer rate is 1.5 million bytes per second.

Two standard features help the 2305 take advantage of the capabilities of the System/370 Block Multiplexer Channels. Rotational Position Sensing lets the drive unit disconnect from the channel during most of the rotational delay period, leaving the channel free for other operations. Multiple Requesting permits queuing of multiple requests for access to data stored on a 2305 drive; after each request is logged, the channel disconnects until the desired record position is reached and the channel is free.

2319 DISK STORAGE: Provides fairly rapid access to moderately large quantities of data stored in interchangeable 2316 Disk Packs. Can either be directly connected to a Model 135 or 145 system or used in a 2314-B Direct Access Storage Facility (DASf). Five models of the 2319 are currently available:

Model A1—three disk drives (87 million bytes) and associated control for attachment to a Model 135 or 145 via the Integrated File Adapter (IFA). Note that the IFA, a featured capability of the original Models GE through I of the 145 Processing Unit, is not available for the new Models H2 through J2.

Model A2—three additional disk drives (87 million bytes) for attachment to the 2319 Model A1 in a Model 145 system.

Model A3—three additional disk drives (87 million bytes) for attachment to the 2319 Model A1 in a Model 135 system.

Model B-1—three disk drives (87 million bytes) and associated control for attachment to a 2314 Model B1 Storage Control in a 2314-B DASf.

Model B2—three additional disk drives (87 million bytes) for attachment to the 2319 Model B1 in a 2314-B DASf.

Each "2314-style" drive stores up to 29.17 million bytes of data on-line. The 11-disk 2316 Disk Pack has 200 data tracks on each of the 20 data recording surfaces. Each track can hold up to 7,294 bytes of data in variable-length records. Each drive has a comb-type access mechanism that can read or write up to 145,880 bytes (20 tracks) in each of its 200 positions. Average head movement time is 60 milliseconds, average rotational delay is 12.5 milliseconds, and data transfer rate is 312,000 bytes per second.

The IFA on a Model 135 or 145 permits attachment of up to eight 2319 drives. The first three are contained in the 2319 Model A1. Up to five additional drives can be connected, using various combinations of the three-drive 2319 Model A2 or A3, the single-drive 2312 Disk Storage Module, the two-drive 2318, and the four-drive 2313. Total on-line storage capacity with the maximum complement of eight drives is 233 million bytes. ▶

IBM System/370

➤ IBM's selection of MOS for the Model 125, 158, and 168 main memories is almost certain to change all that and ensure the widespread use of MOS memories in future computers.

IBM claims three important advantages for its semiconductor main storage:

- Higher storage speeds can be obtained because of (1) the shorter physical distances between the memory components, and (2) the nondestructive readout capability of the monolithic storage, which eliminates the need for a regeneration cycle after each read operation.
- Storage serviceability is improved because each storage array card is a complete functional component that can be replaced within a few minutes.
- Floor-space requirements for large-capacity main memories are greatly reduced. (A Model 168 Processing Unit, for example, requires 40 percent less floor space than a similarly configured Model 165.)

On the negative side, the volatility and newness of the semiconductor main storage may cause some concern among prospective users.

Semiconductor storage requires power to maintain either a zero or one state. Thus, the stored data is lost whenever the power is turned off (whereas core storage maintains its magnetized state when the power is removed). This storage volatility is not likely to create serious problems for System/370 users—but it should spur them to review their operating and checkpoint/restart procedures to make sure that processing can be resumed after unexpected power failures without undue loss of time.

The newness of the semiconductor storage technology naturally makes it less of a "sure thing" than core memory, which has been refined to a high level of reliability through more than 15 years of widespread use. On the other hand, early users of the Model 135 and Model 145 are experiencing no significant memory problems—and it is clear that IBM did not announce the long-awaited advances to bipolar and then MOS memories until it was quite certain that they could pass the critical tests of economy and high reliability in mass production.

RELOADABLE CONTROL STORAGE

The microprograms that control all the internal operations of the Model 125, 135, 145, and 158 Processing Units reside in a semiconductor memory unit called Reloadable Control Storage (RCS). The microprograms are loaded into RCS by means of a small read-only disk unit called the Console File, which reads special "floppy" single-disk cartridges at the rate of 33,300 bits per second. Each cartridge can hold approximately 75,000 bytes, and IBM ➤

➤ A 2314 DASF consists of a 2314 Model B1 Storage Control and three, six, or nine (eight active plus one spare) 2319 disk drives. Thus, it provides 87, 175, or 233 million bytes of on-line data storage at a substantially lower price than the earlier 2314-A and 2314-1 Direct Access Storage Facilities, with which it is functionally compatible. The 2314-B DASF can be used with System/370 Models 135 through 195.

3330 DISK STORAGE: Provides fairly rapid access to extremely large quantities of data stored in interchangeable 3336 Disk Packs. Each Disk Pack contains 12 disks. Nineteen disk surfaces are used for data recording, and a 20th surface holds prerecorded data that controls seeking, position sensing, and clocking. Each disk pack holds up to 100,018,000 bytes of data, so a 16-drive 3330 subsystem can store over 1.6 billion bytes on-line. Each data track has a capacity of 13,030 bytes, and each of the 404 data cylinders holds up to 247,570 bytes (19 tracks). Head movement time ranges from 10 to 55 milliseconds and averages 30 for random accesses. Average rotational delay is 8.4 milliseconds, and data transfer rate is 806,000 bytes per second. Rotational Position Sensing and Multiple Requesting, as described under the 2305 above, are standard features. A Command Retry facility enables the 3330 subsystem to recover from many errors without the use of time-consuming error recovery programs. Error correction coding circuitry in the control unit permits detection and correction of bursts of errors up to 11 bits in length on a single track.

Two, three, or four 3330 series drives, each providing 100 million bytes of on-line storage, can be connected directly to a Model 125 Processing Unit; no I/O channel or attachment feature is required. The first two drives are contained in the 3333 Disk Storage and Control module. The subsystem can be expanded by adding either a 3330 Model 1 Disk Storage module, which contains two drives, or the recently announced 3330 Model 2, which contains one drive. Each drive is mounted in a powered drawer for operating convenience.

In the larger System/370 models, a 3330 subsystem can include from 2 to 32 disk drives, in 1-drive or 2-drive increments. A "channel-attached" 3330 subsystem consists of a 3830 Model 2 Storage Control and from one to four 3333 Disk Storage and Control modules, containing two drives each; the 32-Drive Expansion feature, announced in February 1973, is required when more than two 3333's are used in a subsystem. Up to three 3330 Disk Storage modules, containing one or two drives each, can in turn be attached to each 3333. The 3333 provides logic and power for the attached 3330 modules. (Alternatively, a 3830 Model 1 Storage Control, now offered only on an "as available" basis, can be used to control from one to four 3330 Disk Storage Modules, or two to eight drives; in this case, no 3333's are used.)

An "integrated" 3330 subsystem contains from one to four 3333 Disk Storage and Control modules, containing two drives each; the 32-Drive Expansion feature, announced in February 1973, is required when more than two 3333's are used in a subsystem. Up to three 3330 Disk Storage modules, containing one or two drives each, can in turn be attached to each of the 3333 modules. The subsystem can be connected to a Model 135 via the 3330 Integrated File Adapter; to a Model 145 H2, HG2, I2, IH2, or J2 via the Integrated Storage Control; to a Model 145 GE, GFD, H, HG, or I via the 3345 Storage and Control Frame (Model 3, 4, or 5); or to a Model 158 or 168 via the Integrated Storage Control (ISC). The ISC in a Model 158 or 168 Processing Unit includes two data ➤

IBM System/370

▷ supplies prewritten cartridges containing all the control microprograms required for a specific installation.

RCS is an unusually effective microprogramming technique that has several significant advantages:

- Different versions of the system microcode, supporting different features and options, can be readily interchanged. The use of RCS made it relatively easy for IBM to add virtual storage capabilities to Models 135 and 145. What's more, at some appropriate future date, the System/370 processors could conceivably assume a radically different instruction repertoire and functional characteristics. Many of the functions now performed by software could be "built into the hardware" through the development of suitable control microprograms (the much-discussed "firmware" concept).
- Many of the capabilities which formerly required specialized hardware (floating-point arithmetic, emulators, block multiplexing, disk control logic, etc.) can now be implemented through microprogramming, at no extra cost to the user except for the RCS required to hold the microcode.
- Serviceability is enhanced because the basic system microcode can quickly be replaced by suitable diagnostic microprograms whenever maintenance is required.

Unfortunately, the cost of providing the RCS required to hold the microcode is by no means negligible. For example, every Model 135 system that includes the 3330 Integrated File Adapter will need at least one, and quite possibly two, 12K extensions of the basic 24K-byte RCS—and each 12K increment rents for \$225 per month. In the Model 145, which houses its RCS in an extension of the semiconductor main memory, any increase beyond the basic 32K bytes of RCS is accompanied by an equivalent reduction in the system's main memory capacity.

HARDWARE FEATURES

The System/370 processing units share many significant characteristics with the earlier System/360 processors (Models 25 and above). Reflecting their "all-purpose" design philosophy, they have a large, complex instruction repertoire. They can perform fixed-point arithmetic in either fixed-length binary or variable-length decimal modes, and floating-point arithmetic on operands of three different sizes. In addition, they can perform radix conversions, code translations, and conversions between the packed (2 digits per byte) and unpacked (1 digit per byte) data formats. They have a comprehensive interrupt system that enables them to respond to a variety of special conditions, both internal and external. They have sixteen 32-bit general registers that can serve as accumulators, index registers, or base address registers, as well as four ▷

▶ paths (logical control units) and can control two 3330 subsystems containing a total of up to 64 drives. A 3330 subsystem connected to the Model 135 IFA is limited to a maximum of two 3333 modules and 16 drives total.

The 3333 String Switch Feature, announced in February 1973, permits program-controlled switching of a 3333 Disk Storage and Control module and its attached 3330 Disk Storage Modules between two control units or attachments. The switching can be either dynamic, with the two control units or attachments contending for the 3333 and its attached drives, or static, with the 3333 dedicated to a single control unit or attachment via an enable/disable switch. A Remote Switch Attachment permits installation of the 3333 String Switch on the configuration control panel of a Model 158 MP or 168 MP system.

OTHER MASS STORAGE DEVICES: In addition to the equipment described above, the following older IBM mass storage devices can also be included in a System/370 configuration:

2301 Drum Storage (with Models 165-195)
2303 Drum Storage
2311 Disk Storage Drive
2314 Direct Access Storage Facility, Series A
2321 Data Cell Drive

For details and prices of these units, please refer to the IBM System/360 report (70C-491-03).

INPUT/OUTPUT UNITS

2401 MAGNETIC TAPE UNIT, MODELS 1-6: These units have the following basic characteristics:

Model 1: 800 bpi; 30,000 bytes/sec at 37.5 in/sec.
Model 2: 800 bpi; 60,000 bytes/sec at 75.0 in/sec.
Model 3: 800 bpi; 90,000 bytes/sec at 112.5 in/sec.
Model 4: 1600 bpi; 60,000 bytes/sec at 37.5 in/sec.
Model 5: 1600 bpi; 120,000 bytes/sec at 75.0 in/sec.
Model 6: 1600 bpi; 180,000 bytes/sec at 112.5 in/sec.

All models use standard 1/2-inch, 9-track tape, have 0.6-inch inter-record gaps, and can read backward as well as forward. Models 1, 2, and 3 can alternatively be equipped with a 7-track head, making them compatible with the second-generation IBM 729 tape units. Models 4, 5, and 6 can be equipped with a Dual Density feature that enables them to operate at 800 bpi as well as 1600 bpi.

All models perform read-after-write checking of the data they record. Models 1, 2, and 3 perform vertical, longitudinal, and diagonal parity checks. Models 4, 5 and 6 perform vertical parity checking only, but can automatically correct single-track read errors without rereading.

Up to eight 2401 units can be connected to a 2803 (single-channel) or 2804 (dual-channel) Tape Control of the appropriate model. These tape drives are usable with System/370 Models 135 through 195.

The 2816 Switching Unit permits individual tape drives to be switched between two or more control units. One 2816 can accommodate a maximum of eight 2401 or 2420 Magnetic Tape Units and four 2803 Tape Controls.

2401 MAGNETIC TAPE UNIT, MODEL 8: This model is designed specifically for 7-track tape users; 9-track capability is not available. Standard 1/2-inch tape is read and written at 200, 556, or 800 bpi, with associated data transfer rates of 15,000, 41,700, or 60,000 characters/▶

IBM System/370

▷ 64-bit floating-point registers. And finally, when operating in the System/360-style Basic Control mode, they use a base-plus-displacement addressing scheme that permits direct addressing of up to 16 million bytes of core storage.

The System/370 adds from 13 to 27 new instructions to the System/360's already large instruction set. Thirteen of the new instructions help reduce execution time and program storage requirements by enhancing decimal arithmetic performance, eliminating the need for multiple "move" instructions, and facilitating the blocking and unblocking of records. System/370 processors with virtual storage also include five additional instructions that facilitate control of the Dynamic Address Translation facility. As many as nine more instructions are available for certain processor models to aid in implementing OS/VS2 Release 2, VTAM, and/or multiprocessing.

The Byte-Oriented Operand Feature, standard in the System/370, allows users to ignore, in part, the System/360 restriction that non-decimal operands must be stored in core locations whose addresses are integral multiples of the operand length. It is important to note, however, that significant performance degradation is likely to occur if programmers are allowed to take advantage of this feature and ignore the usual boundary constraints on operand placement.

Two standard hardware features help to make the System/370 a more "time-conscious" system. An improved interval timer with a resolution of 3.3 milliseconds facilitates the timing of short duration tasks, while a time-of-day clock with a 1-microsecond resolution provides a consistent measure of elapsed time for job accounting, communications, and real-time functions. The new Clock Comparator and CPU Timer feature further expands the system timing capabilities.

The buffer (or cache) storage unit, which is a significant architectural feature of Models 155 through 195, consists of 8,192 to 32,768 bytes of fast-access semiconductor storage, depending upon the model. For all processor fetch operations, the buffer storage control determines whether the referenced data is available in buffer storage. If so, buffer storage is accessed; if not, main storage is accessed and the addressed data is both transmitted to the processor and loaded into buffer storage. Buffer loading is performed in units of 32-byte "blocks" in Models 165 and 168, and in 16-byte "halfblocks" in Models 155 and 158. A continuously updated index array provides rapid references to the main storage addresses of all data contained in buffer storage. Thus, in most applications there is a fairly high probability that the operands and instructions required by the processor will already be present in buffer storage and rapidly accessible. Moreover, all buffer storage operations are automatic and completely "transparent" to the System/370 programmer; he can simply ignore the existence of the buffer storage when writing his programs. ▷

▶ second. Up to eight 2401 Model 8 drives can be connected to a 2803 Model 3 (single-channel) or 2804 Model 3 (dual-channel) Tape Control. The Data Conversion Feature is standard on these tape controls, but the 2816 Switching Unit cannot be used.

2415 MAGNETIC TAPE UNIT AND CONTROL: Consists of 2, 4, or 6 tape drives and an integral controller. Usable with System/370 Models 135 through 158. All 6 models of the 2415 use standard 1/2-inch, 9-track tape, have 0.6-inch inter-record gaps, and can read backward as well as forward. Optional features permit reading and writing of 7-track tape by all models, and of 800-bpi tape by the 1600-bpi models. The following models are available:

Model 1: 2 drives; 800 bpi; 15,000 bytes/sec.
 Model 2: 4 drives; 800 bpi; 15,000 bytes/sec.
 Model 3: 6 drives; 800 bpi; 15,000 bytes/sec.
 Model 4: 2 drives; 1600 bpi; 30,000 bytes/sec.
 Model 5: 4 drives; 1600 bpi; 30,000 bytes/sec.
 Model 6: 6 drives; 1600 bpi; 30,000 bytes/sec.

2420 MAGNETIC TAPE UNIT: A high-performance tape drive with automatic threading and a single-capstan vacuum drive. Uses standard 1/2-inch, 9-track tape, recorded at 1600 bpi. Model 5 transfers 160,000 bytes/sec and Model 7 transfers 320,000 bytes/sec. Up to 8 drives can be connected to a 2803 Model 2 Tape Control. The 2420 drives are usable with System/370 Models 135 through 195.

3410/3411 MAGNETIC TAPE SUBSYSTEM: These compact, low-cost tape units, designed primarily to bring magnetic tape capabilities to the small-scale IBM System/3 Model 10, are also available for use with System/370 Models 125 through 158. The 3410 is a tape unit only, while the 3411 contains both a tape unit and the subsystem control unit. The compact, waist-high cabinets are cable-connected to one another at the front corners, making it possible to place them side by side or at any angle up to 90 degrees to one another. The 3410 and 3411 are available in three models, whose principal characteristics are as follows:

	<u>Model 1</u>	<u>Model 2</u>	<u>Model 3</u>
Tape speed, inches/sec	12.5	25	50
Recording density, bpi	1600	1600/800*	1600/800*
Date rate, bytes/sec:			
At 1600 bpi			
(phase-encoded)	20,000	40,000	80,000
At 800 bpi (NRZI)	Not avail.	20,000	40,000*
Inter-block gap, inches	0.6	0.6	0.6
Rewind time,			
minutes/2400' reel	3	3	2

* Requires Dual Density feature.

All three models use half-inch tape recorded in the standard IBM 9-track formats. On a System/370, a 3411 Model 1 Magnetic Tape Unit and Control can accommodate up to three additional 3410 Model 1 Magnetic Tape Units for a maximum subsystem capacity of four tape drives. A 3411 Model 2 can control up to five additional 3410 Model 2 units, and a 3411 Model 3 can control up to five additional 3411 Model 3 units. Models cannot be intermixed within a subsystem. Every 3410 and 3411 tape unit must be equipped with either the Single Density (1600 bpi) or Dual Density (1600 or 800 bpi) feature; the Dual Density capability is not available for the Model 1 units. A System/360/370 Attachment is required on the 3411 Control Unit. ▶

IBM System/370

▷ Models 125, 135, and 145 do not utilize the buffer memory concept. Cost/performance considerations apparently dictated the use of a single level of high-speed semiconductor main storage instead of the more complex two-level memories employed in the larger System/370 processors.

For their logic circuits (as distinguished from their memory circuits), the System/370 processors employ IBM's Monolithic Systems Technology (MST). Each MST logic chip is slightly over one-sixteenth of an inch square and contains more than 100 components forming up to 8 interconnected circuits. Thus, the circuit density is considerably lower than in the storage array chips, though the concepts employed are quite similar.

Along with performance and compatibility, IBM is strongly stressing increased reliability in the System/370. Admitting that the System/360 initially failed to operate at the reliability level its customers had come to expect, IBM has paid a great deal of attention to reliability and ease of maintenance in designing the System/370. An automatic retry capability for central processor operations and error-correcting circuits for main storage often make it possible to continue processing despite hardware faults. New hardware and software facilities, together with centrally located maintenance data banks, facilitate equipment servicing. Program Event Recording, a new standard feature in Models 125, 135, 145, 158, and 168, is a dynamic debugging facility that aids in system maintenance by monitoring selected program events and triggering interrupts when they occur.

PERIPHERAL EQUIPMENT

System/370 computers can utilize most of the 50-odd System/360 peripheral devices. The System/360 peripherals that are *not* supported for use in a System/370 configuration (mainly because of obsolescence or very limited user interest) are as follows:

- 1231 Optical Mark Page Reader
- 1285 Optical Reader
- 1404 Printer
- 1412 Magnetic Character Reader
- 1418 Optical Character Reader
- 1428 Alphanumeric Optical Reader
- 1445 Printer
- 1827 Data Control Unit
- 2302 Disk Storage
- 2361 Large-Capacity Core Storage
- 7340 Hypertape Drive
- 7772 Audio Response Unit.

In addition to the wide array of System/360 peripheral equipment, IBM has recently developed a number of noteworthy mass storage and input/output units primarily for use with the System/370. In general, these newer devices represent significant improvements in performance ▷

► Features of the 3410/3411 subsystem include single-capstan drive, linear rewind, simplified tape threading, and a push-pull quick-release latch. As in the high-performance IBM 3803/3420 subsystem, the tape units are connected to the control unit in radial rather than series fashion to facilitate maintenance. Only digital signals are transmitted across the interface to reduce the sensitivity to noise. Deliveries of 3410/3411 subsystems to System/370 users began in December 1972.

3420 MAGNETIC TAPE UNIT: An economical, high-performance tape drive introduced in November 1970. Incorporates the features of the earlier 2420 drives together with several worthwhile improvements. Air bearings and a single-capstan drive are used to reduce tape wear, and the tape's oxide surface touches only the read/write head and tape cleaner. Wraparound cartridge loading and automatic tape threading are standard features, and a new automatic reel latch makes it unnecessary for the operator to lock the tape reel in place. Additional tachometers control the reel motors' speeds for smoother winding. Read access times are considerably faster than those of the corresponding 2420 drives. A new "radial interface" connects each tape drive directly to the control unit, making it possible to switch individual drives off-line without cable changing. Principal characteristics of the three models are as follows:

- Model 3: 75 inches/sec; 120,000 bytes/sec at 1600 bpi.
- Model 5: 125 inches/sec; 200,000 bytes/sec at 1600 bpi.
- Model 7: 200 inches/sec; 320,000 bytes/sec at 1600 bpi.

Operation in the basic 9-track mode, at 1600 bpi only, requires use of the Single-Density Feature on both the tape drives and the control unit. The Dual-Density Feature permits 9-track operation at either 1600 bpi (phase-encoded) or 800 bpi (NRZI). The 7-Track Feature permits 7-track operation in NRZI mode at either 556 or 800 bpi. One of these three optional features is required on every tape drive and every control unit.

The 3420 tape drives can be used with System/370 Models 135 through 195. Up to eight 3420 drives can be connected to a 3803 Tape Control. The control unit uses monolithic circuits and features "microdiagnostic programs" which facilitate maintenance. Optional Tape Switching Features permit two, three, or four control units to jointly access up to 16 tape drives. The Two-Channel Switch Feature permits a control unit to be accessed via either of two I/O channels.

2495 TAPE CARTRIDGE READER: Reads 16-millimeter sprocketed magnetic tape cartridges recorded by an IBM 50 Magnetic Data Inscrber or Magnetic Tape Selectric Typewriter (MTST). Recording density is 20 bpi, and rated speed is 900 bytes/sec. Feed hopper holds up to 12 cartridges, and successive cartridges are loaded and read automatically at the rate of about 1 cartridge per minute. Usable with Models 125 through 168.

1442 CARD READ PUNCH, MODEL N1: Reads 80-column cards at 400 cpm and punches them at 160 columns per second. Usable with Models 125 through 195; includes an integrated control unit.

1442 CARD PUNCH, MODEL N2: Punches 80-column cards in column-by-column fashion at 160 columns per second (or 91 cpm when all 80 columns are punched). Usable with Models 125 through 168; includes an integrated control unit. ►

IBM System/370

▷ and/or economy. Examples are the high-performance 3330 Disk Storage facility, the economical 2319 Disk Storage facility, the 2000-lpm 3211 Printer, the low-priced 3411 Magnetic Tape Subsystem, the highly cost-effective 3420 Magnetic Tape Units, the 96-column 2596 Card Read Punch, the 3881 Optical Mark Reader, and the 3505 Card Reader and 3525 Card Punch, which share a microprogrammed control unit. Detailed descriptions of all these units can be found in the "Characteristics" section of this report.

Most significant of all the System/370 peripheral devices is the 3330 Disk Storage facility, a logical extension of the design concepts employed in the earlier 2314 Direct Access Storage Facility. The 3330 is making it economically feasible to implement a host of new applications that require rapid access to large on-line data banks. As compared with an 8-drive 2314-A facility, an 8-drive 3330 facility provides 3.4 times the storage capacity (800 million bytes versus 233 million), half the average head-positioning time (30 milliseconds versus 60), two-thirds the average rotational delay (8.4 milliseconds versus 12.5), and 2.6 times the data transfer rate (806,000 bytes per second versus 312,000)—all at a far lower cost per byte stored. In August 1972, IBM increased the maximum number of drives in a 3330 subsystem from 8 to 16 and announced integrated control features that reduce the cost of using 3330 drives with four of the System/370 processing units. In February 1973, IBM again doubled the maximum subsystem size to 32 drives.

Most System/370 installations will use the 3330 as their virtual storage residence device, but users who need really high performance in a paging environment will probably find it necessary to install a 2305 Fixed-Head Storage Facility. The 2305 provides much faster access to comparatively small quantities of data. Unfortunately, its price is high—\$6,400 per month for an 11.2-million-byte unit and its controller. The absence of a fast, economical fixed-head disk or drum is the most obvious weakness in IBM's current lineup of peripheral equipment.

COMMUNICATIONS

Until March 1972, communications control functions in the System/370, as in the System/360, were handled by the 2701 Data Adapter or the 2702 or 2703 Transmission Controls, which place the communications processing burden squarely upon the associated central processor. Then IBM unveiled the 3705 Communications Controller, a minicomputer-based "front-end" processor that contains from 16K to 240K bytes of core storage and can control up to 352 communications lines. In February 1973, IBM added the smaller, program-compatible 3704, which handles up to 32 lines.

When connected to a System/370 computer, the 3704 and 3705 can use either the Network Control Program (NCP) or the 2701/2/3 Emulation Program. When the NCP is ▷

▶ **2501 CARD READER:** Reads 80-column cards serially by column at either 600 cpm (Model B1) or 1000 cpm (Model B2). Usable with Models 125 through 195; includes an integrated control unit.

2520 CARD READ PUNCH, MODEL B1: Can read cards in column-by-column fashion, punch cards in row-by-row fashion, or read and punch simultaneously, at the rate of 500 cpm. Usable with Models 125 through 195; includes an integrated control unit.

2520 CARD PUNCH, MODELS B2 and B3: Punches 80-column cards in row-by-row fashion at either 500 cpm (Model B2) or 300 cpm (Model B3). Usable with Models 125 through 195; includes an integrated control unit.

2540 CARD READ PUNCH: Consists of two functionally separate units, a 1000-cpm reader and a 300-cpm punch, in a single cabinet. Usable with Models 125 through 195. The 2821 Control Unit provides fully buffered card reading and punching; some models of the 2821 can also control one or two 1403 Printers.

2596 CARD READ PUNCH: Equips a System/370 computer to read, punch, and interpret IBM's new 96-column "minicards". Thus, the 2596 makes it possible to interchange 96-column card data between an IBM System/3 and the larger IBM computers. The 2596 has essentially the same mechanical specifications as the 5424 Model A2 Multi-Function Card Unit for the System/3 Model 10. It consists of two 2000-card input hoppers, a read station, a punch station, an optional print station, and four 600-card stackers. On the 2596 (unlike the 5424 MFCU), one input hopper and two stackers are used for reading and the other input hopper and two stackers are used for punching. The 2596 cannot read and punch the same card during a single pass. Rated speeds are 500 cpm for reading and 120 cpm for punching. The optional Card Print feature permits interpretive printing of the data being punched. The printing is in a fixed format of three 32-character lines across the top of each card. Printing is performed simultaneously with punching at 120 cpm. The 2596 contains a built-in control unit and can be used with Models 125 through 195.

3504 CARD READER: Reads standard 80-column cards at either 800 cpm (Model A1) or 1200 cpm (Model A2). Connects directly to a Model 125 Processing Unit via the Integrated 3504 Card Reader Attachment. Functionally identical with the 3505 Card Reader used with System/370 Models 135 through 195, below.

3505 CARD READER: Reads standard 80-column cards at either 800 cpm (Model B1) or 1200 cpm (Model B2). Contains its own fully buffered, microprogrammed control unit, and can be connected directly to any System/370 I/O channel. The 3505 reads cards photoelectrically, in column-by-column fashion, in either EBCDIC or card image mode. Vacuum-assisted friction feeding is used in place of the conventional "picker knife" feeding. If a card fails to feed, three retries are made automatically before a misfeed indication is given. The 3505 has a 3000-card file feed hopper and two 1750-card stackers. Whenever one stacker becomes full, cards are automatically directed to the other stacker while the operator empties the first one. A third, program-selectable 1750-card stacker is optional.

The optional Read Column Eliminate feature for the 3505 suppresses the reading (and checking) of data from specified card columns. The Optical Mark Read feature permits the reading of up to 40 columns of information ▶

IBM System/370

➤ used, the 3704 or 3705 relieves the central processor of many routine tasks such as line control, character and block checking, character buffering, polling, and error recovery. But when the 3704 or 3705 is connected to a System/360 computer, it can function only in the 2701/2/3 Emulation mode. Thus, the 3704 or 3705 will not enable System/360 users to obtain the increased central processor throughput that represents the biggest single benefit of front-end communications processing. This arbitrary limitation represents another far-from-subtle IBM move to pressure System/360 users into upgrading to a System/370.

Model 125 or 135 users can control small communications networks without the need for a separate communications controller by installing the Integrated Communications Adapter—another example of the flexibility and economy that can result from microprogrammed control. The ICA uses a combination of hardware logic and microcode to control up to 22 lines in the Model 125 or 8 lines in the Model 135.

Virtually the entire complement of IBM communications terminals, as described in Reports 70D-491-02 through 70D-491-13, can be connected to a System/370—as can literally hundreds of terminals from independent suppliers.

SOFTWARE

Users of the virtual-storage System/370 processors (Models 125, 135, 145, 155-II, 158, 158 MP, 165-II, 168, and 168 MP) can choose from as many as eight operating systems. Three of them — DOS, OS/MFT, and OS/MVT — are carried over from the System/360 and require the System/370 processor to operate in the Basic Control mode, which means that the virtual storage capabilities cannot be utilized. Three of the five “new” operating systems — DOS/VS, OS/VS1, and OS/VS2 Release 1 — are functional extensions of DOS, OS/MFT, and OS/MVT, respectively; all three operate in the Extended Control mode and support up to 16 million bytes of virtual storage. Release 2 of OS/VS2, announced in February 1973, supports multiprocessing in either a tightly coupled dual-processor configuration of the Model 158 MP or 168 MP or in a loosely coupled, ASP-like network of up to four Models 145, 155-II, 158, 158 MP, 165-II, 168, and/or 168 MP processors; it can also support approximately 1 billion bytes of virtual storage. Associated with each of these systems is a broad range of compilers, utility routines, and application programs. The eighth operating system, VM/370, manages the real resources of a System/370, including CPU time, to create and control multiple concurrent virtual machines.

DOS/VS is an upward extension of DOS that supports virtual storage, permits up to five jobs to be processed simultaneously (compared with the previous three), includes a new relocating loader, and features the POWER ➤

➤ marked on the cards with ordinary pencils; both marked fields and punched fields can be read during a single pass.

3525 CARD PUNCH: Punches standard 80-column cards at 100 cpm (Model P1), 200 cpm (Model P2), or 300 cpm (Model P3). Punches a row at a time, in either EBCDIC or card image mode. Utilizes the buffered control unit and power supply in the 3505 Card Reader, to which the 3525 is connected via a 3525 Adapter on the 3505. The 3505/3525 subsystem can be connected to any System/370 I/O channel. In a Model 125 system, the 3525 can be connected directly to the Model 125 Processing Unit via the Integrated 3525 Card Punch Attachment; only one 3525 can be attached in this manner, and it cannot coexist with a directly connected 2560 MFCM or 5425 MFCU.

The 3525 has a 1200-card feed hopper, two program-selectable 1200-card stackers, and a 200-card reject stacker. When a punching error is detected, the error card is directed to the reject stacker and the contents of the punch buffer are automatically repunched into the next card. If the retry is successful, the correct card is also routed to the error stacker to aid in diagnosing the malfunction. Finally, a third card is punched with the same data and stacked normally.

An optional Card Print unit for the 3525 uses engraved type slugs to print data on the cards in either an EBCDIC or ASCII 64-character set. The Two-Line Card Print feature prints one or two lines of up to 64 characters on each card during a single pass at the rated punching speed. Alternatively, the Multi-Line Card Print feature permits up to 25 lines, each 64 characters in length, to be printed on each card during a single pass. Card speeds are considerably reduced when more than 2 lines are printed; when all 25 lines are printed, the speed drops to 24 cpm for Model P1 and 29 cpm for Models P2 and P3.

The optional Card Read feature for the 3525 provides a parallel photoelectric reading station ahead of the punching station. The feature includes the Read Column Eliminate capability, which permits suppression of the reading (and checking) of data from specified card columns. Reading, punching, and printing operations can be performed on each card during a single pass.

2560 MULTI-FUNCTION CARD MACHINE (MFCM), MODEL A1: Combines the functions of an 80-column card reader, punch, collator, and interpreter in one unit. Reads at 500 cpm, punches at 160 columns per second, and (with the optional Card Print feature) prints on the cards at 140 print positions per second. Has two 1200-card feed hoppers and five 1300-card radial stackers. Cards can be fed from either hopper and directed to any stacker. One 2560 can be directly connected to a Model 125 via the Integrated 2560 Attachment; it cannot coexist with a directly connected 3525 Card Punch or 5425 MFCU.

The optional Card Print feature enables the 2560 to print 2, 4, or 6 lines on a card, operator-adjustable to any of 25 line positions. There are 64 alphanumeric print positions per line, spaced 10 to the inch. The 2560 Card Print Control feature is a prerequisite on the Model 125.

5425 MULTI-FUNCTION CARD UNIT (MFCU): Combines the functions of a 96-column card reader, punch, collator, and interpreter in a single unit. Has two 2000-card feed hoppers and four 600-card radial stackers. Cards fed from either or both hoppers can be read, punched, printed, ➤

IBM System/370

▷ spooling facility as a built-in function. Although DOS/VS can support up to 16 million bytes of virtual storage, most installations will get better overall results by choosing to work within a considerably smaller virtual storage size. And, although DOS/VS provides automatic management of main storage allocation, it requires the user to divide the virtual storage space into a maximum of five fixed partitions and predetermine the programs to be executed in each partition. Thus, DOS/VS simply shifts the fixed-partition requirement of DOS from real storage into virtual storage—and falls far short of delivering all the promised benefits of virtual-storage operation. DOS/VS is scheduled for availability in June 1973.

OS/VS1 is an extension of OS/MFT that supports virtual storage and includes a few other improvements. In the words of one senior IBMer: “VS1’s only real advantage is that it lets you run very large jobs you couldn’t run before.” VS1, like MFT, supports up to 15 fixed partitions—except that under VS1 the fixed partitions are in virtual storage rather than real storage. The partition sizes can be altered dynamically by the operator. As in the case of DOS/VS, most VS1 installations will find it wise to work with a virtual storage size that is considerably smaller than the 16-million-byte maximum. VS1 was already in operation at IBM Datacenters and customer field-test locations when IBM announced it in August 1972. Though early installations were plagued by numerous unscheduled IPL’s (i.e., system failures), IBM claims that VS1 is now delivering throughput performance equal to or better than that of OS/MFT in most cases.

OS/VS2 Release 1 is a significantly improved version of OS/MVT. In addition to supporting a full 16 million bytes of virtual storage, VS2 can handle up to 63 protected batch user regions or 42 TSO user regions, compared with a maximum of 15 regions for MVT. VS2, unlike the smaller IBM operating systems, should enable users to take full advantage of the flexibility that virtual storage promises—but the associated cost, in terms of system resources required for the operating system itself, is high.

Release 2 of OS/VS2 follows closely on the heels of Release 1 and represents a dramatic but suprisingly mildly stated improvement in capabilities. Principally, Release 2 provides for up to a *billion* bytes of virtual storage (up to 16 million bytes for each of more than 60 users) and supports the two IBM versions of multiprocessing—albeit at what must surely be considered an exorbitant cost in memory overhead. For example, on a Model 158 or 168, the additional main memory requirements of Release 2 will increase the user’s costs by about \$2,100 to \$3,300 per month in equipment rental alone, or by about \$92,000 to \$147,000 in purchase price, compared with Release 1 of OS/VS2. The first of IBM’s multiprocessing versions — “tightly coupled” — permits two Model 158 MP or 168 MP systems to share up to 8 million or 16 million bytes of common real memory, respectively. A ▷

▶ and directed to any of the four stackers under program control. One 5425 can be directly connected to a Model 125 via the Integrated 5425 Attachment; it cannot coexist with a directly connected 3525 Card Punch or 2560 MFCM. Either the 1403 Printer/5425 MFCU Power Prerequisite or the 5425 MFCU Power Prerequisite is required on the Model 125, depending on whether or not a 1403 Printer is also installed.

The 5425—like the functionally similar 5424 MFCU used in the System/3—is available in two models. Cards are read serially at 250 cpm in Model A1 and 500 cpm in Model A2. Punching is performed serially at 60 cpm in Model A1 and 120 cpm in Model A2. Printing occurs at a speed of 60 cpm in Model A1 and 120 cpm in Model A2 when printing in any or all of the first three line positions on each card. If the fourth (lower) line position is used, the printing speed drops to 48 cpm for Model A1 and 96 cpm for Model A2. Each of the 4 lines can hold up to 32 printed characters.

In contrast to the 6-bit, 64-character code used in the System/3, the 5425 reads and punches an 8-row code representing a 256-character set. Eight-row punching in columns 33 through 96 can result in overpunching of print positions 65 through 128. Characters printed by the 5425 are a 64-character set that corresponds to a 6-bit subset of the 8-bit card code. A new 8-Bit Read/Punch Feature for the 5496 Data Recorder (Report 70D-491-22) will provide a limited capability for creating (through multi-punch keying) 96-column program or data cards using the 8-bit code structure. Customer shipments of the 5425 MFCU are scheduled to begin in December 1973.

1017 PAPER TAPE READER: Reads 5- to 8-track punched tape at up to 120 char/sec. Model 1 reads strips of tape, while Model 2 includes supply and take-up reels. Usable with Models 125 through 158. Requires 2826 Paper Tape Control, which controls up to two 1017 Readers and two 1017 Punches.

1018 PAPER TAPE PUNCH: Punches 5- to 8-track tape at up to 120 char/sec. Usable with Models 125 through 158. Requires 2826 Paper Tape Control.

2671 PAPER TAPE READER: Reads 5- to 8-track punched tape in strip form at up to 1000 char/sec. Optional facilities permit center-roll or reel feeding and reel take-up at 500 char/sec. or more. Usable with Models 125 through 158. Requires 2822 Paper Tape Reader Control.

1403 PRINTER: Provides high-quality printed output by means of a horizontal chain or train mechanism. The standard character set contains 48 characters, and the Universal Character Set (a no-charge option for Model 2 or N1 only) permits up to 240 characters to be printed. Line spacing of 6 or 8 lines per inch is operator-controlled. Standard skipping speed is 33 inches per second; a dual-speed carriage in Models 2 and N1 permits a speed of 75 inches per second on skips of more than 8 lines.

Models 2, 7, and N1 of the 1403 Printer can be connected to any System/370 processor via the 2821 Control Unit, or directly to a Model 125 via the integrated attachment and power features listed below, or directly to a Model 135 via the optional Integrated Printer Adapter. Characteristics of the three models are as follows:

Model 2: 600 lpm (750 lpm maximum with UCS option), 132 print positions; Features 4505, 4662, ▶

IBM System/370

▷ “loosely-coupled” network involving a central or “global” processor that controls up to four uniprocessors and/or tightly coupled dual processor systems is also available under Release 2. In a loosely coupled system, main memory is not actually shared among systems, but a commonly controlled network (based upon ASP Version III) operates to distribute all or part of the combined pool of system resources among the jobs in a single input stream. OS/VS2 Release 2 can also be used in conjunction with uniprocessor operation, but the cost of the associated memory overhead would likely be insufferable.

Virtual Machine Facility/370 (VM/370) is a sort of “super operating system” that divides a System/370’s real resources among two or more virtual machines. Each virtual machine, in turn, can run under any of the System/370 operating systems and is protected from failures in other virtual machines. VM/370, which is based upon CP-67/CMS for the 360/67, also includes a Conversational Monitor System that provides a general-purpose time-sharing capability. VM/370 should be useful in the development of new systems, conversion from one operating system to another, and provision of economical backup facilities. Its use in a pure production environment, however, will usually be ruled out by the added overhead and resulting performance degradation (typically in the range of 25 or 40 percent) that is unavoidably imposed by this additional level of software.

VSAM (Virtual Storage Access Method) is a new data access method that is available for DOS/VS, VS1, and VS2 as a replacement for ISAM. VSAM promises generally better performance than ISAM, improved security, and complete interchangeability of data sets among the three operating systems. IBM will supply utility routines to aid users in converting their files and programs from ISAM to VSAM.

VTAM (Virtual Telecommunications Access Method) is a new data communications access method that is available for DOS/VS, VS1, and VS2 Release 2 as a replacement for BTAM, TCAM, and QTAM. VTAM is the primary data communications access method for future development efforts in virtual storage environments, with the promise of full upward compatibility between data communication applications programs for all three VS operating systems. Remote data communications under VTAM requires a 3704 or 3705 Communications Controller operating in NCP mode. Both TSO and TCAM access are supported in a sort of “coexistence” under VTAM, with a Teleprocessing On-Line Test Executive Program (TOLTEP) incorporated into VTAM to help set up the data communications terminal network.

Also released in February 1973 were virtual storage versions of IBM’s two primary data base/data communications Program Products, IMS and CICS. (See Reports ▷

▶ and 4667 are required on a Model 125 for direct connection.

Model 7: 600 lpm, 120 print positions; Features 4505 and 4667 are required on a Model 125 for direct connection.

Model N1: 1100 lpm (1400 lpm maximum with UCS option), 132 print positions; Features 4505, 4662, 4667, and 4668 are required on a Model 125 for direct connection.

1443 PRINTER, MODEL N1: Uses a horizontally oscillating typebar. Rated speed is 240 lpm with standard 52-character set. Standard model has 120 print positions, with 24 more positions available as an option. Selective Character Set Feature permits the use of other interchangeable typebars; speeds range from 200 lpm for 63-character set to 600 lpm for 13-character set. Usable with Models 125 through 195; includes an integrated control unit.

3211 PRINTER: Provides high-speed printed output by means of an endless “train” of 432 type characters that move horizontally in front of the printer hammers. The standard character set, consisting of 48 graphic characters in 9 identical arrays, yields a single-spaced printing speed of 2000 lines per minute. Speeds of up to 2500 lpm can be obtained with smaller character sets, and a 120-character Text Printing Set yields an expected printing speed of 906 lpm. The Universal Character Set feature is standard, permitting the use of character arrangements which are optimized for specific applications. Up to 254 different graphic characters can be used on a print train, and the train cartridges can be interchanged by an operator.

The 3211 Printer has a standard 132-character line that can be expanded to 150 print positions. Horizontal spacing is 10 characters/inch, and vertical spacing is 6 or 8 lines/inch. A 180-position forms control buffer, loadable from main storage, defines vertical format control operations, eliminating the need for a carriage control tape. Skipping speed is at least 30 inches per second, with acceleration to a maximum speed of 90 inches per second after 7 lines have passed. Forms ranging from 3.5 to 18.75 inches in width and from 3 to 24 inches in length can be handled. A powered forms stacker automatically compensates for the height of the paper stack, and a self-positioning platen adjusts itself to the thickness of the forms being used. The 3211 can be connected to System/370 Models 125 through 195 via the 3811 Printer Control Unit.

1255 MAGNETIC CHARACTER READER: Reads and sorts MICR-encoded documents from 5.75 to 8.875 inches in length, 2.5 to 4.25 inches in width, and 0.003 to 0.007 inch in thickness. Three models are available. Model 1 reads up to 500 six-inch documents per minute, while Models 2 and 3 read up to 750 six-inch documents per minute. Models 1 and 2 have six horizontal stackers arranged in a single vertical bay and require one and one-half sort passes for each digit position. Model 3 has twelve horizontal stackers in two vertical bays. All three models can also be used for off-line sorting. The optional Self-Checking Number, 51-Column Card Sorting, and Dash Symbol Transmission features are available for all three models. Model 3 can also be equipped with the High-Order Zero and Blank Selection feature, which reduces off-line sorting times. One 1255 can be connected to a Model 125, 135, 145, 155, or 158 via a System/360/370 Adapter. ▶

IBM System/370

➤ 70E-491-01 and -02 for full information.) With these announcements, IBM has strongly emphasized that the DL/1 data base component of IMS is the main data base system and that CICS is the primary data communications monitor for future System/370 developments. In fact, CICS/VS incorporates the salient features of FASTER, a family of three state and local government data communications systems, and effectively removes the FASTER systems from the current product line.

With the announcement of the new virtual-storage operating systems, IBM has made it clear that there will be few, if any, future improvements to DOS, OS/MFT, or OS/MVT, and that free support for these systems will probably be withdrawn within the next two years. Thus, the IBM pressure upon System/360 users to upgrade to the System/370 continues to increase—and users of System/370 computers are now being similarly pressured to climb aboard the virtual storage bandwagon.


COMPATIBILITY

Designed as an evolutionary outgrowth of the System/360, the System/370 offers a high degree of program and data compatibility with the earlier IBM computer line. The new hardware features of the System/370 represent extensions, rather than modifications, of the System/360. As a result, System/360 users can run their application programs on a System/370 in the Basic Control mode with little or no modification and, in most cases, without recompilation. Conversely, it is not possible to directly execute System/370 programs on a System/360 if they make use of the System/370's new instructions or other new hardware features—but this type of downward compatibility is of far less importance to most users.

To run System/360 programs in Extended Control mode, under the new virtual-storage operating systems, all that will normally be required is a pass through the appropriate Linkage Editor. Most System/360 programs can be run in the virtual addressing (paged) mode, with the Linkage Editor performing the necessary division into appropriately sized pages. Programs that are highly time-dependent, and certain other programs that employ nonroutine coding techniques, cannot be paged and must be run in the “virtual=real” or non-swapped mode. Exceptions consist primarily of programs that are device-dependent upon a non-supported device type.

Release 2 of OS/VS2 has been designed about a dual-processor, HASP-like multiprocessing system; an alternate ASP-III-like network multiprocessing mode of system operation is also available. In both cases, significant upward compatibility with the respective 360/370 predecessors is maintained. This is true not only in terms of programming considerations, but also from an operational point of view. In fact, IBM recommends an upward migration path through either HASP or ASP-III as the most suitable way of growing into VS2 Release 2. ➤

MARCH 1973

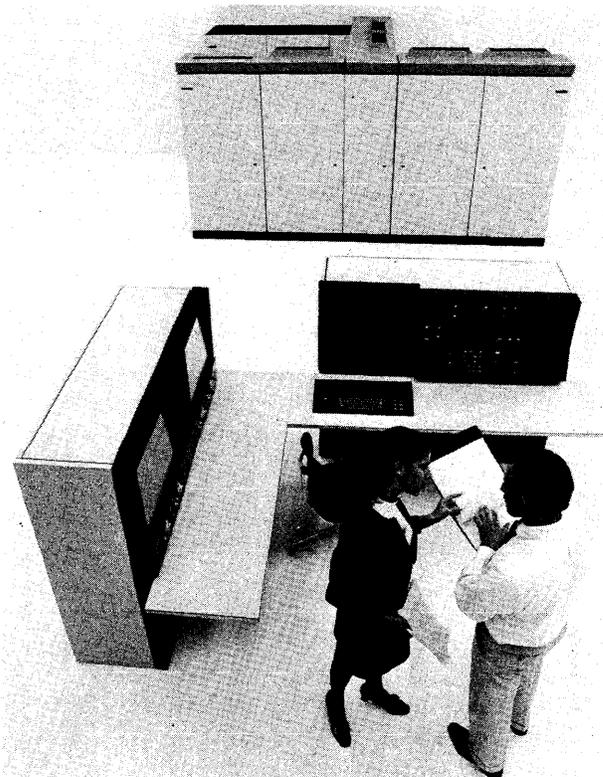© 1973 DATAPRO RESEARCH CORPORATION, MOORESTOWN, N.J. 08057
REPRODUCTION PROHIBITED

The Model 168, largest of IBM's virtual-storage computers, now offers up to 8 million bytes of real MOS main storage; a dual-processor 168 MP system can have up to 16 million bytes. The Model 168 console features a CRT display and keyboard.

➤ **1259 MAGNETIC CHARACTER READER, MODEL 2:** Reads and sorts MICR-encoded documents at up to 600 per minute. Has 11 pockets. Usable only with Models 125, 135, and 145. Also usable for off-line sorting.

1419 MAGNETIC CHARACTER READER: Reads and sorts MICR-encoded documents at up to 1600 per minute. Has 13 pockets. Usable with Models 125 through 168. Also usable for off-line sorting.

1287 OPTICAL READER: Optically reads printed characters into a System/360 at speeds ranging from less than 100 to about 665 documents per minute, depending on document size, number of characters per document, etc. Can also be equipped to read pencil-marked data and/or the handprinted digits 0 thru 9 and letters C, S, T, X, and Z; shapes and sizes of handprinted characters must conform with specified rules. Usable with Models 135 through 168. Five models of the 1287 are available:

Model 1: Reads multiple lines of numeric data from individual paper or card documents up to 5.91 by 9 inches in size.

Model 2: Can read data from continuous journal tapes as well as individual paper or card documents.

Model 3: Same as Model 1, with added capability of reading the alphanumeric USASCSOCR Size A font.

Model 4: Same as Model 2, with added capability of reading the alphanumeric USASCSOCR Size A font.

Model 5: Reads multiple lines of handprinted numeric digits and six letters from individual paper or card documents.



IBM System/370

➤ Integrated emulation is an optional System/370 capability that permits direct execution of most programs written for IBM's second-generation 1400 and 7000 Series computers. The table on page 70C-491-04b shows which compatibility features are available for each of the System/370 processor models. These compatibility options run under control of the regular operating system, enabling emulator jobs to be processed as part of a multiprogramming mix. Thus, IBM has granted another reprieve to the thousands of users who have not yet gotten around to converting their second-generation programs—and simultaneously ensured that a high percentage of these users will stay “locked in” to IBM for several more years.

To date, the swing from the System/360 to System/370 has been marked by a noteworthy *lack* of conversion problems. The reason is simply that neither IBM nor its users can afford another conversion nightmare of the type that accompanied the advent of the System/360 in the mid-sixties, and IBM has obviously taken great pains to avoid a recurrence. The similarity of the System/370 architecture to that of the System/360, coupled with the use of essentially the same peripheral equipment and software, ensures comparatively smooth, straightforward conversions this time.

SUPPORT

As a result of IBM's “unbundled” pricing policy, announced in June 1969, System/370 users must pay separately for most of the educational courses, technical support, and software that were formerly included in IBM's equipment prices.

Most of the existing System/360 software facilities were delivered prior to IBM's unbundling announcement and are therefore available to System/370 users at no additional cost. But most System/370 users will find it advantageous—and in many cases essential—to use the improved assemblers, compilers, sort routines, and other software products that have been introduced during the past four years—and these new products are separately priced. Thus, it has become quite apparent that IBM computer users will henceforth be subjected to subtle pressures toward continual upgrading—to IBM's economic advantage—of their software as well as their hardware.

Because of the widely varying pricing and support policies now offered by IBM and its competitors, users who want to get the most value for their EDP dollars must shop more carefully and determinedly than ever. Hardware costs are now only the first part of the story; the quantities and costs of the required software, education, and professional assistance—and the numerous alternative sources of supply for them—must also be carefully evaluated.

➤ **1288 OPTICAL PAGE READER:** Reads alphanumeric data printed in the USASCSOCR Size A font from page-size documents up to 9 by 14 inches. Can also be equipped to read pencil-marked data and/or the hand-printed digits 0 thru 9 and letters C, S, T, X, and Z. Speed varies with document size, number of characters and fields to be read, etc. (e.g., 14 documents per minute for 8.5-by-11-inch documents with 65 characters on each of 50 lines). Usable with Models 135 through 168.

3881 OPTICAL MARK READER: Reads machine-printed and/or hand-marked data from documents ranging from 3 by 3 inches to 9 by 12 inches in size. Model 1 reads data directly into a System/370 Model 125, 135, or 145 at a speed of 4000 to 6000 documents per hour, depending upon the document size. Model 2 operates off-line, transferring the data to a 3410 Model 1 Magnetic Tape Unit at a speed of 3700 to 5700 documents per hour. Up to 2480 marking positions are available on each 9-by-12-inch document. Up to six different document formats, loaded from format control sheets, can be stored and read during the same run. An optional BCD Read feature facilitates the processing of turnaround documents, and a Serial Numbering feature prints consecutive numbers on the documents being processed.

3886 OPTICAL CHARACTER READER: Reads machine-printed characters and handprinted numerals from documents ranging from 3 by 3 inches to 9 by 12 inches in size. Can read typewritten pages measuring 8.5 by 11 inches at the rate of approximately 330 pages per hour for on-line input to a System/370 (3886 Model 1) or 300 pages per hour for off-line recording on magnetic tape (3886 Model 2). The 3886 reads alphanumeric characters in the OCR A and B fonts, preprinted 3/16-inch Gothic numerals, and the handprinted numerals 0 through 9 and letter X. Machine-printed and handprinted data can be read from the same document. Two output stackers permit segregation of unreadable documents. The 3886 Model 1 connects to a Multiplexer or Selector Channel of System/370 Models 125 through 168. The 3886 Model 2 operates off-line, recording data on a 3410 Model 1 Magnetic Tape Unit for later processing. Considerably slower than the IBM 1287 Optical Reader, the 3886 is also significantly less expensive. Announced in October 1972, the 3886 is scheduled for first customer shipments in the third quarter of 1973.

2250 DISPLAY UNIT: Displays data in both alphanumeric and graphic (line drawing) form in a 12-by-12-inch area on the face of a CRT. Displays up to 52 lines of 74 characters each, and provides format flexibility to position characters, points, and vector end-points anywhere on a 1024-by-1024-position grid. Optional light pen allows program detection of specific displayed points or characters indicated by the operator. Optional keyboard permits entry of alphanumeric data. Model 1 has a built-in control unit and 4K or 8K bytes of buffer storage. Model 3 requires a 2840 Display control, which has a 32K buffer and can control up to four display units. Both models are designed for direct connection to System/370 Models 135 through 195.

TERMINALS: Numerous IBM display terminals, batch terminals, and typewriter terminals can be connected to a System/370 in remote and/or local configurations. For details, please refer to Reports 70D-491-02 through 70D-491-13 in the Peripherals section.

IBM System/370

➤ It is important to note that the newly acquired multi-processing capabilities of the System/370 automatically raise the ante on computer selection studies in terms of both costs and potential rewards. The entire system design effort for medium-to-large data processing environments has been increased by the addition of a new level of complexity. The conscientious user must now determine not only which central processor or processors are best able to handle his workload, but—more fundamentally—whether one or more uniprocessors or a distributed-intelligence multiprocessing network is the best answer to his overall requirements. This is a determination of no mean magnitude, and great care must be taken to define the projected workload and determine with as much precision as possible the performance of the system upon that workload. □

► COMMUNICATIONS CONTROL

2701 DATA ADAPTER UNIT: Enables System/370 Models 125 through 195 to communicate, via appropriate transmission facilities, with a broad range of terminal equipment or with other computers. Accommodates up to four half-duplex start/stop lines with speeds of up to 600 bps; or up to four half-duplex synchronous lines (only two of which can operate simultaneously) with speeds of up to 230,400 bps; or up to four parallel data acquisition devices with word widths of 16 to 48 bits. The 2701 is highly modular; various adapters and special features equip it to transmit via switched or leased telephone lines, the TWX network, Western Union Type A, B, C, D, E, or F Channels, common-carrier broadband services, and privately-owned communication facilities.

2702 TRANSMISSION CONTROL: Permits connection of multiple low-speed terminals to a System/370, Models 125 through 195. Handles a maximum of 31 half-duplex lines with speeds of up to 200 bps, or up to 15 half-duplex lines with speeds of up to 600 bps, all of which can operate simultaneously. Transmission is serial by bit, in start/stop mode. Various adapters and special features equip the 2702 to transmit via switched or leased telephone lines, the TWX network, Western Union Type A, B, C, D, or E Channels, and suitable private communication facilities.

2703 TRANSMISSION CONTROL: Permits connection of multiple low-speed and medium-speed terminals to a System/370, Models 125 through 195. Operates in half-duplex fashion, in either start/stop or synchronous mode. In start/stop mode, a 2703 handles up to 176 lines with speeds of up to 180 bps or up to 72 lines with speeds of up to 600 bps. In synchronous mode, a 2703 handles up to 48 lines with speeds of up to 2400 bps, in either EBCDIC or USASCII code; if 6-bit Transcode is used, the maximum number of lines is 32. Various adapters and special features equip the 2703 to transmit via switched or leased telephone lines, the TWX network, Western Union Type A, B, C, D, E, or F Channels, and suitable private communication facilities.

2711 LINE ADAPTER UNIT: Accommodates up to 32 IBM Line Adapters, which permit an associated 2702 or 2703 Transmission Control or Model 135 Processing Unit to communicate with various IBM Terminals over leased telephone lines or privately-owned facilities. Common-carrier data sets are not required when IBM Line Adapters are used.

370X COMMUNICATIONS CONTROLLERS: On March 1, 1972, IBM unveiled its long-awaited programmable communications processor for the System/360 and System/370 computers. Designed as IBM's evolutionary replacement for the hard-wired 2701, 2702, and 2703 transmission controls, the 3705 Communications Controller is a mini-computer-based front-end processor that can have from 16K to 240K bytes of core storage and control up to 352 communications lines. The 3705 is available in 20 models with varying storage sizes and line capacities, as listed in the price list. Customer shipments began in July 1972.

On February 1, 1973, IBM announced a smaller version of the 3705 called the 3704. The 3704 is available in only four models with a main memory capacity of 16K to 64K bytes. It can accommodate a maximum of 32 lines, just one-half the capacity of the basic 3705 configuration. The 3704 uses the same software as the 3705, ensuring upward compatibility for economic expansion of a small network into a large one. Customer shipments are scheduled to begin in May 1973.

When connected to a System/370 computer, a 370X can use either the Network Control Program (NCP) or the 2701/2/3 Emulation Program. When the NCP is used, a 370X functions as a true "front-end" communications processor and relieves the central processor of many routine tasks such as line control, character and block checking, character buffering, polling, and error recovery.

Along with the announcement of the 3704, IBM introduced significant new software capabilities. The 370X Controllers are also supported under VTAM; major advantages of NCP operation through VTAM is the capability for dynamic allocation of terminals, lines, and 370X Controllers among multiple applications programs and for simultaneous operation in the Emulation and NCP modes within one 370X. In addition, IBM introduced additional software and hardware to permit configuration and usage of a 370X as a remote concentrator. Communication between a remote 370X and a local 370X connected to the host computer is over a leased line operating full-duplex at 4800 bits per second or half-duplex at up to 50,000 bits per second. Programs are loaded into the remote 370X over the communications line only; direct connection of a remote 370X to a computer I/O channel cannot be accomplished. Options are available that allow a 370X to operate in an environment of up to 100 degrees F.

The 3705 consists of a Basic Module and up to three Expansion Modules. The Basic Module houses the Central Control Unit and Control Panel. Also contained in these modules are the core storage, Channel Adapters, Communications Scanners, Line Interface Bases, and Line Sets required to accommodate up to 352 communication lines. Configuration rules for the 3705, which are quite complex, are summarized in the price list. The maximum number of lines that can be connected is a function of the 3705 model, the line speeds and types, and the mode of operation. In the 2701/2/3 Emulation mode, a maximum of 255 lines can be controlled. Line speeds can range from 45.5 to 50,000 bits per second. In the NCP mode, data is transferred between the 3705 and the host computer via a single subchannel interface—a significant difference from the 2701/2/3 controls, which require separate multiplexer subchannel for each communications line.

Configuration rules for the 3704 follow the same general pattern as for the 3705, but are much more straightforward. ➤

IBM System/370

► Detailed reports on both the 3704 and 3705 are contained in the Peripherals section; see Reports 70D-491-31 and 70D-491-32.

MODEL 125 INTEGRATED COMMUNICATIONS ADAPTER: This optional feature for the Model 125 Processing Unit provides the basic control storage and common circuits for direct connection of up to 6 synchronous (BSC) and 16 asynchronous communications lines, depending on the line speeds. The ICA combines the functions of a Byte Multiplexer Channel and a communications control unit. Lines connected via the ICA are addressed and controlled as if they were connected to the Model 125's Multiplexer Channel via a 2703 Transmission Control.

The basic ICA can control either up to 16 asynchronous lines or up to 6 BSC lines. All combinations of BSC and asynchronous lines require the ICA Extension feature. Additional features are required to create appropriate line interfaces for the individual lines, and the associated configuration rules are quite complex. Standard facilities of the ICA for BSC lines include Autopoll, multipoint central station functions, multipoint tributary station functions, EBCDIC transparent mode, and either EBCDIC or ASCII code; the Autopoll and multipoint central station functions are provided for asynchronous lines as well.

Asynchronous line speeds can range from 45.5 to 600 bits/second (though the maximum number of 600-bps lines on the ICA cannot exceed 8). Synchronous line speeds can range from 600 to 50,000 bits/second; but only one high-speed line (above 7200 bps) can be connected and must not be operated concurrently with any other line on the ICA. An ICA-equipped Model 125 can communicate with virtually the full gamut of IBM computers and communications terminals.

MODEL 135 INTEGRATED COMMUNICATIONS ADAPTER: This optional feature permits up to eight communications lines to be connected directly to a Model 135 Processing Unit, without the need for the usual separate communications controller. When the ICA is installed, each line appears to the Model 135 to be a subchannel of the Byte Multiplexer Channel. The ICA is controlled by a combination of microcode and hardware logic. The amount of control storage required for the ICA microcode varies with the number of lines, the types of terminal adapters, and the features employed.

The ICA supports private, leased, or switched half-duplex communications lines. Data rates of up to 4800 bits/second can be handled when self-clocking modems are used. When the ICA does the clocking, it can provide a data rate of 1200 bits/second or any rate between 0 and 600 bits/second.

The ICA provides up to eight line adapters in any combination of the following three types:

IBM Terminal Adapter Type I, Model II—supports communication, at either 134.5 or 600 bits/second, with an IBM 1050, 2740, 2741, or System/7.

IBM Terminal Adapter Type III—supports communication, at either 1200 or 2400 bits/second, with 2260 or 2265 Display Stations and their associated control units.

Synchronous Data Adapter Type II—supports communication, in BSC mode at up to 4800 bits/second, with an IBM 2770, 2780, 2790, 3735, or any of the following IBM computers equipped for BSC transmission: System/3, System/360, 1130, or 1800. Each BSC line can operate in any of three codes: EBCDIC, ASCII, or Six-Bit Transcode. The Autoanswer feature is available for the ICA, but the Autocall feature is not.

7770 AUDIO RESPONSE UNIT: Provides audio responses, in recorded human-voice form, to digital inquiries from pushbutton telephones or other inquiry-type terminals. Usable with Models 135 through 195. Handles a maximum of 48 lines, any or all of which can be active simultaneously. Has a 32-word basic vocabulary, expandable in 16-word increments to a maximum of 128 words. Receives inquiry messages and forwards them to the processing unit, which processes each message and composes an appropriate reply. The 7770 then converts the reply into a sequence of English words which are read from its magnetic drum and transmitted to the inquirer.

SOFTWARE

GENERAL: Software support for the System/370 Models 125 through 195 is basically the same as that provided for the System/360, plus an Extended Control (EC) or virtual mode of operation for Models 125, 135, 145, 155-II, 158, 165-II, and 168 that utilizes the Dynamic Address Translation (DAT) hardware feature, and a multiprocessor capability for the 158 MP and 168 MP systems operating in EC mode.

In Basic Control (BC) or real mode, either the Disk Operating System (DOS) or the Operating System (OS) can be used. Two versions of OS support are provided: Multiprogramming with a Fixed Number of Tasks (MFT) and Multiprogramming with a Variable Number of Tasks (MVT). The virtual-mode counterparts of these systems are Disk Operating System/Virtual Storage (DOS/VS), the Virtual Storage I option of the Operating System (OS/VS1 or VS1), and the Virtual Storage 2 option of

Operating System Availability

	125	135	145	155	155-II	158	158 MP	165	165-II	168	168 MP	195
DOS	4/73	5/72	7/71	2/71	4/73	4/73*	3/74*	—	—	—	—	—
DOS/VS	4/73	6/73	6/73	—	12/73	12/73	3/74	—	—	—	—	—
OS/MFT	—	5/72	7/71	2/71	4/73	4/73	3/74	4/71	12/73	8/73	3/74	—
OS/MVT	—	—	7/71	2/71	4/73	4/73	3/74	4/71	12/73	8/73	3/74	4/73
OS/VS1	—	8/72	8/72	—	4/73	4/73	3/74	—	12/73	12/73	3/74	—
OS/VS2, Rel. 1	—	—	12/72	—	4/73	4/73	3/74	—	12/73	8/73	3/74	—
OS/VS2, Rel. 2	—	—	3/74	—	3/74	3/74	**	—	3/74	3/74	**	—
VM/370	—	11/72	11/72	—	4/73	4/73	3/74	—	12/73	8/73	3/74	—

* Hard Stop mode only.

** Tightly coupled multiprocessing or uniprocessing mode—3/74; loosely coupled multiprocessing—10/74.

IBM System/370

- the Operating System (OS/VS2 or VS2), respectively. VS2 Release 2 goes a step further and includes support for either tightly coupled or loosely coupled multiprocessing networks.

In addition to the above virtual-storage extensions of existing operating systems, a higher-level control system called Virtual Machine Facility/370 (VM/370) is also available. VM/370 provides support for the Conversational Monitor System (CMS)—a general purpose time-sharing facility—as well as for all of the other real and/or virtual operating systems. The table shows which operating systems are available on which computer systems, including the scheduled availability date if the release is planned for the future.

Prior to the August 1972 announcement of virtual storage, the System/370 was compatible with the System/360 and operated under control of basically the same software. Thus, the great variety of System/360 DOS and OS compilers, assemblers, utilities, application packages, etc., was also available, for the most part, for use with the System/370. With the announcement of virtual storage, the full complement of existing System/370 Program Products is also available for the virtual machines, although a number of these programs must be run in a “virtual=real” or non-paged mode. (Any program that modifies active channel programs, contains I/O appendage routines, uses EXCP coding, or is highly time-dependent may not be pageable.) A full list of these Program Products is found in the Pricing section, with indicators showing whether each program can be paged (V) or can be executed only when fully resident in main memory (R, for virtual=real). In some cases where a program can be run in either virtual (V) or virtual=real (R) mode, performance of the system in V mode can be seriously degraded; such programs are marked V,R.

DISK OPERATING SYSTEM: DOS is a disk-oriented operating system for installations with at least 16K bytes of core storage and one 2311 Disk Storage Drive or 2314 or 2319 Direct Access Storage Facility. It was the most widely used of the System/360's eight operating systems and is currently being used on a high proportion of the installed System/370 computers. Multiprogramming, data communications, MICR processing, or COBOL compilation under DOS requires a minimum of 24K bytes. The Storage Protection feature is also required for multiprogramming.

DOS can control concurrent processing of one “background” program and one or two “foreground” programs, each in a fixed “partition” or program area within core storage. Partition sizes can be varied by the operator, in 2K increments. Programs in the background partition are executed sequentially, in automatic stacked-job fashion. Programs in one or both of the foreground partitions can be loaded and executed in similar stacked-job fashion if sufficient storage and I/O facilities are available; if not, each foreground program must be explicitly initiated by the operator. Foreground programs always have priority over the background program.

The principal DOS control program is the Supervisor, which handles I/O scheduling, interrupts, operator communications, multiprogramming control, etc. It occupies from 6K to over 12K bytes of core storage, depending upon the facilities required in a specific installation. A Job Control routine handles job-to-job transitions and I/O device assignments. A Librarian routine creates and maintains a core image library, a relocatable library, a source

statement library, and optional private libraries, all on disk files. A Linkage Editor routine combines program sections from the relocatable libraries and/or a system input unit and prepares them for execution.

Several Input/Output Control Systems are available with DOS, providing macros to handle the following types of I/O: consecutive processing of tape or disk files, indexed sequential access method (for either random or sequential processing of sequentially organized disk files), direct access method (for randomly organized disk files), MICR or OCR input, and telecommunications. DOS provides two distinct types of communications support: the Basic Telecommunications Access Method (BTAM), which performs basic line and message control functions, and the Queued Telecommunications Access Method (QTAM), which extends the techniques of IBM's logical Input/Output Control Systems into the communications environment. BTAM requires a minimum of 24K bytes of core storage, while QTAM requires at least 65K bytes.

As an optional supplement to DOS, POWER II (Priority Output Writers, Execution Processors, and Input Readers) is a Type III DOS enhancement that adds input reader and output writer capabilities similar to those of the full Operating System. In addition to direct spooling capability, POWER II also has optional Remote Job Entry facilities to support up to five batch terminals. By overlapping I/O data transcriptions with disk-oriented processing, POWER II can increase the throughput of some DOS installations by up to 40 percent. Operating in a dedicated foreground partition, POWER II transcribes all input data from card readers and other low-speed input devices to disk storage and transcribes all output data from disk storage to printers and other output devices. Thus, the user's application programs can operate on a disk-to-disk basis for maximum processing efficiency. POWER II can support one or two independent batch job streams and up to 26 I/O devices.

DOS provides language translators for Assembler, RPG, COBOL, FORTRAN, and PL/I. Service routines include both disk and tape sort/merge programs, Autotest, and a wide variety of utility programs.

While DOS can be run directly in the BC (System/360) mode on System/370 Models 135 through 158, operation of DOS on the Model 125 requires not only BC mode, but also the 5213 Console Printer, the 1052 Compatibility Feature, and (for DOS Version 3) the 2311 Model 1 Compatibility Feature.

DOS is classified as a Type I-support program for operation on the System/370 in Basic Control mode only.

DISK OPERATING SYSTEM/VIRTUAL STORAGE: DOS/VS (Release 28 of DOS) is the fifth major version of DOS, and has been designed: (1) to extend to DOS a number of features that were previously reserved exclusively for OS, and (2) to implement support of virtual storage. Among the OS-type features added, DOS/VS allows the user to have: five problem program partitions (F1-F4 and BG) instead of three as in DOS (F1, F2, and BG); single or multi-phase user programs that are self-relocating through the use of a relocating loader; POWER (for spooling) with RJE capability as a built-in function at Sysgen time; procedure library support that allows JCL sets to be cataloged with extended support for procedures with Job Control, service program, and utility program statements; and a Dynamic Partition Priority adjustment capability to specify partition dispatching priority at ►

IBM System/370

- Sysgen time and alter it at IPL or during system operation. Virtual storage support for the System/370 under DOS/VS recognizes up to 16 million bytes of virtual storage in pages of 2K bytes each.

The minimum system supported by DOS/VS is a Model 125 with 96K bytes. The absolute minimum resident memory requirement for DOS/VS is 26K bytes for Models 125, 135, and 145 and 28K bytes for Models 155-II and 158. Minimum practical main memory requirements, however, are about 36K and 40K bytes, respectively. Systems residence for DOS/VS must be on a 2319 or 3330-type direct-access storage device, or on a 2305 Model 2 Fixed-Head Storage Facility (not available for Model 125 or 135). Support for the 2311 Disk as a systems residence device is not provided, and DOS/VS does not support Rotational Position Sensing for 3330 Disks. DOS/VS will become available for Models 125, 135, and 145 in June 1973, and for Models 155-II and 158 in December 1973.

Also available with DOS/VS is a new Assembler Language Translator, a new Virtual Storage Access Method (VSAM), and a new Virtual Telecommunications Access Method (VTAM). The Assembler is a superset of DOS Assemblers D and F that implements all of the System/370 instructions. Among the additions to the Assembler are the following: COPY statements are permitted anywhere in the program; the PRINT statement is effective in macro expansions; and a NOALIGN option allows utilization of the System/370 Byte-Oriented Operand feature by 360-type Assembly programs without recording.

The Virtual Sequential Access Method (VSAM) is a major, optional data management extension that is available for both DOS/VS and OS/VS as an extension and replacement for ISAM. Data sets created by DOS/VS, OS/VS1, or OS/VS2 can be freely interchanged among the three operating systems. Among the features of VSAM are: (1) five types of indexing, including non-dense, key compression, replication, high-level main storage, and low-level with data; (2) distributed free space at the time the data set is created to eliminate ISAM-like overflow and automatically reclaim deleted record space; (3) master catalog with device independence; (4) password data set security protection; and (5) a variety of utility services, including an ISAM/SAM data set conversion facility and an ISAM Interface Program that maps ISAM requests into corresponding VSAM requests. VSAM has Class A support as an SCP component of DOS/VS, and will become available in June 1973.

The Virtual Telecommunications Access Method (VTAM) is IBM's primary terminal access method and the base for future developments of teleprocessing support under DOS/VS and OS/VS. As a replacement for BTAM, TCAM, and QTAM, VTAM controls communications terminal connections and data transfers between those terminals and the user's application programs via a 370X Communications Controller. Upward compatibility is provided among all of IBM virtual storage operating systems. Among the features of VTAM are: (1) Network Control Program (NCP) support of the 370X Communications Controllers, including dynamic sharing of terminals, lines, and the controllers themselves among user programs; (2) support of TCAM under VTAM for OS/VS only; (3) terminal monitoring facilities to handle log-on requests and collect communications network accounting information; and (4) integration of the Teleprocessing On-Line Text Executive Program (TOLTEP). VTAM has Class A support as an SCP component of DOS/VS and will be available in November 1973 for all but remote 370X

support, which will be available in June 1974. The minimum DOS/VS System required for VTAM is 96K bytes.

OPERATING SYSTEM/360: OS is a comprehensive and general-purpose operating system for the larger System/360 and 370 computers. It is designed for installations with disk and/or drum storage facilities and sizeable main memory capacities. The system is highly modular and offers a broad range of control program options, language translators, data management techniques, and service programs. In large, multiprogrammed systems, the OS resident control programs alone may require as much as 200K bytes of core storage.

Two basic versions of OS are available for the System/370: Multiprogramming with a Fixed Number of Tasks (MFT), and Multiprogramming with a Variable Number of Tasks (MVT). They differ primarily in the amount and flexibility of the multiprogramming operations they can control. In both versions, the control programs perform the supervisory functions of job scheduling, resource allocation, I/O scheduling, interrupt control, error handling, and storage and retrieval of data.

Multiprogramming with a Fixed Number of Tasks (MFT) was delivered in December 1966, and a greatly improved "Version II" became available in July 1968. MFT provides the ability to control multiprogramming in up to 15 fixed partitions as small as 8K bytes in size. Partition sizes can be varied by the operator. Automatic job-to-job transitions can be effected in any or all of the partitions. MFT requires at least 131K bytes of core storage.

Multiprogramming with a Variable Number of Tasks (MVT), delivered in October 1967, controls multiprogrammed operation of up to 15 simultaneous tasks. The amount of storage allocated to each task and the number of tasks being processed at any time are dynamically variable. Core storage is allocated in 2048-byte blocks, and the blocks assigned to a given program may be non-contiguous. Task dispatching is performed on the basis of priorities, which may be altered by the tasks themselves during execution. A "roll-out/roll-in" facility enables one task to obtain more core storage by displacing one or more lower-priority tasks. MVT requires at least 262K bytes of core storage.

Also available for OS/MVT is a Time-Sharing Option (TSO). This extension, announced in November 1969, permits interactive time-sharing operations to be run concurrently with teleprocessing and batch processing on a 524K-byte or larger system. Up to 14 regions can be devoted to time-sharing. Programmers at remote terminals can develop, execute, store, and modify programs written in any OS-supported language. COBOL, FORTRAN, and Assembler "prompters" permit the associated compilers to be used in a conversational mode, and dynamic debugging facilities aid in program testing. TSO also offers three compilers designed specifically for use by nonprogrammers: Code and Go FORTRAN, ITF-BASIC, and ITF-PL/I. TSO uses the OS/360 Telecommunications Access Method (TCAM) to handle all remote-terminal I/O operations. TSO-supported terminals include the IBM 2741, 1050, 2260, and 2265, and the Teletype Models 33 and 35. Most of the TSO functions are provided by separately priced IBM Program Products, as listed under "Software Prices."

I/O control under OS is accomplished by an extensive array of "data management" facilities. OS, like earlier IBM input/output control systems, supports two funda- ►

IBM System/370

mental types of data access techniques: basic and queued. The queued access technique deals with individual logical records, provides automatic blocking and buffering facilities, and applies only to sequentially organized files. The basic access technique deals with blocks of I/O data rather than logical records, provides direct programmer control of blocking, buffering, and I/O device functions, and is usable with direct (random) and sequential file organizations.

IBM defines the combination of a specific data access technique and a specific type of file organization as a "data access method." Ten data and telecommunications access methods are available under OS: Basic Sequential Access Method (BSAM), Queued Sequential Access Method (QSAM), Basic Indexed Sequential Access Method (BISAM), Queued Indexed Sequential Access Method (QISAM), Basic Direct Access Method (BDAM), Basic Partitioned Access Method (BPAM), Telecommunications Access Method (TCAM), Basic Telecommunications Access Method (BTAM), Queued Telecommunications Access Method (QTAM), and Graphic Access Method (GAM). With Version 2 of the Information Management System (IMS-2), a separately priced Program Product, four hierarchical structures based on the standard OS access methods are also supported: Hierarchical Sequential Access Method (HSAM), Hierarchical Indexed Sequential Access Method (HISAM), Hierarchical Direct Access Method (HDAM), and Hierarchical Indexed Direct Access Method (HIDAM). (Refer to Report 70E-491-01, IMS-2, for full information.)

OS provides language translators for all of the System/360 or 370 programming languages: Assembler, RPG, COBOL, FORTRAN, PL/I, and ALGOL. Users of the Assembler, COBOL, or FORTRAN language, in fact, are offered a choice of two or more translators. OS service routines include a sort/merge program for either tape or disk, a TESTRAN package that facilitates program debugging, a Graphic Job Processor that permits jobs to be initiated and controlled from a 2250 Display Unit, a Remote Job Entry system that permits jobs to be submitted to a System/370 from a remote communications terminal, a Conversational Remote Job Entry (CRJE) system that supports concurrent on-line development of applications programmers from multiple remote terminals as if each programmer were in a hands-on environment, Linkage Editors that combine separately compiled object modules into programs in a format suitable for loading and execution, and a comprehensive package of utility routines.

Of particular interest are two additional OS support programs that are provided by IBM at no additional charge, but which are considered "prior use" software rather than System Control Programming (SCP): ASP Version 3 and HASP II.

The Asymmetric Multiprocessing System (ASP-III) (formerly Attached Support Processor) is an application program that works in conjunction with OS to control a multiprocessing system with up to 32 processors—one of which is the host processor for ASP residence. Under ASP, the "support processor" (Model 50 or larger) handles all support functions (such as card reading, punching, and printing) and automates many of the operator functions while the host processor plus up to 31 additional "remote main processors" process the computational workload. The practical limit on the number of systems in an ASP network is about 4 or 5, however. ASP also supports remote job submission from binary synchronous communications (BSC) terminals via Remote Job Processing (RJP); and provides peripheral support for large job shop systems. In

RJP functions, ASP is ordinarily used in conjunction with HASP to provide individual remote terminal programming support. The processors are interconnected by means of the Channel-to-Channel Adapter. ASP requires a minimum partition or region size under OS/MVT of about 150K bytes for the Single Processor version, plus about 20K bytes for RJP and about 20K bytes for each additional main processor. ASP is classified as a Type II program.

The Houston Automatic Spooling Priority System (HASP II) is a high-volume spooling package that can handle an essentially unlimited number of peripheral devices, including high-speed remote batch terminals, using 2311 and/or 2319-type direct-access devices for intermediate storage. This Type III prior-use program was developed by IBM's Houston office in conjunction with NASA. Minimum main memory resident requirement for HASP II is about 36K bytes under either OS/MFT or OS/MVT.

Future enhancements to OS will apply only to the virtual storage versions, OS/VS1 and OS/VS2. Thus, Release 21 of OS will be the last major functional release for OS/MFT and OS/MVT. Though these versions will be "functionally stabilized," subsequent maintenance releases to Release 21 will add support for a limited number of new I/O devices. Release 20 of OS will be current through June 1973, while no end of currency for Release 21 of OS has yet been announced. Free support for Release 21, however, is not likely to extend beyond 1974.

OPERATING SYSTEM/VIRTUAL STORAGE: OS/VS is the true System/370 Version of OS/360. It consists of two versions—OS/VS1 (or VS/1) and OS/VS2 (or VS/2)—that directly extend the capabilities of and are highly compatible with OS/MFT and OS/MVT, respectively.

In addition to the basic facilities offered by OS/MFT, VS1 supports a system total of up to 16 million bytes of virtual storage that is divided into 64K-byte segments and 2K-byte pages. Other new facilities of VS1 include: a Job Entry Subsystem (JES1) that provides many of the most important functions of HASP, including Remote Entry Services (RES) and high-volume I/O spooling and scheduling, and supersedes HASP under VS1; additional control block protection; a Centralized Queue Manager facility with Scheduler Work Area Data Sets (SWADS) to improve utilization of the job queue and allow more jobs to be put into queue; and the Dynamic Support System (DSS), an interactive debugger used to identify and correct VS1 programming failures.

VS1 requires a minimum main or real storage size of 160K bytes, although most users will find a partition size of 240K bytes or larger to be more effective for their VS1 system. VS1 can be run on a Model 135 with 128K bytes of real memory if only one active partition is allowed for most environments, and neither OLTEP nor the external trace option of GTF is supported. A minimum of three direct access devices must be provided for VS1 system residence: at least two must be 2319- or 3330-type drives, and the third can be a 2305-2. VS1 was released and demonstrated on August 2, 1972, concurrently with the announcement of virtual storage for the System/370.

VS2 is a significantly improved version of OS/MVT. The enhancements of VS2 Release 1 include support of a system total of 16 million bytes of virtual storage that is divided into 64K-byte segments and 4K-byte pages; virtual storage support of TSO in foreground regions, including native-mode support for the 3704, 3705 Communications Controller under TSO; up to 63 protected batch user

IBM System/370

► regions or 42 TSO user regions (instead of 15 under MVT); Dynamic Priority Scheduling, including I/O load balancing based upon respective I/O data rates; Dynamic Support System (DSS) as in VS1; and a variety of virtual storage support features, including enhancements to the Linkage Editor, Systems Management Facilities (SMF), Link Pack Area (LPA), etc.

Concurrent operations of TSO, batch, and HASP are permitted under OS/VS2 Release 1. With its availability under VS2 Release 1, HASP must be run in the "virtual=real" mode only, making all of HASP resident in real memory during execution (i.e., nonpaged). HASP under VS2 Release 1 has been upgraded to Programming Service Classification A. ASP Version 3 support is available under VS2 Release 1, but also in virtual=real mode only, meaning that all of ASP must be resident in the support processor's real memory during execution. The Job Entry Subsystem JES1 provided for VS1 is not available under VS2 Release 1. Otherwise, VS2 Release 1 is upward-compatible with OS/MFT, OS/MVT, and OS/VS1, except for the CRJE facility, which is not supported.

The minimum real memory requirement for a basic batch version of VS2 Release 1 is 384K bytes. A concurrent batch and TSO system requires at least 512K bytes of real storage, and concurrent operation of HASP, batch, and TSO requires about 768K bytes of real storage. Release 1 of OS/VS2 was delivered in December 1972 and will be current for six months beyond the delivery of VS2 Release 3.

Release 2 of OS/VS2 is a major functional enhancement over Release 1 that features support of: (1) multiprocessing for Model 158 MP and 168 MP systems; (2) larger virtual storage, with up to 16 million bytes of addressable space for each of up to 63 concurrent users; (3) a HASP-like version of the Job Entry System (JES2); (4) an ASP-III-like version of the Job Entry System (JES3); and (5) Virtual Telecommunications Access Method (VTAM) support of the 370X Communications Controllers in Network Control Program (NCP) mode.

With JES2—an optional job entry and control system that is upwardly compatible with HASP—a "tightly coupled" multiprocessing system can be supported using either two identically configured Model 158 MP systems or two not-necessarily-identical Model 168 MP systems. In tightly coupled mode, each processing unit shares the combined main storage.

Under JES3—which is upwardly compatible with ASP Version 3—a master or "global" system using OS/VS2 Release 2 can control a "loosely coupled" network of up to four slave or "local" systems running under OS/VS2 Release 1, OS/VS2 Release 2, or OS/MVT ASP as main processors. Each local system can be either a single processor or a tightly coupled pair of processors using JES2 under VS2 Release 2. In loosely coupled mode, the global processor controls the scheduling, automatic spooling, interleaved job entry from intelligent terminals, and pre-execution volume fetch and setup for the local processors, but does not share main memory with them.

For either tightly or loosely coupled multiprocessing, VS2 Release 2 provides a virtual I/O (VIO) paging mechanism for temporary data sets, private virtual storage of up to 16 million bytes for individual TSO users, a new System Activity Measurement Facility (MF/1) in addition to SMF to measure CPU, channel, I/O device, and paging activity as well as I/O contention and CPU/channel overlap, and extensive system integrity control measures.

VS2 Release 2 will be available for Models 145, 155-II, 158, 158 MP, 165-II, 168, and 168 MP in March 1974 with JES2; JES3 will be available in October 1974. Either JES2 or JES3 is required with VS2 Release 2. With concurrent batch and time-sharing under JES2, VS2 Release 2 runs in an absolute minimum 768K-byte system (with reduced functional capability and limited performance), and more comfortably in at least 1024K bytes of real storage. With JES 3, an absolute minimum of 1024K bytes is required, and a larger main memory will usually be needed. OS/VS2 Release 2 can also be used for uniprocessor systems, most commonly with JES2, where very large virtual storage, VIO, or other functional enhancements of Release 2 over Release 1 are required.

VSAM support is provided for all versions of OS/VS and is similar to VSAM support under DOS/VS, except that user exits for security routines other than standard password protection are provided and user VSAM catalogs are supported in addition to the master VSAM catalog. For OS/VS data set sharing, VSAM provides protection for multiple intra-region updates only.

VTAM support is provided for OS/VS1 and OS/VS2 Release 2 only, and is similar to VTAM support under DOS/VS.

OS/360 facilities that are not supported by any version of OS/VS include: main storage hierarchies involving Large Core Storage (LCS), QTAM (superseded by TCAM), RJE (superseded by RES in VS1 and HASP-ASP/RJE in VS2), TESTRAN, Graphic Job Processor, Rollout/Rollin (obviated by virtual storage), Multiprocessing (MP65), and Direct SYSOUT Writer.

VIRTUAL MACHINE FACILITY/370: VM/370 is a high-level operating environment that provides complementary time-sharing and virtual-machine support to the virtual programming systems provided by DOS/VS and OS/VS. VM/370 runs on the Advanced Function System/370 processors and consists of two major components: the Control Program (CP) and the Conversational Monitor System (CMS).

The VM/370 Control Program divides the resources of a System/370 configuration into multiple virtual machines and allows the concurrent execution of multiple operating systems in any mix: DOS, DOS/VS, OS/MFT, MVT, VS1 and VS2, and VM/370. Each virtual machine can have up to 16 million bytes of virtual storage. The capability to run multiple virtual machines simultaneously should aid System/370 users in developing new systems, converting from one operating system to another, scheduling complex workloads, and providing economical backup facilities.

The Conversational Monitor System (CMS) is an upgraded version of Control Program 67/Cambridge Monitor System (CP-64/CMS), originally designed and implemented on a limited basis in 1968 for use on the time-sharing System/360 Model 67. CMS is virtual storage-based and provides a general-purpose time-sharing capability. CMS supports the BASIC, ANS COBOL, FORTRAN IV, and PL/1 languages.

The minimum system that can support VM/370 is a 240K-byte Model 135. The resident memory requirement for the VM/370 control program is about 80K bytes of real storage plus about 2K bytes of real storage per active virtual machine. Release 1 of VM/370 became available in November 1972.

ITF (INTERACTIVE TERMINAL FACILITY): This separately priced IBM Program Product, announced in November 1969, permits interactive problem-solving on up

IBM System/370

► to 31 terminals in either a dedicated or multiprogramming environment. The terminal users can program in either ITF-BASIC or ITF-PL/1, a subset of PL/1. Each user has access to both a common program library and a private library in which his own programs and data files are stored. ITF will support 10 to 12 terminals on either a 49K DOS (or DOS/VS) system or a 65K OS/360 (or OS/VS) system. Additional core storage permits the use of up to 31 terminals, as well as concurrent batch processing. IBM 2741 and Teletype Model 33 and 35 terminals are supported.

COBOL: IBM offers COBOL compilers under DOS, DOS/VS, OS/360, and OS/VS. DOS COBOL and OS/360 COBOL E use essentially the same source language, which includes many of the facilities of ANS COBOL but also has numerous incompatibilities and restrictions with respect to the standard language. OS/360 COBOL F, which requires at least 80K bytes of core storage for compilation, offers all the language facilities of COBOL E plus useful extensions such as the Sort and Report Writer facilities.

In 1968 IBM announced no-charge ANS (formerly USASI) COBOL compilers for operation under both DOS and OS/360. These two compilers implement the full American National Standard COBOL language as well as certain IBM extensions; the extensions are primarily in the areas of source-language debugging and mass-storage file accessing. IBM offers Language Conversion Programs to aid users in resolving the numerous detail differences between ANS COBOL and the earlier IBM COBOL languages. In 1971, IBM withdrew support of the OS/360 COBOL F compiler in favor of ANS COBOL. The latest and most powerful versions of both the DOS and OS ANS COBOL compilers are classified as separately priced Program Products.

The ANS Subset COBOL Compiler is another IBM Program Product, for use in DOS installations with as little as 32K bytes of storage and one disk drive. (Full ANS COBOL under OS requires at least 65K bytes.) The Subset COBOL language includes the following modules of ANS COBOL: Nucleus (Level 2), Sequential Access (Level 2), Random Access (Level 2), Library (Level 1), Table Handling (Level 2), and Segmentation (Level 1). The ANS Report Writer and Sort modules are not implemented.

For OS/360 and OS/VS, Full ANS COBOL is available in either Version 3 or Version 4, either of which is most conveniently invoked through the TSO COBOL Prompter. Both versions support TSO, and Version 4 can also be used under CMS. Version 3 (also available under DOS and DOS/VS) provides: modification of the generated code for OPEN and MOVE statements to give substantial savings in object-program space; an alphabetized cross-reference listing; a Flow Trace option that gives a formatted trace of a selected number of procedures; a Statement Number option for detailed information about the COBOL statement being executed at the time of an abnormal termination; expanded CLIST and DMAP functions to give more detailed information about the Data Division and Procedure Division; and a RERUN facility that allows automatic checkpoints at end-of-volume. In addition, ON statement count-conditional operands can be identifiers; the GIVING phrase (which requests statistics about an existing error) can be specified; and support is provided for creation and retrieval of ASCII tape files. Also, Version 3 can save machine time by batch compilation, allowing more than one COBOL source program to be processed with a single invocation of the compiler.

Version 4 of Full ANS COBOL provides the facilities of Version 3 plus advanced symbolic debugging; optimized

object code; the ability to write teleprocessing (TP) programs in COBOL (in conjunction with TCAM); a COBOL library management facility; dynamic subprogram linkage giving the user object-time control of main storage; syntax-checking compilation; and string manipulation, for more flexible data handling. A Version 4 Interactive COBOL Debug is also available for use with OS under TSO.

FORTRAN: IBM offers ANS FORTRAN compilers for operation under all levels of System/370 software support as separately priced Program Products. These compilers also provide support for numerous IBM extensions to the language.

Code and Go FORTRAN and the FORTRAN IV (G1) compiler are compile-and-go and batch-mode compilers, respectively, that use the same language level as FORTRAN G and operate under the OS/360 Time-Sharing Option (TSO) as well as under OS/VS. A TSO FORTRAN Prompter is also available to set up and execute the FORTRAN IV (G1) compiler. The FORTRAN IV (H Extended) compiler operates under OS/360 or OS/VS and provides all the facilities of FORTRAN H plus extended-precision arithmetic, asynchronous I/O, and other extensions. An Interactive FORTRAN Debug is available that can be used in conjunction with the Code and Go FORTRAN and FORTRAN IV (G1) compilers in the TSO foreground or under the CMS option of VM/370.

Under DOS or DOS/VS, a DOS FORTRAN IV compiler (not a Program Product) permits the use of an enhanced ANS FORTRAN IV language that includes direct-access I/O statements and arrays of up to seven dimensions.

PL/1: IBM currently offers compilers for PL/1, its multi-purpose programming language, under DOS, DOS/VS, OS/360, OS/VS, and ITF. PL/1 includes a broad range of language facilities suitable for both business and scientific programming, enabling it to handle applications beyond the scope of either COBOL or FORTRAN. Despite its power, PL/1 has not yet found widespread acceptance among users.

The OS/360 PL/1 F compiler requires at least 44K bytes of core storage and handles most—but by no means all—of the language facilities defined by PL/1's co-developers, IBM and the SHARE user group. It provides facilities for handling numerous data types and arithmetic modes, dynamic storage allocation, source-language debugging, data communications, sorting, program segmentation, etc. Moreover, it accommodates seven different data access modes: BSAM, QSAM, BISAM, QISAM, BDAM, QTAM, and VTAM.

The DOS and DOS/VS PL/1 compilers accommodate a "Basic PL/1" language whose facilities are a proper subset of, but considerably less extensive than, those of OS/360 PL/1. Both compilers can be used in 16K-byte systems.

Several other PL/1 compilers are offered as separately priced Program Products. PL/1 Optimizing Compilers offer improvements in compilation speed, object program efficiency, and language facilities through proper use of three optimization options. The OS PL/1 Checkout Compiler is an interpretive processor for the PL/1 F language that features high translation speeds and effective diagnostic and debugging capabilities; it can be used in batch mode under MFT, MVT, VS1, or VS2, or in conversational mode under TSO. ITF-PL/1 uses a subset of the PL/1 language and is designed specifically for time-sharing operation under ITF.

BASIC: The BASIC language, which is gaining widespread popularity for problem-solving applications because of its simplicity and ease of use, is supported for time-sharing use ►

IBM System/370

► under either ITF or TSO. The BASIC compilers are separately priced Program Products. The language features extensive matrix handling facilities and a variety of built-in mathematical functions, but arrays are limited to two dimensions.

APL: Conceived in the early 1960's by Dr. Kenneth E. Iverson of IBM, the APL language is designed to permit clear, concise expression of computational algorithms. Its facilities for handling vectors and arrays are especially powerful. The APL/360 system is a separately priced Program Product, available for time-shared operating under DOS, DOS/VS, OS, or OS/VS. The system requires a minimum partition of 170K bytes and supports IBM 2740, 2741 and 1050 terminals.

ALGOL: As a reluctant concession to current ALGOL users, IBM offers a single ALGOL compiler, which operates under OS on a system with at least 65K bytes of core storage. The OS/360 ALGOL language is a proper subset of ALGOL 60 that encompasses the ECMA and IFIP subsets and provides the IFIP Input/Output Procedures and other useful additions. IBM has stated that it plans no further ALGOL compiler development work and is encouraging ALGOL users to switch to PL/I.

REPORT PROGRAM GENERATORS: IBM offers RPG II as a Program Product for use under DOS or DOS/VS. Both versions use data from five types of user-prepared specification sheets to generate object programs to perform common business data processing functions. If desired, the generated programs can be executed immediately. RPG II for the System/370 is generally compatible with RPG II for the small-scale IBM System/3, where it is the principal language. All of the facilities of the System/3 language are supported except the telecommunications and automatic program overlay functions. Thus, the availability of RPG II for the System/370 represents a significant step toward improved compatibility between the System/3 and the larger IBM computers.

Compilers for the original System/360 RPG language are also available for operation under DOS or OS/360. If desired, the generated programs can be executed immediately. In addition to their basic report-writing functions, RPG programs can handle various types of calculations, update files, perform table look-up operations, accept data from multiple input files, and accommodate user-coded routines to handle functions that cannot be programmed in the RPG language.

ASSEMBLERS: The Assembler language, often called BAL (Basic Assembly Language) or ALP (Assembly Language Programming), is the standard symbolic assembly language used to write machine-oriented programs for all models of the System/370. Assemblers are therefore furnished at all levels of System/370 software support. Facilities for handling macro-instructions and literals are provided at all levels. Though the Assembler language is essentially the same at all the various levels, there are certain differences in the handling of literals, constants, and macros that preclude complete freedom to transfer Assembler-coded programs between the various operating systems.

DOS and OS/360 users are offered a choice of two Assemblers. The two DOS Assemblers require 10K and 44K bytes of core storage. OS/360 Assemblers E and F require a minimum of 18K and 44K bytes, respectively. In both cases, the larger version provides considerably faster assembly.

The new DOS/VS Assembler is a superset of the earlier DOS Assemblers that implements all of the System/370 instructions and promises improved performance through the use of a pre-edited macro library.

OS Assembler H is a separately priced Program Product that requires at least 200K bytes. It is upward-compatible with the other System/370 assemblers and features improved assembly speed (as much as 50 percent faster than earlier versions) macro language extensions, improved diagnostics, batched assemblies within a single job step, and support of the new machine instructions in the System/370 processors. OS Assembler H runs under MFT, MVT, VS1, or VS2. A subset of Assembler H—the System Assembler—is the only language translator provided as a standard component of VS.

UTILITY ROUTINES: Sort/merge programs are offered at all levels of software support for the System/370. All are generalized programs which are controlled by user-supplied parameters, and all can accommodate either fixed or variable-length records. Improved sort/merge programs for both DOS and OS are offered as separately priced Program Products. The enhanced OS or OS/VS version of the Sort/Merge utility program, called OS-SM1, has features and capabilities similar to those of the DOS-SM1 Sort/Merge package, announced in April 1970, which can also function with the System/370. Existing user-prepared control cards and exit routines can be used with no change when using the new Sort/Merge programs.

The new OS or OS/VS Sort/Merge is approximately 10 percent faster than its earlier counterpart, and the DOS or DOS/VS improvement can be up to 42 percent, according to IBM. The OS Sort/Merge program fully supports the 3330 Disk Storage Facility. The new Sort/Merge programs also include support for ASCII-formatted files recorded on 9-track magnetic tape and offer expanded exit facilities to assist the user in writing his own-code additions to the sort/merge process.

Each software level also includes an appropriate complement of data transcription, diagnostic, and other utility routines.

RETAIN/370: This is a system maintenance software package introduced with the System/370. Its acronym stands for "Remote Technical Assistance and Information Network." Its purpose is to provide special assistance to the IBM Customer Engineers when they encounter unusual difficulties in solving complex hardware maintenance problems.

IBM is creating data banks of technical information on hardware problems in Technical Support Centers in New York, Chicago, and Los Angeles. Through RETAIN/370, Customer Engineers can dial up access to these data banks and request any available information in the specific problems at hand. A technician at the support center views any available information on a display screen and relays anything pertinent to the Customer Engineer. If the results are uninformative, the technician at the support center can initiate remote testing of the malfunctioning unit or system for his own analysis and evaluation. When a solution is finally reached, it is stored in the support center's data bank for use whenever a similar problem arises.

3704/3705 COMMUNICATIONS CONTROLLER SOFTWARE: In its native mode, a 370X Communications Controller runs under control of a Network Control Program (NCP) that resides in a minimum of 48K bytes of the controller's main memory. Systems generation and other ►

IBM System/370

► administrative support for NCP must be performed on a System/370 host processor using OS/MFT or OS/MVT in a partition or region of 48K to 50K bytes. Under DOS, the 370X can be operated in a 270X emulation mode only. A virtual storage version of the Network Control Program, NCP/VS, is available for use in conjunction with VTAM and can be run under DOS/VS as well as OS/VS. NCP/VS provides all the capabilities of NCP plus the capability for simultaneous 270X emulation and NCP operation. (Refer to Reports 70D-491-31 and -32 for full descriptions of the 3704/3705 Communications Controllers and the associated software.)

MSP/7 HOST PROGRAM PREPARATION FACILITY II: This facility permits the preparation of System/7 programs on a System/370 computer under DOS, DOS/VS, OS, or OS/VS. HPPF II provides an MSP/7 Macro Library, with System/7 assembler/macro control and I/O subroutines, and the System/7's Host Macro Assemblers (ASM/7), Host Linkage Editors (LINK/7), and Host Storage Load Formatting Program (FORMAT/7). The HPPF II programs are classified as System Control Programming and can run in a paged mode on the System/370 virtual systems.

APPLICATION PROGRAMS: An enormous number of "packaged" application programs—more than 2500—are now available for the System/370 at no charge from IBM as "Prior Use" Type I, II, III, or IV software. These programs were in general use on the System/360 prior to unbundling on December 31, 1969. While many of these programs are rather simple utilities, others are major systems representing dozens of man-years of effort that have subsequently been made available in improved and maintained versions for a fee as IBM Program Products. The Prior Use programs are provided with no free IBM support. Information concerning these programs is available in the *Catalog of Programs for IBM System/360 Models 25 and Above* (GC20-1619).

In the separately priced application programs category, three types of programs are available: Program Products, Field Developed Programs (FDP's), and Installed User Programs (IUP's). Limited support is provided for the FDP's and IUP's (which were first made available in August and October 1971, respectively); it consists only of pertinent error-correction information during the first six months after initial general availability of the programs. More than four dozen FDP's and one dozen IUP's are currently available. A full list of FDP's and IUP's with prices, dates when support ends, and reference manual numbers can be found in the *IBM Customer Information Card for FDP's and IUP's* (GB21-9949).

A list of the currently available System/370 Program Products can be found in the price list at the end of this report, along with an indicator showing whether or not each program can run in virtual (paged) mode.

Three major Program Products with the broadest general interest are described below:

- Generalized Information System, Version 2: GIS/2 provides sets of generalized routines that handle the creation and maintenance of structured data bases, selective retrieval of information, and preparation of customized reports. The system operates under OS/360 or OS/VS and requires a minimum of 196K or 524K bytes for the MFT (VS1) or MVT (VS2) version, respectively.
- Information Management System for Virtual Storage: IMS/VS is similar to IMS-2 (see Report 70E-491-01) and has been designed to ease the task of creating, maintaining, and accessing large direct-access data

bases. With IMS/VS a physical data base can be viewed by any number of individual applications programs according to their respective needs. These "logical" data bases permit a high degree of data and device independence for flexible applications growth and new development. IMS/VS is provided in two versions, one for batch processing data base (DB) environments and one for data communications (DB/DC) environments in which the access to centrally stored data files takes place through remote terminals.

IMS/VS has been enhanced over IMS-2 with program isolation, batch checkpoint/restart, exclusive access to the segment level, multiple root and dependent segment indexing, additional user exits for data compaction, VSAM support, virtual storage execution of the IMS Control program, dynamically alterable variable-length segments, and non-switched data communications support of the IBM System/3 Model 10 and System/7.

IMS/VS will be available for System/370 Models 145, 155-II, 158, 158 MP, 165-II, 168 and 168 MP operating under OS/VS1 and OS/VS2 Release 1 in February 1974, and under OS/VS2 Release 2 by August 1974.

- Customer Information Control System for Virtual Storage: CICS/VS is similar to CICS (see Report 70E-491-02) and is a transaction-oriented, multi-application, data base/data communications (DB/DC) interface between any System/370 virtual storage system and user-written application programs in an on-line environment. CICS/VS provides standard facilities for message switching, terminal inquiry, data collection, order entry, and interactive processing. CICS/VS is IBM's major data communications monitor, and incorporates many of the FASTER capabilities, thus superseding that product family. CICS/OS/VS will be available for OS/VS1 and OS/VS2 Release 1 by February 1974 and for OS/VS2 Release 2 by July 1974. CICS/DOS/VS will be available by March 1974.

PRICING

EQUIPMENT: The following systems illustrate typical System/370 configurations. Obviously, they comprise only a small sampling of the extensive configuration possibilities within the System/370 line. All necessary control units and adapters are included in the indicated prices, and the quoted rental prices include equipment maintenance.

SMALL MODEL 125 DISK SYSTEM: Consists of 98K Model 125 Processing Unit, 3333 Disk Storage and Control (2 drives, 200 million bytes total), 3504 Model A1 Card Reader (800 cpm), 3525 Model P1 Card Punch (100 cpm), and 1403 Model 7 Printer (600 lpm). Monthly rental and purchase prices are approximately \$8,460 and \$391,000, respectively.

MODEL 125 TAPE/DISK SYSTEM: Consists of 131K Model 125 Processing Unit, 3333 Disk Storage and Control plus 3330 Model 1 Disk Storage module (4 drives, 400 million bytes total), six 3410/3411 Model 3 Magnetic Tape Units and Control (80KB), 3504 Model A2 Card Reader (1200 cpm), 3525 Model P3 Card Punch (300 cpm), 1403 Model N1 Printer (1100 lpm), and 5213 Console Printer. Monthly rental and purchase prices are approximately \$13,600 and \$593,000 respectively.

SMALL MODEL 135 DISK SYSTEM: Consists of 98K Model 135 Processing Unit with Integrated File Adapter, 2319 Disk Storage Facility (3 drives, 87 million bytes

IBM System/370

total), 3505 Model B1 Card Reader, 3525 Model P2 Card Punch, 1403 Model 2 Printer, and 3210 Model 1 Console Printer-Keyboard. Monthly rental and purchase prices are approximately \$10,300 and \$476,000, respectively.

MODEL 135 TAPE/DISK SYSTEM: Consists of 245K Model 135 Processor with Integrated File Adapter, two Selector Channels, and 12K Control Storage Expansion, 2319 Disk Storage Facility with one additional 2312 Disk Drive (4 drives, 116 million bytes total), eight 3420 Model 3 Magnetic Tape Units (120KB) and dual tape controls, 3505 Model B2 Card Reader, 3525 Model P3 Card Punch, 1403 Model N1 Printer, and 3210 Model 1 Console Printer-Keyboard. Monthly rental and purchase prices are approximately \$19,700 and \$869,000, respectively.

MODEL 145 TAPE/DISK SYSTEM: Consists of 262K Model 145 Processor with Integrated File Adapter and Two Selector Channels, 2319 Disk Storage Facility with one additional 2312 Disk Drive (4 drives, 116 million bytes total), eight 3420 Model 3 Magnetic Tape Units (120K) and dual-channel tape controls, 2540 Card Read Punch, 1403 Model N1 Printer, and 3210 Model 1 Console Printer-Keyboard. Monthly rental and purchase prices are approximately \$24,300 and \$1,089,000, respectively.

EXPANDED MODEL 145 TAPE/DISK SYSTEM: Consists of 524K Model 145 Processor with four Selector Channels, Block Multiplexer Channel and Word Buffer Features, 3047 Power Unit, eight-drive 3330 Disk Storage facility (800 million bytes), twelve 3420 Model 5 Magnetic Tape Units (200KB) and two tape controls, two 2540 Card Read Punches, two 3211 Printers, and 3215 Console Printer-Keyboard. Monthly rental and purchase prices are approximately \$40,900 and \$1,775,000, respectively.

MODEL 158 TAPE/DISK SYSTEM: Consists of 1048K Model 158 Processor with four Block Multiplexer Channels and two Byte Multiplexer Channels, eight-drive 3330 Disk Storage facility (800 million bytes), 2305 Model 2 Fixed-Head Storage Facility (11.2 million bytes), twelve 3420 Model 5 Magnetic Tape Units (200KB) and two tape controls, two 2540 Card Read Punches, and two 3211 Printers. Monthly rental and purchase prices are approximately \$68,000 and \$3,018,000, respectively.

MODEL 168 TAPE/DISK SYSTEM: Consists of 2097K Model 168 Processor with Buffer Expansion and High-Speed Multiply features, four Block Multiplexer Channels, two Byte Multiplexer Channels, two 8-drive 3330 Disk Storage facilities (1600 million bytes), 2305 Model 2 Fixed-Head Storage Facility (11.2 million bytes), twelve 3420 Model 7 Magnetic Tape Units (320KB) and two tape controls, two 2540 Card Read Punches, two 3211 Printers, and 3066 System Console. Monthly rental and purchase prices are approximately \$120,900 and \$5,517,000, respectively.

SOFTWARE: System/360 software which was being distributed by the IBM Program Library as of June 23, 1969, is available to System/370 users at no additional charge. All subsequent IBM programming announcements (except for certain modifications and improvements of existing IBM programs) are designated as either System Control Programming or Program Products.

System Control Programming provides functions which are fundamental to the operation and maintenance of a system (e.g., loading, scheduling, supervising, and data management) and is available without charge.

Program Products are related to the application of a system to user tasks (e.g., compilers, utility programs, and application programs). These are offered on an individual-charge basis, as listed under "Software Prices."

Also available on an individual-charge basis, but without centralized IBM programming support, are approximately 49 Field-Developed Programs and 18 Installed User Programs for the System/370.

SUPPORT: IBM Systems Engineering assistance is available to System/370 users at a basic rate of \$30.00 or \$37.75 per hour, depending upon the size and complexity of the system.

EDUCATION: IBM "Professional Courses" are now individually priced. System Features Instruction is offered to users of IBM data processing equipment at no charge. Customer Executive Seminars, Industry Seminars, and promotional sessions are still offered at no charge by IBM invitation.

CONTRACT TERMS: The standard IBM rental contract includes equipment maintenance and entitles the customer to up to 176 hours of billable time per month. Time used in excess of that amount is charged for, on all machines equipped with meters, at an extra-use rate. This rate, for most System/370 components, is 10% of the basic hourly rate (i.e., 10% of 1/176 of the monthly rental for each hour of extra use).

IBM's Fixed-Term Lease Plan, introduced on June 1, 1971, offers price reductions of 8 or 16 percent from the short-term monthly rental rates to users willing to sign a 12-month or 24-month contract, respectively. The Fixed-Term Leases apply to nearly all of the System/370 magnetic tape, disk, drum, and printer units and to the associated control units and features, but not to the mainframes or other types of peripheral devices. Extra-use charges are eliminated under these leases, and up to two years of purchase option accruals are available. The user has the option to extend his lease for an indefinite number of additional 12-month or 24-month periods and for one shorter period under the same terms. Users who elect to cancel a Fixed-Term Lease (even for a model upgrade) will be assessed a penalty of 2.5 times the monthly rental on a 12-month contract or 5 times the monthly rental on a 24-month contract (or the remaining due, whichever is less).

IBM's Extended-Term Lease Plan, introduced on March 1, 1972, is a more flexible lease plan under which "selected machines" are offered. The plan has a basic contract period of 24 months and offers monthly charges approximately 15% below the short-term rental prices. Significant provisions of the Extended-Term Plan include: elimination of additional-use charges, unlimited one-year extensions after the initial contract period, a single extension of less than one year, purchase option credits for 24 months, protection against price increases during the contract period, and upgrading of installed machines (through field-installable features and model changes) without termination charges. Charges for early termination decline from a maximum of five times the monthly charge during the first six months of the lease, to four times the monthly charge during the second six months, to three times the monthly charge during the third six months, to the smaller of twice the monthly charge or the remaining amount due during the last six months of the initial contract period or during any extension. ■

IBM System/370 EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*
PROCESSORS AND MAIN STORAGE				
3125	Processing Unit (for Model 125 system):			
	Model FE; 98,304 bytes	231,600	290	4,775
	Model G; 131,072 bytes	241,300	295	4,975
3135	Processing Unit (for Model 135 system):			
	Model FE; 98,304 bytes	281,230	460	5,670
	Model GD; 147,456 bytes	325,255	490	6,570
	Model GF; 196,608 bytes	369,280	520	7,470
	Model DH; 245,760 bytes	413,305	550	8,370
3046	Power Unit (required for 3135)	15,550	33	324
3145	Processing Unit (for Model 145 system):			
	Model GE; 163,840 bytes**	583,440	1,070	12,155
	Model GFD; 212,992 bytes**	626,640	1,100	13,055
	Model H; 262,144 bytes**	669,840	1,130	13,955
	Model HG; 393,316 bytes when used with a 3345 Model 1 or 4**	670,845	1,135	13,975
	Model I; 524,288 bytes when used with a 3345 Model 2 or 5**	671,850	1,135	13,995
	Model H2; 262,144 bytes	657,840	1,095	13,705
	Model HG2; 393,316 bytes	737,000	1,195	15,355
	Model I2; 524,288 bytes	797,000	1,295	16,605
	Model IH2; 786,432 bytes	917,000	1,495	19,105
	Model J2; 1,048,576 bytes	1,037,000	1,695	21,605
3345	Storage and Control Frame (for Model 145):			
	Model 1; 131,072 bytes**	138,240	90	2,880
	Model 2; 262,144 bytes**	252,480	165	5,260
	Model 3; Integrated 3330 Disk Storage Control	60,000	85	1,250
	Model 4; 131,072 bytes plus Integrated 3330 Disk Storage Control**	193,440	175	4,030
	Model 5; 262,144 bytes plus Integrated 3330 Disk Storage Control**	307,680	250	6,410
8100	Two-Channel Switch for 3345 Model 3, 4, or 5 or 3145	9,710	10	200
3046	Power Unit (required for 3345 Model 1, 2, 4, or 5)	15,550	33	324
3047	Power Unit (required for 3145 Models H2 through J2)	16,800	35	350
3155	Processing Unit (for Model 155 system; requires 3360 Mod. 1, 2, or 3 Processor Storage)			
	Model H; 262,144 bytes	959,040	1,730	19,980
	Model HG; 393,216 bytes	960,240	1,730	20,005
	Model I; 524,288 bytes	961,440	1,730	20,030
	Model IH; 786,432 bytes	984,960	1,740	20,520
	Model J; 1,048,576 bytes	987,360	1,740	20,570
	Model JI; 1,572,864 bytes	1,070,400	1,790	22,300
	Model K; 2,097,152 bytes	1,096,320	1,800	22,840
3360	Processor Storage (for Model 155):			
	Model 1; 262,144 bytes	132,000	290	3,000
	Model 2; 393,216 bytes	198,000	435	4,500
	Model 3; 524,288 bytes	264,000	580	6,000
3158	Processing Unit (for Model 158 system; includes semiconductor main storage as indicated):			
	Model I; 524,288 bytes	1,615,200	1,940	33,300
	Model J; 1,048,576 bytes	1,730,100	2,000	35,900
	Model JI; 1,572,864 bytes	1,845,000	2,060	38,500
	Model K; 2,097,152 bytes	1,959,900	2,120	41,100
	Model KJ; 3,145,728 bytes	2,238,700	2,400	47,300
	Model L; 4,194,304 bytes	2,468,500	2,520	52,500
	For Model 158 MP (multiprocessing) systems:			
	Model MP1; 524,288 bytes	1,781,800	2,030	36,700
	Model MP2; 1,048,576 bytes	1,896,700	2,090	39,300
	Model MP3; 1,572,864 bytes	2,011,600	2,150	41,900
	Model MP4; 2,097,152 bytes	2,126,500	2,210	44,500
	Model MP5; 3,145,728 bytes	2,405,300	2,490	50,700
	Model MP6; 4,194,304 bytes	2,635,100	2,610	55,900
3058	Multisystem Unit (required in Model 158 MP systems):	59,780	20	1,220
4600	I/O Assignment Switch Expansion (for 3058)	4,900	1	100
3165	Processing Unit (for Model 165 system; requires 3360 Mod. 4 or 5 Processor Storage):			
	Model I; 524,288 bytes	1,710,720	2,970	35,640
	Model J; 1,048,576 bytes	1,715,760	2,980	35,745
	Model JI; 1,572,864 bytes	1,736,640	3,010	36,180

* Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.
** Not in new production.

IBM System/370
EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*
PROCESSOR FEATURES AND CHANNELS (continued)				
4668	Integrated Printer Adapter for 1403 Model N1	19,165	20	388
6981	Selector Channel No. 1	9,335	4	189
6982	Selector Channel No. 2	8,000	4	162
7520	System/360 Model 20 Compatibility	No charge	No charge	No charge
7861	Control Storage Expansion; 1st 12K increment	11,005	19	225
7862	Control Storage Expansion; 2nd 12K increment	11,005	19	225
7844	Adapter for 3210-1 Console Printer-Keyboard	5,335	4	108
7845	Adapter for 3215 Console Printer-Keyboard	9,040	5	183
8637	Universal Character Set Adapter	1,825	7	37
9841	3333 String Attachment	No charge	No charge	No charge
3210-1	Console Printer-Keyboard; 15 char/sec	5,600	85	175
3215	Console Printer-Keyboard; 85 char/sec	8,000	55	200
For 3145 Processing Unit (Model 145):				
1421-1424	Block Multiplexer Channel Features	No charge	No charge	No charge
1850	Channel-to-Channel Adapter	13,730	12	286
2001	Clock Comparator & CPU Timer	4,800	3	100
2150	Control Store Extension (prerequisite for 9845)	14,400	10	300
3274	Direct Control	6,190	4	129
3910	Floating-Point Instructions	No charge	No charge	No charge
4457	1401/1440/1460 Compatibility	No charge	No charge	No charge
4458	1401/1440/1460, 1410/7010 Compatibility	No charge	No charge	No charge
4650	Integrated File Adapter (IFA) for 2319	28,320	42	590
4660	Integrated Storage Control (ISC) for 3330	55,200	85	1,150
4951-4954	Additional Multiplexer Subchannels (32, 64, 128, or 256)	No charge	No charge	No charge
6982	Selector Channel—2nd	11,660	15	243
6983	Selector Channel—3rd	11,660	15	243
6984	Selector Channel—4th	11,660	15	243
7844	Console Printer Adapter for 3210 Model 1	6,480	4	135
7845	Console Printer Adapter for 3210 Model 2	5,180	6	108
7855	Console Printer Adapter for 3215	9,070	6	189
8810	Word Buffer	10,365	6	216
9841	3333 String Switch Attachment	No charge	No charge	No charge
9845	32-Drive Expansion (2150 is prerequisite)	No charge	No charge	No charge
3210	Console Printer-Keyboard; 15 char/sec:			
	Model 1; for local use	5,600	85	175
	Model 2; for remote use	5,760	90	180
3215	Console Printer-Keyboard; 85 char/sec	8,000	55	200
For 3155 Processing Unit (Model 155):				
1433	Third Block Multiplexer Channel	14,175	12	405
1434	Fourth Block Multiplexer Channel	13,230	10	378
1435	Fifth Block Multiplexer Channel	6,615	5	189
1850	Channel-to-Channel Adapter	13,230	8	378
3274	Direct Control	3,240	4	108
3700	Extended Precision Floating Point	9,070	16	189
3950	IBM 1401/1440/1460/1410/7010 Compatibility	17,280	16	432
4990	Second Byte Multiplexer Channel	14,175	12	405
5450	OS/DOS Compatibility	10,800	16	270
7117	7070/7074 Compatibility	46,655	60	970
7844	Adapter for 3210 1 Printer-Keyboard	7,775	8	162
7845	Adapter for 3210 2 Printer-Keyboard	8,785	8	183
7855	Adapter for 3215 Printer-Keyboard	10,365	8	216
3210	Console Printer-Keyboard; 15 char/sec:			
	Model 1; for local use	5,600	85	175
	Model 2; for remote use	5,760	90	180
3215	Console Printer-Keyboard; 85 char/sec	8,000	55	200
For 3158 Processing Unit (Model 158):				
1433	Third Block Multiplexer Channel	14,175	12	405
1434	Fourth Block Multiplexer Channel	13,230	10	378
1435	Fifth Block Multiplexer Channel	6,615	5	189
1850	Channel-to-Channel Adapter	13,230	8	378
2150	Control Store Extension (prerequisite for 9845)	28,800	20	600
3274	Direct Control	3,240	4	108
3700	Extended Precision Floating Point	No charge	No charge	No charge
3950	IBM 1401/1440/1460/1410/7010 Compatibility	No charge	No charge	No charge

* Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

IBM System/370

EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*
PROCESSORS AND MAIN STORAGE				
3125	Processing Unit (for Model 125 system):			
	Model FE; 98,304 bytes	231,600	290	4,775
	Model G; 131,072 bytes	241,300	295	4,975
3135	Processing Unit (for Model 135 system):			
	Model FE; 98,304 bytes	281,230	460	5,670
	Model GD; 147,456 bytes	325,255	490	6,570
	Model GF; 196,608 bytes	369,280	520	7,470
	Model DH; 245,760 bytes	413,305	550	8,370
3046	Power Unit (required for 3135)	15,550	33	324
3145	Processing Unit (for Model 145 system):			
	Model GE; 163,840 bytes**	583,440	1,070	12,155
	Model GFD; 212,992 bytes**	626,640	1,100	13,055
	Model H; 262,144 bytes**	669,840	1,130	13,955
	Model HG; 393,316 bytes when used with a 3345 Model 1 or 4**	670,845	1,135	13,975
	Model I; 524,288 bytes when used with a 3345 Model 2 or 5**	671,850	1,135	13,995
	Model H2; 262,144 bytes	657,840	1,095	13,705
	Model HG2; 393,316 bytes	737,000	1,195	15,355
	Model I2; 524,288 bytes	797,000	1,295	16,605
	Model IH2; 786,432 bytes	917,000	1,495	19,105
	Model J2; 1,048,576 bytes	1,037,000	1,695	21,605
3345	Storage and Control Frame (for Model 145):			
	Model 1; 131,072 bytes**	138,240	90	2,880
	Model 2; 262,144 bytes**	252,480	165	5,260
	Model 3; Integrated 3330 Disk Storage Control	60,000	85	1,250
	Model 4; 131,072 bytes plus Integrated 3330 Disk Storage Control**	193,440	175	4,030
	Model 5; 262,144 bytes plus Integrated 3330 Disk Storage Control**	307,680	250	6,410
8100	Two-Channel Switch for 3345 Model 3, 4, or 5 or 3145	9,710	10	200
3046	Power Unit (required for 3345 Model 1, 2, 4, or 5)	15,550	33	324
3047	Power Unit (required for 3145 Models H2 through J2)	16,800	35	350
3155	Processing Unit (for Model 155 system; requires 3360 Mod. 1, 2, or 3 Processor Storage)			
	Model H; 262,144 bytes	959,040	1,730	19,980
	Model HG; 393,216 bytes	960,240	1,730	20,005
	Model I; 524,288 bytes	961,440	1,730	20,030
	Model IH; 786,432 bytes	984,960	1,740	20,520
	Model J; 1,048,576 bytes	987,360	1,740	20,570
	Model JI; 1,572,964 bytes	1,070,400	1,790	22,300
	Model K; 2,097,152 bytes	1,096,320	1,800	22,840
3360	Processor Storage (for Model 155):			
	Model 1; 262,144 bytes	132,000	290	3,000
	Model 2; 393,216 bytes	198,000	435	4,500
	Model 3; 524,288 bytes	264,000	580	6,000
3158	Processing Unit (for Model 158 system; includes semiconductor main storage as indicated):			
	Model I; 524,288 bytes	1,615,200	1,940	33,300
	Model J; 1,048,576 bytes	1,730,100	2,000	35,900
	Model JI; 1,572,864 bytes	1,845,000	2,060	38,500
	Model K; 2,097,152 bytes	1,959,900	2,120	41,100
	Model KJ; 3,145,728 bytes	2,238,700	2,400	47,300
	Model L; 4,194,304 bytes	2,468,500	2,520	52,500
	For Model 158 MP (multiprocessing) systems:			
	Model MP1; 524,288 bytes	1,781,800	2,030	36,700
	Model MP2; 1,048,576 bytes	1,896,700	2,090	39,300
	Model MP3; 1,572,864 bytes	2,011,600	2,150	41,900
	Model MP4; 2,097,152 bytes	2,126,500	2,210	44,500
	Model MP5; 3,145,728 bytes	2,405,300	2,490	50,700
	Model MP6; 4,194,304 bytes	2,635,100	2,610	55,900
3058	Multisystem Unit (required in Model 158 MP systems):	59,780	20	1,220
4600	I/O Assignment Switch Expansion (for 3058)	4,900	1	100
3165	Processing Unit (for Model 165 system; requires 3360 Mod. 4 or 5 Processor Storage):			
	Model I; 524,288 bytes	1,710,720	2,970	35,640
	Model J; 1,048,576 bytes	1,715,760	2,980	35,745
	Model JI; 1,572,864 bytes	1,736,640	3,010	36,180

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

**Not in new production.

IBM System/370
EQUIPMENT PRICES

	Purchase Price	Monthly Maint.	Rental (short-term lease)*	
PROCESSORS AND MAIN STORAGE (continued)				
	Model K; 2,097,152 bytes	1,752,000	3,060	36,500
	Model KJ; 3,145,728 bytes	1,803,840	3,160	37,580
3066-1	System Console (required in Model 165 system)	160,560	460	3,345
3067-1	Power and Coolant Distribution Unit (required in Model 165 system)	119,040	110	2,480
9447	208/230-volt Motor Generator Set (for Model 165)	15,000	—	Purchase only
9449	440-volt Motor Generator Set (for Model 165)	15,000	—	Purchase only
3360	Processor Storage (for Model 165):			
	Model 4; 262,144 bytes	132,000	290	3,000
	Model 5; 524,288 bytes	264,000	580	6,000
3168	Processing Unit (for Model 168 system; includes semiconductor main storage as indicated):			
	Model J; 1,048,576 bytes	2,611,900	4,230	53,800
	Model K; 2,097,152 bytes	2,841,700	4,350	59,000
	Model KJ; 3,145,728 bytes	3,081,300	4,630	64,400
	Model L; 4,194,304 bytes	3,311,100	4,750	69,600
	Model LJ; 5,242,860 bytes	3,589,900	5,030	75,800
	Model LK; 6,291,456 bytes	3,819,700	5,150	81,000
	Model LKJ; 7,340,032 bytes	4,049,500	5,270	86,200
	Model M; 8,388,608 bytes	4,279,300	5,390	91,400
	For Model 168 MP (multiprocessing) systems:			
	Model MP1; 1,048,576 bytes	2,691,280	4,240	55,420
	Model MP2; 2,097,152 bytes	2,921,080	4,360	60,620
	Model MP3; 3,145,728 bytes	3,160,680	4,640	66,020
	Model MP4; 4,194,304 bytes	3,390,480	4,760	71,220
	Model MP5; 5,242,860 bytes	3,669,280	5,040	77,420
	Model MP6; 6,291,456 bytes	3,899,080	5,160	82,620
	Model MP7; 7,340,032 bytes	4,128,880	5,280	87,820
	Model MP8; 8,388,608 bytes	4,358,680	5,400	93,020
3066-2	System Console (required in Model 168 system)	160,560	460	3,345
5050	Multiprocessing Feature (for 3066-2)	3,920	1	80
3067-2	Power and Coolant Distribution Unit (required in Model 168 system)	119,040	110	2,480
5050	Multiprocessing Feature (for 3067-2)	14,700	20	300
3068	Multisystem Communication Unit (required in Model 168 MP systems)	637,000	330	13,000
3850	Extended Storage Attachment (required on 3068 if either processor has over 4194K bytes)	6,125	0	125
4600	I/O Assignment Switch Expansion (for 3068)	4,900	1	100
9447	208/230-volt Motor Generator Set (for Model 168)	15,000	—	Purchase only
9449	440-volt Motor Generator Set (for Model 168)	15,000	—	Purchase only
3195	Processing Unit (for Model 195 system; includes core storage as indicated):			
	Model J1; 1,048,576 bytes	4,366,000	13,135	100,800
	Model K1; 2,097,152 bytes	5,866,000	13,885	131,800
	Model KJ1; 3,145,728 bytes	6,900,000	14,700	152,800
	Model L1; 4,194,304 bytes	7,866,000	15,385	171,800
3060	System Console (required in Model 195 system)	308,000	450	7,200
3080	Power Units (three required in Model 195 system)	37,400	15	850
3085	Power Distribution Unit (required in Model 195 system)	30,800	10	700
3086	Coolant Distribution Unit (required in Model 195 system)	33,000	10	750
9442	208/230-volt Motor Generator Set (for Model 195)	14,500	—	Purchase only
9443	440-volt Motor Generator Set (for Model 195)	14,500	—	Purchase only

NOTE: A purchased Model 155 Processing Unit can be converted into a Model 155-II by field installation of the Dynamic Address Translation facility at a one-time charge of \$200,000 and a \$630 increase in the monthly maintenance charge. A purchased Model 165 can be similarly converted into a Model 165-II at a one-time charge of \$400,000 and a \$1,000 increase in the monthly maintenance charge.

PROCESSOR FEATURES AND CHANNELS

For 3125 Processing Unit (Model 125):

3898	External Signals	4,850	1.00	100
3910	Floating Point (including Extended Precision)	No charge	No charge	No charge
4101	First 4K-Word Control Storage Increment	3,650	1.50	75
4102	Second 4K-Word Control Storage Increment	3,650	1.50	75
4457	1401/1440/1460 Compatibility	No charge	No charge	No charge
4500	5424 Card Unit Power Supply	7,750	11.00	160
4505	1403 Printer/5425 Card Unit Power Prerequisite	13,600	30.00	280

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

IBM System/370

EQUIPMENT PRICES

	Purchase Price	Monthly Maint.	Rental (short-term lease) *	
PROCESSOR FEATURES AND CHANNELS (continued)				
4662	Integrated 1403 Model 2/N1 Printer Attachment	500	1.00	10
4667	Integrated 1403 Model 2/7/N1 Printer Attachment	6,300	10.00	130
4668	Integrated 1403 Model N1 Printer Attachment	250	1.00	5
4670	Integrated 2560 Model A1 MFCM Attachment	6,800	10.00	140
4674	2560 Card Print Control	1,450	2.00	30
4675	3411 Magnetic Tape Adapter	4,850	3.00	100
4680	Integrated 3504 Card Reader Attachment	3,150	6.50	65
4685	Integrated 3525 Card Punch Attachment	3,900	9.00	80
4692	Integrated 5213 Console Printer Attachment	4,850	3.00	100
4693	3525 Card Print Control	2,900	2.50	60
4695	Integrated 5425 MFCU Attachment	6,800	16.00	140
5248	Multiplexer Channel	9,700	19.00	200
7520	System/360 Model 20 Compatibility	No charge	No charge	No charge
8005	1052 Compatibility	No charge	No charge	No charge
8040	2311 Model 1 Compatibility	No charge	No charge	No charge
4640	Integrated Communications Adapter (for 3125)	9,950	21.00	205
4641	Integrated Communications Adapter Extension	3,650	1.50	75
1201	Asynchronous Line Group 1 (ALG 1)	1,950	3.00	40
1202	Asynchronous Line Group 2 (ALG 2)	1,950	3.00	40
1231	Asynchronous Line, Medium-Speed, ALG 1	1,950	2.50	40
1232	Asynchronous Line, Medium-Speed, ALG 2	1,950	2.50	40
1241	Asynchronous Line Pair, Low-Speed, ALG 1	2,650	3.50	55
1242	Asynchronous Line Pair, Low-Speed, ALG 2	2,650	3.50	55
1291-1296	Auto-Call Adapter (per line position)	950	1.50	20
4743	IBM Leased Line Adapter	490	2.50	14
	IBM 1200-bps Line Adapter:			
4781	Non-Switched	525	2.50	15
4782	Switched with Auto-Answer	700	3.00	20
4791	Switched with Auto-Answer and Auto-Call	2,275	10.00	65
4792	Line Adapter Base 2	1,200	2.00	25
4793	Line Adapter Base 3	1,200	2.00	25
7100	Synchronous Line Group	1,950	3.00	40
7121	Synchronous Line, High-Speed	4,850	7.00	100
7131	Synchronous Line, Low-Load, First	4,850	7.00	100
7132	Synchronous Line, Low-Load, Second	4,850	7.00	100
7141-7144	Synchronous Line, Medium-Speed with Clock (per line)	2,650	3.50	55
7151-7154	Synchronous Line, Medium-Speed (per line)	2,200	3.00	45
7881	Telegraph Line Pair, ALG 1	2,650	7.50	55
7882	Telegraph Line Pair, ALG 2	2,650	7.50	55
5213	Printer; 85 char/sec.	6,200	48.00	160
For 3135 Processing Unit (Model 135):				
1290	Autocall	2,450	1	50
1421	Block Multiplexer Channel	No charge	No charge	No charge
1431	Block Multiplexer Shared Subchannel	No charge	No charge	No charge
1501	Channel Priority	No charge	No charge	No charge
2001	Clock Comparator & CPU Timer	No charge	No charge	No charge
3274	Direct Control	5,830	1	118
3840	Extended Precision Floating Point	1,330	1	27
3900	Floating-Point	No charge	No charge	No charge
3905-3907	Additional Multiplexer Subchannels (64, 128, or 256)	No charge	No charge	No charge
4457	IBM 1401/1440/1460 Compatibility	No charge	No charge	No charge
4650	Integrated File Adapter (IFA) for 2319	25,340	12	510
4655	Integrated File Adapter (IFA) for 3330 Series	34,700	3	700
4640	Integrated Communications Adapter (ICA)	10,670	21	216
4722	Second Line on ICA	2,130	5	43
4723	Third Line on ICA	4,265	9	86
4724	Fourth Line on ICA	2,130	5	43
4725	Fifth Line on ICA	6,365	14	129
4726	Sixth Line on ICA	2,130	5	43
4727	Seventh Line on ICA	2,130	5	43
4728	Eighth Line on ICA	2,130	5	43
4662	Integrated Printer Adapter for 1403 Model 2	19,165	20	388
4667	Integrated Printer Adapter for 1403 Model 7	19,165	20	388

* Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

IBM System/370 EQUIPMENT PRICES

	Purchase Price	Monthly Maint.	Rental (short-term lease)*	
PROCESSOR FEATURES AND CHANNELS (continued)				
4668	Integrated Printer Adapter for 1403 Model N1	19,165	20	388
6981	Selector Channel No. 1	9,335	4	189
6982	Selector Channel No. 2	8,000	4	162
7520	System/360 Model 20 Compatibility	No charge	No charge	No charge
7861	Control Storage Expansion; 1st 12K increment	11,005	19	225
7862	Control Storage Expansion; 2nd 12K increment	11,005	19	225
7844	Adapter for 3210-1 Console Printer-Keyboard	5,335	4	108
7845	Adapter for 3215 Console Printer-Keyboard	9,040	5	183
8637	Universal Character Set Adapter	1,825	7	37
9841	3333 String Attachment	No charge	No charge	No charge
3210-1	Console Printer-Keyboard; 15 char/sec	5,600	85	175
3215	Console Printer-Keyboard; 85 char/sec	8,000	55	200
For 3145 Processing Unit (Model 145):				
1421-1424	Block Multiplexer Channel Features	No charge	No charge	No charge
1850	Channel-to-Channel Adapter	13,730	12	286
2001	Clock Comparator & CPU Timer	4,800	3	100
2150	Control Store Extension (prerequisite for 9845)	14,400	10	300
3274	Direct Control	6,190	4	129
3910	Floating-Point Instructions	No charge	No charge	No charge
4457	1401/1440/1460 Compatibility	No charge	No charge	No charge
4458	1401/1440/1460, 1410/7010 Compatibility	No charge	No charge	No charge
4650	Integrated File Adapter (IFA) for 2319	28,320	42	590
4660	Integrated Storage Control (ISC) for 3330	55,200	85	1,150
4951-4954	Additional Multiplexer Subchannels (32, 64, 128, or 256)	No charge	No charge	No charge
6982	Selector Channel—2nd	11,660	15	243
6983	Selector Channel—3rd	11,660	15	243
6984	Selector Channel—4th	11,660	15	243
7844	Console Printer Adapter for 3210 Model 1	6,480	4	135
7845	Console Printer Adapter for 3210 Model 2	5,180	6	108
7855	Console Printer Adapter for 3215	9,070	6	189
8810	Word Buffer	10,365	6	216
9841	3333 String Switch Attachment	No charge	No charge	No charge
9845	32-Drive Expansion (2150 is prerequisite)	No charge	No charge	No charge
3210	Console Printer-Keyboard; 15 char/sec:			
	Model 1; for local use	5,600	85	175
	Model 2; for remote use	5,760	90	180
3215	Console Printer-Keyboard; 85 char/sec	8,000	55	200
For 3155 Processing Unit (Model 155):				
1433	Third Block Multiplexer Channel	14,175	12	405
1434	Fourth Block Multiplexer Channel	13,230	10	378
1435	Fifth Block Multiplexer Channel	6,615	5	189
1850	Channel-to-Channel Adapter	13,230	8	378
3274	Direct Control	3,240	4	108
3700	Extended Precision Floating Point	9,070	16	189
3950	IBM 1401/1440/1460/1410/7010 Compatibility	17,280	16	432
4990	Second Byte Multiplexer Channel	14,175	12	405
5450	OS/DOS Compatibility	10,800	16	270
7117	7070/7074 Compatibility	46,655	60	970
7844	Adapter for 3210 1 Printer-Keyboard	7,775	8	162
7845	Adapter for 3210 2 Printer-Keyboard	8,785	8	183
7855	Adapter for 3215 Printer-Keyboard	10,365	8	216
3210	Console Printer-Keyboard; 15 char/sec:			
	Model 1; for local use	5,600	85	175
	Model 2; for remote use	5,760	90	180
3215	Console Printer-Keyboard; 85 char/sec	8,000	55	200
For 3158 Processing Unit (Model 158):				
1433	Third Block Multiplexer Channel	14,175	12	405
1434	Fourth Block Multiplexer Channel	13,230	10	378
1435	Fifth Block Multiplexer Channel	6,615	5	189
1850	Channel-to-Channel Adapter	13,230	8	378
2150	Control Store Extension (prerequisite for 9845)	28,800	20	600
3274	Direct Control	3,240	4	108
3700	Extended Precision Floating Point	No charge	No charge	No charge
3950	IBM 1401/1440/1460/1410/7010 Compatibility	No charge	No charge	No charge

* Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

IBM System/370

EQUIPMENT PRICES

	<u>Purchase Price</u>	<u>Monthly Maint.</u>	<u>Rental (short-term lease)*</u>	
PROCESSOR FEATURES AND CHANNELS (continued)				
4650	Integrated Storage Controls (for 3330 Series)	106,800	215	2,200
4990	Second Byte Multiplexer Channel	14,175	12	405
5450	OS/DOS Compatibility	No charge	No charge	No charge
7117	7070/7074 Compatibility	No charge	No charge	No charge
7840	3213 Console Printer Attachment	4,850	1	100
7905	Two-Channel Switch for Integrated Storage Control	19,420	20	400
9841	3333 String Switch Attachment	No charge	No charge	No charge
9845	32-Drive Expansion (2150 is prerequisite)	No charge	No charge	No charge
3213	Console Printer; 85 char/sec	6,800	73	210
For 3165 Processing Unit (Model 165):				
1432	Buffer Expansion (to 16K bytes)	72,835	55	1,520
3850	Extended Channels	23,280	70	485
4520	High-Speed Multiply	127,910	110	2,665
7117	IBM 7070/7074 Compatibility	132,615	165	2,765
7118	IBM 7080 Compatibility	132,615	165	2,765
7119	IBM 709/7090/7094/7094 II Compatibility	132,615	165	2,765
For 3168 Processing Unit (Model 168):				
1435	Buffer Expansion (to 16K bytes)	72,835	55	1,520
2150	Control Store Extension (prerequisite for 9845)	28,800	20	600
3855	Extended Channels	23,280	70	485
4525	High-Speed Multiply	127,910	110	2,665
4650	Integrated Storage Controls (for 3330 Series)	106,800	215	2,200
7127	IBM 7070/7074 Compatibility	132,615	165	2,765
7128	IBM 7080 Compatibility	132,615	165	2,765
7129	IBM 709/7090/7094/7094 II Compatibility	132,615	165	2,765
7905	Two-Channel Switch for Integrated Storage Control	19,420	20	400
9841	3333 String Switch Attachment	No charge	No charge	No charge
9845	32-Drive Expansion (2150 is prerequisite)	No charge	No charge	No charge
For 3195 Processing Unit (Model 195):				
3851	Extended Channels	14,100	2	300
2860	Selector Channel (for Models 165-195):			
	Mod. 1; one channel	97,855	55	2,100
	Mod. 2; two channels	139,435	90	2,995
	Mod. 3; three channels	181,120	120	3,895
1850	Channel-to-Channel Adapter (for 2860)	9,455	3.75	225
	Channel Indirect Data Addressing (required on 2860 for operation in Extended Control mode):			
1861	For 2860 Model 1	6,990	2	150
1862	For 2860 Model 2	13,970	3	300
1863	For 2860 Model 3	20,930	5	450
2870	Byte Multiplexer Channel (for Models 165-195)	103,500	97	2,195
6990	Selector Subchannel—First (for 2870)	17,400	15	400
6991	Selector Subchannel—Second (for 2870)	10,585	10	250
6992	Selector Subchannel—Third (for 2870)	10,585	10	250
6993	Selector Subchannel—Fourth (for 2870)	10,585	10	250
1861	Channel Indirect Data Addressing (required on 2870 for operation in Extended Control mode):	9,430	2	200
2880	Block Multiplexer Channel (for Models 165-195):			
	Mod. 1; one channel	152,280	340	3,240
	Mod. 2; two channels	218,080	450	4,640
	Channel Indirect Data Addressing (required on 2880 for operation in Extended Control mode):			
1861	For 2880 Model 1	7,050	1	150
1862	For 2880 Model 2	14,100	2	300
	Two-Byte Interface (required on 2880 for attachment of 2305 Model 1 Fixed-Head Storage):			
7850	For 2880 Model 1 or first Channel of Model 2	17,765	6	378
7851	For second channel of 2880 Model 2	17,765	6	378

* Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

**IBM System/370
EQUIPMENT PRICES**

		<u>Purchase Price</u>	<u>Monthly Maint.</u>	<u>Rental (short-term lease)*</u>	<u>Rental (12-month lease)*</u>	<u>Rental (24-month lease)*</u>
MASS STORAGE						
2305	Fixed-Head Storage Facility: Mod. 1; 5.4 million bytes	195,760	495.00	4,900	4,508	4,116
	Mod. 2; 11.2 million bytes	155,810	470.00	3,900	3,588	3,276
2835	Storage Control: Mod. 1; for 2305 Mod. 1	119,850	445.00	3,000	2,760	2,520
	Mod. 2; for 2305 Mod. 2	99,880	380.00	2,500	2,300	2,100
2319	Disk Storage (each unit has 3 disk drives and stores a total of 87 million bytes):					
	Model A1; 3 drives and control, for connection to Model 135 or 145 IFA	38,250	210.00	1,000	920	840
	Model A2; 3 additional drives for Model 145	38,250	210.00	1,000	920	840
	Model A3; 3 additional drives for Model 135	38,475	220.00	1,050	966	882
	Model B1; 3 drives and control, for connection to 2314-B1 Storage Control	38,250	210.00	1,000	920	840
	Model B2; 3 additional drives for connection to 2314-B1 Storage Control	38,250	210.00	1,000	920	840
2314	Storage Control, Model B1	56,810	60.00	1,480	1,362	1,243
2312	Disk Storage; 1 drive, 29 million bytes	20,490	75.00	535	492	449
2313	Disk Storage; 4 drives, 116 million bytes	67,050	240.00	1,745	1,605	1,466
2318	Disk Storage; 2 drives, 58 million bytes	35,390	135.00	920	846	773
3330	Disk Storage: Model 1; 2 drives, 200 million bytes	51,940	170.00	1,300	1,196	1,092**
	Model 2; 1 drive, 100 million bytes	31,000	100.00	770	—	655**
3333	Disk Storage and Control; 2 drives, 200 million bytes (up to three 3330 modules can be attached)	65,000	200.00	1,627	—	1,385**
3830	Storage Control, Model 2 (controls up to four 3333's and twelve 3330's)	81,000	115.00	2,025	1,874	1,723**
2150	Control Store Extension (for 3830; prerequisite for 9845)	18,800	10.00	470	432	395**
8151	3333 String Switch Attachment (for 3830)	No charge	No charge	No charge	—	—
9845	32-Drive Expansion (for 3830)	No charge	No charge	No charge	—	—
8170	Two-Channel Switch (for 3830)	7,990	10.00	200	184	168
8171	Two-Channel Switch, Additional (for 3830)	7,990	10.00	200	184	168
NOTE:	The older IBM 2301, 2303, 2311, 2314-A, and 2321 mass storage devices can also be used in a System/370; for details and prices, please refer to the IBM System/360 report (70C-491-03).					
MAGNETIC TAPE INPUT/OUTPUT						
2803	Tape Control (single-channel; for 2401 or 2420):					
	Mod. 1; for 800 bpi drives	26,070	20.00	650	598	546
	Mod. 2; for 1600 bpi drives	32,070	25.00	800	736	672
	Mod. 3; for 7-track 2401 Model 8 drives	15,300	30.00	450	414	378
5320	Nine-Track Compatibility (for 2803 Mod. 2)	8,840	28.00	230	212	193
7135	Seven- and Nine-Track Compatibility (for 2803 Mod. 2)	14,390	47.00	375	345	315
7185	16-Drive Addressing (for 2803 Mod. 1 or 2)	990	0.75	25	23	21
7900	2420 Model 5/7 Attachment (for 2803 Mod. 2)	13,600	10.00	340	313	286
8100	Two-Channel Switch (for 2803 Mod. 1)	3,360	4.00	100	92	84
2804	Tape Control (two-channel; for 2401):					
	Mod. 1; for 800 bpi drives	37,350	35.00	930	856	781
	Mod. 2; for 1600 bpi drives	43,350	40.00	1,080	994	907
	Mod. 3; for 7-Track 2401 Model 8 drives	21,250	45.00	625	575	525
5321	Nine-Track Compatibility (for 2804 Mod. 2)	10,750	22.00	278	256	234
7136	Seven- and Nine-Track Compatibility (for 2804 Mod. 2)	17,270	43.00	450	414	378
2401	Magnetic Tape Unit:					
	Mod. 1; 30,000 bytes/sec; 800 bpi	12,880	66.00	335	308	281
	Mod. 2; 60,000 bytes/sec; 800 bpi	18,720	75.00	485	446	407
	Mod. 3; 90,000 bytes/sec; 800 bpi	30,310	92.00	785	722	659
	Mod. 4; 60,000 bytes/sec; 1600 bpi	14,800	79.00	385	354	323
	Mod. 5; 120,000 bytes/sec; 1600 bpi	20,640	88.00	535	492	449

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

IBM System/370

EQUIPMENT PRICES

	Purchase Price	Monthly Maint.	Rental (short-term lease)*	Rental (12-month lease)*	Rental (24-month lease)*	
MAGNETIC TAPE INPUT/OUTPUT (Continued)						
	Mod. 6; 180,000 bytes/sec; 1600 bpi	32,230	105.00	835	768	701
	Mod. 8; 15,000/41,700/60,000 char/sec; 7-track	13,600	91.00	400	368	336
3471	Dual Density (for 2401 Mod. 4, 5, or 6)	990	1.75	25	23	21
5121	Mode Compatibility (for 2401 Mod. 1, 2, or 3)	380	No charge	10	9	8
7160	Simultaneous Read-While-Write (for any 2401)	380	No charge	10	9	8
2420	Magnetic Tape Unit:					
	Mod. 5; 160,000 bytes/sec; 1600 bpi	24,870	110.00	565	520	475
	Mod. 7; 320,000 bytes/sec; 1600 bpi	45,020	120.00	1,020	938	857
2816	Magnetic Tape Switching Unit	21,190	4.00	550	506	462
2415	Magnetic Tape Unit and Control:					
	Mod. 1; 2 tape drives; 800 bpi	29,390	108.00	750	690	630
	Mod. 2; 4 tape drives; 800 bpi	47,030	194.00	1,205	1,109	1,012
	Mod. 3; 6 tape drives; 800 bpi	64,660	280.00	1,655	1,523	1,390
	Mod. 4; 2 tape drives; 800/1600 bpi	35,590	124.00	905	833	760
	Mod. 5; 4 tape drives; 800/1600 bpi	57,180	221.00	1,455	1,339	1,222
	Mod. 6; 6 tape drives; 800/1600 bpi	78,770	318.00	2,005	1,845	1,684
3228	Data Conversion Feature (for 2415; either 7125, 7127, or 7135 is a prerequisite)	1,730	1.00	45	41	38
5320	Nine-Track Compatibility (for 2415 Mod. 4, 5, or 6)	5,190	10.00	135	124	113
7125	Seven-Track Compatibility (for 2415 Mod. 1, 2, or 3)	1,920	1.25	50	46	42
7127	Seven-Track Compatibility (for 2415 Mod. 4, 5, or 6)	3,640	3.50	95	87	80
7135	Seven- and Nine-Track Compatibility (for Mod. 4, 5, or 6)	5,950	14.00	155	143	130
3410	Magnetic Tape Unit:					
	Model 1; 20 KB	7,700	45.00	185	170	155
	Model 2; 40/20 KB	10,300	50.00	245	225	206
	Model 3; 80/40 KB	12,800	55.00	305	281	256
3411	Magnetic Tape Unit and Control:					
	Model 1; 20KB	17,000	70.00	405	373	340
	Model 2; 40/20 KB	21,600	75.00	515	474	433
	Model 3; 80/40 KB	26,300	80.00	625	575	525
3211	Single Density Feature (for 3410 & 3411)	2,500	7.50	55	51	46
3221	Dual Density Feature (for 3410 & 3411, Models 2 & 3 only)	3,600	27.00	80	74	67
7360	System/360/370 Attachment (required on 3411)	6,300	15.00	150	138	126
3803	Tape Control (for 3420 Magnetic Tape Units)	25,820	95.00	675	621	567
9570	Single Density Feature (for 3803)	No charge	No charge	No charge	No charge	No charge
3551	Dual Density Feature (for 3803)	2,870	3.00	75	69	63
6408	7-Track Feature (for 3803)	2,870	3.00	75	69	63
8100	Two-Channel Switch (for 3803)	5,740	5.00	150	138	126
1792	2 x 16 Switching Feature	7,650	10.00	200	184	168
1793	3 x 16 Switching Feature	9,760	15.00	255	235	214
1794	4 x 16 Switching Feature	11,480	15.00	300	276	252
3420	Magnetic Tape Units:					
	Mod. 3; 120,000 bytes/sec at 1600 bpi	13,580	50.00	355	327	298
	Mod. 5; 200,000 bytes/sec at 1600 bpi	18,170	55.00	475	437	399
	Mod. 7; 320,000 bytes/sec at 1600 bpi	22,380	65.00	585	538	491
6631	Single Density Feature (for 3420)	3,260	15.00	85	78	71
3550	Dual Density Feature (3420)	4,210	25.00	110	101	92
6407	7-Track Feature (for 3420)	3,260	25.00	85	78	71
2495	Tape Cartridge Reader	18,670	155.00	340		
PUNCHED CARD I/O AND PRINTERS						
1442	Card Read Punch (with control), Mod. N1; 400/91 cpm	25,460	81.00	510		
1442	Card Punch (with control), Mod. N2; 91 cpm	18,185	71.00	365		
2501	Card Reader (with control):					
	Mod. B1; 600 cpm	14,590	51.50	260		
	Mod. B2; 1000 cpm	14,820	55.50	320		
2520	Card Read Punch (with control), Mod. B1; 500 cpm	39,520	151.00	915		
2520	Card Punch (with control):					
	Mod. B2; 500 cpm	35,000	142.00	810		
	Mod. B3; 300 cpm	34,715	114.00	625		
2540	Card Read Punch; 1000/300 cpm (requires 2821 Control Unit)	32,930	124.00	710		

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

IBM System/370
EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*	Rental (12-month lease)*	Rental (24-month lease)*
PUNCHED CARD I/O AND PRINTERS (Continued)						
2560	Multi-Function Card Machine, Model A1; reads 500 cpm, punches 160 col/sec (for Model 125 only)	27,055	97.00	615		
	Card Print Feature for 2560 Model A1:					
1575	First Two Lines	5,880	14.00	135		
1576	Second Two Lines	5,880	14.00	135		
1577	Third Two Lines	5,880	14.00	135		
3504	Card Reader (for Model 125 only):					
	Model A1; 800 cpm	20,000	75.00	470	—	400**
	Model A2; 1200 cpm	21,000	100.00	570	—	485**
3921	51/80-Column Interchangeable Read Feed (for 3504 Model A2 only)	5,000	37.00	125	—	106**
5450	Optical Mark Read Feature (for 3504)	7,950	35.00	184	—	157**
6555	Selective Stacker Feature (for 3504)	2,250	7.00	49	—	42**
3505	Card Reader:					
	Model B1; 800 cpm	28,250	85.00	565		
	Model B2; 1200 cpm	29,250	115.00	670		
5450	Optical Mark Read (for 3505)	7,950	35.00	185		
6122	Read Column Eliminate (for 3505)	No charge	No charge	No charge		
6555	Selective Stacker (for 3505)	2,250	7.00	50		
6777	Special Feature Adapter (for 3505)	250	0.50	5		
8103	3505 Punch Adapter (for 3505)	4,750	3.00	95		
8105	3525 Read/Punch Adapter (for 3505)	5,250	3.50	120		
8101	3525 Multi-Line Print Control (for 3505)	3,000	4.00	60		
8107	3525 Two-Line Print Control (for 3505)	3,000	4.00	60		
3525	Card Punch:					
	Model P1; 100 cpm	20,000	60.00	400		
	Model P2; 200 cpm	20,800	80.00	505		
	Model P3; 300 cpm	21,600	100.00	610		
1533	Card Read Feature (for 3525)	6,000	15.00	120		
5272	Multi-Line Card Print (for 3525)	14,220	83.00	350		
8338	Two-Line Card Print (for 3525)	13,920	68.00	290		
2596	Card Read Punch (for 96-column cards)	29,575	330.00	845		
1510	Card Print Feature (for 2596)	5,250	52.00	150		
5425	Multi-Function Card Unit (for Model 125 only):					
	Model A1; reads 250 cpm, punches 60 cpm, prints 60 cpm	18,000	150.00	570	—	485**
	Model A2; reads 500 cpm, punches 120 cpm, prints 120 cpm	22,000	295.00	740	—	630**
2821	Control Unit:					
	Mod. 1; for one 2540 & one 1403	37,180	44.00	970	892	815
	Mod. 2; for one 1403	23,040	34.00	600	552	504
	Mod. 3; for two 1403's	46,070	69.00	1,200	1,104	1,008
	Mod. 5; for one 2540 & two 1403's	60,220	78.00	1,565	1,440	1,315
	Mod. 6; for one 2540 only	12,720	97.00	440	405	370
3615	1100 lpm Printer Adapter (for 2821; required for 1403 Mod. 3 or N1)	2,400	1.00	75	69	63
7945	Third Printer Control (for 2821 Mod. 3 or 5)	19,190	6.50	500	460	420
8100	Two-Channel Switch (for 2821)	8,390	8.00	200	184	168
8637	Universal Character Set Adapter (for 2821)	610	3.50	15	14	13
1403	Printer:					
	Mod. 2; 600 lpm; 132 print positions	28,030	171.00	750	690	630
	Mod. 7; 600 lpm; 120 print positions	29,960	133.00	630	580	529
	Mod. N1; 1100 lpm; 132 print positions	33,970	197.00	875	805	735
1416	Interchangeable Train Cartridge (required for 1403 Mod. N1)	2,910	Time & mat'ls.	97		
4740	Interchangeable Chain Cartridge Adapter (for 1403 Mod. 2 or 7)	2,580	No charge	73	67	61
8640	Universal Character Set Feature (for 1403 Mod. N1)	380	1.75	10	9	8
8641	Universal Character Set Feature (for 1403 Mod. 2)	380	1.75	10	9	8
1443	Printer (with control), Mod. N1; 240 lpm	36,500	87.50	850	782	714
3211	Printer; 2000 lpm, 132 print positions	69,360	365.00	1,700	1,564	1,428
3216	Interchangeable Train Cartridge (for 3211)	11,550	170.00	350		
5554	18 Additional Print Positions (for 3211)	2,240	8.00	55	51	46
3811	Control Unit (for 3211 Printer)	30,600	115.00	750	690	630

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.
**Extended-Term Plan (other 12-month and 24-month lease prices are for Fixed-Term Plan).

IBM System/370

EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*	Rental (12-month lease)*	Rental (24-month lease)*
PUNCHED CARD I/O AND PRINTERS (Continued)						
5553	18 Additional Print Positions (for 3811)	820	5.00	20	18	17
PAPER TAPE INPUT/OUTPUT						
2826	Paper Tape Control, Mod. 1; for up to two 1017's and/or 1018's	14,380	35.00	275		
5801	Punch Adapter; for first 1018 on 2826 Mod. 1	4,945	9.00	97		
5802	Punch Adapter; for second 1018 on 2826 Mod. 1	4,220	5.00	82		
6101	Reader Adapter; for first 1017 on 2826 Mod. 1	4,220	8.00	82		
6102	Reader Adapter; for second 1017 on 2826 Mod. 1	3,470	5.00	68		
1017	Paper Tape Reader (120 char/sec): Mod. 1; reads strips only	2,330	14.00	49		
	Mod. 2; reads strips or reels	3,565	17.00	73		
1018	Paper Tape Punch (120 char/sec)	5,395	40.00	121		
2822	Paper Tape Reader Control (for one 2671)	9,410	8.25	210		
2671	Paper Tape Reader (1000 char/sec)	6,305	21.00	140		
OPTICAL AND MAGNETIC READERS						
1287	Optical Reader: Mod. 1; reads documents only	122,220	800.00	2,715		
	Mod. 2; reads documents and journal tape	139,680	900.00	3,105		
	Mod. 3; reads documents only	183,525	1,150.00	4,170		
	Mod. 4; reads documents and journal tape	205,155	1,200.00	4,560		
	Mod. 5; reads handprinted digits from documents only	136,000	1,160.00	3,400		
3945	Farrington 7B Font (for 1287)	1,090	1.00	25		
4470	1428 & USASCOCR Font (for 1287)	1,090	1.00	25		
5300	NCR Optical Type Font (for 1287)	4,365	5.00	97		
5370	Numeric Handwriting (for 1287)	34,920	50.00	775		
5479	Optical Mark Reading (for 1287)	4,365	5.00	97		
1288	Optical Page Reader	223,390	1,225.00	4,755		
3850	Expanded Symbol Set (for 1288)	3,055	3.50	68		
5370	Numeric Handwriting (for 1288)	52,380	75.00	970		
5479	Optical Mark Reading (for 1288)	5,140	7.00	97		
6550	Serial Numbering (for 1288)	12,515	60.00	290		
3881	Optical Mark Reader: Mod. 1; for on-line use with Model 135 or 145	56,000	140.00	1,351	—	1,150**
	Mod. 2; for off-line use with 3410	51,000	110.00	1,234	—	1,050**
	Mod. 1 Magnetic Tape Unit					
1471	BCD Read (for 3881)	2,350	1.50	56	—	48**
3450	Document Counters (for 3881)	930	2.00	22	—	19**
3550	Dual Density (for 3881 Mod. 2 only)	5,900	0.50	141	—	120**
3801	Expanded Storage (for 3881)	2,350	0.50	56	—	48**
6451	Serial Numbering (for 3881)	6,900	25.00	165	—	140**
3886	Optical Character Reader: Model 1; on-line	91,000	475.00	2,315	—	1,970**
	Model 2; off-line	98,000	475.00	2,497	—	2,125**
3210	Additional Data Storage (for 3886)	920	0.50	24	—	20**
4520	Additional Hopper & Stacker Capacity (for 3886)	7,400	25.00	188	—	160**
4610	Additional Instruction Storage (for 3886)	4,600	11.00	118	—	100**
4720	Line Marking (for 3886)	5,100	11.00	129	—	110**
5340	Numbering/Marking Adapter (for 3886)	1,400	0.50	35	—	30**
5360	Numeric Handprinting (for 3886)	6,000	29.00	153	—	130**
6450	Serial Numbering (for 3886)	7,400	25.00	188	—	160**
1255	Magnetic Character Reader: Mod. 1; 500 dpm, 6 stackers	38,645	210.00	805		
	Mod. 2; 750 dpm, 6 stackers	44,260	335.00	980		
	Mod. 3; 750 dpm, 12 stackers	60,240	440.00	1,300		
3215	Dash Symbol Transmission (for 1255)	35	No charge	50 (1-time)		
4380	51-Column Card Sorting (for 1255)	720	No charge	15		
4520	High-Order Zero & Blank Selection (for 1255 Mod. 3 only)	1,440	5.00	30		
7060	Self-Checking Numbers (for 1255)	2,330	2.50	49		
6360	System/360/370 Adapter (required on 1255)	21,600	31.00	450		

* Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

** Extended-Term Plan (other 12-month and 24-month lease prices are for Fixed-Term Plan).

IBM System/370
EQUIPMENT PRICES

		<u>Purchase Price</u>	<u>Monthly Maint.</u>	<u>Rental (short-term lease)*</u>	<u>Rental (12-month lease)*</u>	<u>Rental (24-month lease)*</u>
OPTICAL AND MAGNETIC READERS (Continued)						
1259	Magnetic Character Reader; 600 dpm	61,110	260.00	1,360		
1419	Magnetic Character Reader; 1600 dpm	107,185	241.00	2,380		
GRAPHIC DISPLAYS						
2250	Display Unit: Mod. 1; connects directly to a channel	51,215	157.00	1,065		
	Mod. 3; requires 2840 Display Control	74,495	177.00	1,550		
1245	Alphameric Keyboard (for 2250 Mod. 1 or 2)	3,490	4.00	73		
4785	Light Pen (for 2250 Mod. 1 or 2)	4,655	11.00	97		
1001	Absolute Vectors (for 2250 Mod. 2)	13,580	10.00	340		
1002	Absolute Vectors and Control (for 2250 Mod. 1)	15,520	11.00	390		
1498	Buffer; 4,096 bytes (for 2250 Mod. 1)	16,295	7.00	340		
1499	Buffer; 8,192 bytes (for 2250 Mod. 1)	23,280	10.00	485		
1880	Character Generator (for 2250 Mod. 1)	17,460	15.00	365		
NOTE:	Numerous IBM terminals can be connected to a System/370 in local and/or remote configurations. For details and prices, please see Reports 70D-491-02 through 70D-491-13 in the Peripherals section.					
AUDIO RESPONSE						
7770	Audio Response Unit (up to 4 lines)	55,870	38.50	1,165		
4677	I/O Line Expander (for 7770; up to 4 more lines)	8,150	12.50	170		
4679	I/O Line Panel (for 7770; one 4679 required for each 8 lines beyond the first 8)	3,490	2.00	73		
4668	I/O Line Frame (for 7770; required for over 16 lines)	9,310	2.50	194		
8721	Six Additional Vocabulary Words (for 7770)	4,655	2.50	97		
COMMUNICATION CONTROLS						
2701	Data Adapter Unit	9,130	15.00	200		
2702	Transmission Control (for up to 15 lines)	38,395	46.00	850		
7955	31-Line Expansion (for up to 16 more lines on 2702)	4,425	4.00	100		
2703	Transmission Control	65,485	76.00	1,450		
2711	Line Adapter Unit	5,890	23.00	130		
NOTE:	Please refer to Report 70D-491-30 for detailed pricing data on the 2701, 2702, and 2703 Transmission Controls.					
3704 COMMUNICATIONS CONTROLLER						
Model A1	16K bytes, up to 32 lines	26,000	115.00	646	—	550**
Model A2	32K bytes, up to 32 lines	31,000	138.00	764	—	650**
Model A3	48K bytes, up to 32 lines	36,000	161.00	881	—	750**
Model A4	64K bytes, up to 32 lines	41,000	184.00	999	—	850**
NOTE:	Please refer to Report 70D-491-32 for detailed pricing data on the 3704 Communications Controller.					
3705 COMMUNICATIONS CONTROLLER						
Model A1	16K bytes, up to 64 lines	47,150	150.00	1,152	—	980**
Model A2	48K bytes, up to 64 lines	67,650	182.00	1,651	—	1,405**
Model B1	16K bytes, up to 160 lines	62,525	167.00	1,528	—	1,300**
Model B2	48K bytes, up to 160 lines	83,025	199.00	2,027	—	1,725**
Model B3	80K bytes, up to 160 lines	103,525	231.00	2,526	—	2,150**
Model B4	112K bytes, up to 160 lines	124,025	263.00	3,026	—	2,575**
Model C1	16K bytes, up to 256 lines	77,900	184.00	1,904	—	1,620**
Model C2	48K bytes, up to 256 lines	98,400	216.00	2,403	—	2,045**
Model C3	80K bytes, up to 256 lines	118,900	248.00	2,902	—	2,470**
Model C4	112K bytes, up to 256 lines	139,400	280.00	3,402	—	2,895**
Model C5	144K bytes, up to 256 lines	159,900	312.00	3,901	—	3,320**
Model C6	176K bytes, up to 256 lines	180,400	344.00	4,400	—	3,745**
Model D1	16K bytes, up to 352 lines	93,275	201.00	2,280	—	1,940**
Model D2	48K bytes, up to 352 lines	113,775	233.00	2,779	—	2,365**
Model D3	80K bytes, up to 352 lines	134,275	265.00	3,278	—	2,790**
Model D4	112K bytes, up to 352 lines	154,775	297.00	3,778	—	3,215**
Model D5	144K bytes, up to 352 lines	175,275	329.00	4,277	—	3,640**

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.

**Extended-Term Plan (other 12-month and 24-month lease prices are for Fixed-Term Plan).

IBM System/370

EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*	Rental (12-month lease)*	Rental (24-month lease)*
3705 COMMUNICATIONS CONTROLLER (Continued)						
Model D6	176K bytes, up to 352 lines	195,775	361.00	4,776	—	4,065**
Model D7	208K bytes, up to 352 lines	216,275	393.00	5,276	—	4,490**
Model D8	240K bytes, up to 352 lines	236,775	425.00	5,775	—	4,915**
OPTIONS FOR 3705:						
1301	Attachment Base, Type 1 (for attachment of #1541 and/or #1641)	740	0.50	18	—	15**
1302	Attachment Base, Type 2 (for attachment of #1642)	740	0.50	18	—	15**
1541	Channel Adapter, Type 1 (for communication with a System/360 or 370 byte multiplexer channel)	4,100	12.00	100	—	85**
1542	Channel Adapter, Type 2 (for communication with a System/370 byte multiplexer, block multiplexer, or selector channel at up to 375 kilobytes/second)	7,465	12.00	182	—	155**
1641	Communication Scanner, Type 1 (interface between line attachment features and central control unit; character assembly/disassembly is performed by the stored program)	2,175	8.00	53	—	45**
1642	Communication Scanner, Type 2 (interface between line attachment features and central control unit; performs character assembly/disassembly and character buffering for each line automatically)	7,215	12.00	176	—	150**
3620	Extended Environment (permits operation in a Class C environment, at 50 to 100 deg. F.)	960	No charge	24	—	20**
4650	Business Machine Clock (provides clocking, at 45.5 to 2400 bps, when not provided by modems)	490	1.00	12	—	10**
4670	Internal Air Circulation 1	480	No charge	12	—	10**
4670	Internal Air Circulation 2	240	No charge	6	—	5**
4701	Line Interface Base, Type 1 (for attachment of up to 8 line sets, Types 1A through 1G, in any combination)	1,680	4.00	41	—	35**
4711	Line Set, Type 1A (for 2 start/stop lines at up to 1200 bps via external modems)	740	2.00	18	—	15**
4713	Line Set, Type 1C (for 2 half-duplex IBM start/stop terminals at up to 1200 bps via IBM provided cables)	740	2.00	18	—	15**
4714	Line Set, Type 1D (for 2 start/stop or synchronous lines at up to 7200 bps via external modems)	2,420	6.50	59	—	50**
4715	Line Set, Type 1E (for attachment of 2 external Automatic Calling Units)	1,190	2.50	29	—	25**
4716	Line Set, Type 1F (for 2 half-duplex IBM synchronous terminals at up to 2400 bps via IBM provided cables)	2,420	6.50	59	—	50**
4717	Line Set, Type 1G (for 1 synchronous line at 19,200 or 50,000 bps via external modem)	3,115	7.50	76	—	65**
4718	Line Set, Type 1H (for 1 synchronous line at up to 7200 bps via external modem)	2,650	12.00	65	—	55**
4702	Line Interface Base, Type 2 (for attachment of up to 8 Type 2A line sets)	1,680	3.50	41	—	35**
4721	Line Set, Type 2A (for 2 single-current telegraph lines)	1,190	5.00	29	—	25**
4703	Line Interface Base, Type 3 (for attachment of up to 6 Type 3A and/or 3B line sets)	2,910	3.00	71	—	60**
4731	Line Set, Type 3A (for 2 half-duplex, start/stop lines at up to 134.5 bps)	985	2.00	24	—	20**
4731	Line Set, Type 3B (for 2 four-wire, start/stop lines at up to 134.5 bps)	985	2.00	24	—	20**
4704	Line Interface Base, Type 4 (for attachment of up to 2 Type 4A, 4B, and/or 4C line sets)	1,930	4.00	47	—	40**
4741	Line Set, Type 4A (for 2 half-duplex, start/stop lines at up to 600 bps)	1,680	4.50	41	—	35**
4742	Line Set, Type 4B (for 2 half-duplex, leased start/stop lines at up to 600 bps)	1,680	6.00	41	—	35**
4743	Line Set, Type 4C (for 2 four-wire leased start/stop lines at up to 600 bps)	1,680	6.00	41	—	35**
6250	Remote Power Off	480	0.50	12	—	10**
6260	Remote Program Loader	9,600	35.00	235	—	200**

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.
 **Extended-Term Plan (other 12-month and 24-month lease prices are for Fixed-Term Plan).

IBM System/370 EQUIPMENT PRICES

		Purchase Price	Monthly Maint.	Rental (short-term lease)*	Rental (12-month lease)*	Rental (24-month lease)*
8002	Two-Channel Switch (permits a #1541 or #1542 to be switched between 2 System/360 or 370 channels on same or different CPU's)	2,420	3.50	59	—	50**
8510	Unit Protection (permits the control panel to be locked)	35	No charge	35 (one-time charge)		

*Rental prices include equipment maintenance; 12-month and 24-month leases permit unlimited usage at no additional cost.
**Extended-Term Plan (other 12-month and 24-month lease prices are for Fixed-Term Plan).

SOFTWARE PRICES

	Monthly Use Charge					OS/VS2 Rel. 1	OS/VS2 Rel. 2
	DOS	DOS/VS	OS/MFT	OS/VS1	OS/MVT		
PROGRAM PRODUCTS—SYSTEMS							
APL/360	275R	—	400R	—	400R	—	—
Assembler H	—	225V	225R	225V	225R	225V	225V
TSO Assembler Prompter	—	—	—	—	30R	30V	30V
ITF BASIC*	120R	120R	120R	120R	120R	120R	120R
TSO ITF BASIC*	—	—	—	—	120R	120V	120V
Full ANS COBOL Version 3 Compiler and Library	75R	75V	40R	40V	40R	40V	40V
Full ANS COBOL Library Version 3	20R	20V	—	—	—	—	—
Full ANS COBOL Version 4 Compiler and Library	—	—	175R	175V	175R	175V	175V
Full ANS COBOL Library Version 4	—	—	60R	60V	60R	60V	60V
TSO COBOL Prompter	—	—	—	—	30R	30V	30V
COBOL Interactive Debug (TSO)	—	—	—	—	220R	220V	220V
Subset ANS COBOL Compiler and Library	150R	150V	—	—	—	—	—
Customer Information and Control System (CICS) Entry	200R	200V,R	—	—	—	—	—
Full Customer Information and Control System (CICS) Version 1	—	—	600R	—	600R	—	—
CICS Version 1 Language and Terminal Feature	—	—	85R	—	85R	—	—
Full Customer Information and Control System (CICS) Version 2/Standard	500R	500V,R	700R	700V,R	700R	700V,R	—
Full Customer Information and Control System for Virtual Storage (CICS/VS)	—	350V	—	750V	—	750V	750V
FASTER LC	100R	100V	—	—	—	—	—
FASTER MT	285R	285V	450R	450V	450R	450V	—
FORTTRAN IV (G1) Compiler	—	—	65R	65V	65R	65V	65V
FORTTRAN IV (H Extended) Compiler	—	—	260R	260V	260R	260V	260V
FORTTRAN IV Library (Mod 1)	—	—	65R	65V	65R	65V	65V
FORTTRAN IV Library (Mod II)	—	—	90R	90V	90R	90V	90V
FORTTRAN IV Library (ASCII)	50R	50V	—	—	—	—	—
TSO FORTTRAN Prompter	—	—	—	—	30R	30V	30V
Code and Go FORTTRAN Compiler	—	—	275R	275V	275R	275V	275V
FORTTRAN Interactive Debug	—	—	—	—	150R	150V	150V
FORTTRAN IV Library Option 1	30R	30V	—	—	—	—	—
Generalized Information System (GIS)/2	—	—	450-1500R	450-1500V	450-1500R	450-1500V	450-1500V
GIS DL/1 Query Support Feature	—	—	150R	150V	150R	150V	150V
Information Management System (IMS) Version 1	—	—	600R	—	600R	—	—
Information Management System (IMS) Version 2	—	—	550R	550R	550R	550V,R	—
IMS Data Communications Feature	—	—	625R	625R	625R	625R	—
Information Management System for Virtual Storage (IMS/VS)	—	—	—	700V	—	700V	700V
IMS/VS Data Communications Feature	—	—	—	850V	—	850V	850V
IMS Interactive Query Facility (IQF)	—	—	300R	300V	300R	300V	300V
PL/1 Optimizing Compiler	185R	185V	185R	185V	185R	185V	185V
PL/1 Optimizing Compiler and Libraries	250R	250V	250R	250V	250R	250V	250V
PL/1 Checkout Compiler	—	—	340R	340V	340R	340V	340V
PL/1 Resident Library	40R	40V	40R	40V	40R	40V	40V
PL/1 Transient Library	25R	25V	25R	25V	25R	25V	25V
ITF PL/1*	120R	120R	120R	120R	120R	120R	120R
TSO ITF PL/1	—	—	—	—	120R	120V	120V

* Either ITF PL/1 or ITF BASIC as first language costs \$120/month; as a second language, the charge is \$60/month.
V: Program runs in virtual (paged) mode.
R: Program runs in virtual=real (nonpaged) mode.

NOTE: V, R indicates that a program can run in either mode; in this case, virtual execution is generally intended for testing and small-volume operational use where the benefits of virtual storage are more important than high-volume throughput.

IBM System/370
SOFTWARE PRICES

	Monthly Use Charge					OS/VS2 Rel. 1	OS/VS2 Rel. 2
	DOS	DOS/VS	OS/MFT	OS/VS1	OS/MVT		
PROGRAM PRODUCTS--SYSTEMS (Continued)							
RPG II	95R	95V	—	—	—	—	—
RPG II Auto Report Feature	30R	30V	—	—	—	—	—
Tape and Disk Sort/Merge	80R	80V	—	—	—	—	—
Sort/Merge SM1	40R	40V	60R	60V	60R	60V	60V
ASCII Magnetic Tape/Data Set Utilities	100R	100V	100R	100V	100R	100V	100V
TSO Data Utilities	—	—	—	—	145R	145V	145V
1288 Basic Unformatted Read System (BURS)	50R	50V	50R	50V	50R	50V	—
VIDEO/370	210R	210R	210R	210R	210R	210R	210R
PROGRAM PRODUCTS--APPLICATIONS							
Fashion Reporter System	165R	165V	—	—	—	—	—
Consumer Goods System—Allocation	150R	150V	150R	150V	150R	150V	—
Consumer Goods System—Forecasting	200R	200V	200R	200V	200R	200V	—
Order Allocation System	125R	—	—	—	—	—	—
Agribusiness Mgmt. Info. System	225R	—	—	—	—	—	—
Rigid Frame Selection Program	25R	—	25R	—	25R	—	—
Coursewriter III Version 2	—	—	150R	—	150R	—	—
Coursewriter III Version 3	200R	200V,R	275R	275V,R	275R	275V,R	275V
Financial Terminal System	400R	—	—	—	—	—	—
Brokerage Acct. System Elements	800R	—	—	—	—	—	—
Active Certificate Info.	300R	—	—	—	—	—	—
Alpha Search Inquiry System	200R	200V	200R	200V	200R	200V	200V
Automatically Programmed Tool (APT)—BP	150R	—	—	—	—	—	—
Automatically Programmed Tool (APT)—IC	300R	—	—	—	—	—	—
Automatically Programmed Tool (APT)—AC	500R	—	—	—	—	—	—
Budgets and Plans Generator (BUDPLAN)	—	—	—	150V	—	150V	150V
Business Analysis/BASIC	260R	260V	260R	260V	260R	260V	260V
Law Enforcement Manpower Resource Allocation	350R	—	—	—	—	—	—
Budget Accounting Information System (BACIS)	260R	260V	—	—	—	—	—
Basic Courts System	625R	625V	—	—	—	—	—
Medical Information System V2	50R	—	—	—	—	—	—
Shared Laboratory Info. System	250R	—	—	—	—	—	—
SHAS Compatibility Teleprocessing	275R	—	—	—	—	—	—
Text Processor Edit 360	250R	250R	—	—	—	—	—
Text Processor Pagation/360	450R	450R	—	—	—	—	—
Capacity Planning Infinite Loading**	75R	75V	100R	100V	100R	100V	100V
Capacity Planning Finite Loading**	225R	225V	275R	275V	275R	275V	275V
Requirements Planning Interface**	25R	25V	—	—	—	—	—
Requirements Planning**	—	—	230R	230V	230R	230V	230V
Inventory Control**	—	—	175R	175V	175R	175V	—
Data Base Organization & Maintenance Proc. (DBOMP)	100R	100V	—	—	—	—	—
Shop Floor Control**	100R	100V	155R	155V	155R	155V	155V
Advanced Life Information System V2	500R	500V	—	—	—	—	—
Consolidated Functions Ordinary (CFO) II	300R	300V	300R	300V	300R	300V	300V
Property and Liability Info. Systems V2	300R	300V	—	—	—	—	—
PALIS Additional File Facility 2314	250R	250V	—	—	—	—	—
PALIS Automobile Enhancements	225R	225V	—	—	—	—	—
PALIS Homeowner's Enhancements	225R	225V	—	—	—	—	—
Fare Quote/Ticketing (PARS)	—	—	—	—	8,500R	—	—
Tariff Publishing System	200R	200V	—	—	—	—	—
Traffic Profile Analysis System	300R	300V	—	—	—	—	—
Power System Planning (PSP)	—	—	300R	300V	300R	—	—
PSP Flow Output & Cap. Feature	—	—	90R	90V	90R	—	—
PSP Short Circuit Ro Feature	—	—	75R	75V	75R	—	—
Vehicle Scheduling - Extended	100R	110V	175R	175V	175R	175V	175V
REAL/360	170R	—	—	—	—	—	—
General Purpose Simulation System V2	20R	—	150R	—	150R	—	—
FIRST—Message Switching	280R	—	280R	—	280R	—	—
FIRST—Equipment Control	1,000R	—	1,000R	—	1,000R	—	—

** Integral Part of Production Information and Control System (PICS).

V: Program runs in virtual=real (nonpaged) mode.

R: Program runs in virtual real (nonpaged) mode.

NOTE: V,R indicates that a program can run in either mode; in this case, virtual execution is generally intended for testing and small-volume operational use where the benefits of virtual storage are more important than high-volume throughput.

IBM System/370

SOFTWARE PRICES

	Monthly Use Charge					OS/VS2 Ref. 1	OS/VS2 Ref. 2
	DOS	DOS/VS	OS/MFT	OS/VS1	OS/MVT		
PROGRAM PRODUCTS—APPLICATIONS (Continued)							
DATA/360	50R	—	100R	—	100R	—	—
DATA/360 Version 2	125R	—	125R	—	125R	—	—
GPSS V	55R	—	55R	55V	55R	55V	55V
Planning System Generator II	80R	80V	80R	80V	80R	80V	80V
Catalist	1,200R	1,200V	—	—	—	—	—
Forecasting and Modeling System	200R	—	200R	—	200R	—	—
Graphic Analysis of Three-Dimensional Data	—	—	300R	—	300R	—	—
Health Care Support/ECG	350R	350V	350R	350V	350R	350V	—
Health Care Support/Accounting	—	295V	—	—	—	—	—
Health Care Support/Lab. Info. System	—	250V	—	—	—	—	—
Health Care Support/Data Communications	—	295V	—	—	—	—	—
Learn ATS	40R	—	40R	40R	40R	40R	—
DBOMP-CIGS Interface	75R	75V,R	—	—	—	—	—
Electronic Circuit Analysis Program	—	—	170R	—	170R	—	—
Check Processing Control System	—	—	1,100R	1,100V,R	1,100R	1,100V,R	—
Telecommunications Control System	—	—	2,500R	—	2,500R	—	—
Registered Rep. System	—	—	2,000R	—	2,000R	—	—
Securities Order Matching	—	—	2,100R	—	2,100R	—	—
STAT/BASIC—ITF	45R	45R	45R	45V	45R	45V	45V
Display Management System	185R	—	185R	—	185R	—	—
Procedure Library Mathematics	100R	—	100R	100V	100R	100V	100V
Mathematical Programming System Extended	—	—	130R	130V	130R	130V	130V
MPS Upper Bound Feature	—	—	650R	650V	650R	650V	650V
Project Management System, V3	—	—	300R	—	300R	—	—
Project Management System, V4	—	—	350R	350R	350R	350R	350R
MiniPERT	150R	—	150R	—	150R	—	—
Computer System Simulator II	—	—	2,500R	2,500V	2,500R	2,500V	2,500V
PL/1 Simulation Language	—	—	250R	250V	250R	250V	—
Continuous System Modeling	—	—	90R	—	90R	—	90V
CSM Graphic Feature	—	—	340R	—	340R	—	340V
Graphic Analysis of 3 Dimensional Data	—	—	300R	—	300R	—	—
Bill Processor Sys IMS/360 Bridge**	150R	—	150R	150R	150R	150R	—
EPIC - Socrates	175R	175V	175R	175V	175R	175V	175V
EPIC - Fast	95R	95V	95R	95V	95R	95V	95V
EPIC - Budget/Finance	110R	100V	110R	110V	110R	110V	110V
EPIC - Student	80R	80V	80R	80V	80R	80V	80V
Interactive Training System (ITS)	225R	—	225R	225V,R	225R	225V,R	225V
ITS Course Structuring Feature	25R	—	25R	25V,R	25R	25V,R	25V
Math/BASIC ITF	45R	45R	45R	45R	45R	45R	45V
Matrix Generator and Report Writer	400R	—	400R	—	400R	—	—
Subroutine Library Mathematics	100R	100V	100R	100V	100R	100V	100V
STAIRS	500R	—	500R	500V,R	500R	500V,R	—
SIMPL/1 (5734-XXB)	—	—	—	—	—	R	R

** Integral Part of Production Information and Control System (PICS).

V: Program runs in virtual (paged) mode.

R: Program runs in virtual=real (nonpaged) mode.

NOTE: V,R indicates that a program can run in either mode; in this case, virtual execution is generally intended for testing and small-volume operational use where the benefits of virtual storage are more important than high-volume throughput.