

Reconstructor Spectra (9B)

-
-

Copyright (c) 2012 Young W. Lim.


Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Please send corrections (or suggestions) to youngwlim@hotmail.com.


This document was produced by using OpenOffice and Octave.

Reconstructor


Ideal Reconstructor

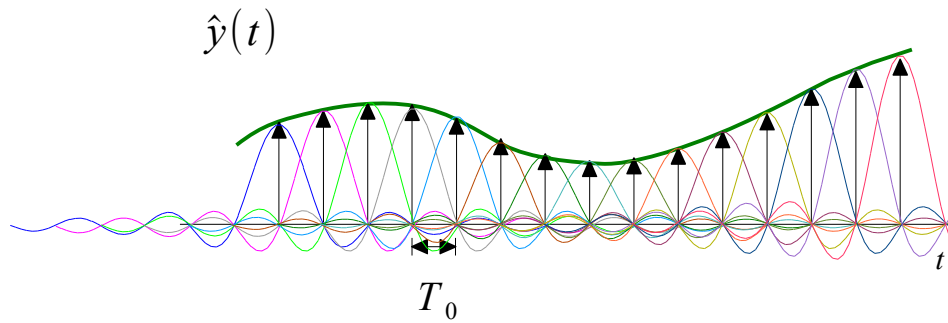


Practical Reconstructor

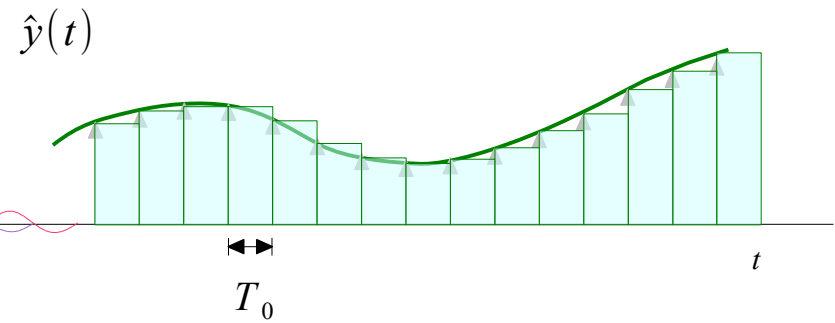

↓ CTFT

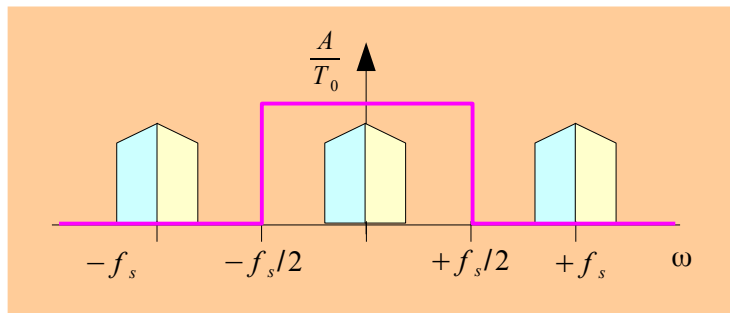


↓ CTFT

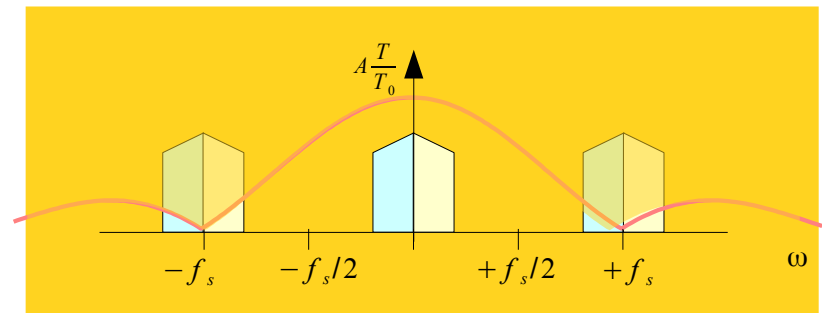


Reconstructor


Ideal Reconstructor

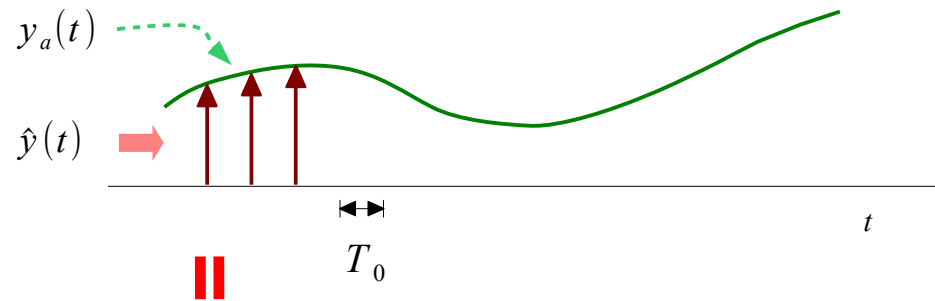


$$y_a(t) = \sum_{n=-\infty}^{\infty} y(nT_0) h(t-nT_0)$$

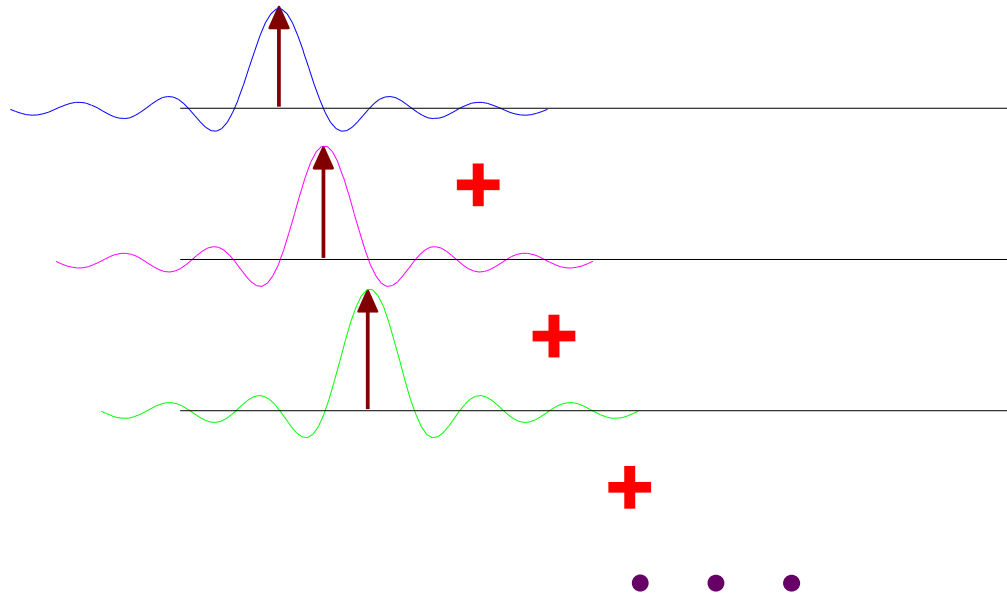

Practical Reconstructor

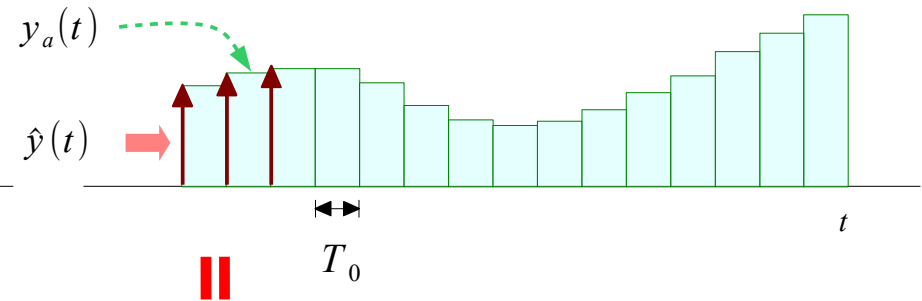


$$y_a(t) = \sum_{n=-\infty}^{\infty} y(nT_0) h(t-nT_0)$$

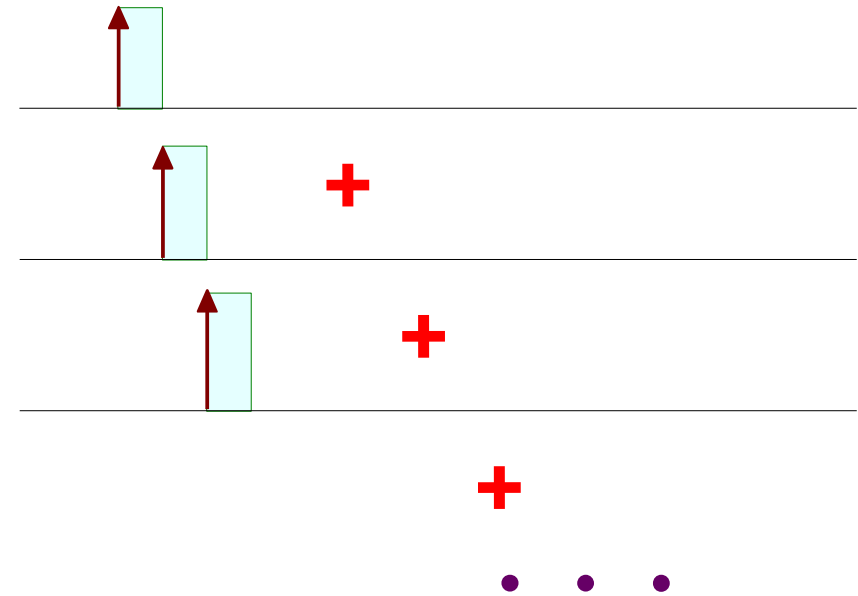


Reconstructor

Ideal Reconstructor

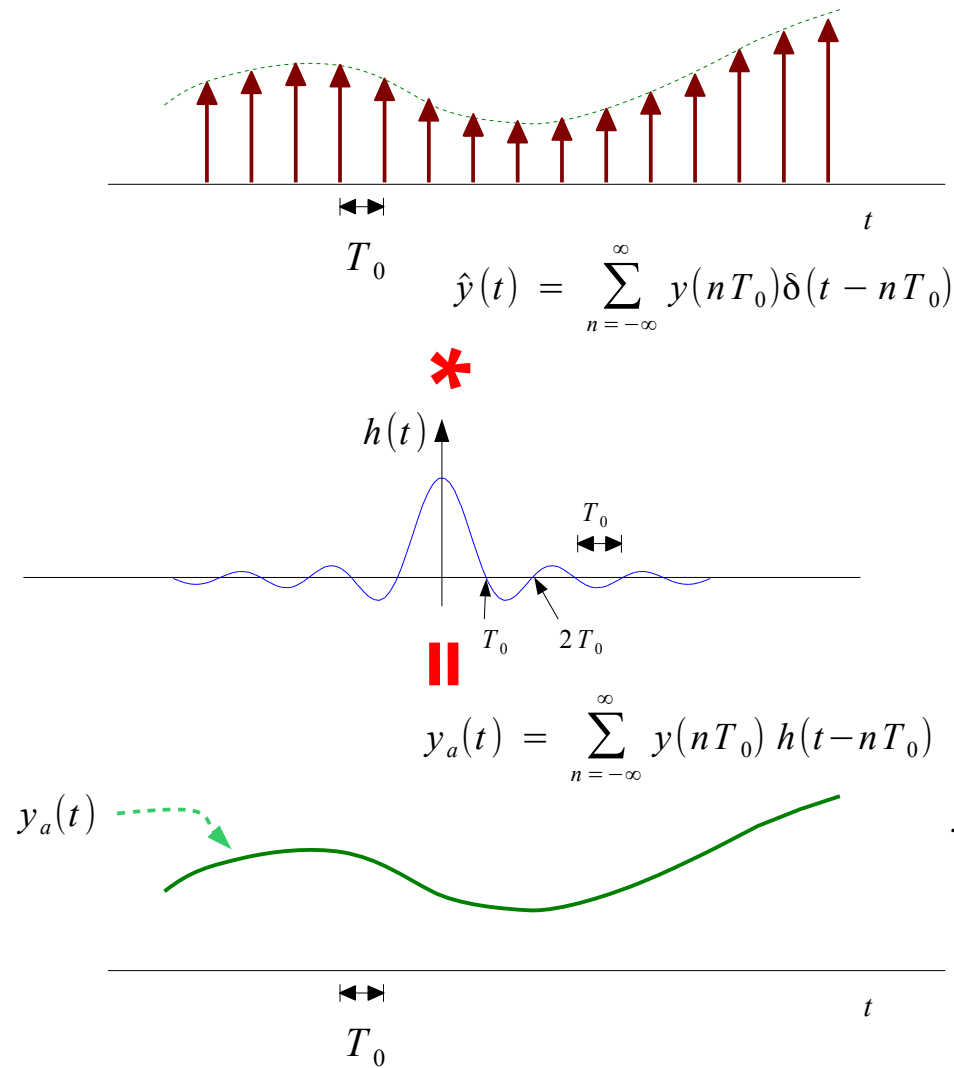


Practical Reconstructor

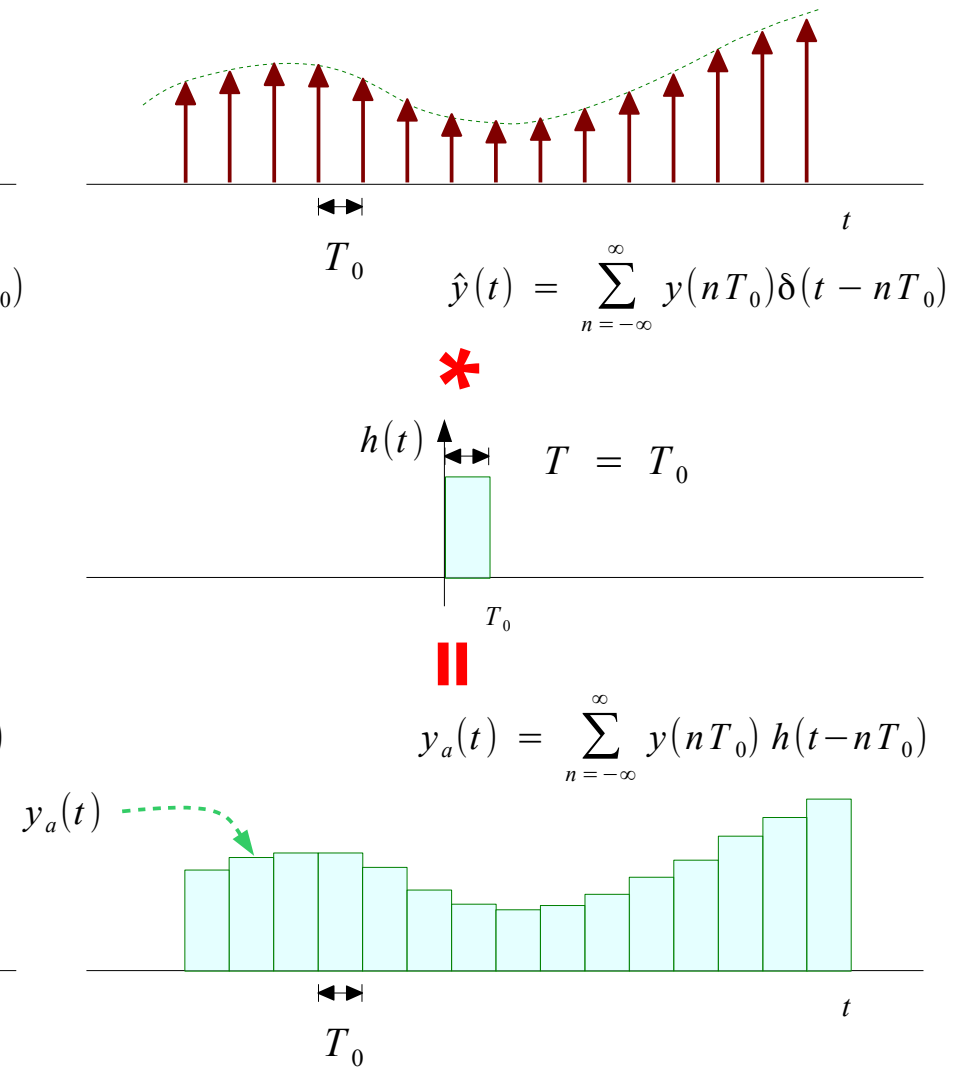

Reconstructor

Ideal Reconstructor




$$\hat{y}(t) = \sum_{n=-\infty}^{\infty} y(nT_0) \delta(t - nT_0)$$

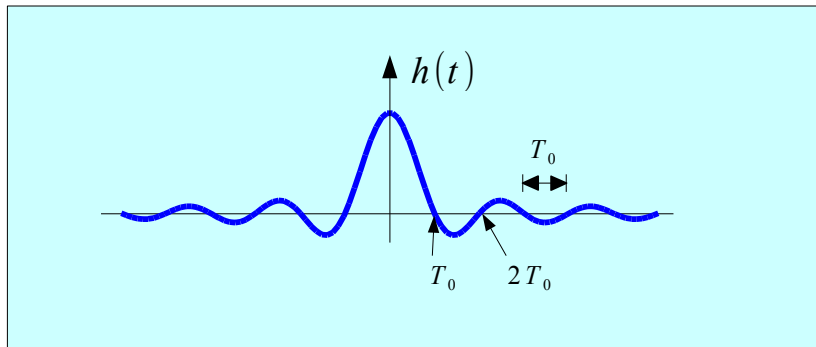

$$y_a(t) = \sum_{n=-\infty}^{\infty} y(nT_0) h(t - nT_0)$$

Practical Reconstructor

$$\hat{y}(t) = \sum_{n=-\infty}^{\infty} y(nT_0) \delta(t - nT_0)$$

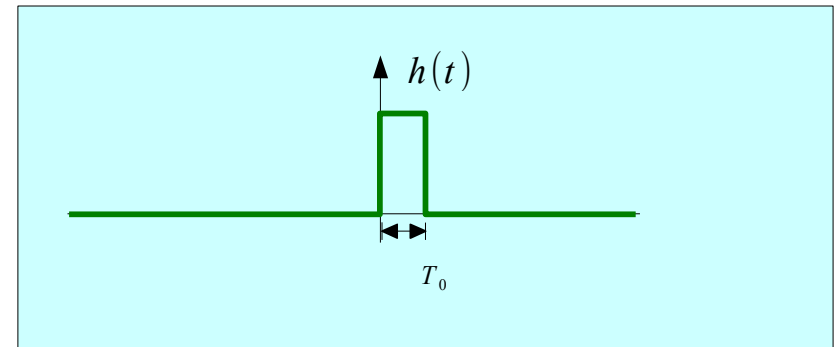


$$y_a(t) = \sum_{n=-\infty}^{\infty} y(nT_0) h(t - nT_0)$$


CTFT of Reconstructors

$$t = \pm T_0, \pm 2T_0, \pm 3T_0, \dots$$

$$\rightarrow h(t) = 0$$

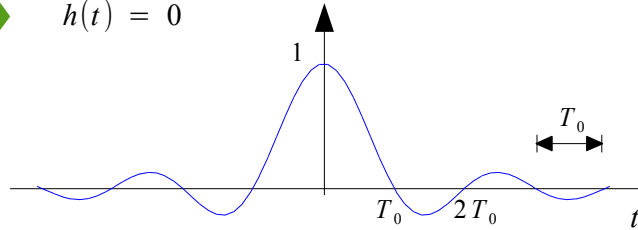


$$\frac{1}{T_0} \equiv f_s$$

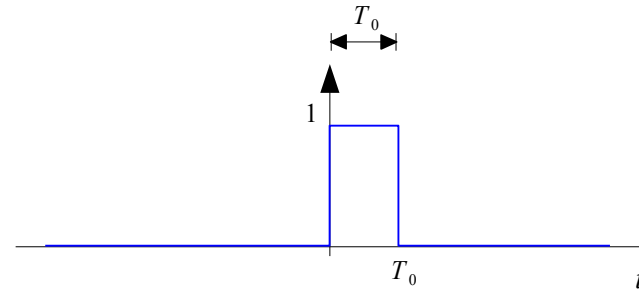

$$h(t) = \frac{\sin(\pi t/T_0)}{\pi t/T_0} = \frac{\sin(\pi f_s t)}{\pi f_s t}$$


$$h(t) = u(t) - u(t - T_0) = \begin{cases} 1, & 0 \leq t \leq T_0 \\ 0, & \text{otherwise} \end{cases}$$

CTFT

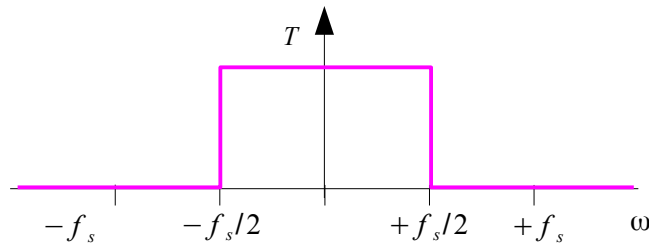

$$H(f) = \begin{cases} T_0, & |f| \leq f_s/2 \\ 0, & \text{otherwise} \end{cases}$$

CTFT

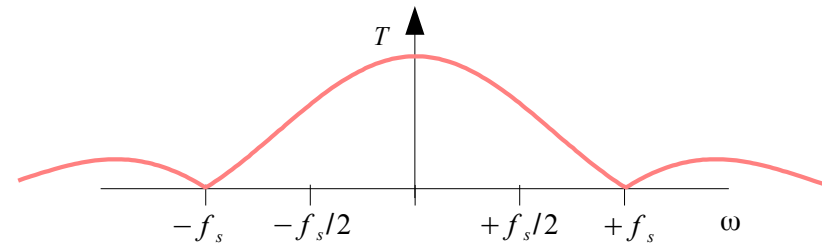

$$H(f) = T_0 \cdot \frac{\sin(\pi f T_0)}{\pi f T_0} e^{-j\pi f T_0}$$

CTFT of Reconstructors

$$h(t) = \frac{\sin(\pi t/T_0)}{\pi t/T_0} = \frac{\sin(\pi f_s t)}{\pi f_s t}$$

inverse  CTFT

$$\begin{aligned} h(t) &= \frac{1}{2\pi} \int_{-\pi f_s}^{+\pi f_s} T_0 \cdot e^{+j\omega t} d\omega \\ &= \frac{T_0}{2\pi} \left[\frac{1}{jt} e^{+j\omega t} \right]_{-\pi f_s}^{+\pi f_s} = \frac{T_0}{2\pi} \frac{e^{+j\pi f_s t} - e^{-j\pi f_s t}}{jt} \\ &= \frac{e^{+j\pi f_s t} - e^{-j\pi f_s t}}{2jt\pi/T_0} \xrightarrow{\pi f_s} \\ &= \frac{\sin(\pi f_s t)}{\pi f_s t} \end{aligned}$$

$$f_s = 1/T_0$$

$$\pi f = \pi/T_0$$

$$H(f) = \begin{cases} T_0, & |f| \leq f_s/2 \\ 0, & \text{otherwise} \end{cases}$$

$$h(t) = u(t) - u(t-T_0) = \begin{cases} 1, & 0 \leq t \leq T_0 \\ 0, & \text{otherwise} \end{cases}$$

 CTFT

$$\begin{aligned} H(j\omega) &= \int_0^{T_0} 1 \cdot e^{-j\omega t} dt \\ &= \left[\frac{-1}{j\omega} e^{-j\omega t} \right]_0^{T_0} = -\frac{e^{-j\omega T_0} - 1}{j\omega} \\ &= e^{-j\omega T_0/2} \cdot \left(\frac{e^{+j\omega T_0/2} - e^{-j\omega T_0/2}}{j\omega} \right) \xrightarrow{2j\omega/2} \\ &= \frac{\sin(\omega T_0/2)}{\omega/2} \cdot e^{-j\omega T_0/2} \quad \times \frac{T_0}{T_0} \end{aligned}$$

$$\omega = 2\pi f$$

$$\omega/2 = \pi f$$

$$H(f) = T_0 \cdot \frac{\sin(\pi f T_0)}{\pi f T_0} e^{-j\pi f T_0}$$

CTFT of Reconstructors

$$h(t) = \frac{\sin(\pi t/T_0)}{\pi t/T_0} = \frac{\sin(\pi f_s t)}{\pi f_s t}$$

inverse  CTFT $f_s = 1/T_0$

$$H(f) = \begin{cases} T_0, & |f| \leq f_s/2 \\ 0, & \text{otherwise} \end{cases}$$

$$h(t) = u(t) - u(t-T_0) = \begin{cases} 1, & 0 \leq t \leq T_0 \\ 0, & \text{otherwise} \end{cases}$$

 CTFT $\omega = 2\pi f$

$$H(f) = T_0 \cdot \frac{\sin(\pi f T_0)}{\pi f T_0} e^{-j\pi f T_0}$$

$$h(t) = \frac{\sin(\pi f_s t)}{\pi f_s t}$$

$$\lim_{t \rightarrow 0} \frac{\sin(\pi f_s t)}{\pi f_s t} = \lim_{t \rightarrow 0} \frac{\pi f_s \cos(\pi f_s t)}{\pi f_s}$$



$$h(0) = 1$$

$$H(f) = T_0 \cdot \frac{\sin(\pi f T_0)}{\pi f T_0} e^{-j\pi f T_0}$$

$$\lim_{f \rightarrow 0} \frac{\sin(\pi f T_0)}{\pi f T_0} = \lim_{f \rightarrow 0} \frac{\pi T_0 \sin(\pi f T_0)}{\pi T_0}$$

$$H(0) = T_0$$

Analog Reconstructor

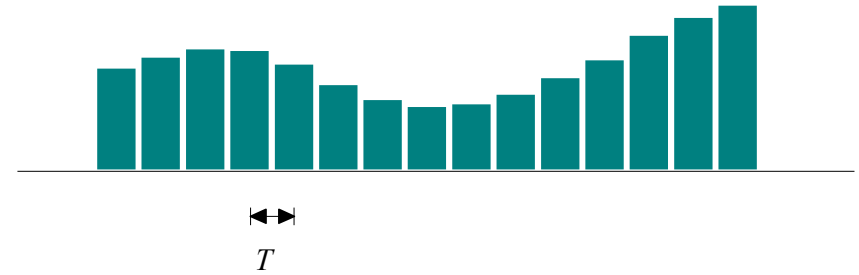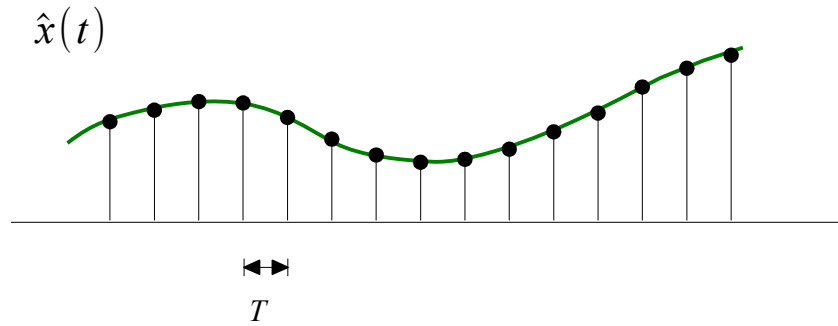

$$\hat{y}(t) = \sum_{n=-\infty}^{+\infty} y(nT) \delta(t-nT)$$


$$Y_a(f) = H(f) \hat{Y}(f)$$

$$y_a(t) = \int_{-\infty}^{+\infty} h(t-t') \hat{y}(t') dt'$$

$$\hat{Y}_a(f) = \frac{1}{T} \sum_{m=-\infty}^{+\infty} Y(f - m f_s)$$

$$y_a(t) = \sum_{n=-\infty}^{+\infty} y(nT) h(t-nT)$$





Impulse Response of Ideal Reconstructor

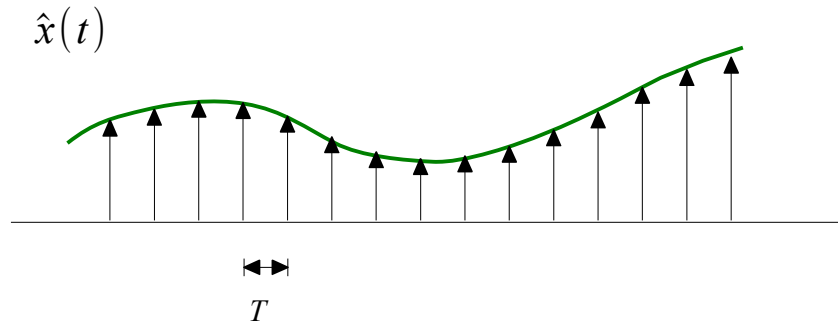

$$\hat{Y}(f) = \frac{1}{T} Y(f) \quad -\frac{f_s}{2} \leq f \leq +\frac{f_s}{2}$$


$$y(t) = \sum_{n=-\infty}^{+\infty} y(nT) h(t-nT)$$

$$h(t) = \frac{\sin(\pi t/T)}{\pi t/T} = \frac{\sin(\pi f_s t)}{\pi f_s t}$$

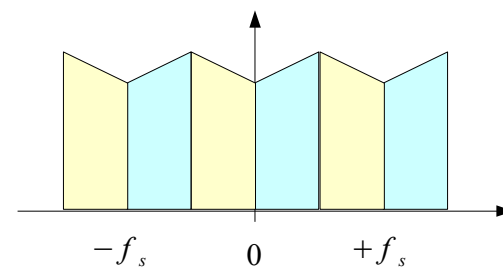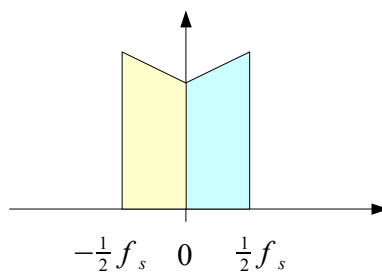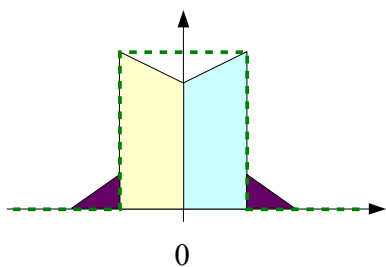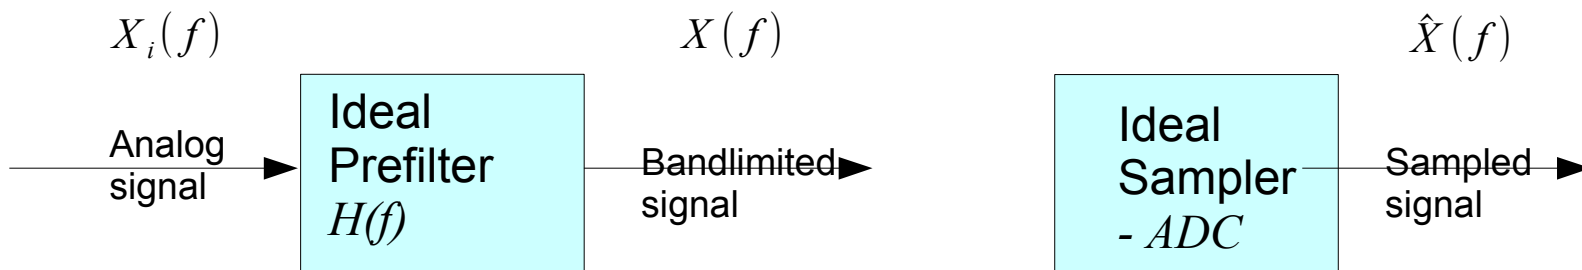



$\frac{2}{4}f_s$ $\frac{3}{4}f_s$ f_s

Zero Order Hold (ZOH)

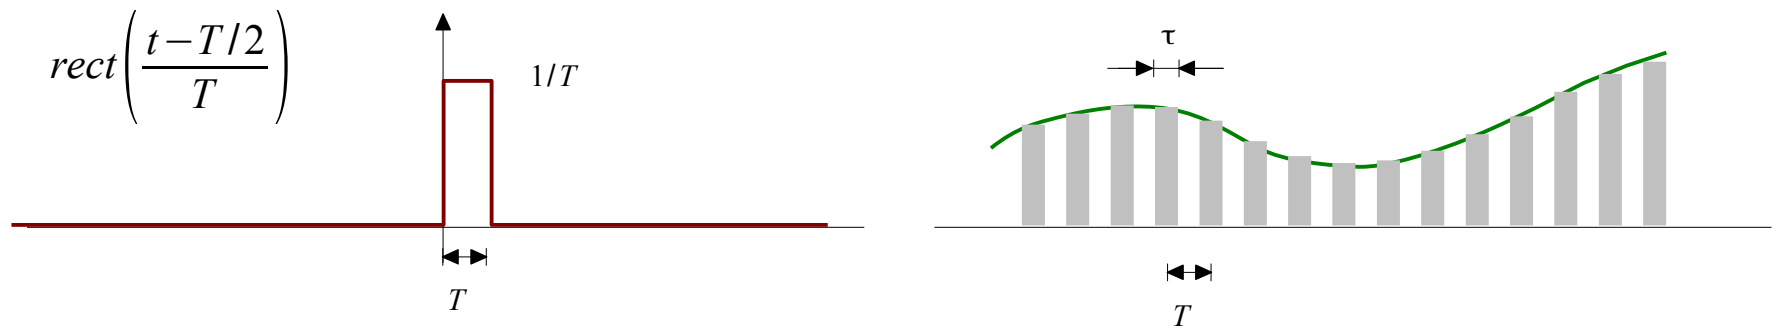

$$x_{ZOH}(t) = \sum_{n=-\infty}^{+\infty} x[n] \cdot rect\left(\frac{t-T/2-nT}{T}\right)$$



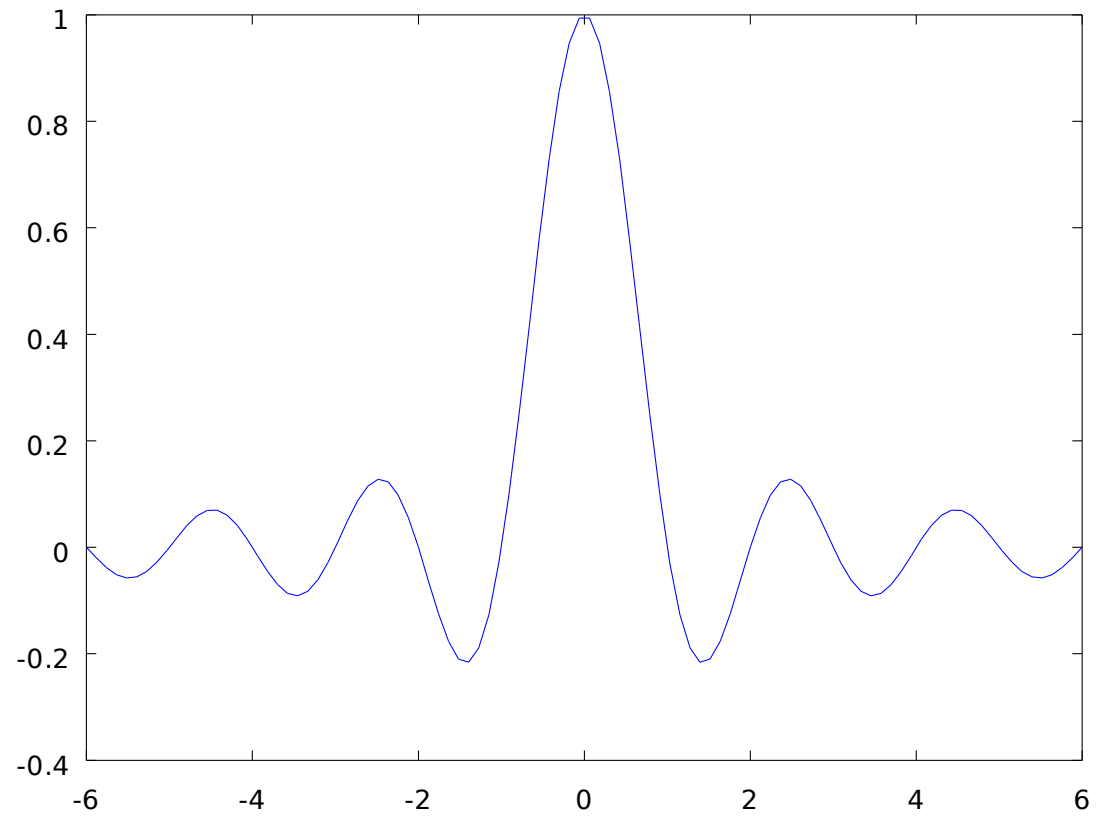

References

- [1] <http://en.wikipedia.org/>
- [2] J.H. McClellan, et al., Signal Processing First, Pearson Prentice Hall, 2003
- [3] A “graphical interpretation” of the DFT and FFT, by Steve Mann
- [4] R. G. Lyons, Understanding Digital Signal Processing, 1997
- [5] AVR121: Enhancing ADC resolution by oversampling
- [6] S.J. Orfanidis, Introduction to Signal Processing
www.ece.rutgers.edu/~orfanidi/intro2sp