


PDP11

WATCHDOG TIMER
MD-11-DBQAA-A

EP-DBQAA-A-DL-A
COPYRIGHT © 1976
FICHE 1 OF 1

NOV 1976
digital
MADE IN USA

This microfiche card contains a grid of frames, each displaying technical data. The data is organized into columns and rows, with some frames containing headers and footers. The content includes various alphanumeric strings, possibly representing memory addresses, register values, or diagnostic codes. The frames are arranged in a regular grid pattern, typical of microfiche storage.

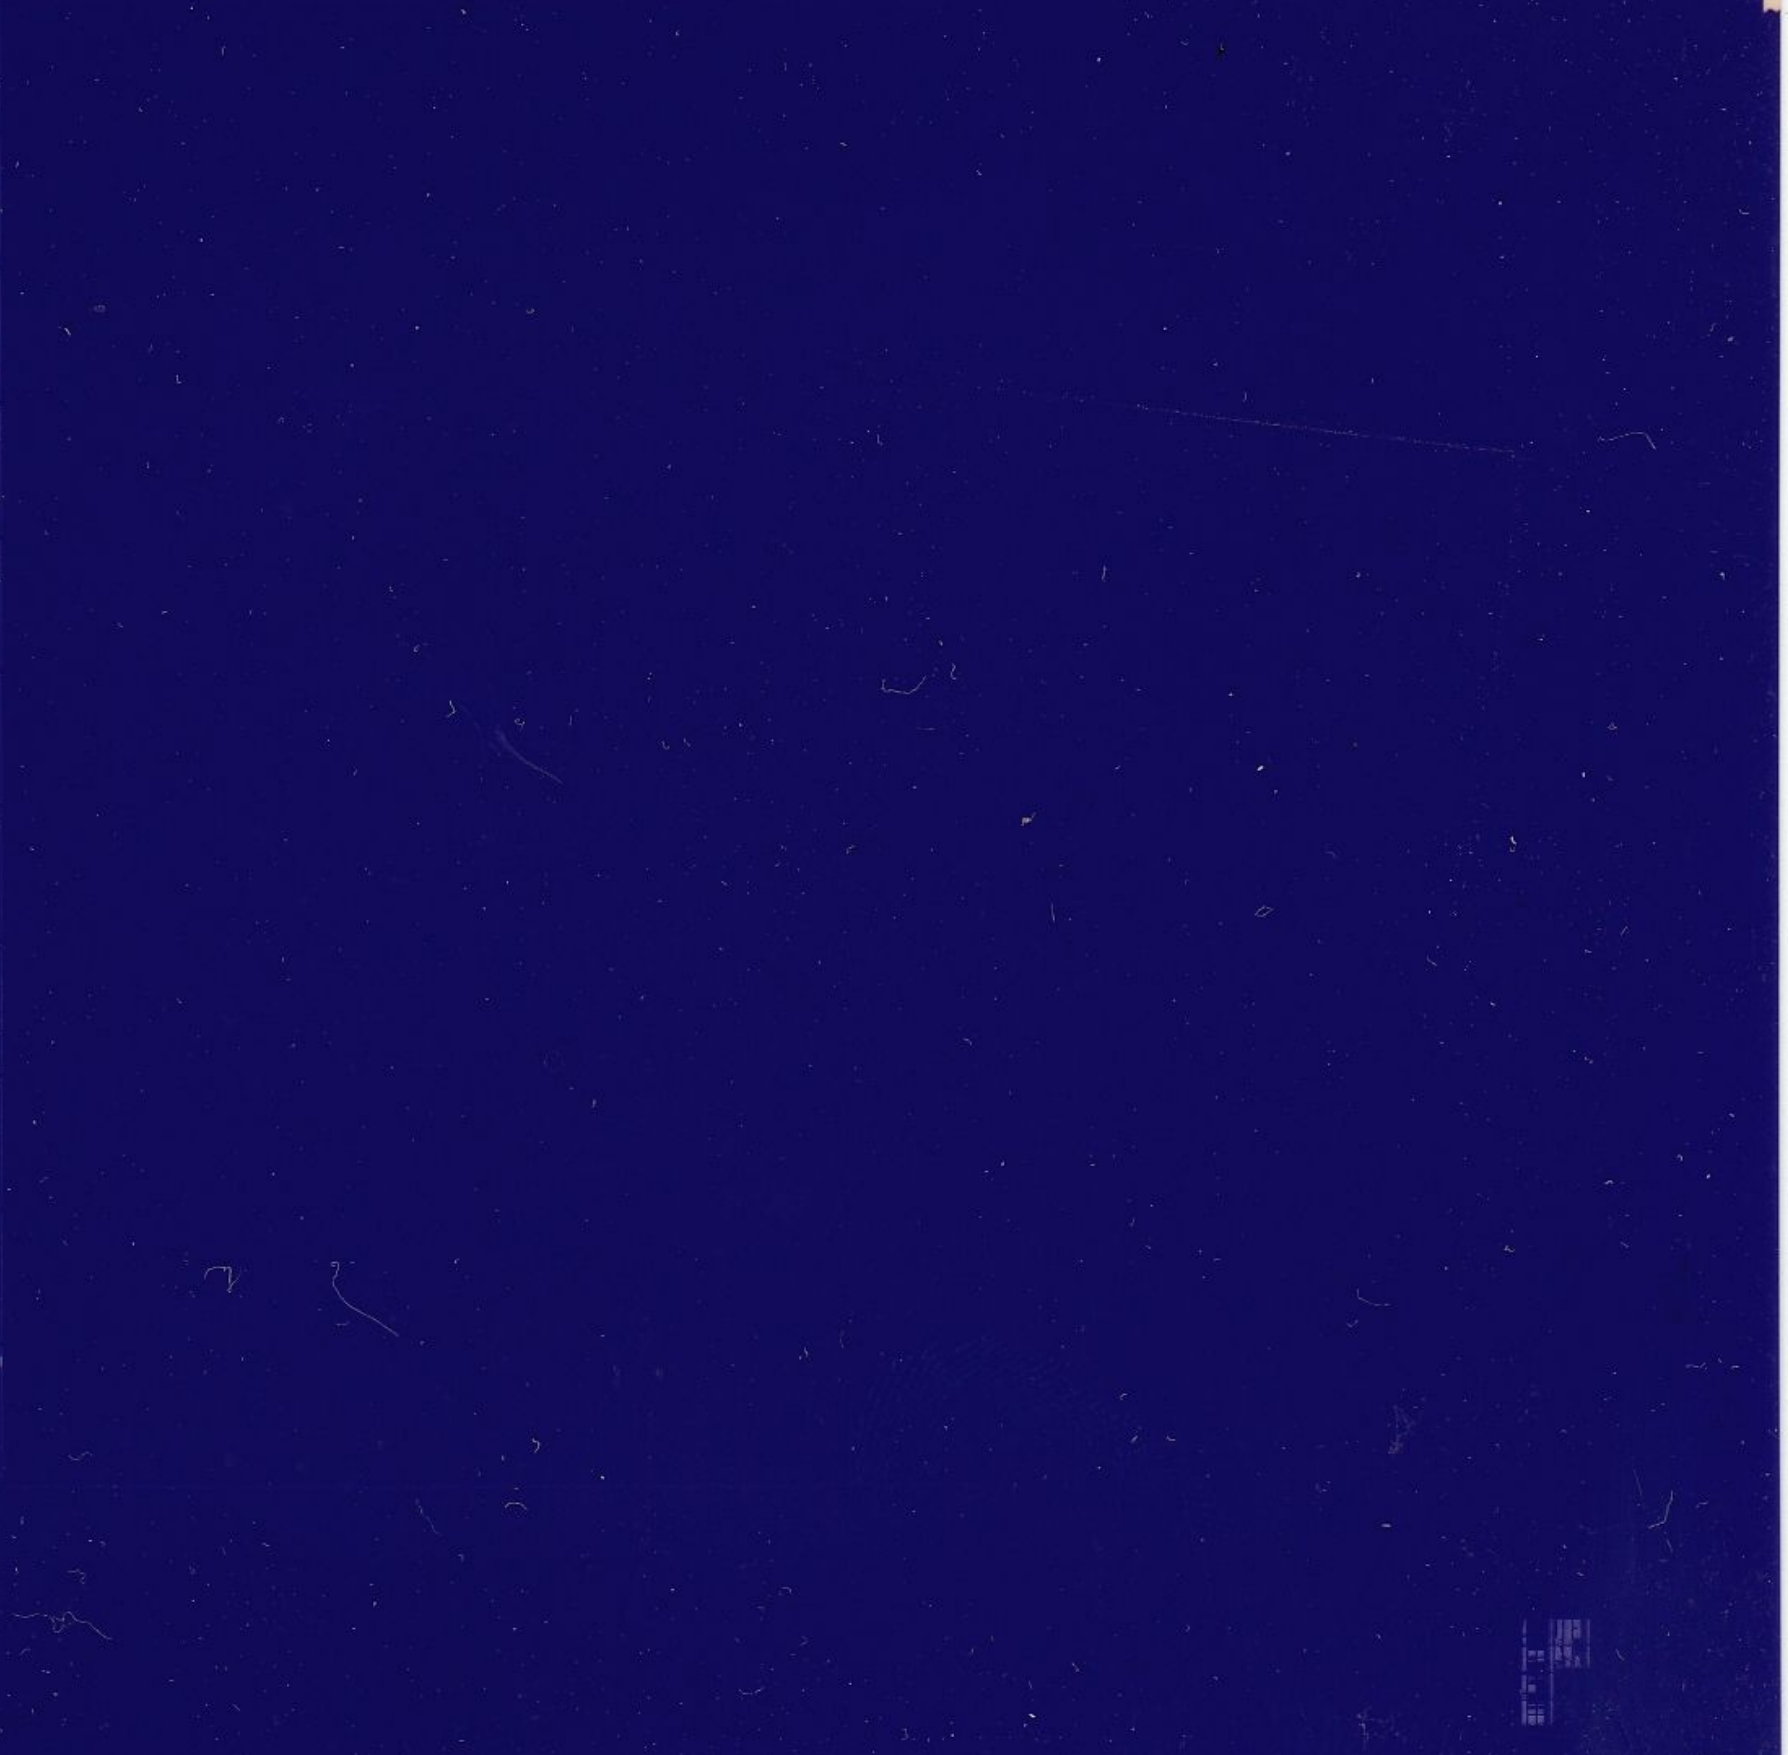

B01

MAIN MACY11 27.732) 15-007-75 11:28 PAGE 2
DB0000 P11

.REM 2

IDENTIFICATION

PRODUCT CODE: MAINDEC-11-DBGAA-A-D
PRODUCT NAME: WATCH DOG DIAGNOSTIC
DATE:
MAINTAINER: DIAGNOSTIC GROUP
AUTHOR: GEORGE BAISLEY .

COPYRIGHT MARCH 1973
DIGITAL EQUIPMENT CORPORATION
MAYNARD, MASSACHUSETTS 01754

DB0000 P11

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80

1. ABSTRACT

THE FUNCTION OF THE WATCHDOG DIAGNOSTICS IS TO VERIFY THAT THE WATCH DOG TIMER PERFORMS AS SPECIFIED BY THE PRINT SET. THE WATCH DOG PACKAGE CONSISTS OF ONE TAPE. THE WATCH DOG TIMER HARDWARE IS COMPOSED OF TWO INDEPENDENT FUNCTIONAL PARTS: A. WATCH DOG TIMER AND B. WATCH DOG LINE CLOCK EACH HAVE THEIR OWN VECTOR AND DEVICE ADDRESSES. THE LINE CLOCK PORTION OF THE DIAGNOSTICS REQUIRES THE OPERATOR TO MONITOR IT'S OPERATION WITH A CLOCK CAPABLE OF MEASURING TIME IN SECONDS.

2. REQUIREMENTS

2.1 EQUIPMENT

PDP-11/40 ONLY WITH WATCH DOG TIMER

PDP-11/20 MAY BE USED, HOWEVER IT WILL NOT EXERCISE THE RESTART LOGIC PORTION AND THEREFORE WILL FAIL THOSE FUNCTIONS.

2.2 STORAGE

2.2.1. PROGRAM STORAGE

THIS PROGRAM LOADS IN 4K OF MEMORY

3. LOADING PROCEDURE

3.1 METHOD

PROGRAM IS IN ABSOLUTE FORMAT AND IS LOADED USING THE ABSOLUTE LOADER

ABSOLUTE LOADER START ADDRESS *500

MEMORY SIZE

*

4K	17
8K	37
12K	57
16K	77
20K	117
24K	137
28K	157

3.1.1. LOAD ADDRESS OF ABS LOADER INTO SWITCHES

3.1.2. DEPRESS "LOAD ADDRESS" KEY ON CONSOLE

3.1.3. DEPRESS "START" KEY ON CONSOLE

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124

- 4. STARTING PROCEDURE
 - A. SET SWITCH REGISTER TO 000200
 - B. DEPRESS "LOAD ADDRESS" KEY
 - C. DEPRESS START

THE PROGRAM WILL JUMP TO THE DIAGNOSTIC MONITOR AND TYPE OUT THE OPERATING INSTRUCTIONS. THIS IS ONCE ONLY CODE. TO RETYPE THE OPERATING INSTRUCTION THE OPERATOR MAY EITHER RELOAD THE PROGRAM OR LOAD THE ADDRESS "MONITOR" IN THE SWITCH REGISTER AND DEPRESS START.

4.1 CONTROL SWITCH SETTINGS

- SR15 HALT ON ERROR
- SR14 SCOPE LOOP (SCOPE ON TEST OR ERROR)
- SR13 INHIBIT ERROR PRINTOUT
- SR12 SHORT ERROR REPORT
- SR11 INHIBIT ITERATIONS

4.2 STARTING ADDRESSES

ADDRESSES	COMMENT
000200	NORMAL START WITH 200 LEFT IN THE SWITCHES THE PROGRAM TYPES OUT FULL INSTRUCTIONS ONCE AND ABBREVIATED INSTRUCTIONS THEREAFTER. WITH THE SWITCHES ZERO THE PROGRAM SETUP EITHER THE DEFAULT OR PREVIOUSLY SELECTED PARAMETERS AND IMMEDIATELY ASKS FOR DYNAMIC SWITCH SETTINGS.
MONITOR	RELOAD TAPE FOR RETYPING OF INSTRUCTIONS
000042	IF THIS LOCATION IS NONZERO THE PROGRAM ASSUMES IT IS RUNNING UNDER ACT11 OR DDP AND USES THE DEFAULT PARAMETERS

5. OPERATING PROCEDURE

STARTING FROM 200 CAUSES THE FOLLOWING TYPE OUT.

MAINDEC-11-DBQAA-A-D

DYNAMIC SWITCH SETTINGS

SR15 HALT ON ERROR
SR14 SCOPE LOOP
SR13 INHIBIT ERROR PRINTOUT
SR12 SHORT ERROR REPORT
SR11 INHIBIT ITERATIONS

TYPE: <D>, FOR DEFAULT PARAMETERS
<P>, FOR PREVIOUS PARAMETERS
<S>, FOR SELECT PARAMETERS
<N>, FOR START WITH THIS TEST NUMBER

D,P,S,N?

IN RESPONSE TO THIS LAST QUESTION THE OPERATOR IS REQUIRED TO TYPE ONE OF THE LETTERS IN THE STRING. ON THE FIRST TIME THRU THIS DIAGNOSTIC TYPE "D" FOR DEFAULT TO SET UP PARAMETERS, OR TYPE "S" TO SELECT PARAMETERS.

TYPE "P" OR "N" AFTER THE PARAMETERS HAVE BEEN SELECTED FROM PREVIOUS RUNS.

IF ANY CHARACTER OTHER THAN ONE IN THE STRING IS TYPED THE MONITOR WILL REJECT THE CHARACTER AND RETYPE THE STRING.

IF, IN RESPONSE TO THE STRING, THE OPERATOR TYPES AN "S" THE SELECTION SEQUENCE IS ENTERED AND THE FOLLOWING DIALOGUE TAKES PLACE.

NOTE: THESE ARE THE DEFAULT PARAMETERS: TYPING <CR> IS EQUIVALENT TO TYPING THE DEFAULT PARAMETER.

TEST NUMBER: 1
BASE ADDRESS: 172400
VECTOR ADDRESS: 300
WD PRIORITY LEVEL: 6

TIMEOUT VALUE IN MILLISECS + TOLERANCE: 140
TRIGGER VALUE IN MILLISECS (5% OF TIMOUT VALUE): 7

CLOCK FREQ IN HZ: 1000
RESTART ADDRESS: 173776
SET SWITCHES

AT ANY TIME DURING THE 'S' ELECTION SEQUENCE A CONTROL C MAY BE TYPED AND THE MONITOR WILL ASK AGAIN "D,P,S,N?"

125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177

178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218

5.1 "TEST NUMBER: 1"

HERE THE MONITOR IS ASKING FOR THE NUMBER OF THE FIRST TEST IN THE CHAINING SEQUENCE. THE DEFAULT ANSWER IS (1) ONE, THE FIRST TEST IN THE CHAIN. THE OPERATOR MAY TYPE ANY TEST NUMBER AS SPECIFIED IN THE LISTING; HOWEVER, AT THIS WRITING THERE IS NO CHECK TO SEE IF THE OPERATOR SELECTED A NONEXISTANT TEST NUMBER. HENCEFORTH THE NUMBER TYPED AFTER THE COLON IS THE DEFAULT PARAMETER UNTIL CHANGED....TYPING A <CR> IS EQUIVALENT TO TYPING THIS DEFAULT PARAMETER.

"BASE ADDRESS: 172400"

THIS IS THE BASE ADDRESS FOR THE WATCH DOG TIMER AND ASSOCIATED LINE CLOCK. BY TYPING THE CORRECT BASE ADDRESS; CLKCSR, WDCSR, AND !DDAT ARE GENERATED AUTOMATICALLY. EG. 172400,172404,172406 RESPECTIVELY

TYPING <CR> WILL GENERATE THE DEFAULT PARAMETERS. 172400,172404,172406

"VECTOR ADDRESS: 300"

THE WATCH DOG TIMER IS CUT TO INTERRUPT TO ADDRESS 300 AT THE FACTORY. BY TYPING THE CORRECT VECTOR ADDRESS; CLKIV, CLKIS, WDIV, AND WDIS ARE GENERATED AUTOMATICALLY EG. 300, 302, 304, 306 RESPECTIVELY

TYPING <CR> WILL GENERATE THE DEFAULT PARAMETERS 300, 302, 304, 306

"WD PRIORITY LEVEL: 6"

THIS IS THE DEVICE INTERRUPT PRIORITY LEVEL - THE W.D.T. IS FACTORY WIRED TO LEVEL 6. BY TYPING THE WRONG PRIORITY LEVEL THE DIAGNOSTIC WILL RESPOND WITH ERRORS IN THE PROGRAM ACCORDINGLY.

TYPING <CR> WILL SET UP THE DEFAULT VALUE 6.

"TIMEOUT VALUE IN MILLISECS + TOLERANCE : 140"

219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265

TIMEOUT (OR TIMOUT) IS THE WATCH DOG'S TIME OUT VALUE. THAT IS, UNLESS IT IS "UPDATED" WITHIN THE PRECUT VALUE THE WATCH DOG RELAY WILL FALL CAUSING RESTART, ETC.

BY TYPING THE CORRECT TIMOUT VALUE IN MILLISECS (DECIMAL NUMBERS ONLY, NO FRACTIONS OR DECIMAL POINT), THE DIAGNOSTIC WILL PASS THE TESTS. BY REDUCING THIS NUMBER AT THE MONITOR LEVEL (TYPING "S" ELECT PARAMETERS) AND ALTERNATELY RUNNING THE PROGRAM THE ACTUAL PRECUT VALUE OF TIMOUT CAN BE ASCERTAINED.... THE PROGRAM WILL FAIL BY SPECIFYING THAT A TOO LOW VALUE OF TIMOUT WAS TYPED IN. BY REPEATEDLY RUNNING THE PROGRAM AND RESELECTING THE TIMOUT VALUE, IT CAN BE DETERMINED TO AN ACCURACY OF + 1 MSEC.

TYPING <CR> WILL SET UP THE DEFAULT VALUE .40 (MILLISECONDS IN DECIMAL NUMBERS)

NOTE1: TYPE WHOLE DECIMAL NUMBERS ONLY, FRACTIONS WILL CAUSE ERRORS, THE LOWEST ACCEPTABLE NUMBER IS 1.

NOTE2: THE HIGHEST VALUE THAT WILL BE ACCEPTED IS 10000 MILLISECONDS (10 SECS) TYPING A NUMBER HIGHER THAN 10000 WILL CAUSE ERRORS WITHIN THE PROGRAM (DO NOT USE COMMAS).

"TRIGER VALUE IN MILLISECS (5% OF TIMOUT VALUE): 7"

TRIGGER (OR TRIGER) IS THE WATCH DOG'S TOO SOON (OR TOOSN) VALUE. THAT IS, IF THE WATCH DOG IS "UPDATED" IN LESS TIME THAN 5% OF TIMOUT VALUE THE WATCH DCG WILL GENERATE THE TOOSN BIT AND CAUSE INTERRUPT (IF INTERRUPT ENABLE IS SET).

BY TYPING THE CORRECT TRIGER VALUE IN MILLISECS (DECIMAL NUMBERS ONLY, NO FRACTIONS, OR DECIMAL POINT), THE DIAGNOSTIC WILL PASS THE TESTS. BY REDUCING THIS NUMBER AT THE MONITOR LEVEL (TYPING "S" ELECT PARAMETERS) AND ALTERNATELY RUNNING THE PROGRAM, THE ACTUAL PRECUT VALUE OF TRIGER CAN BE ASCERTAINED.... THE PROGRAM WILL FAIL BY SPECIFYING THAT A TOO LOW VALUE OF TRIGER WAS TYPED IN. BY REPEATEDLY RUNNING THE PROGRAM AND RESELECTING THE TRIGER VALUE, IT CAN BE DETERMINED TO AN ACCURACY OF + 1 MSEC.

TYPING <CR> WILL SET UP THE DEFAULT VALUE 7 (MILLISECONDS IN DECIMAL NUMBERS)

NOTE1: TYPE WHOLE DECIMAL NUMBERS ONLY, FRACTIONS WILL CAUSE ERRORS; THE LOWEST ACCEPTABLE NUMBER IS 1.

266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317

NOTE2: THE HIGHEST VALUE THAT WILL BE ACCEPTED IS 10000 MILL-ISECONDS (10 SECS). TYPING A NUMBER HIGHER THAN 10000 WILL CAUSE ERRORS WITHIN THE PROGRAM (DO NOT USE COMMAS). THIS NUMBER SHOULD NEVER HAVE TO BE USED AS TRIGER VALUE WILL NOT EXCEED 5% OF TIMEOUT VALUE.

"CLOCK FREQ IN HZ: 1000"

THIS IS THE WATCH DOG'S LINE CLOCK FREQUENCY PRECUT AT THE FACTORY. OTHER ACCEPTABLE FREQUENCIES ARE 50, 60, 100, AND 200 HZ. TYPING OTHER THAN SPECIFIED FREQUENCIES WILL GENERATE AN ERROR WITHIN THE PROGRAM.

TYPING <CR> WILL SET UP THE DEFAULT VALUE 1000

"RESTART ADDRESS: 173776"

THIS NUMBER IS THE RESTART ADDRESS.....IT IS NECESSARY THAT BEFORE RUNNING THE DIAGNOSTIC THAT THIS NUMBER BE STRAPPED OR SWITCHED IN THE WATCH DOG TIMER, DO NOT USE ANY VALID R.O.M. STARTING ADDRESS.....

SHOULD THE ABOVE NUMBER BE IN CONFLICT WITH ANY VALID R.O.M. ADDRESS, CHOOSE ANY NUMBER FROM 173000 TO 173776 AND STRAP THE WATCH DOG TIMER ACCORDINGLY.

"SET SWITCHES"

HERE THE MONITOR ASKS FOR THE CONSOLE SWITCH SETTINGS

SR15 HALT ON ERROR
SR14 SCOPE LOOP
SR13 INHIBIT ERROR PRINTOUT
SR12 SHORT ERROR REPORT
SR11 INHIBIT ITERATIONS

LOAD THE SWITCH REGISTER WITH THE APPROPRIATE FUNCTION AND TYPE <CR>

5.2 PROGRAM AND/OR OPERATOR ACTION

THE TYPICAL APPROACH SHOULD BE

1. SET SR15 - HALT ON ERROR WHEN AN ERROR HALT OCCURS.
2. CLEAR SR15
3. SET SR14 AND DEPRESS "CONTINUE" ON CONSOLE. PROGRAM WILL SCOPE ON ERROR.
4. IF ERROR IS REPETITIVE SET SR13 AND SCOPE ERROR

318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373

5. SET SR11 IF THE TEST IS FAILING ON A PARTICULAR PASS I.E.
2ND AND NOT THE 1ST

THE ERROR PC SHOULD BRING THE OPERATOR TO A POINT IN THE LISTING WHERE THE ERROR IS DOCUMENTED. THEN USING THE PRINTS AND THE FLOWS THE ERROR CAN BE TRACED TO ITS SOURCE.

AT ANY TIME DURING THE INITIALIZATION OR TESTING THE OPERATOR CAN TYPE CONTROL C AND CONTROL WILL BE RETURNED TO THE MONITOR. SOME TESTS ARE 5 TO 10 SECONDS IN DURATION SO THE RESPONSE TO CONTROL C WILL NOT BE INSTANTANEOUS.

THE RESTART ADDRESS IS 200. IF THIS ADDRESS IS LEFT IN THE CONSOLE SWITCHES WHEN "START" IS PRESSED, THE MONITOR WILL TYPE OUT "P, P, S, N?". IF THE SWITCHES ARE ZEROED THE TYPE OUT WILL BE "SET SWITCHES".

6. ERRORS

TYPICALLY ERROR REPORTS TAKE THE FOLLOWING FORMAT.

ERROR PC 002776

THIS INDICATES THAT WHILE EXECUTING THE TESTS AN ERROR STATE WAS DETECTED AND IS DOCUMENTED AT PROGRAM COUNT 002776 AND TEST 3

A TYPICAL APPROACH MIGHT BE; TYPE CONTROL C, RESULTS

D, P, S, N? N
TEST NUMBER: 3
SET SWITCHES

IN RESPONSE TO SWITCHES SET THE FOLLOWING

SR15=0 HALT ON ERROR
SR14=1 SCOPE
TYPE <CR>

IF THE ERROR IS REPEATABLE SET SR13 INHIBIT PRINT AND START TROUBLE SHOOTING. REFER TO LISTING FOR THE COMMENTS ASSOCIATED WITH THE ERROR.

ADDED NOTE: MANY ERRORS THAT MAY BE ENCOUNTERED WILL NOT BE THERE WHEN EXAMINING THE CONTENTS OF THE SWITCH REGISTER. THIS IS PRIMARILY DUE TO THE TIMING CHARACTERISTICS WITHIN THE WATCH DOG TIMER. IN MANY CASES WHEN TIMING PLAYS AN IMPORTANT ROLE IN THE DIAGNOSTIC ROUTINE, THE DATA IS STORED AT A TEMPORARY TAG LOCATION PRIOR TO HALTING ON ERROR. THEREFORE, BACK-UP INTO THE DIAGNOSTICS TO FIND WHERE THIS DATA IS TEMPORARILY HELD; LOAD IT'S PC INTO THE SWITCH REGISTER AND 'EXAMINE'. GOOD LUCK!

6.2 ERROR RECOVERY

PROGRAM CAN BE RESTARTED AT ANY TIME BY LOAD ADDRESS 200 AND

J01

.MAIN. NACY11 27(732) 15-OCT-76 11:28 PAGE 10
DBQAAA.P11

374

DEPRESS START

375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416

7. RESTRICTIONS

7.1 STARTING RESTRICTIONS

- A. DISCONNECT THE USERS CABLE AND INSTALL THE JUMPER PLUG THAT WAS SUPPLIED WITH THE WATCH DOG TIMER.
- B. STRAP THE RESTART ADDRESS TO AN UNUSED R.O.M. ADDRESS PREFERABLY 173776. SHOULD THIS ADDRESS BE USED, CHOOSE ANY OTHER ADDRESS BETWEEN 173000 TO 173776 AND LOAD THIS WHEN "S" ELECTING PARAMETERS.
- C. SHOULD THE JUMPER PLUG BE UNAVAILABLE; JUMPER THE FOLLOWING:

PIN 8 TO PIN 2
 PIN 5 TO PIN 7
 PIN 6 TO PIN 3
 PIN 10 TO PIN 3
 PIN 11 TO PIN 1, THRU A SWITCH (RESTART SWITCH)
 PIN 9 TO PIN 1
 PIN 17 TO PIN 16
 PIN 15 TO PIN 14

ALL OF THESE JUMPERS MUST BE IN PRIOR TO RUNNING ANY OF THE FEED BACK LOOP TESTS. THEY ARE NOT REQUIRED IF ONLY THE LINE CLOCK PORTION OF THE WATCH DOG IS TO BE TESTED. SEE LISTINGS FOR DETAILED INFORMATION.

8. MISCELLANEOUS

- A. DISCONNECT USERS CABLE AND INSERT JUMPER PLUG - SEE SECTION 7.1
- B. IT IS IMPORTANT TO RUN THE LINE CLOCK PORTION BEFORE ATTEMPTING TO RUN THE WATCH DOG PORTION; IN PARTICULAR THE MNCLK TEST AS ALL WATCH DOG TIMING IS BASED UPON THE PRESENCE OF THE MAINTENANCE CLOCK (MNCLK).
- C. LINE CLOCK ACCURACY TESTS AT BEST ARE CLOSE APPROXIMATIONS, PRECISION MEASUREMENT IS BEYOND THE SCOPE OF THIS DIAGNOSTIC.

417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448

9. PROGRAM DESCRIPTION

THE PROGRAM CONSISTS OF A SERIES OF SMALL TESTS THAT CHECK EACH OF THE INDIVIDUAL FUNCTIONS AND CHARACTERISTICS OF THE WATCH DOG TIMER AND ASSOCIATED LINE CLOCK.

TEST NAME	DESCRIPTION
TEST 1 (LINE CLOCK)	TEST THAT START CLEARS LINE CLOCK INTERRUPT ENABLE BIT
TEST 2 (LINE CLOCK)	TEST THAT CLOCK INTERRUPTS TO CORRECT VECTOR ADDRESS
TEST 3 (LINE CLOCK)	TEST THAT CLOCK INTERRUPT PUSHES CONDITION CODES AND PROGRAM COUNTER ONTO STACK
TEST 4 (LINE CLOCK)	TEST THAT RESET SETS CLOCK FLAG (TICK)
TEST 5 (LINE CLOCK)	TEST LINE CLOCK REPEATABILITY TO MAKE SURE THAT OVER TWO EQUAL PERIODS OF TIME THE LINE CLOCK PUTS OUT THE SAME NUMBER OF PULSES.
TEST 6 (LINE CLOCK)	TEST LINE CLOCK REPEATABILITY WITH INTERRUPT
TEST 7 (LINE CLOCK)	LINE CLOCK ACCURACY TEST (CLOCK CAPABLE OF MEASURING TIME IN SECONDS IS REQUIPED)

MO1

449	TEST 10	MAINTENANCE CLOCK BIT TEST (MNCLK)
450	(LINE CLOCK/WD TIMER)	
451	TEST 11	MNCLK ACCURACY TEST
452	(LINE CLOCK/WD TIMER)	(CLOCK CAPABLE OF MEASURING TIME
453		IN SECONDS IS REQUIRED)
454		
455	TEST 12	TEST THAT CHECKS BITS: READ/WRITE
456	(WDT)	ABILITY OF WD DATA (WDDAT)
457		
458	TEST 13	TEST THAT CHECKS TOO SOON (TOOSN)
459	(WDT)	BIT; READ/SET ABILITY OF WDCSR
460		
461	TEST 14	TEST THAT CHECKS BITS WD INTERRUPT
462	(WDT)	ENABLE (WDIEN), EXTERNAL REQUEST
463		(EXTREQ), AND WD ENABLE (WDENAB);
464		READ/WRITE ABILITY OF WDCSR
465		
466	TEST 15	TEST THAT WATCH DOG INTERRUPTS TO
467	(WDT)	CORRECT VECTOR ADDRESS AND
468		TOOSN BIT IS SET BY "UPDATING" TOO
469		FAST (TOO SOON)
470		
471	TEST 16	TEST THAT CHECKS THE UPDATE SEQUENCE
472	(WDT)	IN REVERSE DOES NOT CAUSE AN ACT-
473		UAL 'UPDATE'
474		
475	TEST 17	TEST THAT CHECKS WD RELAY IS PICKED
476	(WDT)	AND DROPS IN TIME SPECIFIED BY
477		TIMOUT. THIS TEST CAN BE USED
478		TO DETERMINE ACTUAL TIME OUT VALUE
479		+ OR - 1 MSEC. SEE SECTION 5.1
480		
481		NOTE: IT IS IMPORTANT THAT TIMEOUT
482		BE SELECTED TO PASS THIS TEST WITH
483		A VALUE JUST OVER THE PRECUT VALUE
484		OF "TIMEOUT".
485		
486		

487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504

TEST 20
(WDT)

TEST THAT CHECKS TOOSN BIT NOT
SET IN TIME SPECIFIED BY TRIGER.
THIS TEST CAN BE USED TO DETERMINE
ACTUAL TRIGGER VALUE + OR - 1 MSEC.
SEE SECTION 5.1

NOTE: IT IS IMPORTANT THAT TRIGER
BE SELECTED TO PASS THIS TEST WITH
A VALUE JUST OVER THE PRECUT VALUE
OF "TRIGGER".

TEST 21
(FEEDBACK LOOP)

TEST THAT CHECKS REMOTE SENSE LOGIC.
START LOGIC AND RESTART LOGIC.
IT IS IMPORTANT THAT THE DEVICE
IS OPERATING ON AN 11/40 FOR THIS
TEST. ALSO RESTART ADDRESS SHALL
BE DETERMINED PRIOR TO RUNNING
THIS TEST.

560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615

000000

. = 0

. REM *

MAINDEC-11-DBQAA-A-D
COPYRIGHT 1973 DIGITAL EQUIPMENT CORP.
146 MAIN ST. MAYNARD, MA. 01754
MAINTAINER: DIAGNOSTICS
AUTHOR: G. BAISLEY

*

HALT
HALT
. +2
HALT
. +2
HALT
. +2
HALT

: TRAP HERE IF ADDRESS
: LINES DROP
: TRAP PC POINTS TO HALT
: TRAP PC POINTS TO HALT
: TRAP PC POINTS TO HALT

000000 000000
000002 000000
000004 000006
000006 000000
000010 000012
000012 000000
000014 000016
000016 000000

616	000020	000022	.	+2	:	TRAP PC POINTS TO HALT
617	000022	000000	HALT		:	
618	000024	000026	.	+2	:	TRAP PC POINTS TO HALT
619	000026	000000	HALT		:	
620	000030	000032	.	+2	:	TRAP PC POINTS TO HALT
621	000032	000000	HALT		:	
622	000034	000036	.	+2	:	TRAP PC POINTS TO HALT
623	000036	000000	HALT		:	
624	000040	000042	.	+2	:	TRAP PC POINTS TO HALT
625	000042	000000	HALT		:	
626	000044	000046	.	+2	:	TRAP PC POINTS TO HALT
627	000046	000000	HALT		:	
628	000050	000052	.	+2	:	TRAP PC POINTS TO HALT
629	000052	000000	HALT		:	
630	000054	000056	.	+2	:	TRAP PC POINTS TO HALT
631	000056	000000	HALT		:	
632	000060	000062	.	+2	:	TRAP PC POINTS TO HALT
633	000062	000000	HALT		:	
634	000064	000066	.	+2	:	TRAP PC POINTS TO HALT
635	000066	000000	HALT		:	
636	000070	000072	.	+2	:	TRAP PC POINTS TO HALT
637	000072	000000	HALT		:	
638	000074	000076	.	+2	:	TRAP PC POINTS TO HALT
639	000076	000000	HALT		:	
640	000100	000102	.	+2	:	TRAP PC POINTS TO HALT
641	000102	000000	HALT		:	
642	000104	000106	.	+2	:	TRAP PC POINTS TO HALT
643	000106	000000	HALT		:	
644	000110	000112	.	+2	:	TRAP PC POINTS TO HALT
645	000112	000000	HALT		:	
646	000114	000116	.	+2	:	TRAP PC POINTS TO HALT
647	000116	000000	HALT		:	
648	000120	000122	.	+2	:	TRAP PC POINTS TO HALT
649	000122	000000	HALT		:	
650	000124	000126	.	+2	:	TRAP PC POINTS TO HALT
651	000126	000000	HALT		:	
652	000130	000132	.	+2	:	TRAP PC POINTS TO HALT
653	000132	000000	HALT		:	
654	000134	000136	.	+2	:	TRAP PC POINTS TO HALT
655	000136	000000	HALT		:	
656	000140	000142	.	+2	:	TRAP PC POINTS TO HALT
657	000142	000000	HALT		:	
658	000144	000146	.	+2	:	TRAP PC POINTS TO HALT
659	000146	000000	HALT		:	
660	000150	000152	.	+2	:	TRAP PC POINTS TO HALT
661	000152	000000	HALT		:	
662	000154	000156	.	+2	:	TRAP PC POINTS TO HALT
663	000156	000000	HALT		:	
664	000160	000162	.	+2	:	TRAP PC POINTS TO HALT
665	000162	000000	HALT		:	
666	000164	000166	.	+2	:	TRAP PC POINTS TO HALT
667	000166	000000	HALT		:	
668	000170	000172	.	+2	:	TRAP PC POINTS TO HALT
669	000172	000000	HALT		:	
670	000174	000176	.	+2	:	TRAP PC POINTS TO HALT
671	000176	000000	HALT		:	

728	000360	000362	.+2	; TRAP PC POINTS TO HALT
729	000362	000000	HALT	
730	000364	000366	.+2	; TRAP PC POINTS TO HALT
731	000366	000000	HALT	
732	000370	000372	.+2	; TRAP PC POINTS TO HALT
733	000372	000000	HALT	
734	000374	000376	.+2	; TRAP PC POINTS TO HALT
735	000376	000000	HALT	
736	000400	000402	.+2	; TRAP PC POINTS TO HALT
737	000402	000000	HALT	
738				
739		104400	SCOPE=TRAP	; SCOPE LOOP TRAP
740				
741		100000	BIT15=100000	
742		040000	BIT14=40000	
743		020000	BIT13=20000	
744		010000	BIT12=10000	
745		004000	BIT11=4000	
746		002000	BIT10=2000	
747		001000	BIT9=1000	
748		000400	BIT8=400	
749		000200	BIT7=200	
750		000100	BIT6=100	
751		000040	BIT5=40	
752		000020	BIT4=20	
753		000010	BIT3=10	
754		000004	BIT2=4	
755		000002	BIT1=2	
756		000001	BIT0=1	
757		000000	HERE=0	
758			; REGISTER DEFINITIONS	
759				
760		000000	R0=%0	
761		000001	R1=%1	
762		000002	R2=%2	
763		000003	R3=%3	
764		000004	R4=%4	
765		000005	R5=%5	
766		000005	TTY=%5	
767		000006	R6=%6	
768		000006	SP=%6	; STACK POINTER
769		000007	PC=%7	; PROGRAM COUNTER
770				
771		000004	TYPE=ICT	
772		000240	NOP=240	
773		177776	PS=177776	; PROCESSOR STATUS
774		177570	SWR=177570	
775		177570	SR=177570	; SWITCH REGISTER
776			; PROCESSOR PRIORITY LEVELS	
777		000000	LEVEL0=000	
778		000040	LEVEL1=040	
779		000100	LEVEL2=100	
780		000140	LEVEL3=140	
781		000200	LEVEL4=200	
782		000240	LEVEL5=240	
783		000300	LEVEL6=300	

```

784          000340          LEVEL7=340
785
786
787          :TTY ADDRESSES
788 000404 177560          TKS:177560
789 000406 177562          TKB:177562
790 000410 177564          TPS:177564
791 000412 177566          TPB:177566
792
793          :MISC DEFINITIONS
794          000015          CR=15
795          000012          LF=12
796
797          ;EMT DEFINITIONS
798
799 000414 104000          ERROR          ;TRAPS TO T.ERROR
800 000416 104001          SAVRG          ;TRAPS TO T.SAVRG
801 000420 104002          RSTRG          ;TRAPS TO T.RSTRG
802 000422 104003          ACCEPTO          ;TRAPS TO T.ACCEPTO
803 000424 104004          KEY.TO.RO          ;TRAPS TO T.KEY.TO.RO
804
805
806          ;TRAP INITIALIZATION
807
808          000020          .=20
809 000020 013150 000340          .IOT,LEVEL7          ;TTY OUTPUT TRAP,LEVEL 7
810
811          000024          .=24
812 000024 013552 000340          PFAIL,LEVEL7          ;POWER FAIL TRAP
813
814          000030          .=30
815 000030 012322 000340          EMTDECODER,LEVEL7          ;EMT DECODER TRAP,LEVEL 7
816
817          000034          .=34
818 000034 012536 000340          SCOPEC,LEVEL7          ;SCOPE TRAP
819          000200          .=200
820
821 000200 000137 001100          START: JMP      @#BEGIN          ;GO TO BEGINNING OF PROGRAM
822
823          001100          .=1100
824
825 001100 012706 001100          BEGIN: MOV      @#BEGIN,SP          ;SET UP STACK POINTER
826 001104 012767 000340 176664          MOV      @#LEVEL7,PS          ;PRIORITY LEVEL 7
827 001112 005737 000042          TST      @#42          ;ACT!!
828 001116 001404          BEQ      BGNO          ;BR IF NO
829 001120 004767 006214          JSR      PC,DEFAULT          ;INSERT DEFAULT PARAMETERS
830 001124 000137 007310          JMP      @#MON13
831 001130 005327 000001          BGNO: DEC      @1          ;ONCE ONLY
832 001134 001002          BNE      BGN1
833 001136 000137 006346          JMP      @#MONITOR
834 001142 032767 000200 176420          BGN1: BIT      @200,SR          ;TEST FOR FAST START
835 001150 001402          BEQ      BGN2          ;BRANCH IF FAST START
836 001152 000137 006404          JMP      @#MON1.0
837 001156 012706 001100          BGN2: MOV      @#BEGIN,SP
838 001162 012767 000340 176606          MOV      @#LEVEL7,PS
839 001170 000137 007252          JMP      @#MON10          ;USE PREVIOUS PARAMETERS
  
```

```

840
841
842
843      000200
844      000100
845
846      000200
847      000100
848      000040
849      000020
850      000010
851      000004
852      000002
853      000001
854
855      000010
856      000004
857      000002
858      000001
859
860      001174 000000
861      001176 000000
862      001200 000000
863      001202 000000
864
865      001204 000000
866      001206 000000
867      001210 000000
868      001212 000000
869
870      001214 000300
871      001216 000302
872      001220 000304
873      001222 000306
874      001224 172400
875      001226 172402
876      001230 172404
877      001232 172406
878
879      001234 000214
880      001236 000007
881      001240 001750
882      001242 173776
883      001244 176030
884      001246 166170
885      001250 154360
886
887
888
889      001252 000030
890      001254 000005
891      001256 000300
892      001260 000000
893      001262 003720
894      001264 000000
895      001266 000000

;DEFINITIONS
;CLOCK CSR XXXD
TICK=BIT7
CLKEN=BIT6
;WATCH DOG CSR XXX4
FLAG=BIT7
WDIEN=BIT6
TOOSN=BIT5
REMSN=BIT4
EXTREQ=BIT3
WDENAB=BIT2
WDRLY=BIT1
X=BIT0
;WATCH DOG DATA XXX6
MNCLK=BIT3
WD2=BIT2
WD1=BIT1
X=BIT0
;WATCH DOG VECTOR AND DEVICE ADDRESSES
CLKIV:0
CLKIS:0
WDIV:0
WDIS:0
;WATCH DOG ADDRESSES
CLKCSR:0
VOID:0
WDCSR:0
WDDAT:0
;DEFAULT VECTOR AND DEVICE ADDRESS
DFLTIV: 300 ;CLKIV
        302 ;CLKIS
        304 ;WDIV
        306 ;WDIS
DFLTAD: 172400 ;CLKCSR
        172402 ;VOID
        172404 ;WDCSR
        172406 ;WDDAT
;DEFAULT MISC. PARAMETERS
DFLMSC: 140. ;TIMOUT
        7. ;TRIGER
        1000. ;CLOCKF
        173776 ;ROMADD
        -1000. ;SEC1
        -5000. ;SECS
        -10000. ;SEC10

;MISC SCRATCH PAD
FEEDBK: 24. ;SCHMIDT TRIGGER TIME
RLYPT: 5. ;RELAY PICK TIME
WDPRT: LEVEL6
FIRST.TST:0
TIMRUN: 2000. ;REAL TIME OF 2 SEC. USING MNCLK
SAVR1: 0
SAVR2: 0

```

896	001270	000000	TIMOUT:0	
897	001272	000000	TRIGER:0	
898	001274	000000	CLOCKF:0	
899	001276	000000	DECNUM:0	
900	001300	000000	TTRIG:0	
901	001302	000000	LESS1: 0	
902	001304	000000	XCNT:0	
903	001306	000000	WDBASE: 0	
904	001310	000000	WDIBAS: 0	
905	001312	000000	LOCTRP: 0	
906	001314	000026	TRANST: 22.	; SAVE RESTART ADDRESS HERE
907	001316	176030	SEC1: -1000.	; TRANSISTOR SATURATE TIME
908	001320	166170	SEC5: -5000.	; DEFAULT VALUE
909	001322	154360	SEC10: -10000.	
910	001324	011610	MNCLKT: 5000.	; DEFAULT VALUE-MNCLK TIME=5 SEC.
911	001326	000000	BUFF2: 0	
912	001330	000000	BUFF1: 0	
913	001332	173776	ROMADD: 173776	; DEFAULT RESTART ADDRESS
914				
915				
916				

```

917 ;*****
918 ;TEST 1 W D LINE CLOCK BIT TESTS
919 ;*****
920 001334 104400 †ST1: SCOPE
921 001336 012767 000010 011310 MOV #10,ICOUNT ;ITERATION COUNT
922 001344 012767 000001 011160 MOV #1,ERTSTN ;SAVE TEST # FOR ERROR REPCRT
923 001352 012767 001360 011300 MOV #SCP1,RETURN ;SCOPE LOOP RETURN ADRS
924 001360 SCP1:
925
926 :TEST THAT START CLEARS LINE CLOCK INTERRUPT ENABLE BIT
927 001360 032777 000100 177616 LKTEST: BIT #CLKEN,@CLKCSR
928 001366 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
929 001370 104000 ERROR ;ERROR, CLOCK INTERRUPTS ENABLE NOT CLEARED BY START
930 :TEST THAT START SETS CLOCK TICK
931 001372 105777 177606 LK1: †STB @CLKCSR
932 001376 100401 BMI .+4 ;BRANCH IF NO ERROR CONDITION
933 001400 104000 ERROR ;ERROR, CLOCK TICK NOT SET BY START
934 :TEST THAT CLOCK TICK WILL SET AFTER SUFFICIENT PERIOD OF TIME
935 001402 005077 177576 LK2: CLR @CLKCSR
936 001406 005000 CLR R0
937 001410 105777 177570 LK2A: TSTB @CLKCSR ;IS CLOCK TICK SET
938 001414 100403 BMI LK3
939 001416 005200 INC R0 ;NO INCREMENT COUNT
940 001420 001373 BNE LK2A ;WAIT SUFFICIENT AMOUNT OF TIME FOR CLOCK
941 001422 104000 ERROR ;ERROR,CLOCK TICK FAILED TO SET
942 :TEST THAT INTERRUPT ENABLE BIT MAY BE SET
943 001424 005077 177554 LK3: CLR @CLKCSR
944 001430 105777 177550 TSTB @CLKCSR
945 001434 100375 BPL .-4 ;SYNC CLOCK
946 001436 012767 000340 176332 MOV #LEVEL7,PS ;SET PRIORITY 7
947 001444 012777 000100 177532 MOV #100,@CLKCSR ;CLEAR CLOCK TICK AND SET INTERRUPT ENABLE
948 001452 032777 000100 177524 BIT #CLKEN,@CLKCSR ;IS INTERRUPT ENABLE SET?
949 001460 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
950 001462 104000 ERROR ;INTERRUPT ENABLE NOT SET
951 :TEST THAT INTERRUPT ENABLE BIT MAY BE CLEARED
952 001464 005077 177514 LK4: CLR @CLKCSR
953 001470 105777 177510 TSTB @CLKCSR
954 001474 100375 BPL .-4 ;SYNC CLOCK
955 001476 012777 000100 177500 MOV #100,@CLKCSR ;CLEAR CLOCKFLAG AND SET INTERRUPT ENABLE
956 001504 005077 177474 CLR @CLKCSR ;CLEAR INTERRUPT ENABLE
957 001510 032777 000100 177466 BIT #CLKEN,@CLKCSR
958 001516 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
959 001520 104000 ERROR ;INTERRUPT ENABLE NOT CLEARED
960 001522 105777 177456 TSTB @CLKCSR ;WAIT FOR CLOCK TICK
961 001526 100375 BPL .-4
962
963

```

K02

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 24
 DBQAAA.P11 T2 INTERRUPT ENABLE TEST

```

964 ;*****
965 ;TEST 2 INTERRUPT ENABLE TEST
966 ;*****
967 001530 104400 ST2: SCOPE
968 001532 012767 0C0010 J11114 MOV #10,ICOUNT ;ITERATION COUNT
969 001540 012767 000002 010764 MOV #2,ERTSTN ;SAVE TEST # FOR ERROR REPCRT
970 001546 012767 001554 011104 MOV #SCP2,RETURN ;SCOPE LOOP RETURN ADRS
971 001554 SCP2:
972
973 ;TEST THAT CLOCK INTERRUPTS TO CORRECT VECTOR ADDRESS
974 001554 016777 177476 177414 LK5: MOV WDPRT,@CLKIS
975 001562 016767 177514 176206 MOV LESS1,PS ;SET PROCESSOR PRIORITY LESS THAN LINE CLOCK
976 001570 012777 001630 177376 MOV #LK5B,@CLKIV ;SET UP VECTOR RETURN POINTER
977 001576 005077 177402 CLR @CLKCSR
978 001602 105777 177376 TSTB @CLKCSR
979 001606 100375 BPL .-4 ;SYNC CLOCK
980 001610 012777 000100 177366 MOV #100,@CLKCSR ;ENABLE INTERRUPT AND CLEAR CLOCK TICK
981 001616 005000 CLR RD
982 001620 005200 LK5A: INC RD
983 001622 001376 BNE LK5A ;WAIT FOR INTERRUPT
984 001624 104000 ERROR ;INTERRUPT FAILED TO OCCUR
985 001626 000433 BR LK6 ;
986 001630 016777 177342 177336 LK5B: MOV CLKIS,@CLKIV ;RESTORE TRAPCATCHER
987 001636 012777 000000 177332 MOV #0,@CLKIS ;
988 001644 105777 177334 TSTB @CLKCSR
989 001650 100401 BMI .+4 ;BRANCH IF NO ERROR CONDITION
990 001652 104000 ERROR ;INTERRUPT NOT CAUSED BY CLOCK
991 001654 012716 001670 MOV #LKS.1,(SP) ;LOAD RETURN ADDRESS
992 001660 012767 000340 176110 MOV #LEVEL7,PS ;RESTORE PROC STATUS
993 001666 000002 RTI
994 001670 LK5.1: NOP
995
996
  
```


L02

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 25
 DBQARA.P11 T3 CHECK CORRECT COND. CODES AND PROGRAM COUNTER ON STACK

```

997 ;*****
998 ;TEST 3 CHECK CORRECT COND. CODES AND PROGRAM COUNTER ON STACK
999 ;*****
1000 001672 104400 TST3: SCOPE
1001 001E74 012767 0C0010 010752 MOV #10,ICOUNT ;ITERATION COUNT
1002 001702 012767 000003 010622 MOV #3,ERTSTN ;SAVE TEST # FOR ERROR REPORT
1003 001710 012767 001716 010742 MOV #SCP3,RETURN ;SCOPE LOOP RETURN ADRS
1004 001716 SCP3:
1005
1006 ;TEST THAT CLOCK INTERRUPT PUSHES COND. CODES AND PROGRAM COUNTER ONTO STACK
1007 001716 016777 177334 177252 LK6: MOV WDPRT,CLKIS
1008 001724 005077 177254 CLR CLKCSR
1009 001730 105777 177250 TSTB CLKCSR
1010 001734 100375 BPL .-4 ;SYNC CLOCK
1011 001736 012777 001764 177230 MOV #LK6A,CLKIV ;SET UP VECTOR RETURN
1012 001744 016767 177332 176024 MOV LESS1,PS ;SET PROC. PRIORITY
1013 001752 012777 000100 177224 MOV #100,CLKCSR ;SET ENABLE BIT
1014 001760 000277 SCC ;SET ALL COND. CODES
1015 001762 000001 WAIT ;WAIT FOR INTERRUPT
1016 001764 016777 177206 177202 LK6A: MOV CLKIS,CLKIV ;RESTORE CLKIV
1017 001772 012777 000000 177176 MOV #0,CLKIS
1018 002000 012767 000340 175770 MOV #LEVEL7,PS ;RESTORE PRCC. STATUS
1019 002006 011637 001330 MOV (SP),#BUFF1 ;PC
1020 002012 016637 000002 001326 MOV 2(SP),#BUFF2 ;PS
1021 002020 022737 001764 001330 CMP #LK6A,#BUFF1
1022 002026 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1023 002030 104000 ERROR ;WRONG PC PUSHED ONTO STACK
1024 002032 162737 000017 001326 SUB #17,#BUFF2 ;SUBTRACT CONDITION CODES
1025 002040 026737 177236 001326 CMP LESS1,#BUFF2
1026 002046 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1027 002050 104000 ERROR ;WRONG PS PUSHED ONTO STACK
1028 002052 012716 002060 MOV #LK6.1,(SP) ;LOAD RETURN ADDRESS
1029 002056 000002 RTI
1030 002060 000240 LK6.1: NOP
1031
1032

```

M02

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 26
DBQAAA.P11 T4 RESET TEST

1033				
1034				
1035				
1036	002062	104400		
1037	002064	012767	000010	010562
1038	002072	012767	000004	010432
1039	002100	012767	002106	010552
1040	002106			
1041				
1042				
1043	002106	005077	177072	
1044	002112	105777	177066	
1045	002116	100375		
1046	002120	005077	177060	
1047	002124	000005		
1048	002126	105777	177052	
1049	002132	100401		
1050	002134	104000		
1051				
1052				

```

;*****
;TEST 4 RESET TEST
;*****
TST4: SCOPE
MOV #10,ICOUNT ; ITERATION COUNT
MOV #4,ERTSTN ; SAVE TEST # FOR ERROR REPORT
MOV #SCP4,RETURN ; SCOPE LOOP RETURN ADRS

SCP4:

;TEST THAT RESET SETS CLOCK FLAG
LK7: CLR @CLKCSR ; CLEAR CLOCK FLAG
TSTB @CLKCSR
BPL -4 ; WAIT FOR CLOCK TICK
CLR @CLKCSR
RESET ; SHOULD CLEAR CLOCK TICK
TSTB @CLKCSR
BMI .+4 ; BRANCH IF NO ERROR CONDITION
ERROR ; RESET DID NOT CLEAR CLOCK FLAG

```

```

1053 ;*****
1054 ;TEST 5 LINE CLOCK REPEATIBILITY
1055 ;*****
1056 002136 104400 †TST5: SCOPE
1057 002140 012767 000010 010506 MOV #10,ICOUNT ;ITERATION COUNT
1058 002146 012767 000005 010356 MOV #5,ERTSTN ;SAVE TEST # FOR ERROR REPRRT
1059 002154 012767 002162 010476 MOV #SCPS,RETURN ;SCOPE LOOP RETURN ADRS
1060 002162
1061
1062 ;TEST LINE CLOCK REPEATABILITY
1063 ;MAKE SURE THAT OVER TWO EQUAL PERIODS OF TIME
1064 ;THE LINE CLOCK PUTS OUT THE SAME NUMBER OF PULSES
1065 002162 005000 LK8: CLR R0 ;CLEAR 1ST TIME COUNT
1066 002164 005001 CLR R1 ;CLEAR 1ST CLOCK COUNT
1067 002166 012767 000340 175602 MOV #LEVEL7,PS ;SET PRIORITY
1068 002174 005077 177004 CLR @CLKCSR
1069 002200 105777 177000 TSTB @CLKCSR
1070 002204 100375 BPL -4 ;SYNC CLOCK
1071 002206 005077 176772 CLR @CLKCSR
1072 002212 105777 176766 TSTB @CLKCSR
1073 002216 100375 BPL -4 ;SYNC CLOCK 2ND TIME TO MAKE SURE
1074 002220 005077 176760 CLR @CLKCSR
1075 002224 105777 176754 LK8A: TSTB @CLKCSR ;IS CLOCK TICK SET
1076 002230 100003 BPL LK8B ;NO
1077 002232 005201 INC R1 ;+1 TO CLOCK COUNT
1078 002234 005077 176744 CLR @CLKCSR ;CLEAR CLOCK IF SET
1079 002240 005200 LK8B: INC R0 ;+1 TO TIME COUNT
1080 002242 001370 BNE LK8A ;REPEAT UNTIL R0=0
1081 002244 005000 CLR R0 ;CLEAR 2ND TIME COUNT
1082 002246 005002 CLR R2 ;CLEAR 2ND CLOCK COUNT
1083 002250 005077 176730 CLR @CLKCSR
1084 002254 105777 176724 TSTB @CLKCSR
1085 002260 100375 BPL -4
1086 002262 005077 176716 CLR @CLKCSR
1087 002266 105777 176712 TSTB @CLKCSR
1088 002272 100375 BPL -4 ;SYNC CLOCK 2ND TIME TO MAKE SURE
1089 002274 005077 176704 CLR @CLKCSR
1090 002300 105777 176700 LK8C: TSTB @CLKCSR ;IS CLOCK TICK SET
1091 002304 100003 BPL LK8D ;NO
1092 002306 005202 INC R2 ;+1 TO CLOCK COUNT
1093 002310 005077 176670 CLR @CLKCSR ;CLEAR CLOCK IF SET
1094 002314 005200 LK8D: INC R0 ;+1 TO TIME COUNT
1095 002316 001370 BNE LK8C ;REPEAT UNTIL R0=0
1096 002320 010167 176740 MOV R1,SAVR1 ;SAVE R1
1097 002324 010267 176736 MOV R2,SAVR2 ;SAVE R2
1098 002330 020102 CMP R1,R2 ;ARE THEY EQUAL ?
1099 002332 001411 BEQ LK8E ;YES
1100 002334 062701 000001 ADD #1,R1 ;ARE THEY OFF BY 1 COUNT ?
1101 002340 020102 CMP R1,R2
1102 002342 001405 BEQ LK8E ;YES
1103 002344 162701 000002 SUB #2,R1 ;ARE THEY OFF BY 1 COUNT ?
1104 002350 020102 CMP R1,R2
1105 002352 001401 BEQ LK8E ;YES
1106 002354 104000 ERROR ;CLOCK TICK DIFF BY MORE THAN 1 COUNT
1107 ;IN EQUAL PERIODS OF TIME
1108 002356 000240 LK8E: NOP

```

803

MAIN. MACY11 27.732) 15-OCT-76 11:28 PAGE 28
DB0000.P11 TS LINE CLOCK REPEATIBILITY

1109
1110

```

1111 ;*****
1112 ;TEST 6 LINE CLOCK REPEATABILITY WITH INTERRUPT
1113 ;*****
1114 002360 104400 TST6: SCOPE
1115 002362 012767 000010 010264 MOV #10,ICOUNT ;ITERATION COUNT
1116 002370 012767 000006 010134 MOV #6,ERTSTN ;SAVE TEST # FOR ERROR REPORT
1117 002376 012767 002404 010254 MOV #SCP6,RETURN ;SCOPE LOOP RETURN ADRS
1118 002404 SCP6:
1119
1120 ;TEST LINE CLOCK REPEATABILITY WITH INTERRUPT
1121 002404 016767 176672 175364 LK9: MOV LESS1,PS ;SET PROC. PRIORITY
1122 002412 005001 CLR R1 ;CLEAR 1ST CLOCK COUNT
1123 002414 012777 002500 176552 MOV #LK9B,@CLKIV
1124 002422 016777 176630 176546 MOV WDPRT,@CLKIS
1125 002430 005077 176550 CLR @CLKCSR
1126 002434 105777 176544 TSTB @CLKCSR
1127 002440 100375 BPL -4 ;SYNC CLOCK
1128 002442 005077 176536 CLR @CLKCSR
1129 002446 105777 176532 TSTB @CLKCSR
1130 002452 100375 BPL -4 ;SYNC CLOCK 2ND TIME TO MAKE SURE
1131 002454 012777 000100 176522 MOV #100,@CLKCSR ;ENABLE INTERRUPT
1132 ;WAIT FOR CLOCK INTERRUPTS
1133 002462 004567 005632 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1134 002466 001262 TIMRUN ;FUNCTION TO OCCUR
1135 002470 042777 000100 176506 BIC #CLKEN,@CLKCSR ;CLEAR INTERRUPT ENABLE
1136 002476 000405 BR LK9C
1137 002500 005201 LK9B: INC R1
1138 002502 012777 000100 176474 MOV #100,@CLKCSR ;CLEAR TICK & SET ENABLE
1139 002510 000002 RTI
1140 002512 016767 176564 175256 LK9C: MOV LESS1,PS
1141 002520 005002 CLR R2 ;CLEAR 2ND CLOCK COUNT
1142 002522 012777 002606 176444 MOV #LK9E,@CLKIV
1143 002530 016777 176522 176440 MOV WDPRT,@CLKIS
1144 002536 005077 176442 CLR @CLKCSR
1145 002542 105777 176436 TSTB @CLKCSR
1146 002546 100375 BPL -4 ;SYNC CLOCK
1147 002550 005077 176430 CLR @CLKCSR
1148 002554 105777 176424 TSTB @CLKCSR
1149 002560 100375 BPL -4 ;SYNC CLOCK SECOND TIME TO MAKE SURE
1150 002562 012777 000100 176414 MOV #100,@CLKCSR ;ENABLE INTERRUPT
1151 ;WAIT FOR CLOCK INTERRUPTS
1152 002570 004567 005524 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1153 002574 001262 TIMRUN ;FUNCTION TO OCCUR
1154 002576 042777 000100 176400 BIC #CLKEN,@CLKCSR ;CLEAR INTERRUPT ENABLE
1155 002604 000405 BR LK9F
1156 002606 005202 LK9E: INC R2
1157 002610 012777 000100 176366 MOV #100,@CLKCSR ;CLEAR TICK & SET ENABLE
1158 002616 000002 RTI
1159 002620 005077 176360 LK9F: CLR @CLKCSR
1160 002624 012767 000340 175144 MOV #LEVEL7,PS ;RESTORE PROC. STATUS
1161 002632 016777 176340 176334 MOV CLKIS,@CLKIV ;RESTORE CLKIV
1162 002640 012777 000000 176330 MOV #0,@CLKIS
1163 002646 010167 176412 MOV R1,SAVR1 ;SAVE
1164 002652 010267 176410 MOV R2,SAVR2 ;SAVE
1165 002656 020127 000000 CMP R1,#0
1166 002662 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
    
```


E03

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 31
 DBQAAA.P11 T7 LINE CLOCK ACCURACY TEST

```

1184 ;*****:*****
1185 ;TEST 7 LINE CLOCK ACCURACY TEST
1186 ;*****:*****
1187 002726 104400 TST7: SCOPE
1188 002730 012767 000000 007716 MOV #0,ICOUNT ; ITERATION COUNT
1189 002736 012767 000007 007566 MOV #7,ERTSTN ; SAVE TEST # FOR ERROR REPORT
1190 002744 012767 002752 007706 MOV #SCP7,RETURN ; SCOPE LOOP RETURN ADRS
1191 002752 SCP7:
1192
1193 ;RING BELL AFTER EACH OF FIRST (5) 1 SECOND INTERVALS
1194 ;RING BELL AFTER 10 SECOND INTERVAL
1195 ;(INTERRUPT MODE)
1196 002752 016700 176340 LK10: MOV SEC1,RO
1197 002756 004767 005762 JSR PC,TIME ; BELL AFTER 1 SECOND
1198 002762 016700 176330 MOV SEC1,RO
1199 002766 004767 005752 JSR PC,TIME ; BELL AFTER 2 SEC.
1200 002772 016700 176320 MOV SEC1,RO
1201 002776 004767 005742 JSR PC,TIME ; BELL AFTER 3 SEC.
1202 003002 016700 176310 MOV SEC1,RO
1203 003006 004767 005732 JSR PC,TIME ; BELL AFTER 4 SEC.
1204 003012 016700 176300 MOV SEC1,RO
1205 003016 004767 005722 JSR PC,TIME ; BELL AFTER 5 SEC.
1206 003022 016700 176272 MOV SEC5,RO
1207 003026 004767 005712 JSR PC,TIME ; BELL AFTER 10 SEC.
1208 ;RING BELL AFTER 10 SECONDS USING CLOCK TICK (NON INTERRUPT)
1209 ;5 TIMES
1210 003032 012703 177773 MOV #5,R3
1211 003036 016700 176260 LK10B: MOV SEC10,RO
1212 003042 005077 176136 LK10A: CLR @CLKCSR ; CLEAR CLOCK TICK
1213 003046 105777 176132 TSTB @CLKCSR ; WAIT FOR CLOCK TICK
1214 003052 100375 BPL -4
1215 003054 005200 INC RO ; FINISHED 10 SECONDS?
1216 003056 001371 BNE LK10A
1217 003060 000004 012206 TYPE BELL ; RING BELL EVERY 10 SECONDS
1218 003064 005203 INC R3
1219 003066 001363 BNE LK10B ; 5 BELLS
1220
1221
  
```

F03

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 32
 DBQAAA.P11 T10 MNCLK TEST

```

1222 :*****
1223 :TEST 10 MNCLK TEST
1224 :*****
1225 003070 104400 TST10: SCOPE
1226 003072 012767 000010 007554 MOV #10,ICOUNT ;ITERATION COUNT
1227 003100 012767 000010 007424 MOV #10,ERTSTN ;SAVE TEST # FOR ERROR REPCRT
1228 003106 012767 003114 007544 MOV #SCP10,RETURN ;SCOPE LOOP RETURN ADRS
1229 003114 SCP10:
1230
1231 :MAINTENANCE CLOCK BIT TEST--MNCLK
1232 003114 005000 LK11: CLR R0 ;CLEAR 0 STATE COUNTER
1233 003116 005001 CLR R1 ;CLEAR 1 STATE COUNTER
1234 003120 012702 000001 MOV #1,R2 ;TIME COUNTER
1235 003124 032777 000010 176060 TMNCLK: BIT #MNCLK,#WDAT ;TEST MNCLK BIT
1236 003132 001002 BNE SET
1237 003134 005200 CLEAR: INC R0 ;STORE 0 STATE
1238 003136 000401 BR .+4
1239 003140 005201 SET: INC R1 ;STORE 1 STATE
1240 003142 005202 INC R2
1241 003144 001367 BNE TMNCLK ;WAIT SUFFICIENT TIME TO STORE BOTH STATES
1242 003146 005700 TST R0
1243 003150 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1244 003152 104000 ERROR ;MNCLK IS NOT WORKING-CLEARED
1245 003154 005701 TST R1
1246 003156 001001 BNE .+4 ;BRANCH IF NO ERROR CONDICION
1247 003160 104000 ERROR ;MNCLK IS NOT WORKING-SET
1248
1249
  
```



```

1250 ;*****
1251 ;TEST 11 MNCLK ACCURACY TEST
1252 ;*****
1253 003162 104400 TST11: SCOPE
1254 003164 012767 000000 007462 MOV #0,ICOUNT ;ITERATION COUNT
1255 003172 012767 000011 007332 MOV #11,ERTSTN ;SAVE TEST # FOR ERROR REPORT
1256 003200 012767 003206 007452 MOV #SCP11,RETURN ;SCOPE LOOP RETURN ADRS
1257 003206 SCP11:
1258
1259 ;RING BELL AFTER 5 SEC INTERVAL--5 TIMES
1260 003206 012703 177773 LK12: MOV #-5,R3
1261 003212 005077 175766 CLR @CLKCSR
1262 003216 105777 175762 TSTB @CLKCSR
1263 003222 100375 BPL .-4 ;SYNC CLOCK
1264 003224 LK12A:
1265 003224 004567 005070 JSR R5,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1266 003230 001324 MNCLKT ;FUNCTION TO OCCUR
1267 003232 000004 012206 TYPE BELL ;BELL
1268 003233 005203 INC R3
1269 003240 001371 BNE LK12A ;RING BELL 5 TIMES
1270
1271

```

H03

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 34
 DBQAAA.P11 T12 WD1,WD2 READ/WRITE TEST

```

1272 ;*****
1273 ;TEST 12 WD1,WD2 READ/WRITE TEST
1274 ;*****
1275 003242 104400 TST12: SCOPE
1276 003244 012767 000010 007402 MOV #10,ICOUNT ;ITERATION COUNT
1277 003252 012767 000012 007252 MOV #12,ERTSTN ;SAVE TEST # FOR ERROR REPCRT
1278 003260 012767 003266 007372 MOV #SCP12,RETURN ;SCOPE LOOP RETURN ADRS
1279 003266 SCP12:
1280
1281
1282 ;THE FOLLOWING JUMPERS MUST BE INSERTED
1283 ;IF JUMPER PLUG IS USED --OPEN SWITCH--
1284 ;PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1285 ;PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1286 003266 005077 175716 CLR @WDCSR ;CLEAR WDCSR
1287 003272 117727 175712 MOVB @WDCSR,(PC)+
1288 003276 000000 STORE2: 0 ;PASS CONTENTS OF WDCSR INTO HERE
1289 003300 042737 000020 003276 BIC #20,@STORE2 ;CLEAR REMSEN BIT
1290 003306 122737 000000 003276 CMPB #0,@STORE2
1291 003314 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1292 003316 104000 ERROR ;WDCSR NOT CLEARED
1293 003320 052777 000002 175664 BIS #WD1,@WDDAT ;SET WD1
1294 003326 032777 000002 175656 BIT #WD1,@WDDAT ;VERIFY SET
1295 003334 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1296 003336 104000 ERROR ;WD1 NOT SET
1297 003340 032777 000004 175644 BIT #WD2,@WDDAT ;WD1 SHOULD NOT BE CLEARED, WD2 MUST BE SET
1298 003346 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1299 003350 104000 ERROR ;WD2 NOT SET
1300 003352 042777 000004 175632 BIC #WD2,@WDDAT ;CLEAR WD2 ,WD2 CLEARS WD1 AND THEN WD1 SETS WD2
1301 003360 032777 000002 175624 BIT #WD1,@WDDAT
1302 003366 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1303 003370 104000 ERROR ;WD1 NOT CLEARED
1304 003372 032777 000004 175612 BIT #WD2,@WDDAT
1305 003400 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1306 003402 104000 ERROR ;WD2 NOT SET
1307
1308
1309

```

```

1310 ;*****
1311 ;TEST 13 TOO SOON
1312 ;*****
1313 003404 104400 †ST13: SCOPE
1314 003406 012767 000010 007240 MOV #10,ICOUNT ; ITERATION COUNT
1315 003414 012767 000013 007110 MOV #13,ERTSTM ; SAVE TEST # FOR ERROR REPCAT
1316 003422 012767 003430 007230 MOV #SCP13,RETURN ; SCOPE LOOP RETURN ADRS
1317 003430 SCP13:
1318
1319
1320 ;THE FOLLOWING JUMPERS MUST BE INSERTED
1321 ;IF JUMPER PLUG IS USED --OPEN SWITCH--
1322 ;PIN 17 TO PIN 16 (CLOCK IN FOR W0ENAB)
1323 ;PIN 15 TO PIN 14 (DATA IN FOR W0ENAB)
1324 003430 005077 175554 CLR #WDCSR ; CLEAR TOOSN ETC.
1325 003434 052777 000002 175550 BIS #WD1,#WDDAT ; SET WD1, FIRST UPDATE SEQ.
1326 003442 032777 000002 175542 BIT #WD1,#WDDAT ; VERIFY SET
1327 003450 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1328 003452 104000 ERROR ; WD1 NOT SET
1329 003454 032777 000004 175530 BIT #WD2,#WDDAT ; WD2 SHOULD NOT BE CLEARED
1330 003462 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1331 003464 104000 ERROR ; WD2 NOT SET
1332 003466 042777 000004 175516 BIC #WD2,#WDDAT ; CLEAR WD2
1333 003474 032777 000002 175510 BIT #WD1,#WDDAT
1334 003502 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1335 003504 104000 ERROR ; WD1 NOT CLEARED
1336 003506 032777 000004 175476 BIT #WD2,#WDDAT
1337 003514 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1338 003516 104000 ERROR ; WD2 NOT SET
1339
1340 003520 052777 000002 175464 BIS #WD1,#WDDAT ; SECOND UPDATE SEQ.
1341 003526 032777 000002 175456 BIT #WD1,#WDDAT ; VERIFY SET
1342 003534 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1343 003536 104000 ERROR ; WD1 NOT SET
1344 003540 032777 000004 175444 BIT #WD2,#WDDAT ; WD2 SHOULD NOT BE CLEARED
1345 003546 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1346 003550 104000 ERROR ; WD2 NOT SET
1347 003552 042777 000004 175432 BIC #WD2,#WDDAT ; CLEAR WD2
1348 003560 032777 000002 175424 BIT #WD1,#WDDAT
1349 003566 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1350 003570 104000 ERROR ; WD1 NOT CLEARED
1351 003572 032777 000004 175412 BIT #WD2,#WDDAT
1352 003600 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1353 003602 104000 ERROR ; WD2 NOT SET
1354 003604 032777 000040 175376 BIT #TOOSN,#WDCSR
1355 003612 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1356 003614 104000 ERROR ; TOO SOON DID NOT SET
1357 003616 042777 000040 175364 BIC #TOOSN,#WDCSR
1358 003624 032777 000040 175356 BIT #TOOSN,#WDCSR
1359 003632 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1360 003634 104000 ERROR ; TOO SOON IS NOT CLEARED
1361
1362

```

J03

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 36
 DBQAAA.P11 T14 WDCSR READ/WRITE BIT TEST

```

1363 :*****
1364 :TEST 14 WDCSR READ/WRITE BIT TEST
1365 :*****
1366 003636 104400 †ST14: SCOPE
1367 003640 012767 000010 007006 MOV #10,ICOUNT ; ITERATION COUNT
1368 003646 012767 000014 006656 MOV #14,ERTSTN ; SAVE TEST # FOR ERROR REPORT
1369 003654 012767 003662 006776 MOV #SCP14,RETURN ; SCOPE LOOP RETURN ADRS
1370 003662 SCP14:
1371
1372
1373 ; THE FOLLOWING JUMPERS MUST BE INSERTED
1374 ; IF JUMPER PLUG IS USED --OPEN SWITCH--
1375 ; PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1376 ; PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1377 003662 052777 000100 175320 BIS #WDIEN,2WDCSR
1378 003670 032777 000100 175312 BIT #WDIEN,2WDCSR
1379 003676 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1380 003700 104000 ERROR ; WD INTERRUPT ENABLE CANNOT BE SET
1381 003702 042777 000100 175300 BIC #WDIEN,2WDCSR
1382 003710 032777 000100 175272 BIT #WDIEN,2WDCSR
1383 003716 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1384 003720 104000 ERROR ; WD INTERRUPT ENABLE BE CLEARED
1385
1386 003722 052777 000010 175260 BIS #EXTREQ,2WDCSR
1387 003730 032777 000010 175252 BIT #EXTREQ,2WDCSR
1388 003736 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1389 003740 104000 ERROR ; EXTREQ CANNOT BE SET
1390 003742 042777 000010 175240 BIC #EXTREQ,2WDCSR
1391 003750 032777 000010 175232 BIT #EXTREQ,2WDCSR
1392 003756 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1393 003760 104000 ERROR ; EXTREQ CANNOT BE CLEARED
1394 ; WD ENABLE OPTIONAL JUMPER MUST BE INSTALLED
1395 003762 052777 000004 175220 BIS #WDENAB,2WDCSR
1396 003770 032777 000004 175212 BIT #WDENAB,2WDCSR
1397 003776 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1398 004000 104000 ERROR ; WD ENABLE CANNOT BE SET,CHECK JUMPER
1399 004002 042777 000004 175200 BIC #WDENAB,2WDCSR
1400 004010 032777 000004 175172 BIT #WDENAB,2WDCSR
1401 004016 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1402 004020 104000 ERROR ; WD ENABLE CANNOT BE CLEARED
1403
1404

```

K03

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 37
 DBQAAA.P11 T15 INTERRUPT ENABLE TEST

```

1405 ;*****
1406 ;TEST 15 INTERRUPT ENABLE TEST
1407 ;*****
1408 004022 104400 ST15: SCOPE
1409 004024 012767 000010 006622 MOV #10,ICOUNT ;ITERATION COUNT
1410 004032 012767 000015 006472 MOV #15,ERTSTN ;SAVE TEST # FOR ERROR REPCRT
1411 004040 012767 004046 006612 MOV #SCP15,RETURN ;SCOPE LOOP RETURN ADRS
1412 004046 SCP15:
1413
1414
1415 ;THE FOLLOWING JUMPERS MUST BE INSERTED
1416 ;IF JUMPER PLUG IS USED --OPEN SWITCH--
1417 ;PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1418 ;PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1419 004046 005077 175136 CLR #WDCSR
1420 004052 100001 BPL .+4 ;BRANCH IF NO ERROR CONDITION
1421 004054 104000 ERROR ;TOO SOON IS NOT CLEARED
1422 004056 016777 175174 175116 MOV WDPRT,#WDIS
1423 004064 012777 004162 175106 MOV #INTTST,#WDIV
1424 004072 016767 175204 173676 MOV LESS1,PS
1425 004100 032777 000002 175102 BIT #WORLY,#WDCSR
1426 004106 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1427 004110 104000 ERROR ;WD RELAY SHOULD NOT BE SET
1428 004112 052777 000100 175070 BIS #WDIEN,#WDCSR
1429 004120 052777 000002 175064 BIS #WD1,#WDDAT ;UPDATE SEQ.
1430 004126 042777 000004 175056 BIC #WD2,#WDDAT
1431 004134 052777 000002 175050 BIS #WD1,#WDDAT ;THIS SECOND JPDATE SEQUENCE SHOULD
1432 ;SET TOO SOON AND SET FLAG
1433 004142 042777 000004 175042 BIC #WD2,#WDDAT
1434
1435 004150 005000 CLR RO
1436 004152 005200 DELAY: INC RO ;WAIT UNTIL INTERRUPT
1437 004154 001376 BNE DELAY
1438 004156 104000 ERROR ;INTERRUPT DID NOT OCCUR
1439 004160 000435 BR CONTI
1440 004162 016777 175014 175010 INTTST: MOV WDIS,#WDIV ;RESTORE WDIV
1441 004170 012777 000000 175004 MOV #0,#WDIS
1442 004176 105777 175006 TSTB #WDCSR
1443 004202 100401 BMI .+4 ;TEST FLAG
1444 004204 104000 ERROR ;BRANCH IF NO ERROR CONDITION
1445 004206 032777 000040 174774 BIT #TOOSN,#WDCSR ;ERROR ,INTERRUPT NOT CAUSED BY FLAG
1446 004214 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1447 004216 104000 ERROR ;TOO SOON DID NOT GET SET
1448 004220 042777 000040 174762 BIC #TOOSN,#WDCSR
1449 004226 032777 000040 174754 BIT #TOOSN,#WDCSR
1450 004234 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1451 004236 104000 ERROR ;TOO SOON DID NOT CLEAR
1452 004240 012716 004254 MOV #CONTI,(SP) ;LOAD RETURN ADDRESS
1453 004244 012767 000340 173524 MOV #LEVEL7,PS ;RESTORE PROC STATUS
1454 004252 000002 RTI
1455
1456 004254 042777 000004 174726 CONTI: BIC #WDENAB,#WDCSR ;CLEAR WDENAB--THIS DROPS WORLY
1457 004262 005027 CLR (PC)+ ;WAITING SO THAT WD RELAY
1458 ;CLEARS BEFORE PROCEEDING
1459 004264 000000 15: 0
1460 004266 005367 177772 25: DEC 15
  
```

L03

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 38
DBQAAA.P11 T15 INTERRUPT ENABLE TEST

1461 004272 001375 BNE 25
1462
1463

```

1464 ;*****
1465 ;TEST 16 REVERSE UPDATE SEQUENCE TEST
1466 ;*****
1467 004274 104400 †ST16: SCOPE
1468 004276 012767 000010 006350 MOV #10,ICOUNT ; ITERATION COUNT
1469 004304 012767 000016 006220 MOV #16,ERTSTN ; SAVE TEST # FOR ERROR REPCRT
1470 004312 012767 004320 006340 MOV #SCP16,RETURN ; SCOPE LOOP RETURN ADRS
1471 004320 SCP16:
1472
1473 ; THE FOLLOWING JUMPERS MUST BE INSERTED
1474 ; IF JUMPER PLUG IS USED --OPEN SWITCH--
1475 ; PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1476 ; PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1477 004320 005077 174664 CLR @WDCSR
1478 004324 005077 174662 CLR @WDDAT ; WD2 WILL ALWAYS BE "SEEN" SET
1479 004330 032777 000002 174654 BIT #WD1,@WDDAT
1480 004336 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1481 004340 104000 ERROR ; WD1 IS NOT CLEARED
1482 004342 032777 000004 174642 BIT #WD2,@WDDAT
1483 004350 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1484 004352 104000 ERROR ; WD2 IS NOT SET
1485 004354 012777 000002 174630 MOV #2,@WDDAT ; SET WD1 & TRY TO CLEAR WD2 SIMULTANEOUSLY
1486 004362 032777 000002 174622 BIT #WD1,@WDDAT
1487 004370 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1488 004372 104000 ERROR ; WD1 IS NOT SET
1489 004374 032777 000004 174610 BIT #WD2,@WDDAT
1490 004402 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1491 004404 104000 ERROR ; WD2 IS NOT SET
1492 004406 012777 000002 174576 MOV #2,@WDDAT ; SET WD1 & TRY TO CLEAR WD2 SIMULTANEOUSLY
1493 004414 032777 000002 174570 BIT #WD1,@WDDAT
1494 004422 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1495 004424 104000 ERROR ; WD1 IS NOT CLEARED
1496 004426 032777 000004 174556 BIT #WD2,@WDDAT
1497 004434 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1498 004436 104000 ERROR ; WD2 IS NOT SET
1499 ;WAIT UNTIL LOOP CLEARS
1500 004440 005027 CLR (PC)+
1501 004442 000000 2$: 0
1502 004444 005367 177772 3$: DEC 2$
1503 004450 001375 BNE 3$
1504
1505

```

```

1506 :*****
1507 ;TEST 17 RELAY PICK TEST
1508 :*****
1509 004452 104400 †ST17: SCOPE
1510 004454 012767 000010 006172 MOV #10,ICOUNT ; ITERATION COUNT
1511 004462 012767 000017 006042 MOV #17,ERTSTN ; SAVE TEST # FOR ERROR REPRCT
1512 004470 012767 004476 006162 MOV #SCP17,RETURN ; SCOPE LOOP RETURN ADRS
1513 004476 SCP17:
1514
1515 ; THE FOLLOWING JUMPERS MUST BE INSERTED
1516 ; IF JUMPER PLUG IS USED --OPEN SWITCH--
1517 ; PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1518 ; PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1519 004476 005077 174506 CLR @WDCSR
1520 004502 032777 000002 174500 BIT #WDRLY,@WDCSR
1521 004510 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1522 004512 104000 ERROR ; WD RELAY SHOULD NOT BE PICKED
1523 004514 052777 000004 174466 BIS #WDENAB,@WDCSR ; ENABLE RELAY
1524 004522 052777 000002 174462 BIS #WD1,@WDDAT ; UPDATE SEQ.
1525 004530 042777 000004 174454 BIC #WD2,@WDDAT
1526 004536 004567 003556 JSR RS,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
1527 004542 001254 RLYPT ; FUNCTION TO OCCUR
1528 004544 032777 000002 174436 BIT #WDRLY,@WDCSR
1529 004552 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
1530 004554 104000 ERROR ; WD RELAY DID NOT PICK
1531 004556 042777 000004 174424 BIC #WDENAB,@WDCSR ; CLEAR ENABLE
1532 004564 004567 003530 JSR RS,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
1533 004570 001254 RLYPT ; FUNCTION TO OCCUR
1534 004572 032777 000002 174410 BIT #WDRLY,@WDCSR
1535 004600 001401 BEQ .+4 ; BRANCH IF NO ERROR CONDITION
1536 004602 104000 ERROR ; CLEARING WDENAB DID NOT CLEAR ENABLE RELAY
1537 ; WAIT UNTIL TRIGGER O.S. FALLS
1538 004604 004567 003510 JSR RS,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
1539 004610 001272 TRIGER ; FUNCTION TO OCCUR
1540 ; WAIT AGAIN TO MAKE SURE
1541 004612 004567 003502 JSR RS,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
1542 004616 001272 TRIGER ; FUNCTION TO OCCUR
1543 004620 052777 000004 174362 BIS #WDENAB,@WDCSR ; ENABLE RELAY
1544 004626 052777 000002 174356 BIS #WD1,@WDDAT ; UP DATE SEQ.
1545 004634 042777 000004 174350 BIC #WD2,@WDDAT
1546 004642 004567 003452 JSR RS,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
1547 004646 001270 TIMOUT ; FUNCTION TO OCCUR
1548 004650 032777 000002 174332 BIT #WDRLY,@WDCSR
1549 004656 001401 BEQ .+4 ; BRANCH IF NO ERRGR CONDITION
1550 004660 104000 ERROR ; TIMOUT VALUE TOO LOW
1551 ; WAIT UNTIL LOOP CLEARS
1552 004662 005027 CLR (PC)+
1553 004664 000000 25: 0
1554 004666 005367 177772 35: DEC 25
1555 004672 001375 BNE 35
1556
1557
1558
1559

```



```

1560
1561
1562
1563 004674 104400
1564 004676 012767 003010 005750
1565 004704 012767 003020 005620
1566 004712 012767 004720 005740
1567 004720
1568
1569
1570
1571
1572
1573 004720 005077 174264
1574 004724 032777 000040 174256
1575 004732 001401
1576 004734 104000
1577 004736 052777 000002 174246
1578 004744 042777 000004 174240
1579 004752 004567 003342
1580 004756 001272
1581 004760 052777 000002 174224
1582 004766 042777 000004 174216
1583 004774 032777 000040 174206
1584 005002 001401
1585 005004 104000
1586
1587 005006 004567 003306
1588 005012 001270
1589
1590

```

```

:*****
:TEST 20 TRIGER VALUE TEST--TOO SOON
:*****
↑ST20: SCOPE
MOV #10,ICOUNT ; ITERATION COUNT
MOV #20,ERTSTN ; SAVE TEST # FOR ERROR REPCRT
MOV #SCP20,RETURN ; SCOPE LOOP RETURN ADRS
SCP20:
; THE FOLLOWING JUMPERS MUST BE INSERTED
; IF JUMPER PLUG IS USED --OPEN SWITCH--
; PIN 17 TO PIN 16 (CLOCK IN FOR W DENAB)
; PIN 15 TO PIN 14 (DATA IN FOR W DENAB)
CLR #WDCSR
BIT #TOOSN,#WDCSR
BEQ .+4 ; BRANCH IF NO ERROR CONDITION
ERROR ; TOOSN SHOULD NOT BE SET
BIS #WD1,#WDDAT ; UP DATE SEQ.
BIC #WD2,#WDDAT
JSR R5,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
; FUNCTION TO OCCUR
TRIGER
BIS #WD1,#WDDAT ; SECOND UP DATE SEQ.
BIC #WD2,#WDDAT
BIT #TOOSN,#WDCSR
BEQ .+4 ; BRANCH IF NO ERROR CONDITION
ERROR ; TRIGER VALUE TOO LOW
; WAIT TO AVOID TOOSN
JSR R5,HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
; FUNCTION TO OCCUR
TIMOUT

```

C04

MAIN. MACY11 27.732) 15-OCT-76 11:28 PAGE 42
 DB2200.P11 T21 FEED BACK LOOP TEST

```

1591 :*****
1592 :TEST 21 FEED BACK LOOP TEST
1593 :*****
1594 005014 104400 ST21: SCOPE
1595 005016 012767 000010 005630 MOV #10,ICOUNT ;ITERATION COUNT
1596 005024 012767 000021 005500 MOV #21,ERTSTN ;SAVE TEST # FOR ERROR REPORT
1597 005032 012767 005040 005620 MOV #SCP21,RETURN ;SCOPE LOOP RETURN ADRS
1598 005040
1599
1600 :THE FOLLOWING JUMPERS MUST BE INSERTED--OR USE JUMPER PLUG
1601 :PIN 8 TO PIN 2 (-15V TO C OF RELAY)
1602 :PIN 5 TO PIN 7 (COLLECTOR TO REMSEN)
1603 :PIN 6 TO PIN 3 (EMITTER TO N.O. OF RELAY)
1604 :PIN 10 TO PIN 3 (INTR.S.T. TO N.O. OF RELAY)
1605 :PIN 11 TO PIN 1 THRU A SWITCH (RESTART S.T. TO N.C. OF RELAY)
1606 :PIN 9 TO PIN 1 (START S.T. TO N.C. OF RELAY)
1607 :PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1608 :PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1609 :THIS ROUTINE CHECKS REMOTE SENSE LOGIC, EXTREQ(IN
1610 :NON-INTERRUPT MODE), START LOGIC.
1611 :*****
1612 : OPEN SWITCH
1613 :*****
1614 005040 005077 174144 CLR @WDCSR
1615 005044 032777 000002 174136 BIT #WDRLY,@WDCSR
1616 005052 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1617 005054 104000 ERROR ;WD RELAY SHOULD NOT BE PICKED
1618 005056 127727 174126 000000 CMPB @WDCSR,#0
1619 005064 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1620 005066 104000 ERROR ;WDCSR SHOULD BE CLEARED
1621 005070 052777 000004 174112 BIS #WDENAB,@WDCSR ;ENABLE RELAY
1622 005076 032777 000004 174104 BIT #WDENAB,@WDCSR
1623 005104 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1624 005106 104000 ERRCR ;CHECK JUMPERS,WDENAB NOT SET
1625 005110 005077 174076 CLR @WDDAT
1626 005114 017727 174072 MOV @WDDAT,(PC)+
1627 005120 000000 STORE: 0 ;PASS CONTENTS OF WDDAT HERE
1628 005122 042737 000370 005120 BIC #370,@STORE ;CLEAR MNCLK
1629 005130 126727 177764 000004 CMPB STORE,#4 ;IS WD2 SET?
1630 005136 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1631 005140 104000 ERROR ;WD2 NOT SET
1632 005142 052777 000002 174042 BIS #WD1,@WDDAT ;UP DATE SEQ.
1633 005150 032777 000002 174034 BIT #WD1,@WDDAT
1634 005156 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1635 005160 104000 ERROR ;WD1 NOT SET
1636 005162 042777 000004 174022 BIC #WD2,@WDDAT
1637 005170 032777 000002 174014 BIT #WD1,@WDDAT
1638 005176 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1639 005200 104000 ERROR ;WD1 NOT CLEARED
1640 ;WHEN RELAY PICKS (APPROX. 1 MSEC) IT SETS EXTREQ & REMSEN (20 MSEC LATER)
1641 005202 004567 003112 JSR R5,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1642 005206 001252 FEEDBK ;FUNCTION TO OCCUR
1643 005210 004567 003104 JSR R5,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1644 005214 001272 TRIGER ;FUNCTION TO OCCUR
1645 005216 017727 173766 MOV @WDCSR,(PC)+
1646 005222 000000 STORE1: 0 ;PASS CONTENTS OF WDCSR HERE
  
```

1647	005224	126727	177772	000236	CMPB	STORE1, #236	
1648	005232	001401			BEQ	.+4	; BRANCH IF NO ERROR CONDITION
1649	005234	104000			ERROR		; BITS 1,2,3,4,7 NOT SET
1650							; FLAG & EXTREQ ARE SET BY INTERRUPT LOGIC
1651							; REMSEN SET WHEN RELAY OPENS(SETS)
1652	005236	032777	000002	173744	1\$:	BIT	#WDRLY, #WDCSR ; WAIT UNTIL RELAY CLEARS(DROPS)
1653	005244	001374				BNE	1\$
1654	005246	032777	000004	173734		BIT	#WDENAB, #WDCSR
1655	005254	001401				BEQ	.+4 ; BRANCH IF NO ERROR CONDITION
1656	005256	104000				ERROR	; WDENAB NOT CLEARED
1657							; WHEN RELAY DROPS (APPROX. 1 MSEC) IT CLEARS WDENAB
1658							; AND APPROX. 20 MSEC LATER WDENAB SETS AGAIN
1659	005260	004567	003034			JSR	R5, HOLDUP ; STALL SUFFICIENT TIME TO ALLOW
1660	005264	001252				FEEDBK	; FUNCTION TO OCCUR
1661	005266	032777	000004	173714		BIT	#WDENAB, #WDCSR
1662	005274	001001				BNE	.+4 ; BRANCH IF NO ERROR CONDITION
1663	005276	104000				ERROR	; WDENAB NOT SET
1664							; WDENAB SET BY START LOGIC, BUT SHOULD NOT SET WDRLY AGAIN
1665	005300	032777	000002	173702		BIT	#WDRLY, #WDCSR
1666	005306	001401				BEQ	.+4 ; BRANCH IF NO ERROR CONDITION
1667	005310	104000				ERROR	; WDRLY SHOULD NOT BE SET AGAIN
1668	005312	042777	000004	173670		BIC	#WDENAB, #WDCSR ; FORCE CLEAR WDRLY
1669	005320	005027				CLR	(PC)+ ; WAIT UNTIL LOOP CLEARS
1670	005322	000000			2\$:	D	
1671	005324	005367	177772		3\$:	DEC	2\$
1672	005330	001375				BNE	3\$
1673							
1674							

E04

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 44
 DBQAAA.P11 T22 EXTREQ WITH INTERRUPT TEST--FEED BACK LOOP

```

1675 ;*****
1676 ;TEST 22 EXTREQ WITH INTERRUPT TEST--FEED BACK LOOP
1677 ;*****
1678 005332 104400 †ST22: SCOPE
1679 005334 012767 000010 005312 MOV #10,ICGUNT ;ITERATION COUNT
1680 005342 012767 000022 005162 MOV #22,ERTSTN ;SAVE TEST # FOR ERROR REPRCT
1681 005350 012767 005356 005302 MOV #SCP22,RETURN ;SCOPE LOOP RETURN ADRS
1682 005356
1683
1684 ;THE FOLLOWING JUMPERS MUST BE INSERTED--OR USE JUMPER PLUG
1685 ;PIN 8 TO PIN 2 (-15V TO C OF RELAY)
1686 ;PIN 5 TO PIN 7 (COLLECTOR TO REMSEN)
1687 ;PIN 6 TO PIN 3 (EMITER TO N.O. OF RELAY)
1688 ;PIN 10 TO PIN 3 (INTR.S.T. TO N.O. OF RELAY)
1689 ;PIN 11 TO PIN 1, THRU A SWITCH (RESTART S.T. TO N.C. OF RELAY)
1690 ;PIN 9 TO PIN 1 (START S.T. TO N.C. OF RELAY)
1691 ;PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
1692 ;PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
1693 ;*****
1694 ; OPEN SWITCH
1695 ;*****
1696 005356 005077 173626 CLR #WDCSR
1697 005362 016777 173670 173612 MOV #WOPRT,#WDIS
1698 005370 012777 005460 173602 MOV #EXTINT,#WDIV
1699 005376 016767 173700 172372 MOV #LESS1,#PS
1700 005404 032777 000002 173576 BIT #WDRLY,#WDCSR
1701 005412 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1702 005414 104000 ERROR ;WD RELAY SHOULD NOT BE PICKED
1703 005416 052777 000004 173564 BIS #WDENAB,#WDCSR
1704 005424 052777 000100 173556 BIS #WDIEN,#WDCSR
1705 005432 052777 000002 173552 BIS #WD1,#WDDAT ;UP DATE SEQ.
1706 005440 042777 000004 173544 BIC #WD2,#WDDAT
1707 ;STALL UNTIL INTERRUPT OCCURS
1708 005446 005000 CLR RO
1709 005450 005200 DELAY1: INC RO ;WAIT UNTIL INTERRUPT
1710 005452 001376 BNE DELAY1
1711 005454 104000 ERROR ;INTERRUPT DID NOT OCCUR
1712 005456 000425 BR CONTU
1713 005460 016777 173516 173512 EXTINT: MOV #WDIS,#WDIV ;RESTORE WDIV
1714 005466 012777 000000 173506 MOV #0,#WDIS
1715 005474 105777 1735!0 TSTB #WDCSR
1716 005500 100401 BMI .+4 ;TEST FLAG
1717 005502 104000 ERROR ;BRANCH IF NO ERROR CONDITION
1718 005504 032777 000010 173476 BIT #EXTREQ,#WDCSR ;ERROR, INTERRUPT NOT CAUSED BY FLAG
1719 005512 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1720 005514 104000 ERROR ;EXTREQ DID NOT GET SET
1721 005516 012716 005532 MOV #CONTU,(SP) ;LOAD RETURN ADDRESS
1722 005522 012767 000340 172246 MOV #LEVEL7,#PS ;RESTORE PROC. STATUS
1723 005530 000002 RTI
1724 005532 042777 000004 173450 CONTU: BIC #WDENAB,#WDCSR ;FORCE CLEAR WDRLY
1725 005540 005027 CLR (PC)+ ;WAIT UNTIL LOOP CLEARS
1726 005542 000000 25: 0
1727 005544 005367 177772 35: DEC 25
1728 005550 001375 BNE 35
1729
1730

```

F04

MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 45
 DBQAAA.P11 T23 WD TRIGGER O.S. TRANSISTOR TEST

```

1731 :*****
1732 :TEST 23 WD TRIGGER O.S. TRANSISTOR TEST
1733 :*****
1734 005552 104400 TST23: SCOPE
1735 005554 012767 000010 005072 MOV #10,ICOUNT ;ITERATION COUNT
1736 005562 012767 000023 004742 MOV #23,ERTSTN ;SAVE TEST # FOR ERROR REPORT
1737 005570 012767 005576 005062 MOV #SCP23,RETURN ;SCOPE LOOP RETURN ADRS
1738 005576 SCP23:
1739
1740 ;THE FOLLOWING JUMPERS MUST BE INSERTED--OR USE JUMPER PLL'S
1741 ;PIN 8 TO PIN 2 (-15V TO C OF RELAY)
1742 ;PIN 5 TO PIN 7 (COLLECTOR TO REMSEN)
1743 ;PIN 6 TO PIN 3 (EMITER TO N.O. OF RELAY)
1744 ;PIN 10 TO PIN 3 (INTR.S.T. TO N.O. OF RELAY)
1745 ;PIN 11 TO PIN 1, THRU A SWITCH (RESTART S.T. TO N.C. OF RELAY)
1746 ;PIN 9 TO PIN 1 (START S.T. TO N.C. OF RELAY)
1747 ;PIN 17 TO PIN 16 (CLOCK IN FOR W DENAB)
1748 ;PIN 15 TO PIN 14 (DATA IN FOR W DENAB)
1749 :*****
1750 : OPEN SWITCH
1751 :*****
1752 005576 005077 173406 CLR #WDCSR
1753 005602 032777 000002 173400 BIT #WORLY,#WDCSR
1754 005610 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1755 005612 104000 ERROR ;WORLY NOT CLEARED--DROPPED
1756 005614 052777 000004 173366 BIS #WDENAB,#WDCSR
1757 005622 052777 000002 173362 BIS #WD1,#WDAT ;UPDATE SEQ.
1758 005630 042777 000004 173354 BIC #WD2,#WDAT
1759 ;WAIT UNTIL REMSEN SETS
1760 005636 004567 002456 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1761 005642 001252 FEEDBK ;FUNCTION TO OCCUR
1762 005644 004567 002450 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1763 005650 001272 TRIGER ;FUNCTION TO OCCUR
1764 005652 032777 000020 173330 BIT #REMSSEN,#WDCSR
1765 005660 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
1766 005662 104000 ERROR ;TRANSISTOR IS OPEN
1767 005664 042777 000004 173316 BIC #WDENAB,#WDCSR ;FORCE CLEAR WORLY
1768 005672 004567 002422 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1769 005676 001270 TIMEOUT ;FUNCTION TO OCCUR
1770 005700 004567 002414 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1771 005704 001252 FEEDBK ;FUNCTION TO OCCUR
1772 005706 005077 173276 CLR #WDCSR
1773 005712 032777 000002 173270 BIT #WORLY,#WDCSR
1774 005720 001401 BEQ .+4 ;BRANCH IF NO ERROR CONDITION
1775 005722 104000 ERROR ;WORLY NOT CLEARED--DROPPED
1776 005724 052777 000004 173256 BIS #WDENAB,#WDCSR
1777 005732 012737 010726 000014 MOV #88,#14
1778 005740 012737 000340 000016 MOV #LEVEL7,#16
1779 005746 012746 000360 MOV #360,-(SP) ;SET "T" BIT
1780 005752 012746 005760 MOV #15,-(SP)
1781 005756 000002 RTI ;1ST FALSE RETURN INTERRUPT
1782 ;UP DATE SEQ. FOR 22 MSEC TO OPEN TRANSISTOR, PREVENTING
1783 ;REMSSEN SETTING
1784 005760 004567 002334 JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
1785 005760 001314 TRANST ;FUNCTION TO OCCUR
1786 005764 001314

```

G04

MAIN. MACY11 27.732) 15-OCT-76 11:28 PAGE 46
 DBQAAA.P11 T23 WD TRIGGER O.S. TRANSISTOR TEST

1787	005766	012746	000340			MOV	#340, -(SP)	;RESTORE STACK
1788	005772	012745	006000			MOV	#CONTT, -(SP)	
1789	005776	000002				RTI		;2ND FALSE RTI STOP UP DATE SEQ
1790	006000	012737	000016	000014	CONTT:	MOV	#16, @#14	;RESTORE TRAP CATCHER
1791	006006	012737	000000	000016		MOV	#0, @#16	
1792	006014	032777	000020	173166		BIT	#REMSEN, @WDCSR	
1793	006022	001401				BEQ	.+4	;BRANCH IF NO ERROR CONDITION
1794	006024	104000				ERROR		;TRANSISTOR DID NOT OPEN
1795								;TRANSISTOR SHOULD BE OPEN PREVENTING REMSEN SETTING
1796	006026	047.77	000004	173154		BIC	#WDENAB, @WDCSR	;FORCE CLEAR WDRLY
1797	006034	75027				CLR	(PC)+	;WAIT UNTIL LOOP CLEARS
1798	006036	000000			25:	0		
1799	006040	005367	177772		35:	DEC	25	
1800	006044	001375				BNE	35	
1801								
1802								

H04

MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 47
DB0AAA.P11 T24 END FEED BACK LOOP TEST

```
1803 ;*****
1804 ;TEST 24 END FEED BACK LOOP TEST
1805 ;*****
1806 006046 104400 †ST24: SCOPE
1807 006050 012767 000001 004576 MOV #1,ICOUNT ;ITERATION COUNT
1808 006056 012767 000024 004446 MOV #24,ERTSTN ;SAVE TEST # FOR ERROR REPCRT
1809 006064 012767 006072 004566 MOV #SCP24,RETURN ;SCOPE LOOP RETURN ADRS
1810 006072 SCP24:
1811
1812 006072 000004 012210 TYPE NEXTST
1813 006076 000137 007276 JMP #MON12
1814
1815
```

```

1816
1817
1818
1819 006102 104400
1820 006104 012767 000001 004542
1821 006112 012767 000025 004412
1822 006120 012767 006126 004532
1823 006126
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837 006126 005077 173056
1838 006132 032777 000002 173050
1839 006140 001401
1840 006142 104000
1841 006144 052777 000004 173036
1842 006152 005037 001312
1843 006156 012737 006240 000004
1844 006164 012737 000340 000006
1845 006172 052777 000002 173012
1846 006200 042777 000004 173004
1847 006206 004567 002106
1848 006212 001252
1849 006214 042777 000004 172766
1850 006222 005027
1851 006224 000000
1852 006226 005367 177772
1853 006232 001375
1854 006234 104000
1855 006236 000420
1856 006240 011667 173046
1857 006244 023737 001332 001312
1858 006252 001401
1859 006254 104000
1860 006256 012737 000006 000004
1861 006264 012737 000000 000006
1862 006272 012716 006300
1863 006276 000002
1864 006300 005027
1865 006302 000000
1866 006304 005367 177772
1867 006310 001375
1868
1869

```

```

;*****
;TEST 25 RESTART TEST
;*****
†ST25: SCOPE
MOV #1,ICOUNT ;ITERATION COUNT
MOV #25,ERTSTN ;SAVE TEST # FOR ERROR REPCAT
MOV #SCP25,RETURN ;SCOPE LOOP RETURN ADRS

SCP25:
;THE FOLLOWING JUMPERS MUST BE INSERTED--OR USE JUMPER PLUG
;PIN 8 TO PIN 2 (-15V TO C OF RELAY)
;PIN 5 TO PIN 7 (COLLECTOR TO REMSEN)
;PIN 6 TO PIN 3 (EMMITER TO N.O. OF RELAY)
;PIN 10 TO PIN 3 (INTR.S.T. TO N.O. OF RELAY)
;PIN 11 TO PIN 1, THRU A SWITCH (RESTART S.T. TO N.C. OF RELAY)
;PIN 9 TO PIN 1 (START S.T. TO N.C. OF RELAY)
;PIN 17 TO PIN 16 (CLOCK IN FOR WDENAB)
;PIN 15 TO PIN 14 (DATA IN FOR WDENAB)
;*****
;CLOSE SWITCH
;*****
CLR @WDCSR
BIT @WDRLY,@WDCSR
BEQ .+4 ;BRANCH IF NO ERROR CONDITION
ERROR ;WDRLY NOT CLEARED--DROPPED
BIS @WDENAB,@WDCSR ;ENABLE RELAY
CLR @#LOCTRP ;CLEAR TRAP LOCATION FOR RESTART ADDR.
MOV @CRUNCH,@#4 ;SET UP SERVICE ROUTINE
MOV @LEVEL7,@#6
BIS @WD1,@WDAT ;UPDATE SEQ.
BIC @WD2,@WDAT
JSR RS,HOLDUP ;STALL SUFFICIENT TIME TO ALLOW
FEEDBK ;FUNCTION TO OCCUR
BIC @WDENAB,@WDCSR ;FORCE CLEAR WDRLY
CLR (PC)+ ;WAIT UNTIL "CRUNCH" OCCURS

2$: 0
3$: DEC 2$
BNE 3$
ERROR ;RESTART DID NOT OCCUR
BR RTNST
CRUNCH: MOV (SP),LOCTRP
CMP @#ROMADD,@#LOCTRP
BEQ .+4 ;BRANCH IF NO ERROR CONDITION
ERROR ;WRONG RESTART ADDRESS
MOV @#,@#4 ;RESTORE TRAPCATCHER
MOV @0,@#6
MOV @RTNST,(SP)
RTNST: CLR (PC)+ ;WAIT UNTIL LOOP CLEARS
4$: 0
5$: DEC 4$
BNE 5$

```


J04

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 49
 DBQAAA.P11 T26 END RESTART TEST

```

1870 ;*****
1871 ;TEST 26 END RESTART TEST
1872 ;*****
1873 006312 104400 †ST26: SCOPE
1874 006314 012767 000001 004332 MOV #1,ICOUNT ;ITERATION COUNT
1875 006322 012767 000026 004202 MOV #26,ERTSTN ;SAVE TEST # FOR ERROR REPORT
1876 006330 012767 006336 004322 MOV #SCP26,RETURN ;SCOPE LOOP RETURN ADRS
1877 006336
1878
1879 006336 000004 012246 TYPE ENDTST
1880 006342 000137 007276 JMP @MONI2
1881
1882
1883 .SBTTL MONITOR
1884
1885 ;*****
1886 006346 MONITOR:
1887 ;*****
1888
1889
1890
1891 006346 000005 RESET
1892 006350 012706 001100 MOV #BEGIN,SP ;SET UP STACK POINTER
1893 006354 012767 000340 171414 MOV #LEVEL7,PS ;MONITOR AT LEVEL 7
1894 006362 000004 012203 TYPE ,HOME ;HOME UP AND ERASE SCREEN
1895
1896 006366 000004 011054 H: TYPE ,HEADER
1897 006372 012737 006476 006370 MOV #RELOD,@#H+2 ;HEADER TEXT GETS WIPED BY NPR'S
1898 006400 004737 007340 JSR PC,@#DEFAULT ;SET UP DEFAULT PARAMETERS
1899
1900 MONI.0:
1901 006404 012706 001100 MOV #BEGIN,SP ;SET UP STACK POINTER
1902 006410 000004 011630 TYPE ,FSTART
1903 006414 104004 KEY.TO.R0
1904 006416 122700 000104 CMPB #'D,R0 ;D = DEFAULT PARAMETERS
1905 006422 001003 BNE 1$
1906 006424 004737 007340 JSR PC,@#DEFAULT ;SET UP DEFAULT PARAMETERS
1907 006430 000403 BR 2$
1908 006432 122700 000120 1$: CMPB #'P,R0 ;P = PREVIOUSLY SELECTED PARAMETERS
1909 006436 001002 BNE 3$
1910 006440 000137 007252 2$: JMP @MONI0
1911 006444 122700 000123 3$: CMPB #'S,R0 ;S = GO THROUGH AND SELECT PARAMETERS
1912 006450 001426 BEQ MONI
1913 006452 122700 000116 CMPB #'N,R0 ;N = START AT THIS TEST #
1914 006456 001352 BNE MONI.0
1915 006460 000004 011645 TYPE ,MSG0
1916 006464 104003 ACCEPT0
1917 006466 016767 004412 172564 MOV OCTNUM,FIRST.TST
1918 006474 000761 BR 2$
1919
1920 006476 051137 046105 040517 RELOD: .ASCIZ "+RELOAD FOR HEADER TEXT"
1921 006504 020104 047506 020122
1922 006512 042510 042101 051105
1923 006520 052040 054105 000124
1924
1925 .EVEN
;SET UP TEST PARAMETERS

```

K04

```

1926
1927 006526 004737 007340      MON1: JSR   PC,2#DEFAULT ;SET UP DEFAULT PARAMETERS
1928 006532 000004 011645      TYPE   ,MSG0           ;FIRST TEST #
1929
1930 006536 104003                ACCEPTO ;ACCEPT TEST NUMBER FROM KEYBOARD
1931
1932
1933 006540 005767 004340      TST   OCTNUM           ;TEST FOR DEFAULT
1934 006544 001403                BEQ   MON3             ;BRANCH ON DEFAULT
1935 006546 016767 004332 172504  MOV   OCTNUM,FIRST.TST ;LOAD FIRST TEST #
1936
1937 006554 000004 011664      MON3: TYPE   ,MSG1           ;BASE ADDRESS:
1938
1939
1940 006560 104003                ACCEPTO ;ACCEPT BASE ADDRESS FROM KEYBOARD
1941
1942 006562 005767 004316      TST   OCTNUM
1943 006566 001405                BEQ   MON4
1944 006570 016767 004310 172510  MOV   OCTNUM,WDBASE
1945 006576 004767 001774      JSR   PC,WDADDR
1946
1947 006602 000004 011704      MON4: TYPE   ,MSG2           ;ACCEPT INTERRUPT VECTOR
1948 006606 104003                ACCEPTO
1949 006610 005767 004270      TST   OCTNUM
1950 006614 001405                BEQ   MON4.1
1951 006616 016767 004262 172464  MOV   OCTNUM,WDIBAS
1952 006624 004767 002022      JSR   PC,WDEVC
1953
1954
1955 006630 000004 011730      MON4.1: TYPE   ,MSG3           ;PRIORITY
1956 006634 104003                ACCEPTO ;ACCEPT WD PRIORITY LEVEL
1957 006636 005767 004242      TST   OCTNUM           ;TEST FOR DEFAULT
1958 006642 001425                BEQ   MON5             ;BRANCH ON DEFAULT
1959 006644 006367 004234      ASL   OCTNUM
1960 006650 006367 004230      ASL   OCTNUM
1961 006654 006367 004224      ASL   OCTNUM
1962 006660 006367 004220      ASL   OCTNUM
1963 006664 006367 004214      ASL   OCTNUM
1964 006670 016767 004210 172360  MOV   OCTNUM,WDPRT   ;LOAD PRIORITY
1965 006676 005367 004202      DEC   OCTNUM
1966 006702 042737 000037 013104  BIC   #37,2#OCTNUM   ;CLEAR TNZVC
1967 006710 016767 004170 172364  MOV   OCTNUM,LESS1   ;PRIORITY TO ALLOW WD INTERRUPTS
1968
1969
1970
1971 006716 000004 011773      MON5: TYPE   ,MSG5           ;TIME OUT VALUE
1972 006722 004767 001226      JSR   PC,DACCEPT      ;ACCEPT DECIMAL # FROM TTY
1973 006726 005767 172344      TST   DECNUM
1974 006732 001403                BEQ   MON5.1           ;BRANCH ON DEFAULT
1975 006734 016767 172336 172326  MOV   DECNUM,TIMOUT   ;PUT IN NEW VALUE
1976 006742 000004 012043      MON5.1: TYPE   ,MSG6           ;TRIGER VALUE
1977 006746 004767 001202      JSR   PC,DACCEPT      ;ACCEPT DECIMAL # FROM TTY
1978 006752 005767 172320      TST   DECNUM
1979 006756 001403                BEQ   MON6             ;BRANCH ON DEFAULT
1980 006760 016767 172312 172304  MOV   DECNUM,TRIGER   ;PUT IN NEW VALUE
1981 006766 000004 012123      MON6: TYPE   ,MSG7           ;CLOCKF

```

1982	006772	004767	001156		JSR	PC,DACCEP	;ACCEPT DECIMAL # FROM TTY
1983	006776	005767	172274		TST	DECNUM	
1984	007002	001512			BEQ	MON7	;BRANCH ON DEFAULT
1985	007004	022767	001750	172264	CYCIK:	CMP #1000.,DECNUM	
1986	007012	001012			BNE	CYC200	
1987	007014	012767	176030	172274	MOV	#-1000.,SEC1	;SET UP 1000 HZ CONSTANTS
1988	007022	012767	166170	172270	MOV	#-5000.,SECS	:
1989	007030	012767	154360	172264	MOV	#-10000.,SEC10	:
1990	007036	000471			BR	OUTDEC	
1991	007040	022767	000310	172230	CYC200:	CMP #200.,DECNUM	
1992	007046	001012			BNE	CYC100	
1993	007050	012767	177470	172240	MOV	#-200.,SEC1	;SET UP 200 HZ CONSTANTS
1994	007056	012767	176030	172234	MOV	#-1000.,SECS	:
1995	007064	012767	174060	172230	MOV	#-2000.,SEC10	:
1996	007072	000453			BR	OUTDEC	
1997	007074	022767	000144	172174	CYC100:	CMP #100.,DECNUM	
1998	007102	001012			BNE	CYC50	
1999	007104	012767	177634	172204	MOV	#-100.,SEC1	;SET UP 100 HZ CONSTANTS
2000	007112	012767	177014	172200	MOV	#-500.,SECS	:
2001	007120	012767	176030	172174	MOV	#-1000.,SEC10	:
2002	007126	000435			BR	OUTDEC	
2003	007130	022767	000062	172140	CYC50:	CMP #50.,DECNUM	
2004	007136	001012			BNE	CYC60	
2005	007140	012767	177716	172150	MOV	#-50.,SEC1	;SET UP 50 HZ CONSTANTS
2006	007146	012767	177406	172144	MOV	#-250.,SECS	:
2007	007154	012767	177014	172140	MOV	#-500.,SEC10	:
2008	007162	000417			BR	OUTDEC	
2009	007164	022767	000074	172104	CYC60:	CMP #60.,DECNUM	
2010	007172	001401			BEQ	+.4	;BRANCH IF NO ERROR CONDITION
2011	007174	104000			ERROR		;UNASSIGNED CLOCK FREQ.
2012	007176	012767	177704	172112	MOV	#-60.,SEC1	;SET UP 60 HZ CONSTANTS
2013	007204	012767	177324	172106	MOV	#-300.,SECS	:
2014	007212	012767	176650	172102	MOV	#-600.,SEC10	:
2015	007220	000400			BR	OUTDEC	
2016	007222	016767	172050	172044	OUTDEC:	MOV DECNUM,CLOCKF	;PUT IN NEW VALUE
2017	007230	000004	012146		MON7:	TYPE ,MSG8	;RESTART ADDRESS
2018	007234	104003			ACCEPTO		;ACCEPT RESTART ADDRESS
2019	007236	005767	003642		TST	OCTNUM	;TEST FOR DEFAULT
2020	007242	001403			BEQ	MON10	;BRANCH ON DEFAULT
2021	007244	016767	003634	172060	MOV	OCTNUM,ROMADD	;PUT IN NEW VALUE
2022							;ASK FOR DYNAMIC SWITCH SETTINGS ON CONSOL SWITCHES
2023							
2024	007252	005067	003252		MON10:	CLR ERRCNT	
2025	007256	000004	011755		TYPE	MSG4	;SET DYNAMIC SWITCHES
2026	007262	104004			KEY.TO.RO		;TYPE ANYTHING
2027	007264	122700	000003		CMPB	#3,RO	;TEST FOR CONTROL C
2028	007270	001002			BNE	MON12	
2029	007272	000167	171106		JMP	MON1.0	;RETURN TO MONITOR IF ↑C
2030							
2031							
2032							
2033	007276	016767	171756		MON12:	MOV FIRST.TST,RO	;TEST FOR DEFAULT
2034	007302	001002			BNE	MON13	;BRANCH IF NOT DEFAULT
2035	007304	005267	171750		INC	FIRST.TST	;DEFAULT TEST NUMBER IS ONE
2036	007310	016767	171744	003214	MON13:	MOV FIRST.TST,ERTST;	
2037	007316	006300			ASL	RO	

M04

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 52
 DBGAAA.P11 MONITOR

```

2038 007320 016037 012660 012660      MOV      TSTABLE-2(RO),@#RETURN
2039 007326 062737 000024 012660      ADC      #24,@#RETURN
2040 007334 000170 012660      MON14:  JMP      @TSTABLE-2(RO) ;JUMP TO SELECTED TEST
2041
2042
2043
2044 007340 012767 000300 171710  DEFAULT:;UTILITIES
2045 007346 012767 000240 171726      MOV      #LEVEL6,WDPRT
2046 007354 012700 001224      MOV      #DFLTAD,RO
2047 007360 004767 000056      JSR      PC,LODAD
2048 007364 012700 001214      MOV      #DFLTIV,RO
2049 007370 004767 000012      JSR      PC,LODIV
2050 007374 012700 001234      MOV      #DFLMSC,RO
2051 007400 004767 000060      JSR      PC,LODMSC
2052 007404 000207      RTS      PC ;SET UP DEFAULT PARAMETERS
2053 007406 012067 171562  LODIV:  MOV      (RO)+,CLKIV
2054 007412 012067 171560      MOV      (RO)+,CLKIS
2055 007416 012067 171556      MOV      (RO)+,WDIV
2056 007422 012067 171554      MOV      (RO)+,WDIS
2057 007426 000207      RTS      PC
2058 007430 012700 001306  FREI:  MOV      #WDBASE,RO
2059 007434 004767 000002      JSR      PC,LODAD
2060 007440 000207      RTS      PC
2061 007442 012067 171536  LODAD:  MOV      (RO)+,CLKCSR
2062 007446 012067 171534      MOV      (RO)+,VOID
2063 007452 012067 171532      MOV      (RO)+,WDCSR
2064 007456 012067 171530      MOV      (RO)+,WDDAT
2065 007460 000207      RTS      PC
2066 007464 012067 171600  LODMSC: MOV      (RO)+,TIMOUT
2067 007470 012067 171576      MOV      (RO)+,TRIGER
2068 007474 012067 171574      MOV      (RO)+,CLOCKF
2069 007500 012067 171626      MOV      (RO)+,ROMADD
2070 007504 012067 171606      MOV      (RO)+,SECI
2071 007510 012067 171604      MOV      (RO)+,SECS
2072 007514 012067 171602      MOV      (RO)+,SECIO
2073 007520 000207      RTS      PC
2074
2075 007522 013527  TIMEUP:;UTILITIES
2076 007524 000000  TCNT:  MOV      @ (R5)+,(PC)+ ;FETCH TIMEUP COUNT
2077 007526 004567 000026      JSR      R5,SCALE ;SCALE TO CLOCKF
2078 007532 032777 000200 171444  T.1:  BIT      #FLAG,@CLKCSR
2079 007540 100374      BPL      T.1 ;WAIT FOR TICK
2080 007542 042777 000200 171434      BIC      #FLAG,@CLKCSR ;CLEAR DONE
2081 007550 005367 177750      DEC      TCNT ;KEEP TIME
2082 007554 001366      BNE      T.1 ;BRANCH IF NO TIMEOUT
2083 007556 000205      RTS      R5
2084 007560 022767 001750 171506  SCALE: CMP      #1000.,CLOCKF ;IS CLOCK @ 1KC
2085 007566 001001      BNE      HZ200 ;NO TRY 200 HZ
2086 007570 000541      BR      EXIT ;NO SCALING, EXIT
2087 007572 022767 000310 171474  HZ200: CMP      #200.,CLOCKF ;IS CLOCK @ 200 HZ
2088 007600 001024      BNE      HZ100 ;NO TRY 100 HZ
2089 007602 005067 171476      CLR      XCNT ;CLEAR SCALE LOCATION
2090 007606 026727 177712 000005      CMP      TCNT,#5 ;CAN YOU DIVIDE BY 5
2091 007614 002001      BGE      .+4 ;BRANCH IF NO ERROR CONDITION
2092 007616 104000      ERROR
2093 007620 005267 171460  DIV5:  INC      XCNT ;INCR SCALE LOCATION
  
```

N04

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 53
 DBQAAA.P11 MONITOR

```

2094 007624 162767 000005 177672 SUB #5,TCNT ;DIV. BY 5, SUCCESSIVE SUBTRACTION
2095 007632 005767 177666 TST TCNT ;CAN IT BE SUBTRACTED AGAIN
2096 007636 001401 BEQ OUT1 ;IS IT ZERO
2097 007640 100367 BPL DIV5 ;IS IT POSITIVE
2098 007642 016767 171436 177654 OUT1: MOV XCNT,TCNT ;MOV SCALED VALUE TO TCNT
2099 ;VALUE HAS BEEN SCALED ( 1/5)
2100 007650 000511 BR EXIT
2101 007652 022767 000144 171414 HZ100: CMP #100.,CLOCKF ;IS CLOCK @ 100 HZ
2102 007660 001024 BNE HZ50 ;NO, TRY 50 HZ
2103 007662 005067 171416 CLR XCNT ;CLEAR SCALE LOCATION
2104 007666 026727 177632 000012 CMP TCNT,#12 ;CAN YOU DIVIDE BY 10?
2105 007674 002001 BGE .+4 ;BRANCH IF NO ERROR CONDITION
2106 007676 104000 ERROR ;TRY HIGHER CLOCK FREQ
2107 007700 005267 171400 DIV10: INC XCNT ;INCR SCALE LOCATION
2108 007704 162767 000012 177612 SUB #12,TCNT ;DIVIDE BY 10, SUCCESSIVE SUBTRACTION
2109 007712 005767 177606 TST TCNT ;CAN IT BE SUBTRACTED AGAIN
2110 007716 001401 BEQ OUT2 ;IS IT ZERO
2111 007720 100367 BPL DIV10 ;IS IT POSITIVE
2112 007722 016767 171356 177574 OUT2: MOV XCNT,TCNT ;MOV SCALED VALUE TO TCNT
2113 ;VALUE HAS BEEN SCALED ( 1/10)
2114 007730 000461 BR EXIT
2115 007732 022767 000062 171334 HZ50: CMP #50.,CLOCKF ;IS CLOCK @ 50 HZ
2116 007740 001024 BNE HZ60 ;NO TRY 50 HZ
2117 007742 005067 171336 CLR XCNT ;CLEAR SCALE LOCATION
2118 007746 026727 177552 000024 CMP TCNT,#24 ;CAN YOU DIVIDE BY 20?
2119 007754 002001 BGE .+4 ;BRANCH IF NO ERROR CONDITION
2120 007756 104000 ERROR ;TRY HIGHER CLOCK FREQ
2121 007760 005267 171320 DIV20: INC XCNT ;INCR SCALE LOCATION
2122 007764 162767 000024 177532 SUB #24,TCNT ;DIVIDE BY 20, SUCCESSIVE SUBTRACTION
2123 007772 005767 177526 TST TCNT ;CAN IT BE SUBTRACTED AGAIN
2124 007776 001401 BEQ OUT3 ;IS IT ZERO
2125 010000 100367 BPL DIV20 ;IS IT POSITIVE
2126 010002 016767 171276 177514 OUT3: MOV XCNT,TCNT ;MOV SCALED VALUE TO TCNT
2127 ;VALUE HAS BEEN SCALED ( 1/20)
2128 010010 000431 BR EXIT
2129 010012 022767 000074 171254 HZ60: CMP #60.,CLOCKF ;IS CLOCK @ 60 HZ
2130 010020 001401 BEQ ERROR .+4 ;BRANCH IF NO ERROR CONDITION
2131 010022 104000 ERROR ;CLOCKF HAS BEEN ASSIGNED AN UNASSIGNED VALUE
2132 010024 005067 171254 CLR XCNT ;CLEAR SCALE LOCATION
2133 010030 026727 177470 000020 CMP TCNT,#20 ;CAN YOU DIVIDE BY 16?
2134 010036 002001 BGE .+4 ;BRANCH IF NO ERROR CONDITION
2135 010040 104000 ERROR ;TRY HIGHER CLOCK FREQ.
2136 010042 005267 171236 DIV16: INC XCNT ;INCR SCALE LOCATION
2137 010046 162767 000020 177450 SUB #20,TCNT ;DIVIDE BY 16, SUCCESSIVE SUBTRACTION
2138 010054 005767 177444 TST TCNT ;CAN IT BE SUBTRACTED AGAIN
2139 010060 001401 BEQ OUT4 ;IS IT ZERO
2140 010062 100367 BPL DIV16 ;IS IT POSITIVE
2141 010064 016767 171214 177432 OUT4: MOV XCNT,TCNT ;MOV SCALED VALUE TO TCNT
2142 ;VALUE HAS BEEN SCALED ( 1/16)
2143 010072 000400 BR EXIT
2144 010074 000205 EXIT: RTS RS
2145
2146 ;THIS UTILITY CALCULATES TRIGGER (ONE 20TH OF TIMEOUT)
2147 010076 016767 171166 171174 CTRIG: MOV TIMEOUT,TTRIG ;START CALCULATION OF TRIGER
2148 010104 005067 171174 CLR XCNT
2149 010110 026727 171164 000000 CMP TTRIG,#0 ;CHECK FOR VALID TIMEOUT
  
```

```

2150 010116 001001 BNE .+4 ;BRANCH IF NO ERROR CONDITION
2151 010120 104000 ERROR ;TIMOUT CANNOT BE ZERO
2152 010122 005267 171156 ONE20TH: INC XCNT
2153 010126 162767 000024 171144 SUB #24, TTRIG ;DIVIDE BY 20, SUCCESSIVE SUBTRACTION
2154 010134 005767 171140 TST TTRIG ;CAN IT BE SUBTRACTED AGAIN
2155 010140 001401 BEQ OUTS ;IS IT ZERO
2156 010142 100367 SPL ONE20TH ;IS IT POSITIVE
2157 010144 016767 171134 171120 OUTS: MOV XCNT, TRIGER ;TRIGER IS NOW ONE 20TH OF TIMOUT
2158 010152 000207 RTS PC
2159
2160
2161 ;ACCEPT DECIMAL NUMBER FROM TTY, UP TO 10000.
2162 010154 000240 DACCEPT: NOP
2163 010156 005067 171114 CLR DECNUM ;CLEAR DECIMAL NUMBER LOCATION
2164 010162 010146 MOV R1, -(SP) ;SAVE R1
2165 010164 010046 MOV R0, -(SP) ;SAVE R0
2166 010166 005001 ACPTD: CLR R1 ;
2167 010170 ACPTD.1:
2168 010170 104004 KEY.TO.R0 ;FETCH AN ASCII CHAR FROM KEYBOARD
2169 010172 120027 000003 CMPB R0, #3 ;CONTROL C?
2170 010176 001002 BNE AD.2
2171 010200 000137 006404 JMP #MONI.0
2172 010204 122700 000177 AD.2: CMPB #177, R0 ;TEST FOR RUBOUT
2173 010210 001433 BEQ RUBOUD
2174 010212 122700 000015 CMPB #15, R0 ;TEST FOR <CR>
2175 010216 001433 BEQ CARGO
2176 010220 120027 000040 CMPB R0, #40 ;EXIT IF SPACE
2177 010224 001430 BE? CARGO
2178 010226 120027 000000 CMPB R0, #0 ;TEST FOR VALID DECIMAL NUMBER
2179 010232 002422 [LT RUBOUD
2180 010234 120027 000071 CMPB R0, #'9
2181 010240 003017 BGT RUBOUD
2182 010242 042700 177760 BIC #177760, R0 ;CONVERT ASCII TO DECIMAL
2183 010246 006301 ASL R1
2184 010250 010167 171022 MOV R1, DECNUM
2185 010254 006301 ASL R1
2186 010256 006301 ASL R1
2187 010260 066701 171012 ADD DECNUM, R1
2188 010264 060001 ADD R0, R1 ;CHALK'M UP
2189 010266 022701 023420 CMP #10000., R1
2190 010272 100001 BPL .+4 ;BRANCH IF NO ERROR CONDITION
2191 010274 104000 ERROR ;NUMBER EXCEEDS 10000
2192 010276 000734 BR ACPTD.1 ;FETCH NEXT CHAR
2193 010300 000004 012304 RUBOUD: TYPE .QUES ;TYPE?
2194 010304 000730 BR ACPTD
2195 010306 010167 170764 CARGO: MOV R1, DECNUM ;PLACE DECIMAL NUMBER HERE
2196 010312 012600 MOV (SP)+, R0 ;RESTORE R0
2197 010314 012601 MOV (SP)+, R1 ;RESTORE R1
2198 010316 000207 RTS PC
2199
2200
2201 ;STALL FOR "X" MILLI SECS.
2202 010320 013527 HOLDUP: MOV #1, (R5)+, (PC)+
2203 010322 000000 HOLDIT: 0 ;MOVE PASSED ARG. INTO HERE
2204 010324 004767 000200 JSR PC, SCALE
2205 010330 062767 000001 177764 ADD #1, HOLDIT
  
```

```

2206 010336 032777 000010 170646 BIT #MNCLK, @WDDAT
2207 010344 001014 PNE SVCHH ; START COUNTING @ 1 TRANSITIONS
2208 010346 032777 000010 170636 SVCLL: BIT #MNCLK, @WDDAT ; CHECK FOR 1 STATE
2209 010354 001374 BNE SVCLL ; LOOP UNTIL MNCLK=0
2210 010356 005367 177740 DEC HOLDIT ; @ EVERY 0 TRANSITION
2211 010362 001421 BEQ OUTMN
2212 010364 032777 000010 170620 SVCHL: BIT #MNCLK, @WDDAT ; CHECK FOR 0 STATE
2213 010372 001774 BEQ SVCHL ; LOOP UNTIL MNCLK=1
2214 010374 000764 BR SVCLL
2215 010376 032777 000010 170606 SVCHH: BIT #MNCLK, @WDDAT ; CHECK FOR 0 STATE
2216 010404 001774 BEQ SVCHH ; LOOP UNTIL MNCLK=1
2217 010406 005367 177710 DEC HOLDIT ; @ EVERY 1 TRANSITION
2218 010412 001405 BEQ OUTMN
2219 010414 032777 000010 170570 SVCLH: BIT #MNCLK, @WDDAT ; CHECK FOR 1 STATE
2220 010422 001374 BNE SVCLH ; LOOP UNTIL MNCLK=0
2221 010424 000764 BR SVCHH
2222 010426 000205 OUTMN: RTS
2223
2224 ; THIS UTILITY SCALES HOLDIT BY 4/5
2225 010430 022767 000074 170636 SCALEN: CMP #60., CLOCKF ; IS IT 60 HZ?
2226 010436 001036 BNE OUT6
2227 010440 005067 170640 CLR XCNT
2228 010444 026727 177652 000000 CMP HOLDIT, #0 ; CHECK FOR VALID NUMBER
2229 010452 001001 BNE .+4 ; BRANCH IF NO ERROR CONDITION
2230 010454 104000 ERROR ; HOLDIT CANNOT BE ZERO
2231 010456 026727 177640 000005 CMP HOLDIT, #5. ; IS IT LESS THAN 5?
2232 010464 100420 BMI OUT6 ; YES, LEAVE HOLDIT AS IS
2233 010466 006367 177630 MULT4: ASL HOLDIT ; MULTIPLY BY 2
2234 010472 006367 177624 ASL HOLDIT ; MULTIPLY BY 2
2235 010476 005267 170602 ONE5TH: INC XCNT
2236 010502 162767 000005 177612 SUB #5., HOLDIT ; DIVIDE BY 5, SUCCESSIVE SUBTRACTION
2237 010510 005767 177606 TST HOLDIT ; CAN IT BE SUBTRACTED AGAIN?
2238 010514 001401 BEQ OUT6.1 ; NO
2239 010516 100367 BPL ONE5TH ; YES
2240 010520 016767 170560 177574 OUT6.1: MOV XCNT, HOLDIT ; HOLDIT IS NOW APPROX. 4/5 OF ORIGINAL
2241 010526 000207 OUT6: RTS
2242
2243 ; THIS UTILITY SCALES HOLDIT BY 5/4
2244 010530 022767 000074 170536 SCALEF: CMP #60., CLOCKF ; IS IT 60 HZ ?
2245 010536 001016 BNE OUT7 ; NO
2246 010540 016767 177556 170536 MOV HOLDIT, XCNT ; SAVE HOLDIT
2247 010546 006367 177550 MULT5: ASL HOLDIT
2248 010552 006367 177544 ASL HOLDIT
2249 010556 066767 170522 177536 ADD XCNT, HOLDIT
2250 010564 006267 177532 ONE4TH: ASR HOLDIT
2251 010570 006267 177526 ASR HOLDIT
2252 010574 000207 OUT7: RTS
2253
2254
2255 ; NEW WATCH DOG ADDRESSES
2256 010576 016767 170504 170400 WDOADR: MOV WDBASE, CLKCSR
2257 010604 062737 000002 001306 ADD #2, @WDBASE
2258 010612 013767 001306 170366 MOV @WDBASE, VOID
2259 010620 062737 000002 001306 ADD #2, @WDBASE
2260 010626 013767 001306 170354 MOV @WDBASE, WDCSR
2261 010634 062737 000002 001306 ADD #2, @WDBASE

```

```

2262 010642 013767 001306 170342
2263 010650 000207
2264
2265
2266
2267 010652 016767 170432 170314
2268 010660 062737 000002 001310
2269 010666 013767 001310 170302
2270 010674 062737 000002 001310
2271 010702 013767 001310 170270
2272 010710 062737 000002 001310
2273 010716 013767 001310 170256
2274 010724 000207
2275 010726 052777 000002 170256
2276 010734 042777 000004 170250
2277 010742 000006
2278
2279 010744 012777 010776 170222
2280 010752 016767 170324 167016
2281 010760 016777 170272 170210
2282 010766 052777 000100 170210
2283 010774 000777
2284 010776 005200
2285 011000 001020
2286 011002 042777 000100 170174
2287 011010 000004 012206
2288 011014 012716 011052
2289 011020 012766 000340 000002
2290 011026 016777 170144 170140
2291 011034 012777 000000 170134
2292 011042 042777 000200 170134
2293 011050 000002
2294 011052 000207
2295
2296 000012
2297 000015
2298 011054 057537 040515 047111
2299 011062 042504 026503 030461
2300 011070 042055 050502 040501
2301 011076 040455 042055
2302
2303 011102 057537 054504 040516
2304 011110 044515 020103 053523
2305 011116 052111 044103 051440
2306 011124 052105 044524 043516
2307 011132 173
2308 011133 137 020040 020040
2309 011140 020040 051440 020122
2310 011146 032461 020040 020040
2311 011154 040510 052114 047440
2312 011162 020116 051105 047522
2313 011170 122
2314 011171 137 020040 020040
2315 011176 020040 051440 020122
2316 011204 032061 020040 020040
2317 011212 041523 050117 020105

```

```

MOV @#WDBASE,WDDAT
RTS PC

:NEW WATCH DOG VECTORS
MOVEC: MOV WDIBAS,CLKIV
ADD #2,@#WDIBAS
MOV @#WDIBAS,CLKIS
ADD #2,@#WDIBAS
MOV @#WDIBAS,WDIV
ADD #2,@#WDIBAS
MOV @#WDIBAS,WDIS
RTS PC
BB: BIS #WD1,@WDDAT
BIC #WD2,@WDDAT
RTT

:THIS ROUTINE RINGS BELL AT INTERVAL DETERMINED BY RO
TIME: MOV #TIME2,@CLKIV ;SET UP VECTOR RETURN
MOV LESS1,PS ;SET PROC. PRIORITY
MOV WDPRT,@CLKIS
TIME1: BIS #100,@CLKCSR ;ENABLE INTERRUPT
BR ;WAIT,,AFTER SERVICING INTERRUPT "RETURN HERE"
TIME2: INC RO
BNE TIME3
BIC #CLKEN,@CLKCSR ;CLEAR INTERRUPT ENABLE
TYPE BELL ;RING BELL
MOV #TIME4,(SP) ;CLEAR OUT "RETURN HERE"
MOV #LEVEL7,2(SP)
MOV CLKIS,@CLKIV ;RESTORE TRAPCATCHER
MOV #0,@CLKIS
TIME3: BIC #TICK,@CLKCSR ;CLEAR TICK
RTI
TIME4: RTS PC ;RETURN TO PROGRAM
.SBTTL
MESSAGES
LF=12
CR=15
HEADER: .ASCII "+-+MAINDEC-11-DBQAA-A-D"

```

```

.ASCII "+-+DYNAMIC SWITCH SETTINGS"
.ASCII "+ SR 15 HALT ON ERROR"
.ASCII "+ SR 14 SCOPE LOOP"

```


E05

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 57
 DBQAAA.P11 MESSAGES

2318	011220	047514	050117			
2319	011224	020137	020040	020040	.ASCII	"< SR 13 INHIBIT ERROR PRINTOUT"
2320	011232	020040	051123	030440		
2321	011240	020063	020040	044440		
2322	011246	044116	041111	052111		
2323	011254	042440	051122	051117		
2324	011262	050040	044522	052116		
2325	011270	052517	124			
2326	011273	137	020040	020040	.ASCII	"< SR 12 SHORT ERROR REPORT"
2327	011308	020040	051440	020122		
2328	011306	031061	020040	020040		
2329	011314	044123	051117	020124		
2330	011322	051105	047522	020122		
2331	011330	042522	047520	052122		
2332	011336	020137	020040	020040	.ASCII	"< SR 11 INHIBIT ITERATIONS"
2333	011344	020040	051123	030440		
2334	011352	020061	020040	044440		
2335	011360	044116	041111	052111		
2336	011366	044440	042524	040522		
2337	011374	044524	047117	123		
2338	011401	137	052137	050131	.ASCII	"< TYPE: <D>, FOR DEFAULT PARAMETERS"
2339	011406	035105	020040	036040		
2340	011414	037104	043054	051117		
2341	011422	042040	043105	052501		
2342	011430	052114	050040	051101		
2343	011436	046501	052105	051105		
2344	011444	123				
2345	011445	137	020040	020040	.ASCII	"< <P>, FOR PREVIOUS PARAMETERS"
2346	011452	020040	020040	050074		
2347	011460	026076	047506	020122		
2348	011466	051120	053105	047511		
2349	011474	051525	050040	051101		
2350	011502	046501	052105	051105		
2351	011510	123				
2352	011511	137	020040	020040	.ASCII	"< <S>, FOR SELECT PARAMETERS"
2353	011516	020040	020040	051474		
2354	011524	026076	047506	020122		
2355	011532	042523	042514	052103		
2356	011540	050040	051101	046501		
2357	011546	052105	051105	123		
2358	011553	137	020040	020040	.ASCIZ	"< <N>, FOR START WITH THIS TEST NUMBER"
2359	011560	020040	020040	047074		
2360	011566	026076	047506	020122		
2361	011574	052123	051101	020124		
2362	011602	044117	044124	052040		
2363	011610	044510	020123	042524		
2364	011616	052123	047040	046525		
2365	011624	042502	000122			
2366	011630	057537	026104	026120	FSTART:	.ASCIZ "< <D,P,S,N,> "
2367	011636	026123	026116	020077		
2368	011644	000				
2369	011645	137	042524	052123	MSG0:	.ASCIZ "< TEST NUMBER: "
2370	011652	047040	046525	042502		
2371	011660	035122	000040			
2372	011664	041137	051501	020105	MSG1:	.ASCIZ "< BASE ADDRESS: "
2373	011672	042101	051104	051505		

F05

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 58
 DBQAAA.P11 MESSAGES

2374	011700	035123	000040			
2375	011704	044537	052116	051105	MSG2: .ASCIZ	"*INTERRUPT VECTOR:"
2376	011712	052522	052120	053040		
2377	011720	041505	047524	035122		
2378	011726	000040				
2379	011730	053537	020104	051120	MSG3: .ASCIZ	"*WD PRIORITY LEVEL:"
2380	011736	047511	044522	054524		
2381	011744	046040	053105	046105		
2382	011752	020072	000			
2383	011755	137	042523	020124	MSG4: .ASCIZ	"*SET SWITCHES"
2384	011762	053523	052111	044103		
2385	011770	051505	000			
2386	011773	137	044524	042515	MSG5: .ASCIZ	"*TIME OUT VALUE IN MILLISECS+TOLERANCE:"
2387	012000	047440	052125	053040		
2388	012006	046101	042525	044440		
2389	012014	020116	044515	046114		
2390	012022	051511	041505	025523		
2391	012030	047524	047514	040522		
2392	012036	041516	035105	000		
2393	012043	137	051124	043511	MSG6: .ASCIZ	"*TRIGER VALUE IN MILLISECS(5% OF TIMOUT VALUE):"
2394	012050	051105	053040	046101		
2395	012056	042525	044440	020116		
2396	012064	044515	046114	051511		
2397	012072	041505	024122	022465		
2398	012100	047440	020106	044524		
2399	012106	047515	052125	053040		
2400	012114	046101	042525	035051		
2401	012122	000				
2402	012123	137	046103	041517	MSG7: .ASCIZ	"*CLOCK FREQ IN HZ:"
2403	012130	020113	051106	050505		
2404	012136	044440	020116	055110		
2405	012144	000072				
2406	012146	051137	051505	040524	MSG8: .ASCIZ	"*RESTART ADDRESS:"
2407	012154	052122	040440	042104		
2408	012162	042522	051523	000072		
2409	012170	052537	051122	051117	ERPC: .ASCIZ	"*ERROR PC "
2410	012176	050040	020103	000		
2411	012203	035	000037		HOME: .ASCIZ	<35><37>
2412	012206	000207			BELL: .ASCIZ	<207>
2413	012210	042137	020117	042522	NEXTST: .ASCIZ	"*DO RESTART TEST,CLOSE SWITCH"
2414	012216	052123	051101	020124		
2415	012224	042524	052123	041454		
2416	012232	047514	042523	051440		
2417	012240	044527	041524	000110		
2418	012246	042537	042116	052040	ENDTST: .ASCIZ	"*END TEST"
2419	012254	051505	000124			
2420	012260	020137	051105	047522	ECM: .ASCIZ	"* ERRORS DETECTED: "
2421	012266	031522	042040	052105		
2422	012274	041505	042524	035104		
2423	012302	000040				
2424	012304	006477	000012		.QUES: .ASCIZ	"*?"<CR><LF>
2425	012310	020040	020040	000	SPAC4: .ASCIZ	<40><40><40><40>
2426	012315	040	000		SPACE: .ASCIZ	<40>
2427	012317	015	000012		CRLF: .ASCIZ	<CR><LF>
2428					.EVEN	
2429					.SBTTL	MONITOR FILES

```

;EMULATOR DECODER ROUTINE
EMTDECODER:
    MOV    @R6, -(R6)      ; DUPLICATE PC ON STACK
    SUB    #2, @R6        ; POINT PC TO EMT INST.
    MOV    @R6, @R6       ; MOV EMT INST ONTO STACK
    CMPB  @R6, #20       ; TEST THAT CALL IS WITHIN LIMITS
    BLOS  EMTOK          ; BRANCH IF WITHIN LIMITS
    ERROR

EMTOK:
    ROL   @R6             ; EMT ARGUMENT X 2.
    BIC  #177001, @R6    ; CLEAR HIGH BYTE
    ADD  #EMTAG, @R6     ; FORM ADRS OF ROUTINE ADRS
    MOV  @R6, @R6        ; PUT ROUTINE ADRS ON STACK
    JMP  @R6             ; JUMP TO ROUTINE
                                ; TAGS FOR EMT CALL
                                ; BEGINNING OF EMT TABLE

EMTAG:
    .BLKW 20.            ; RESERVE 16. WORDS FOR ADRS LIST

HLTSW=BIT15
LOPSW=BIT14
T.ERROR:
    TYPE  @R6            ; ERPC
    MOV  @R6, (PC)+     ; SAVE ERROR PC +2
    ETMPO:
    SUB  #2, ETMPO      ; HERE
    MOV  TTY, -(SP)     ; CORRECT PC
    MOV  @ETMPO, TTY    ; SAVE TTY
                                ; TYPE IN OCTAL
    JSR  PC, PRINTR    ; TYPR LEADING ZERO'S
    MOV  (SP)+, TTY     ; RESTORE TTY
    BIT  #HLTSW, SR     ; TEST FOR HALT ON ERROR
    BEQ  ERRLOP        ; BRANCH IF NO HALT
                                ; HALT ON ERROR
    ERRLOP:
    BIT  #LOPSW, SR    ; TEST FOR SCOPE LOOP
    BEQ  EXTR1
    MOV  #BEGIN, %6    ; REINIT STACK POINTER
    MOV  LESS1, %5     ; WD PRIORITY MINUS ONE
    JMP  @RETURN

EXTR1:
    RTI
ERRCNT: 0
ERTSTN: 0
ERFLG: 0
; SCOPE LOOP AND CONTROL SUBROUTINE
; ERROR CONTROL FLAG -1=MAP ERROR

SCOPEC:
    TSTB @TKS
    BPL  SCOPEH
    MOV  @TKB, (PC)+
    DTMP:
    BIC  #200, DTMP
    CMPB DTMP, #3
    BNE  SCOPEH
    JMP  @MON1.0
    SCOPEH:
    BIT  #BIT14, SR    ; TEST FOR SCOPE
    BNE  SCOPEB        ; BRANCH IF SCOPE SELECTED
    
```

H05

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 60
 DBQAAA.P11 MONITOR FILES

```

2486 012604 032767 004000 164756      BIT      #BIT11,SF      ;TEST FOR ITERATIONS
2487 012612 001015                      BNE      SCOPEA   ;EXIT IF ITERATIONS INHIBITED
2488
2489
2490
2491
2492
2493
2494 012614 026767 000036 000032      CMP      SCOPEF,ICOUNT ;TEST FOR COMPLETION OF ITERATIONS
2495 012622 001407                      BEQ      SCOPEG   ;BRANCH IF COMPLETE
2496 012624 005267 00002E                      INC      SCOPEF   ;INCREMENT ITERATION COUNT
2497 012630 00572E                      SCOPEB: TST      (SP)+ ;POP RETURN PC
2498 012632 012667 165140                      MOV      (SP)+,PS ;RESTOR PROCESSOR STATUS
2499 012636 000177 000016                      JMP      @RETURN  ;
2500 012642 011667 000012                      SCOPEG: MOV      @SP,RETURN ;SET UP SCOPE RETURN ADRS
2501 012646 005067 000004                      SCOPEA: CLR      SCOPEF   ;CLEAR ITERATION COUNT
2502 012652 000002                      RTI
2503 012654 000001                      ICOUNT: 1          ;NUMBER OF REQUESTED ITERATIONS
2504 012656 000000                      SCOPEF: 0          ;ITERATION COUNT
2505 012660 001334                      RETURN: TST1      ;DEFAULT RETURN
2506 012662                      TSTABLE:          ;BEGINNING OF TABLE OF TEST ADDRESSES
2507                      012762          ;TEST ADDRESS LIST
2508
2509                      ;ACCEPT OCTAL NUMBER FROM TTY
2510                      T.ACCEPTO:
2511 012762 005067 000116                      CLR      OCTNUM   ;CLEAR OCTAL NUMBER LOCATION
2512 012766 010146                      MOV      R1,-(SP) ;SAVE R1
2513 012770 010046                      MOV      R0,-(SP) ;SAVE R0
2514 012772 005001                      ACPTO:  CLR      R1  ;
2515 012774 104004                      ACPTO.1: KEY.TO.R0 ;FETCH AN ASCII CHAR FROM KEYBOARD
2516 012776 120027 000003                      CMPB    R0,#3     ;CONTROL C?
2517 013002 001002                      BNE     AO.2
2518 013004 000137 006404                      JMP     @MONI.0
2519 013010 122700 000177                      AO.2:  CMPB    #177,R0 ;TEST FOR RUBOUT
2520 013014 001423                      BEQ     RUBOUT
2521 013016 122700 000015                      CMPB    #15,R0    ;TEST FOR <CR>
2522 013022 001423                      BEQ     CARG
2523 013024 120027 000040                      CMPB    R0,#40   ;EXIT IF SPACE
2524 013030 001420                      BEQ     CARG
2525 013032 120027 000000                      CMPB    R0,#0    ;TEST FOR VALID OCTAL NUMBER
2526 013036 002412                      BLT     RUBOUT
2527 013040 120027 000067                      CMPB    R0,#7
2528 013044 003007                      BGT     RUBOUT
2529 013046 042700 177770                      BIC     #177770,R0 ;CONVERT ASCII TO OCTAL
2530 013052 006301                      ASL     R1
2531 013054 006301                      ASL     R1
2532 013056 006301                      ASL     R1
2533 013060 050001                      BIS     R0,R1    ;CHALK'M UP
2534 013062 000744                      BR      ACPTO.1  ;FETCH NEXT CHAR
2535
2536 013064 000004 012304                      RUBOUT: TYPE     .QUES ;TYPE?
2537 013070 000740                      BR      ACPTO
2538 013072 010167 000006                      CARG:  MOV     R1,OCTNUM ;PLACE OCTAL NUMBER HERE
2539 013076 012600                      MOV     (SP)+,R0 ;RESTORE R0
2540 013100 012601                      MOV     (SP)+,R1 ;RESTOR R1
2541 013102 000002                      RTI
  
```

```

2542 013104 000000 OCTNUM: 0
2543 ;FETCH AN ASCII CHARACTER FROM KEYBOARD
2544
2545 013106 T.KEY.TO.RD:
2546 013106 105777 165272 TSTB @TKS ;TEST FOR DONE
2547 013112 100375 BPL -4 ;WAIT FOR KEYBOARD
2548 013114 117700 165266 MOV @TKB,RO ;FETCH CHAR
2549 013120 117777 165262 165264 MOV @TKB,@TPB ;ECHO
2550 013126 004767 000006 JSR PC,TTYFLG ;WAIT FOR DONE
2551 013132 042700 177600 BIC #177600,RO ;7 BIT ASCII
2552 013136 000002 RTI
2553 ;TEST FOR TRANSMITTER DONE
2554
2555 013140 TTYFLG:
2556 013140 105777 165244 TSTB @TPS
2557 013144 100375 BPL TTYFLG
2558 013146 700207 RTS PC
2559
2560 013150 010567 000112 .IOT: MOV TTY,SAY ;SAVE TTY
2561 013154 032767 020C00 164406 BIT #BIT13,SR ;TEST FOR INHIBIT PRINT
2562 013162 001032 BNE .TERM
2563 013164 017605 000000 MOV @6,TTY ;GET ADDRESS TO BE TYPED
2564 013170 122715 000044 .MORE: CMPB #'$',TTY ;TERMINATOR?
2565 013174 001425 BEQ .TERM
2566 013176 105715 TSTB (TTY) ;TERMINATOR?
2567 013200 001423 BEQ .TERM
2568 013202 122715 000001 CMPB #1,(TTY) ;RESTORE OLD SEQUENCE
2569 013206 001416 BEQ .REST
2570 013210 122715 000137 CMPB #'+',(TTY) ;SET UP CR LF
2571 013214 0C1406 BEQ .CRLF
2572 013216 105777 165166 TSTB @TPS
2573 013222 100375 BPL -4
2574 013224 112577 165162 MOV @((TTY)+,@TPB
2575 013230 000757 BR .MORE
2576 013232 005205 .CRLF: INC TTY
2577 013234 010546 MOV TTY,-(6)
2578 013236 012705 013270 MOV #.CAR,TTY
2579 013242 000752 BR .MORE
2580 013244 012605 .REST: MOV (6)+,TTY
2581 013246 000750 BR .MORE
2582 013250 062716 000002 .TERM: ADD #2,(6)
2583 013254 016705 000006 MOV .SAY,TTY
2584 013260 004767 177654 .IOTE: JSR PC,TTYFLG ;WAIT FOR DONE
2585 013264 000002 RTI
2586
2587 013266 000000 .SAY: 0
2588 013270 005015 001 .CAR: .ASCII <CR><LF><1>
2589 013274 000000 .EVEN
2590 013274 000000 .TYPE: 0
2591
2592 013276 000000 000000 000000 PRINT2: .WORD 0,0,0,0
2593 013304 000000 PRINT3: .BYTE 0,0
2594 013306 000 000
2595
2596 013310 112767 000001 177770 PRINTR: MOVB #1,PRINT3 ;SET ZERO FILL SWITCH
2597 013316 000402 BR .+6
  
```

2598	013320	005067	177762		PRINTS: CLR	PRINT3		;SUPRESS LEADING ZERO'S
2599	013324	112767	177772	177755	MOV	#-6,PRINT3+1		;SET COUNT
2600	013332	032767	020000	164230	BIT	#BIT13,SR		
2601	013340	001041			BNE	PRTE		
2602	013342	010446			MOV	%4,-(6)		;SAVE R4
2603	013344	012704	013276		MOV	#PRINT2,%4		;SET POINTER TO FIRST ASCII CHAR.
2604	013350	105014			CLRB	(4)		;CLEAR FIRST BYTE
2605	013352	000405			BR	PRINTF		;ROTATE FORST BIT
2606	013354	105014			PRINTL: CLRB	(4)		;CLEAR BYTE OF CHARACTER
2607	013356	006105			ROL	TTY		;ROTATE BIT INTO C
2608	013360	106114			ROLB	(4)		;PACK IT
2609	013362	006105			ROL	TTY		;ROTATE BIT INTO C
2610	013364	106114			ROLB	(4)		;PACK IT
2611	013366	006105			PRINTF: ROL	TTY		;ROTATE BIT INTO C
2612	013370	106114			ROLB	(4)		;PACK IT
2613	013372	105714			TSTB	(4)		
2614	013374	001402			BEQ	+.6		
2615	013376	105267	177704		INCB	PRINT3		
2616	013402	105767	177700		TSTB	PRINT3		;CHECK FILL SWITCH
2617	013406	001402			BEQ	+.6		
2618	013410	152724	000060		BISB	#'0,(4)+		;MAKE INTO ASCII CHAR
2619	013414	105267	177667		INCB	PRINT3+1		
2620	013420	001355			BNE	PRINTL		;REPEAT
2621	013422	022704	013276		CMP	#PRINT2,%4		
2622	013426	001002			BNE	+.6		
2623	013430	112724	000060		MOV	#'0,(4)+		
2624	013434	105014			CLRB	(4)		
2625	013436	000004	013276		TYPE	PRINT2		;TYPE IT
2626	013442	012604			MOV	(6)+,%4		;RESTORE R5
2627	013444	000207			PRTE: RTS	%7		
2628					;SAVE REGS 0 TO 4 SUBROUTINE,			
2629	013446	012667	000032		↑.SAVRG: MOV	(6)+,SVRPC		;SAVE PC AND PSW.
2630	013452	012667	000030		MOV	(6)+,SVRPSW		
2631	013456	010546			MOV	%5,-(6)		
2632	013460	010446			MOV	%4,-(6)		;SAVE REGS 0 - 4
2633	013462	010346			MOV	%3,-(6)		;IN STACK.
2634	013464	010246			MOV	%2,-(6)		
2635	013466	010146			MOV	%1,-(6)		
2636	013470	010046			MOV	%0,-(6)		
2637	013472	016746	000010		MOV	SVRPSW,-(6)		;RESTORE PC AND PSW.
2638	013476	016746	000002		MOV	SVRPC,-(6)		
2639	013502	000002			RTI			;EXIT.
2640	013504	000000			SVRPC: 0			
2641	013506	000000			SVRPSW: 0			
2642					;RESTORE REGS 0 TO 4 SUBROUTINE.			
2643	013510	012667	000032		↑.RSTRG: MOV	(6)+,RSTPC		;SAVE PC AND PSW.
2644	013514	012667	000030		MOV	(6)+,RSTPSW		
2645	013520	012600			MOV	(6)+,%0		;RESTORE REGS 0 - 4
2646	013522	012601			MOV	(6)+,%1		;FROM STACK.
2647	013524	012602			MOV	(6)+,%2		
2648	013526	012603			MOV	(6)+,%3		
2649	013530	012604			MOV	(6)+,%4		
2650	013532	012605			MOV	(6)+,%5		
2651								
2652	013534	016746	000010		MOV	RSTPSW,-(6)		;RESTORE PC AND PSW.
2653	013540	016746	000002		MOV	RSTPC,-(6)		

K05

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 63
 DBQAAA.P11 MONITOR FILES

```

2654
2655 013544 000002          RTI          ;EXIT
2656 013546 000000          RSTPC:  0
2657 013550 000000          RSTPSW: 0
2658
2659          ;POWER FAIL ROUTINE
2660          ;IF SELECTED VERIFY STATUS-IN IS UP
2661          ;AND CE AND DE ARE PRESENTED AS STATUS
2662
2663 013552 104001          PFAIL:  SAVRG
2664 013554 010667 000054          MOV      R6,SAVR6
2665 013560 012767 013570 164236          MOV      #PWRUP,24
2666 013566 000000          HALT
2667          ;POWER UP ROUTINE
2668 013570 000240          PWRUP:  NOP          ;PATCH ANYONE?
2669 013572 016706 000036          MOV      SAVR6,R6
2670 013576 104002          RSTRG
2671 013600 012767 013552 164216          MOV      #PFAIL,24 ;RESTORE POWER FAIL VECTOR
2672 013606 005027          CLP      (PC)+
2673 013610 000000          0
2674 013612 005367 177772          DEC      .-2
2675 013616 001375          BNE      .-4
2676 013620 000004 013636          TYPE    ,PFLD
2677 013624 012667 164146          MOV      (SP)+,PS
2678 013630 000177 177024          JMP      @RETURN
2679 013634 000000          SAVRE . 0
2680 013636 050137 053517 051105          PFLD:  .ASCIZ  "+POWER FAILED+"
2681 013644 043040 044501 042514
2682 013652 057504 000
2683          .EVEN
2684
2685          .END
000001
  
```


N05

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 67
 DBQAAA.P11 CROSS REFERENCE TABLE -- USER SYMBOLS

H2200	007572	2085	2087*											
H250	007732	2102	2115*											
H260	010012	2116	2129*											
ICOUNT	012654	921*	968*	1001*	1037*	1057*	1115*	1188*	1226*	1254*	1276*	1314*	1367*	1409*
		1468*	1510*	1564*	1595*	1679*	1735*	1807*	1820*	1874*	2493	2503*		
INTTST	004162	1423	1440*											
KEY.T0=	104004	803*	1903	2026	2168	2515								
LESS1	001302	901*	975	1012	1025	1121	1140	1424	1699	1967*	2045*	2280	2468	
LEVEL0=	000000	777*												
LEVEL1=	000040	778*												
LEVEL2=	000100	779*												
LEVEL3=	000140	780*												
LEVEL4=	000200	781*												
LEVEL5=	000240	782*	2045											
LEVEL6=	000300	783*	891	2044										
LEVEL7=	000340	784*	809	812	815	818	826	838	946	992	1018	1067	1160	1453
		1722	1778	1844	1893	2289								
LF =	000012	795*	2296*	2424	2427	2588								
LKTEST	001360	927*												
LK1	001372	931*												
LK10	002752	1196*												
LK10A	003042	1212*	1216											
LK10B	003036	1211*	1219											
LK11	003114	1232*												
LK12	003206	1260*												
LK12A	003224	1264*	1269											
LK2	001402	935*												
LK2A	001410	937*	940											
LK3	001424	938*	943*											
LK4	001464	952*												
LK5	001554	974*												
LK5A	001620	982*	983											
LK5B	001630	976*	986*											
LK5.1	001670	991*	994*											
LK6	001716	985*	1007*											
LK6A	001764	1011	1016*	1021										
LK6.1	002060	1028	1030*											
LK7	002106	1043*												
LK8	002162	1065*												
LK8A	002224	1075*	1080											
LK8B	002240	1076*	1079*											
LK8C	002300	1090*	1095											
LK8D	002314	1091*	1094*											
LK8E	002356	1099	1102	1105	1108*									
LK9	002404	1121*												
LK9B	002500	1123	1137*											
LK9C	002512	1136	1140*											
LK9E	002606	1142	1156*											
LK9F	002620	1155	1159*											
LK9G	002724	1172	1175	1178	1181*									
LOCTRP	001312	905*	1842*	1856*	1857									
LODAD	007442	2047	2059	2061*										
LODIV	007406	2049	2053*											
LODMSC	007464	2051	2066*											
LPSW =	040000	2451*	2465											
MINCLK =	000010	855*	1235	2206	2208	2212	2215	2219						

E06

.MAIN. MACY11 27(732) 15-OCT-76 11:28 PAGE 71
 DBQAAA.P11 CROSS REFERENCE TABLE -- USER SYMBOLS

TIMOUT	001270	896#	1547	1588	1769	1975*	2066*	2147										
TIMRUN	001262	893#	1134	1153														
TKB	000406	789#	2478	2548	2549													
TKS	000404	788#	2476	2546														
THINCLK	003124	1235#	1241															
T00SN =	000040	848#	1354	1357	1358	1445	1448	1449	1574	1583								
TPB	000412	791#	2549*	2574*														
TPS	000410	790#	2556	2572														
TRANST	001314	906#	1786															
TRIGGER	001272	897#	1539	1542	1580	1644	1763	1980*	2067*	2157*								
TSTABL	012662	914	2038	2040	2506#													
TST1	001334	920#	925	2505														
TST10	003070	1225#	1230															
TST11	003162	1253#	1258															
TST12	003242	1275#	1280															
TST13	003404	1313#	1318															
TST14	003636	1366#	1371															
TST15	004022	1408#	1413															
TST16	004274	1467#	1472															
TST17	004452	1509#	1514															
TST2	001530	967#	972															
TST20	004674	1563#	1568															
TST21	005014	1594#	1599															
TST22	005332	1678#	1683															
TST23	005552	1734#	1739															
TST24	006046	1806#	1811															
TST25	006102	1819#	1824															
TST26	006312	1873#	1878															
TST3	001672	1000#	1005															
TST4	002062	1036#	1041															
TST5	002136	1056#	1061															
TST6	002360	1114#	1119															
TST7	002726	1187#	1192															
TTRIG	001300	900#	2147*	2149	2153*	2154												
TTY =	%000005	766#	2457	2458*	2460*	2560	2563*	2564	2566	2568	2570	2574	2576*	2577				
TTYFLG	013140	2578#	2580*	2583*	2607*	2609*	26.1*											
TYPE =	000004	2550	2555#	2557	2584													
		771#	1217	1267	1812	1879	1894	1896	1902	1915	1928	1937	1947	1955				
		1971	1976	1981	2017	2025	2193	2287	2453	2536	2625	2676						
T.ACCE	012762	802	2510#															
T.ERRR	012434	799	2452#															
T.KEY.	013106	803	2545#															
T.RSTR	013510	801	2643#															
T.SAVR	013446	800	2629#															
T.I	007532	2078#	2079	2082														
VOID	001206	866#	2062*	2258*														
WDADOR	010576	1945	2256#															
WDBASE	001306	903#	1944*	2058	2256	2257*	2258	2259*	2260	2261*	2262							
WDCSR	001210	867#	1286#	1287	1324*	1354	1357*	1358	1377*	1378	1381*	1382	1386*	1387				
		1390#	1391	1395*	1396	1399*	1400	1419*	1425	1428*	1442	1445	1448*	1449				
		1456#	1477*	1519*	1520	1523*	1528	1531*	1534	1543*	1548	1573*	1574	1583				
		1614#	1615	1618	1621*	1622	1645	1652	1654	1661	1665	1668*	1696*	1700				
		1703#	1704*	1715	1718	1724*	1752*	1753	1756*	1764	1767*	1772*	1773	1776*				
		1792	1796*	1837*	1838	1841*	1849*	2063*	2260*									
WDDAT	001212	868#	1235	1293*	1294	1297	1300*	1301	1304	1325*	1326	1329	1332*	1333				
		1336	1340*	1341	1344	1347*	1348	1351	1429*	1430*	1431*	1433*	1478*	1479				

ADD	1100	1173	2039	2187	2188	2205	2249	2257	2259	2261	2268	2270	2272	2442	2582
ASL	1959	1960	1961	1962	1963	2037	2183	2185	2186	2233	2234	2247	2248	2530	2531
ASR	2532														
BEQ	2250	2251													
	828	835	928	958	1022	1026	1099	1102	1105	1172	1175	1178	1291	1302	1334
	1349	1359	1383	1392	1401	1426	1450	1480	1494	1521	1535	1549	1575	1584	1616
	1619	1630	1638	1648	1655	1666	1701	1754	1774	1793	1839	1858	1912	1934	1943
	1950	1958	1974	1979	1984	2010	2020	2096	2110	2124	2130	2139	2155	2173	2175
	2177	2211	2213	2216	2218	2238	2252	2466	2494	2520	2522	2524	2565	2567	2569
	2571	2614	2617												
BGE	2091	2105	2114	2134											
BGT	2181	2528													
BIC	1135	1154	1209	1300	1332	1347	1357	1381	1390	1399	1430	1433	1448	1456	1525
	1531	1545	1578	1582	1628	1636	1668	1706	1724	1758	1767	1796	1846	1849	1966
	2080	2182	2276	2286	2292	2441	2480	2529	2551						
BIS	1293	1325	1340	1377	1386	1395	1428	1429	1431	1523	1524	1543	1544	1577	1581
	1621	1632	1703	1704	1705	1756	1757	1776	1841	1845	2275	2282	2533		
BISB	2618														
BIT	834	927	948	957	1235	1294	1297	1301	1304	1326	1329	1333	1336	1341	1344
	1348	1351	1354	1358	1378	1382	1387	1391	1396	1400	1425	1445	1449	1479	1482
	1486	1489	1493	1496	1520	1528	1534	1548	1574	1583	1615	1622	1633	1637	1652
	1654	1661	1665	1700	1718	1753	1764	1773	1792	1838	2078	2206	2208	2212	2215
	2219	2461	2465	2484	2486	2561	2600								
BLOS	2438														
BLT	2179	2526													
BMI	932	938	989	1049	1443	1716	2232								
BNE	832	940	949	983	1080	1095	1166	1169	1216	1219	1236	1241	1243	1246	1269
	1295	1296	1305	1327	1330	1337	1342	1345	1352	1355	1379	1388	1397	1437	1446
	1461	1483	1487	1490	1497	1503	1529	1555	1623	1634	1653	1662	1672	1710	1719
	1728	1765	1800	1853	1867	1905	1909	1914	1986	1992	1998	2004	2028	2034	2062
	2085	2088	2102	2116	2150	2170	2207	2209	2220	2226	2229	2245	2285	2482	2485
	2487	2517	2562	2601	2620	2622	2675								
BPL	945	954	961	979	1010	1045	1070	1073	1076	1085	1088	1091	1127	1130	1146
	1149	1214	1263	1420	2079	2097	2111	2125	2140	2156	2190	2239	2477	2547	2557
	2573														
BR	985	1136	1155	1238	1439	1712	1855	1907	1918	1990	1996	2002	2008	2015	2086
	2130	2114	2128	2143	2192	2194	2214	2221	2283	2534	2537	2575	2579	2581	2597
	2605														
CLR	935	936	943	952	956	977	981	1008	1043	1046	1065	1066	1068	1071	1074
	1078	1081	1082	1083	1086	1089	1093	1122	1125	1128	1141	1144	1147	1159	1212
	1232	1233	1261	1286	1324	1419	1435	1457	1477	1478	1500	1519	1552	1573	1614
	1625	1669	1696	1708	1725	1752	1772	1797	1837	1842	1850	1864	2024	2089	2103
	2117	2132	2148	2163	2166	2227	2500	2511	2514	2598	2672				
CLRB	2604	2606	2624												
CMP	1021	1025	1098	1101	1104	1165	1168	1171	1174	1177	1857	1985	1991	1997	2003
	2009	2084	2087	2090	2101	2104	2115	2118	2129	2133	2149	2189	2225	2228	2231
	2244	2493	2621												
CMPB	1290	1618	1629	1647	1904	1908	1911	1913	2027	2169	2172	2174	2176	2178	2180
	2437	2481	2516	2519	2521	2523	2525	2527	2564	2568	2570				
DEC	831	1460	1502	1554	1671	1727	1799	1852	1866	1965	2081	2210	2217	2674	
EMT	799	800	801	802	803										
HALT	608	609	611	613	615	617	619	621	623	625	627	629	631	633	635
	637	639	641	643	645	647	649	651	653	655	657	659	661	663	665
	667	669	671	673	675	677	679	681	683	685	687	689	691	693	695
	697	699	701	703	705	707	709	711	713	715	717	719	721	723	725
	727	729	731	733	735	737	2463	2666							

.MAIN. MACY11 27.732) 15-OCT-76 11:28 PAGE 79
 DBQAAA.P11 CROSS REFERENCE TABLE -- PERMANENT SYMBOLS

.EVEN	1924	2428	2589	2683											
.LIST	1	562	597	796	799	800	801	802	803	914	917	925	964	972	997
	1005	1033	1041	1053	1061	1111	1119	1184	1192	1222	1230	1250	1258	1272	1280
	1310	1318	1363	1371	1405	1413	1464	1472	1506	1514	1560	1568	1591	1599	1675
.MACRO	1683	1731	1739	1803	1811	1816	1824	1870	1878						
	1	563	564	565	566	568	571	573	575	578	579	591	583	584	585
.MLIST	587	588	589	593	594	595	597								
	1	562	597	796	799	800	801	802	803	914	917	925	964	972	997
	1005	1033	1041	1053	1061	1111	1119	1184	1192	1222	1230	1250	1258	1272	1280
	1310	1318	1363	1371	1405	1413	1464	1472	1506	1514	1560	1568	1591	1599	1675
.PAGE	1683	1731	1739	1803	1811	1816	1824	1870	1878						
	917	964	997	1033	1053	1111	1184	1222	1250	1272	1310	1363	1405	1464	1506
	1560	1591	1675	1731	1803	1816	1870								
.REM	1	599													
.REPT	610														
.SBTTL	917	964	997	1033	1053	1111	1184	1222	1250	1272	1310	1363	1405	1464	1506
	1560	1591	1675	1731	1803	1816	1870	1883	2295	2429					
.WORD	2592														

ERRORS DETECTED: 0
 DEFAULT GLOBALS GENERATED: 0

*.DBQAAA.SEG/SOL/CRF/NL:TOC/PAGNUM/DS:ERFZ=SYSMAC.CO,DBQAAA.P11
 RUN-TIME: 32 41 4 SECONDS
 RUN-TIME RATIO: 187/78=2.3
 CORE USED: 41K (81 PAGES)

