

home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw



Technical Information W4e



Anaerobic Methods of Distillery Waste and Wastewater Treatment

**Naturgerechte Technologien, Bau- und Wirtschaftsberatung (TBW) GmbH Frankfurt, Germany
June 2000**

During alcohol production, large amounts of waste and wastewater are produced. These may have a considerable environmental impact by polluting both water bodies and soil, by causing an adverse climatic effect and odour nuisance. Due to the high concentration of organic matter, both distillery waste and wastewater at the same time do have a

Technical Field: Energy / Environment (E) Water / Sanitation (W) Agriculture (A) Foodprocessing (F) Manufacturing (M)
This Technical Information is available in: English (e) French (f) German (g) Spanish (s) Other:.....

average pH-value is low (3,5 to 6). **Table 1** represents a summary of research results on cane molasses, confirming these average values. The named characteristics make the distillery wastewater one of the industrial residues most difficult to treat and dispose off properly.

Table 1: Average values for stillage from

great potential that can be utilised for fertilising or power generating purposes. The water can principally be reused for irrigation purposes.

1 Introduction

Alcohol production through the process of fermentation is an industrial activity implemented almost world-wide. Due to the agricultural origin of the primary matter used, distilleries are usually located in rural areas. Agricultural products like sugar cane, sugar beet, different cereals, grapes etc. are either fermented directly or in the form of sub-products, after being processed in order to condition the sugar contained in the plants for the alcoholic fermentation with yeast.

The distillation (i.e. the separation process) with 2 or 3 columns the number depending on the required concentration of ethanol produces a highly polluting residue. For the production of every litre of alcohol, 10 to 30 litres of industrial wastewater, called vinasse, stillage or slops, are generated. Its organic load is high, varying from 20 to 120 g COD (or 2,000-12,000 mg) per litre, the effluent temperature is high (around 90 C), the

Parameter (Source: [2])	Range of Values for Cane Molasses
pH	3.5 5.7
Temperature	80 105 C
COD	15 176 g/l

The high organic loading is the cause for a great potential for negative climatic impacts and heavy pollution of water and soil if the residues are being disposed of untreated. The large production of fuel ethanol in Brazil for example, has generated severe problems of water pollution. Brazil is producing more than 13×10^6 litres of ethanol per year (a typical distillery in Brazil producing about 120,000 l/d), utilising sugar cane juice, molasses or mixtures from both as substrate for the ethanol production.

Different forms of utilisation, treatment and final disposal have been developed to avoid environmentally negative impacts of stillage. Physical and chemical treatment options of the residue have not been very successful until now, whereas the high organic content of the residue make it well suitable for biological treatment, especially for anaerobic fermentation. Therefore, the treatment

1 of

gate Information Service / gtZ, PO Box 5180, 65726 Eschborn, Germany
distillery
wastewater
with
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

[home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw](#)



Technical Information W4e



anaerobic systems is broadly applied and accepted and more than 40 industrial treatment plants in distilleries are in operation world-wide. Mostly, the so-called UASB (Upflow Anaerobic Sludge Blanket) and the anaerobic filter, in some cases anaerobic contact systems, are applied.

The high organic concentration in the stillage can make anaerobic treatment profitable, particularly due to the primary energy yield in form of methane, combining environmental soundness with economical usefulness due to possible savings in the fuel needs of the distillery.

2 Social aspects

Social impacts associated with the production of alcohol can be considered from two main points of view: a positive one in terms of job

temporary population, is being wiped out by the discharge of stillage into surface waterbodies, causing eutrophication and, as a result, lack of oxygen. Foul smells are commonplace near a distillery and downstream of alcohol production sites.

3 Distillery process

The distillation process has three main steps:

Step 1: The fermentation of the carbon (sugar) source:

The substrate e.g. molasses from sugar cane (molasse is the residual syrup from sugar production from which no crystalline sucrose can be obtained by simple means) is brought into contact with yeast cultures. Under appropriate conditions (pH

one in terms of job potential, is a negative one due to the environmental pollution caused by the industrial production process.

The disposal of the high-strength stillage (vinasse) into rivers and streams poses particularly serious risks to the neighbouring population since the sugar-growing regions are usually rural areas with a considerably high population density, in Cuba even the highest in the whole country. This is the result of sugar cane cultivation being labour intensive, especially during the harvest season, which extends during six to eight months a year. Many seasonal workers come from neighbouring regions or countries, other provinces or from suburban sectors and settle down temporarily in villages and camps, in addition to people permanently living downstream in villages and cities close to the rivers. As these foul up with continuous discharge of highly polluted, untreated wastewater, water-quality related illnesses like diarrhoea or viral hepatitis become an ever recurring problem.

Fish, representing a valuable source of protein within the diet of

4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

Step 2: The separation of yeast and alcoholic solution:

After the fermentation process ends by reaching the inhibitory alcohol concentration or the temperature limit (around 40 C), the substrate is usually separated into alcoholic solution and yeast sludge by centrifugation. The recuperation of yeast is important in order to reduce the organic load of the wastewater. The dried yeast can be utilised as animal feed with high protein content.

Step 3: The extraction of alcohol by distillation:

The produced alcohol is distilled utilising a counter current of steam. A first distillation column removes the biggest part of the water

the local and the

2

(and

yeast

gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany

Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

it

was

not

removed


home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw



Technical Information W4e



before) which represents the principal residue of the distillery. A second column concentrates and purifies the ethanol to a content of 60%, a third column (rectification column) if installed is designated for the production of ethanol of more than 95%.

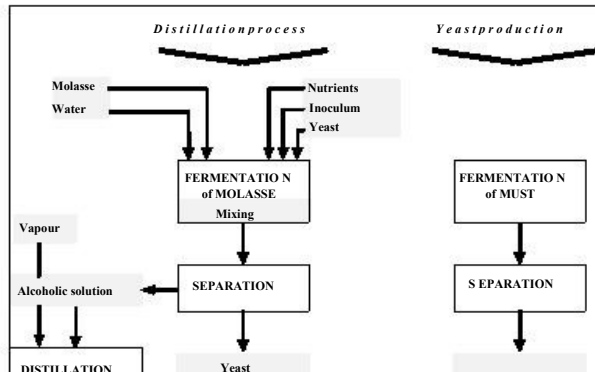

The stillage from the separation process contains a large amount of yeast which, as mentioned above, should be dried and utilised as animal feed. This yeast sludge is therefore usually not being treated within a wastewater treatment system. Speaking of wastewater treatment, the **stillage from the distillation process is** the major stream of liquid waste with the highest organic loading. Its composition depends significantly on the raw material used for the fermentation process. All stillages do however contain sugar compounds (glucose, polysaccharides) and alcohol (ethanol, glycerol). Yeast residues will lead to the presence of amino acids and proteins in the wastewater. Speaking of molasse as substrate for alcohol fermentation, only about 10% of the substrate are retained in the process, 90%.

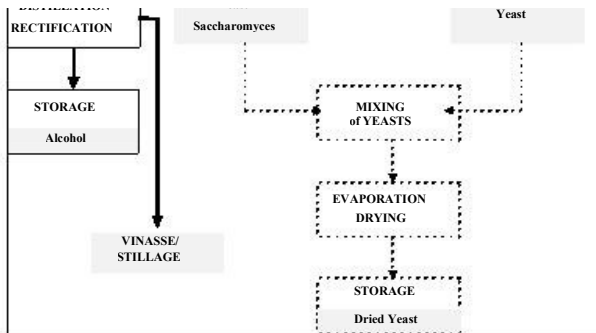


Fig. 1: Fermentation process for alcohol and yeast production

4 Origin and composition of distillery waste and wastewater

The liquid wastes from alcohol production can mainly be divided into (see Fig. 2)

- stillage from the** separation (centrifuge) and distillation process;
- cleaning water from the different** plant components, i.e. fermenters, distillation columns, floors;
- refrigeration water from cooling after** distillation.

90 %

including caramels developed during sugar production that are causing a darker color of the wastewater. Because molasse already is a more concentrated liquid, its stillage will also have higher concentrations of salts and organic matter as well as sulphate. Stillage from sugar cane molasse in average contains 93% of water, 5% dry matter and 2% minerals.

Table 2 shows average values for different wastewater parameters in the alcohol industry in Cuba.

Table 2: Average values for composition of stillage from alcohol production from sugar cane molasse in Cuba

Parameter	Unit	Value
Stillage produced l/l alcohol		17 25
COD total	mgO ₂ /l	70,000
BOD ₅	mgO ₂ /l	34,000
pH	(none)	4.2-4.4
Total Solids	g/l	70 95
Suspended Solids	g/l	2.8 3.4
Volatile Solids	g/l	65 75
Total Fixed Solids	g/l	7 37
Total Nitrogen	mgN/l	800
Total Phosphor	mgP ₂ O ₅ /l	200
Potassium	mgK ₂ O/l	3,200
Sulfate	mgSO ₂ /l	2,670
Sodium	mgNa/l	310

Source: [3]

Information...

3

gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw




Technical Information W4e



The cleaning water has a comparably low organic loading and can be used to dilute the heavily polluted stillage in order to condition it for anaerobic treatment.

The refrigeration water is only exposed to heat pollution, i.e. a rise in temperature, and is usually not contaminated additionally during the process, as it is led in a closed cycle within the heat exchange system. Therefore, it generally will not be subject to wastewater treatment.

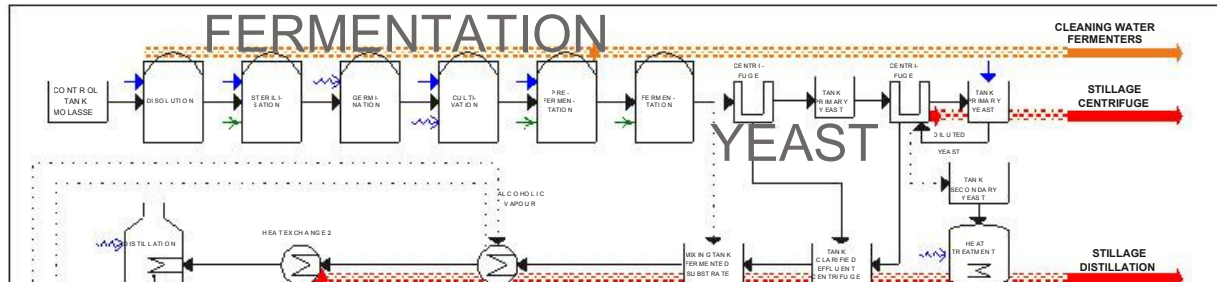

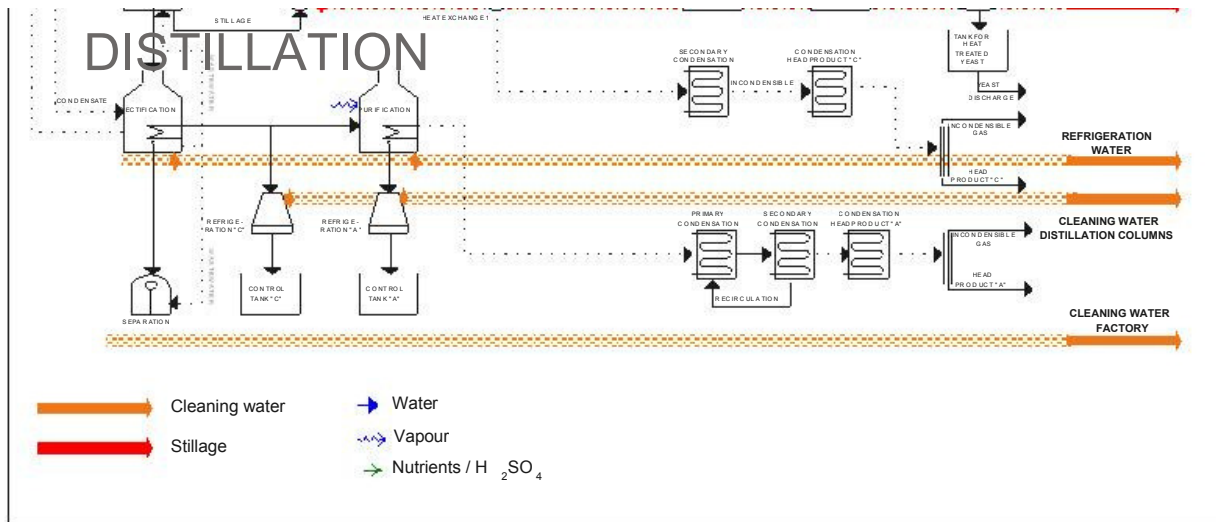


Fig. 2: Alcohol production and wastewater streams (Source: TBW, [3])

4

gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

[home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw](#)



Technical Information W4e



5 Suitability of distillery wastewater for anaerobic treatment

Due to its high energy content in the form of contained organic material, distillery stillage is generally very well suitable for anaerobic treatment. Owing to its characteristics, a possible COD-removal of 6575% can be assumed. Prior to the actual treatment steps, some conditioning measures for the stillage do however have to be taken:

5.1 Necessary conditioning of stillage Cooling

The high temperature of the stillage from the distillation process have to be adjusted at least to the maximum values tolerable for the biologic degradation.

5.2 Suitable anaerobic processes

Among a number of different treatment alternatives generally applicable, the following processes are considered to be the most suitable ones for the anaerobic treatment of distillery wastes.

UASB (Upflow Anaerobic Sludge Blanket) Reactor

Anaerobic reactor with up-flow regime of the treated wastewater, sludge retention and 3-phase separation for the separation of methane, sludge and treated wastewater. The EGSB Expanded Granular Sludge Bed Reactor may be used as alternative: this is in principle a high, lean UASB with high upflow velocity.

Anaerobic Filter (Fixed Bed Reactor)

Reactor with an inert filter medium with a high specific surface for on-growth of

Flow regulation, mixing

Strong variations in the volumetric flow of the wastewater have to be compensated by storage/equalisation capacities and appropriate dosage/mixing device. The stillage should be kept separately from other wastewater streams (cleaning water) in order to ensure maximum control of its concentration.

Conditioning of pH-Value

The usually low pH-value has to be corrected by neutralisation. Further to the addition of alkaline solution, treated substrate, having a pH-value of about 7, can be recirculated for this purpose.

Nutrients, alkalinity, suspended solids

The content of macro-/micro-nutrients and suspended solids as well as the alkalinity of the substrate usually range within the tolerable limits for anaerobic bacterial activity. Should the values exceed the limits in individual cases, these need to be adjusted.

biomass

(to be recycled with external separation and recirculation of sludge.

plastic

material)

Anaerobic Contact Process

Totally mixed reactor with separation and recirculation of sludge to the methanogenic reactor. The realisation of sludge-degassing improves the sludge consistency for separation.

6 Advantages of anaerobic treatment of distillery wastewater

6.1 Environmental aspects

The implementation of anaerobic technology for the treatment of distillery wastewater has several environmental benefits as a considerable contribution to a sustainable development:

Prevention of pollution of water and soil:

Anaerobic treatment of the wastewater avoids as any other installed treatment technology would the discharge of highly polluted wastewater into water, onto surface land and its possible infiltration into

5 the groundwater level

gate Information Service / gTZ, PO Box 5980, 68720 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw



Technical Information W4e



Mitigation of greenhouse gases

Reduction of methane emissions:

The emission of large amounts of methane to the atmosphere from uncontrolled disposal and discharge of wastewater are prevented by controlled anaerobic digestion of the organic matter in the wastewater. The methane produced within the digestion process has to be collected and must not be released to the atmosphere.

Reduction of fossil fuel demand:

If the methane produced is utilised as a renewable source of energy for power and heat production, the fossil fuel demand of the distillery can be reduced considerably. In contrast to fossil fuels, methane represents a CO₂-neutral source of energy, i.e. no additional

6.2 Socio-economic aspects

Hygiene aspects

The hygiene conditions for the population in the neighbourhood of distilleries will be significantly improved, reducing health risks by waterborne diseases and ensuring a better water quality of potential sources for drinking water.

Nutritional aspects

The necessary ambient conditions for fish can be restored to a certain extent, thus again making available an important source of food for the people.

6.3 Economic aspects

Fuel savings

Significant amounts of fossil fuel can be saved in the distillery by generating power and heat from the methane produced during

additional CO₂-equivalents emitted by its use. adding to

For an exemplary distillery producing an average of 8001,000 litres of stillage per day (50,000 l/d of alcohol), the reduction of CO₂-emissions by collection and utilisation of methane is in the order of 10,000 t/a of CO₂-equivalents, the reduction by substitution of fossil fuels is in the order of 10,000 t/a of CO₂-equivalents.

An exemplary distillery (13) plant concept: stillage treatment in ponds transformed into modular anaerobic reactors (digester volume: 10,000 m) with upflow-regime (UASB) and gas collection) may clarify both above named aspects:

- generation of 12 m to 14 m of biogas per m of stillage;
- avoidance of methane emissions with a CO₂-equivalent of 60,000 t/a by gas collection and combustion;
- avoidance of further 10,000 t/a of CO₂emission by substitution of fossil fuels in the production process.

using generated units and using the generated for energy within the alcohol production process. One of the most important process steps in this respect is the production of vapour for the distillation process. Produced electric power can also be utilised for process control, steering devices or other electric appliances within the industrial plant.

Revenues from energy sales

If the methane is utilised in co-generation units, the high energy content of the wastewater will often lead to a production of surplus energy which can be fed to regional or national power grids. Given appropriate legislation that guarantees the remuneration of power feeding to the grid, this will contribute to the economy of the wastewater treatment plant and may even lead to an economic benefit.

In the above named distillery (chapter 6.1), only 10 % of the total electricity produced by biogas utilisation are used in the alcohol production process, so that in theory the entire energy demand could be substituted in order to be independent of possible irregularities of biogas and electricity

6 production,
10
gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>
of
the
energy

home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw



Technical Information W4e



demand are still calculated to be provided by fossil fuels.

If the produced energy surplus of more than 15 Mio kWh/a is fed to the public grid at a rate of for example 0.067 US\$/kWh, revenues from energy sales will amount to about 1 Mio US\$.

7 Alternative treatment and disposal options for stillage

Further to the anaerobic treatment option, there are several other possibilities for treatment and/or reuse of waste streams from alcohol production. Some examples are listed below.

Incineration after evaporation

The water content of the stillage is significantly decreased by evaporation, so that the dried substrate

8 Example: Coconut Toddy Distillery

The distillery produces alcohol through distillation of coconut toddy. Bottling is carried out at a different section on the same site. The distillery is situated close to a river. It operates during the daytime from 8 a.m. to 5 p.m.

8.1 Industrial process

Coconut toddy distillery has two continuous and three pot distillation columns out of which 3-4 columns normally operate. Two pot distillation columns have a daily capacity of 6,750l/ batch each, the third of 4,050l/ batch. Distillation rates of the two continuous columns are 4,500 l/h and 1,000 l/h. Toddy is received from 1 p.m. to 9 p.m. and stored in the two receiving tanks from

that the dried substrate ~~that has a residual feed~~ is suitable for incineration. The ashes can be utilised as fertiliser or, with the addition of chemicals, for the recuperation of K_2SO_4 and $CaSO_4$. The adverse environmental effects of disposal of untreated stillage are avoided, but the high energy demand of the evaporation process that will in most cases be met by using fossil sources of energy should be taken into consideration.

Spray-irrigation

The stillage is applied directly to agricultural land for fertilising purposes. Due to the high organic loading, this can however lead to undesired accumulation of nutrients in the soil and to infiltration of soluble components to groundwater. In Brazil, where spray irrigation is very popular, high concentrations of nitrate and chlorine were found in the groundwater.

Growing of algae and fungus

Owing to its high protein content and nutritional value, the stillage can be used as nutritional substrate for the growing of algae and fungus.

which (collection tanks). There are 27 wash backs of 1,700-2,000 l capacity each. After being pumped the toddy into the pot distillation columns and the overhead tank to feed the continuous distillation columns, the wash backs and collection tanks are washed using a hose connected to a pipe. This wash water is pumped to the overhead tank to be fed to the continuous distillation columns. Similarly, the overhead tank wash water is fed to a continuous column. After washing the wash backs, a lime solution is applied on the tank surfaces with a brush. Floor washings in the toddy collection area go to the river through a drain. The amount of toddy distilled per day is in the range of 40 m³-60 m³. Since the alcohol present in the toddy is about 5-8%, the maximum volume of effluent generated in the distillery per day can be assumed to be 60 m³. Bottle washing is also carried out using a bottle washer with a capacity of 6,000 bottles per hour and the continuous flow of effluent ends up in the river along with wash water from manual washings. The washing starts with a fresh water bath which is discharged daily followed by two caustic baths, two water baths and three more water baths

7

gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw



Technical Information W4e



used counter currently. The caustic baths of capacity of 9,000 l and 6,600 l are replenished daily and discharged twice a week and once a week respectively. 500 kg -700 kg of NaOH is applied per month. The labels removed from the bottles are extracted from the machine adhering to a screen and are detached with fresh water.

8.2 Effluent generation (Quantity and quality)

The two sources of effluent identified in this distillery are:

1. Stillage from distillation process and wash water from distillation columns
2. Waste water from bottling plant

Distillery effluent

flow: 90 m³/d (estimated amount

including washing effluent),

effluent quality:

pH:

substituted. In this, capital investment is needed for the counter current heat exchanger and for the cooling water pumps. Further, this will eliminate the necessity of including a cooling tower in the effluent treatment system.

3. Spillage of furnace and other oil should not be discharged to the effluent drain. The oil can be separated and collected by installing suitable oil interceptors.
4. In the anaerobic digester system suggested for the treatment of distillery effluent, a reduction of 96% BOD is expected. The daily total BOD removal of 864 kg will generate about 260 m³ of biogas (based on 0.3 m³ biogas generation per kg of BOD removed). This is equivalent to 170 l of fuel oil. In this, capital investment is needed for the gas holder, gas burner and distribution line.

ε

BOD: 15,000 mg/l
 COD: 30,000 mg/l
 SS: 750 mg/l
 TS: 21,150 mg/l
 Temp.: 95C

Bottle washer effluent

flow: 69m/d,

effluent quality:

pH: 12-14

COD: 385 mg/l

NaOH: 0.003 %

8.3 Recommended waste minimisation options

1. Good house keeping should be maintained at all times in the wash back area. Frequent washing and cleaning is therefore necessary.
2. Stillage is discharged at a temperature above 90C. A waste heat exchanger could be designed to lower the temperature from 90C to 65C. The discharge rate is 5,500 l/h. The cooling water temperature will be elevated from 30C to 55C, recovering 574 MJ of heat at the same rate per hour. If the energy content of the hot water from this system is used for the boiler, approximately 15 l of fuel oil can be

5. Collection separately and using it for the neutralisation of distillery stillage. By concentrated use of alkaline solution for neutralisation purposes could be minimised. Capital investment is requested for the construction of a separate drain for alkaline effluent, collection tank, filter unit and the dosing pump.

6. Recycling of wastewater generated in the screen-washing unit of bottle washer after filtration. This source is measured as 2.7 m/h. This option reduces daily effluent flow from 69 m to 47 m. This option necessitates investments in a filter unit and feed pump.

8.4 Motivation for investment

Waste heat recovery from stillage
 Recovery of biogas from anaerobic digesters
 Use of alkaline effluent for neutralisation of stillage
 Recycling of screen wastewater
 Cleaner Production options given

8

gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>

home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw



Technical Information W4e



8.5 Benefits from investment

Use as fuel oil for boiler to heat boiler feed water
Reduction in NaOH consumption.
Reduce total effluent volume.

9 References and further information

- [1] Arnoux M. and Michelot E. 1988: Mthanisation des vinasses de mlasse de canne sucre par le procd SGN film fixe la Societ industrielle de sucrerie Guadeloupe. EU-Direction Gnrle nergie, Brussels (Belgium).
- [2] Noyola, A. 1996: Tratamiento de Aguas Residuales de Destileras. Memorias IV Seminario-Taller Latinoamericano sobre Tratamiento de

9.2 Institutions and Organisations

Deutsche Gesellschaft fr Technische Zusammenarbeit (GTZ) GmbH, German Appropriate Technology Exchange GATE Information Service

P.O. Box 5180, 65726 Eschborn, Germany

Phone: ++49 (0)6196 / 79-3094,

Fax: ++49 (0)6196 / 79-7352,

Email: gate-id@gtz.de

Internet: <http://www.gtz.de/gate/gateid.afp>

Naturgerechte Technologien, Bau- und Wirtschaftsberatung (TBW) GmbH

Baumweg 10, 60316 Frankfurt, Germany

Phone: ++49 (0)69 / 943507-0

Fax: ++49 (0)69 / 943507-11

Email: tbw@tbw-frankfurt.com

Universidad Autnoma Metropolitana (UNAM), Instituto de Ingeniera, Apartado

Aguas

(Residuales)

- [3] TBW GmbH Frankfurt 1998: Energetic Reuse of Distillery Wastewater CDC-TBW, Frankfurt (Germany).
- [4] TBW GmbH Frankfurt 1998: Endbericht zur Förderung der Anaerobtechnologie zur Behandlung kommunaler und industrieller Abwasser und Abfälle. GTZ-TBW-BMZ, Frankfurt (Germany).
- [5] Tilche A. and Rozzi A. 1988: Poster Papers of the Fifth International Symposium on Anaerobic Digestion. Monduzzi Editore, Bologna (Italy).
- [6] Verink J. 1994: Anaerobic Wastewater Treatment at the Distillery in Cardenas. TBW, Frankfurt (Germany).

9.1 Useful Links

<http://www.sunbeam.net/vsi/>

(Vasantdada Sugar Institute, India)

<http://www.gtz.de/anaerob/index.html>

(GTZ Sectoral Project Promotion of anaerobic treatment for municipal and industrial sewage and waste)

<http://www.execpc.com/~drer/anadoc.htm>

(Bioenergy from anaerobically treated wastewater)

<http://www.distill.com/spanish.html>

(Distillery terminology in English and Spanish)

Postal

DOF.

-

472
Ministerio del Azcar (MINAZ), Calle 223

09799, e/ N y O, Vedado, Ciudad La

Habana, Cuba.

04510
Mexico,

9

gate Information Service / gtz, PO Box 5180, 65726 Eschborn, Germany
Phone: +49 (0)6196 / 79-3094, Fax: +49 (0)6196 / 79-7352, Email: gate-id@gtz.de, Internet: <http://www.gtz.de/gate/gateid.afp>