



The Treadle Pump

Improvements to Traditional Treadle Pump, 1990

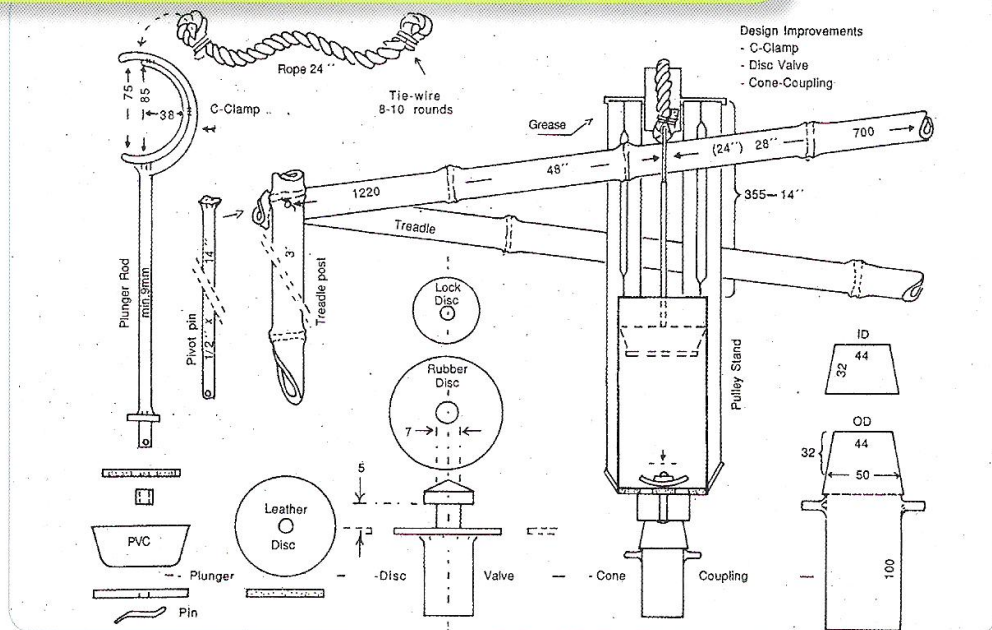

Pumphead Section

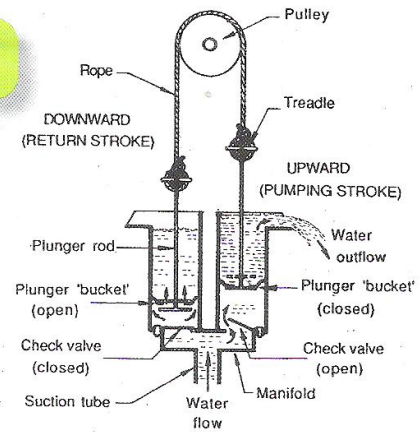

TREADLE PUMP

Twin cylinder pump.
For tubewell, capacity max. 35 imp. GPM.

Bamboo Cut List

- Bamboo Cutting list**
- A- Treadle post- 2 @ 3'
 - B- Treadle bar - 2 @ 7 $\frac{1}{2}$ '
 - C- Frame post - 2 @ 6'
 - D- Arm-rest
 - E- Pulley beam - 1 @ 26" split in halves, pulley axle is bedded in shallow grooves 18" above cylinder tops
 - F- Treadle guide - 1 @ 26"
 - G- Bamboo pipe- sections @ 20'-24' plus 10' strainer

