

[Home](#)-immediately access 800+ free online publications. **[Download](#)** CD3WD (680 Megabytes) and distribute it to the 3rd World. CD3WD is a 3rd World Development private-sector initiative, mastered by Software Developer **[Alex Weir](#)** and hosted by **[GNUveau_Networks](#)** (From globally distributed organizations, to supercomputers, to a small home server, if it's Linux, we know it.)

[home.cd3wd.ar.cn.de.en.es.fr.id.it.ph.po.ru.sw](#)

TESTING THE EFFICIENCY

OF WOOD-BURNING COOKSTOVES

International Standards

Originally prepared from
proceedings of a meeting of experts
convened in December 1982 by
Volunteers in Technical Assistance (VITA)

Revised May 1985

Published by:

VITA
1600 Wilson Boulevard, Suite 500
Arlington, Virginia 22209 USA
Tel: 703/276-1800 . Fax: 703/243-1865
Internet: pro-info@vita.org

ISBN 0-86619-229-8

(c) 1985, Volunteers in Technical Assistance

CONTENTS

Acknowledgements

Introduction

Water Boiling Test

Equipment

Procedure

Procedural Notes

Data and Calculation Form

Test Series Reporting Form

Controlled Cooking Test

Equipment

Procedure

Procedural Notes

Data and Calculation Form

Test Series Reporting Form

Kitchen Performance Test

Equipment

Procedure

Procedural Notes

Data and Calculation Form

Test Series Reporting Form

Technical Notes

Glossary

Abbreviations

APPENDIXES:

A. Concepts of Efficiency

B. Participants at Arlington meeting

C. Participants at Louvain "Woodstoves Seminar"

D. Participants at Marseille meeting

ACKNOWLEDGEMENTS

This document is a revision of Testing the Efficiency of Woodburning Cookstoves, first published by Volunteers In Technical Assistance in December, 1982. The earlier work was the outcome of a special international

workshop held in Arlington, Virginia, through the support of the U.S. Agency for International Development (USAID), the Government of The Netherlands, and IBM/Europe. Since publication, many useful comments have been received from users of this document, enabling us now to clarify a number of concepts and remove certain inconsistencies. In some cases we have rejected suggestions that would have demanded a revision of fundamental principles agreed to at Arlington. Such changes were felt to go beyond the scope of this work.

These revised guidelines are an effort to bring the work of the Arlington Group to a wider audience for practice, scrutiny and further discussion. We hope that such a process will lead to an even more refined version of procedures for testing woodburning cookstoves.

Paul Bussman, The Woodburning Stove Group,
Eindhoven, The Netherlands

Jonathon Loose, Intermediate Technology Development
Group, Reading, England

K. Krishna Prasad, The Woodburning Stove Group,
Eindhoven, The Netherlands

Timothy Wood, Volunteers in Technical Assistance,
Arlington, Virginia, USA

February, 1985

INTRODUCTION

Testing is an essential component of any program that promotes the use of improved woodburning stoves in developing countries. This is true regardless of how programs are administered or by what means the stoves are disseminated.

Stove testing is the systematic measuring of the advantages and limitations of a particular stove model. Its primary aim is to help identify the most effective and desirable stoves for a specific social and economic context. With ongoing stove production, a testing program provides essential quality control and may lead to important design modifications.

Problems surrounding woodstove design and testing have gained increasing attention over the past several years. Many individuals and groups have become involved, circulating papers, and meeting occasionally to discuss problems. At the "Seventh Woodstove Seminar" held at Louvain, Belgium, March 4 - 5, 1982, it was agreed that a systematic effort should be undertaken to reach as wide a consensus as possible on field testing of woodstoves. Too many approaches to testing were being used, it was felt, resulting in misunderstanding and hindering comparison of results.

An informal international working group of Louvain participants and others on developing a standard for field testing of woodstoves met in Marseille 12 - 14 May, 1982. This group agreed that there was an urgent need for an internationally acceptable standard. It noted that field testing had been done in many places by many different people, some of

whom have published on the subject and made suggestions for standards. None of the published suggestions was used as a basis for discussion. Rather, the group brainstormed from comments received following the Louvain meeting, and from new ideas, keeping the earlier suggestions in mind.

The consensus at Marseille was that:

- * A worldwide standard should be simple and limited. A standard will be more acceptable if it imposes strict rules only where necessary, but includes recommendations where possible.

- * A distinction should be made between testing done for local use only (for stove users and others) and testing where the results are intended to be transmitted to other places.

- * The standard should represent a compromise between the widest possible range of applications, and the closest possible fit with actual cooking practices.

- * It would be useful for the standard to classify the many different parameters that influence stove performance.

The Marseille group decided that evaluation concepts and reporting specifications could be fixed in the standard test procedure, and that food, fuels, and pots could be specified in local standards. While the stove itself cannot be standardized, a detailed description of the stove is needed with the test report. It was thought that an international

standard might recommend a way to do this. Discussions resulted in a set of "instructions" for the draft of a proposed standard. The Marseille group draft was circulated among participants, who then provided comments. The resulting second draft was discussed, among others, at the meeting convened by VITA December 6 - 10, 1982.

The 13 stove experts from ten countries who attended the week-long Arlington meeting agreed on three basic tests and reporting procedures. By imposing a scientific standard in stove testing, the Arlington group hopes to assure a high degree of uniformity in stove test results from around the world. The widespread use of standardized testing procedures will permit the comparison of stove designs on a more systematic basis, and foster wider sharing of the results of research and development efforts. This will benefit stove designers and users, and ultimately all who depend on the world's forest resources.

The following tests were formulated by the group at Arlington:

A Water boiling test, to measure how much wood is used to boil water under fixed conditions. This is a laboratory test, to be done both at full heat and at a lower "simmering" level to replicate the two most common cooking tasks. While it does not necessarily correlate to actual stove performance when cooking food, it facilitates the comparison of stoves under controlled conditions with relatively few cultural variables.

A Kitchen performance test, to measure how much fuelwood is used per person in actual households when cooking with a traditional stove, and when using an experimental Stove. The tester simply measures how much wood the family has at the beginning and at the end of each testing period.

A controlled cooking test, to serve as a bridge between the water boiling test and the kitchen performance tests. Trained local cooks prepare pre-determined meals in a specified way, using both traditional and experimental stoves.

The Arlington group recognized that some of the procedures described here differ significantly from what had been recommended in the past. The main difference is in the concept of efficiency used. These standards are based on a broader description and justification of efficiency than Percentage of Heat Utilized (PHU). They interpret evaporation as a measure of energy wasted, not energy used (see Appendix A, Concepts of Efficiency). It is not the group's intention to demand that these standards be adopted. Rather, it is hoped that stove testers will use the standards and share their experience in using them. The purpose of developing standards for testing is to help technicians get the most reliable results from their tests, to consider sources of error, and to interpret test results reliably. These standards do not preclude the use of existing ways of testing; however, the group thinks that the new standards can yield more reliable, comparable results.

This document includes the step by step procedures for each of the standardized tests, followed by Procedural Notes that give specific suggestions for conducting the tests. The sample data and reporting forms included for each test are designed to simplify the recording of essential information. For easy reference, Technical Notes giving background information relevant to all three tests are printed on colored paper. A glossary and list of abbreviations are followed by a section discussing concepts of efficiency used in testing stoves.

The original document was prepared by Dr. Timothy Wood, with Prof. Guido de Lepeleire, Dr. Gautam Dutt, and Howard Geller. Editing was done by Margaret Crouch, with typesetting by Maria Garth. The Arlington meeting was made possible by the support of the U.S. Agency for International Development (USAID), the Government of the Netherlands, and IBM/Europe. USAID also funded this revised edition of the manual. A complete list of the participants in the Arlington meeting is included in the Appendix.

WATER BOILING TEST

The Water Boiling Test (WBT) is a relatively short, simple simulation of common cooking procedures. It measures the fuel consumed for a certain class of tasks. It is used for a quick comparison of the performance of different stoves.

Water Boiling Tests use water to simulate food; the standard quantity is two-thirds the full pan capacity.

The test includes "high power" and "low power" phases. The high power phase involves heating the standard quantity of water from the ambient temperature to boiling as rapidly as possible. (see Technical Note 1). The low power phase follows. The power is reduced to the lowest level needed to keep the water simmering over a one-hour period.

Each WBT should be repeated at least four times. Results may be averaged and analyzed statistically.

EQUIPMENT

- * Stove
- * Pots without lids - see Procedural Note 1)
- * A balance accurate to 10 grams with a recommended capacity of 5 kg (Technical Note 2)
- * Locally dominant wood species, air dried (Technical Notes 3, 4), preferably pieces of uniform size
- * Water, within 2 [degrees] C of ambient temperature
- * Timing device
- * Mercury or digital thermometer for measuring temperatures up to 105 [degrees] C (Technical Note 6)
- * Device to measure/estimate the moisture content of wood (Technical Note 4)
- * Forms for recording data and calculations
- * Optional: wire tongs for handling hot charcoal and wood; insulated gloves.

PROCEDURE

1. Determine and record moisture content for wood to be used in test. See Technical Notes 3 and 4, pp. (Note: this is generally done for a series of tests, rather than for each individual test.)
2. Note and record the test conditions. Prepare a drawing of the pots and stove to be tested. (Note: in any test series be sure to use the same pots for all tests.) Include all relevant stove dimensions and show how the pots fit into the stove (Technical Note 9). Note climatic conditions (Technical Note 8).

3. Weigh the empty, dry pots, and record this weight on the Data and Calculation Form. Fill each pot with water to 2/3 capacity and record the new weight.

4. Take a quantity of wood not more than twice the estimated needed amount, weigh it, and record the weight on the Data and Calculation Form.

5. Place a thermometer in each pot so that water temperature may be measured in the center, about 1 cm from the bottom. Record water temperatures and confirm that they vary no more than 2 [degrees] C from ambient.

6. After a final check of preparations, light the fire as in Technical Note 10. Record the exact starting time. Throughout the following "high power" phase of the test, control the fire with the means commonly used locally to bring the first pot to a boil as rapidly as possible.

7. Regularly record the following on the Data and Calculation Form:

- * the water temperature in each pot;
- * the weight of any wood added to the fire;
- * any action taken to control the fire (dampers, blowing, etc.); and
- * the fire reaction (smoke, etc.).

8. Record the time at which the water in the first pot comes to a full boil.

9. At this time rapidly do the following:

- * Remove all wood from the stove and knock off any charcoal. Weigh the wood, together with the unused wood from the previously weighed supply.
- * Weigh all charcoal separately (Procedural Note 2).
- * Record the water temperature from each pot.
- * Weigh each pot, with its water.
- * Return charcoal, burning wood, and pots to the stove to begin the "low power" phase of the test.

Record all measurements on the Data and Calculation Form.

With practice a single tester can complete this step within 2 to 4 minutes and move on to Step 10 without introducing significant error to the data. If, however, this interruption is judged too difficult or disruptive, an alternate procedure is suggested in Procedural Note 3.

10. For the next 30 minutes maintain the fire at a level just sufficient to keep the water simmering. Use the least amount of wood possible, and avoid vigorous boiling. Continue to monitor all conditions noted in Step 7. If the temperature of the water in the first pot drops more than 5 [degrees] below boiling, the test must be considered invalid.

11. Recover and weigh separately the charcoal and all remaining wood. Record the weights.

12. Weigh each pot with its remaining water. Record the weight.

13. Calculate the amount of wood consumed, the amount of water remaining, the test duration, the Specific Fuel Consumption, and, for multipot stoves, the Consumption Ratio (Procedural Note 5). Minimum and maximum power levels may also be calculated (Technical Note 11).

14. Interpret test results (see Procedural Note 4), and fill out a Test Series Reporting Form.

PROCEDURAL NOTES

1. Stove tests are often conducted with lidded pots to reduce the effect of drafts on evaporation rate from the pot. However, if the testing site is properly protected from drafts, lids should be left off, thus reducing the error caused by condensed water dripping from the lid back into the pot.

2. With lightweight stove models, often the stove and its contents can be weighed together as a unit, and the weight of the empty stove subtracted later. It is not necessary to separate charcoal and ashes, since ash weight is usually insignificant.

3. "High power" and "low power" tests may be conducted separately. The fire is extinguished at the end of Step 7, and the stove is allowed to cool. The entire test is then repeated in exactly the same way, except that the fire is reduced the moment the first pot comes to a boil. There is no interruption to weigh water or fuel as described

in Steps 8-13.

The test is ended 30 minutes after boiling, and all measurements are recorded. The weight of the fuel used during the high power phase is subtracted from the total amount used in the low power phase. A separate or modified data sheet is needed for recording test results.

Final calculations remain unchanged.

4. It is important to know how to interpret the results of the WBT, and to remember that a low specific fuel consumption indicates a high efficiency. As efficiency declines, Specific Fuel Consumption (SFC) rises. It is possible to use WBT results to judge the suitability of a stove for various cooking tasks. For example, for high power cooking (rapid frying and boiling), a stove with the greatest high power efficiency might be best; for simmering, however, the best stove might be the one that shows low SFC for both high and low power. (See also Appendix A which explains concepts of efficiency.

5. The Consumption Ratio may be useful when testing stoves that accommodate more than one pot. It expresses the amount of water evaporated from the main pot as a fraction of the total evaporated from all pots.

The consumption ratio is always less than 1.0. The lower its value, the lower the proportion of heat used by the main pot.

There are at least two ways in which the Consumption Ratio may be useful to the stove tester:

a) It serves as a check on consistent stove operation. With multipot stoves the user determines how heat from the fire is apportioned to the various pots. In a series of Water Boiling Tests it is essential that this be done in a consistent manner. By comparing the Consumption Ratios in a test series one can detect variations in stove operation.

b) It may help to show whether enough heat reaches all the pots to be useful for cooking.

As a rule, Consumption Ratio should not be used as a correction factor for comparison of multipot and singlepot stoves. Such comparisons are never valid in Water Boiling Tests because of the many interfering variables.

WATER BOILING TEST

DATA AND CALCULATION FORM(*)

Test Number _____ Location _____
Date _____ Test conditions _____
Stove _____ Remarks _____
Tester _____

END OF END OF
INITIAL HIGH POWER LOW POWER
MEASUREMENT PHASE PHASE

Wood moisture content a) _____
 Dry weight of Pot #1 b) _____
 Dry weight of Pot #2 c) _____
 Weight of wood d) _____ kg j) _____ kg s) _____ kg
 Weight of charcoal k) _____ kg t) _____ kg
 Weight of Pot #1 with water e) _____ kg m) _____ kg u) _____ kg
 Weight of Pot #2 with water f) _____ kg n) _____ kg v) _____ kg
 Water temperature, Pot #1 g) _____ [degree] C p) _____ [degree] C w) _____ [degree] C
 Water temperature, Pot #2 h) _____ [degree] C q) _____ [degree] C y) _____ [degree] C
 Time i) _____ r) _____ z) _____

(Use the graph outline on reverse side to record changes in water temperature)

CALCULATIONS HIGH POWER PHASE LOW POWER PHASE

Wood consumed A) $d-j =$ _____ kg J) $j-s =$ _____ kg
 Charcoal remaining B) $K =$ _____ kg K) $t-k =$ _____ kg
 Equivalent dry wood consumed C) $A/(1+a)-1.5 B =$ _____ kg L) $J/(1+a)-1.5 K =$ _____ kg
 Water vaporized, Pot, #1 D) $e-m =$ _____ kg M) $m-u =$ _____ kg
 Water vaporized, Pot #2 E) $f-n =$ _____ kg N) $n-v =$ _____ kg
 Consumption ratio F) $D/(D+E) =$ _____ P) $M/(M+N) =$ _____
 Specific fuel consumption G) $C/D =$ _____ Q) $L/M =$ _____
 Duration of test H) $r-i =$ _____ R) $z-r =$ _____
 Burning rate I) $C/H =$ _____ kg/min S) $L/R =$ _____ kg/min


Overall Specific Fuel Consumption (SFC): $(C+L)/(D+M) = \underline{\hspace{2cm}}$

(*) This is an example of a form to be completed every time a test is run. It is easily modified for cases where high and high-low power phases are run independently.

<TIME/TEMPERATURE PLOT - HIGH POWER PHASE>

44p08.gif (600x600)

TIME/TEMPERATURE PLOT - HIGH POWER PHASE

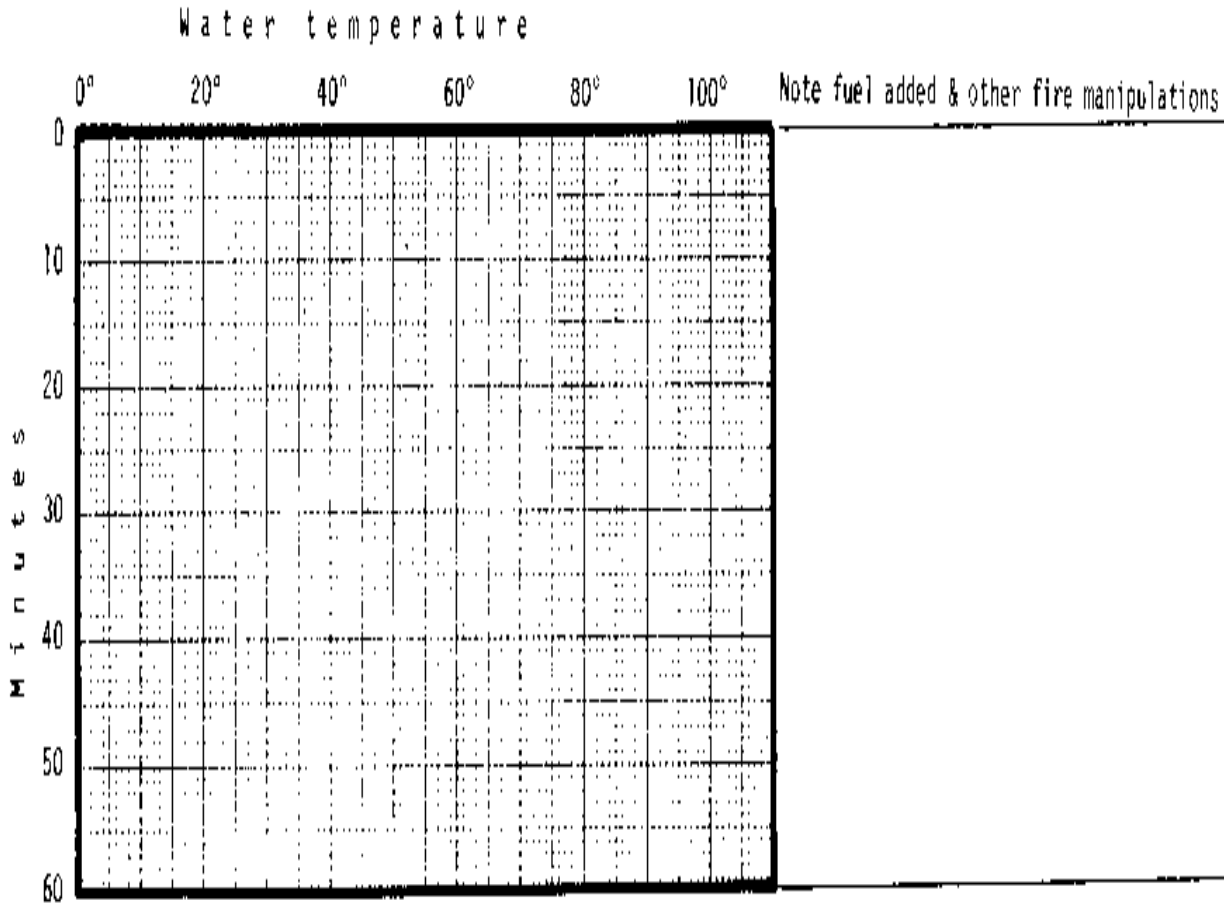

**WATER BOILING TEST
TEST SERIES REPORTING FORM**

Organization conducting tests _____

Mailing address _____

Name of stove tested _____

Test numbers being reported _____ Test supervisor _____

SUMMARY OF TEST CONDITIONS (draft protection, ambient temperature, etc.)

FUELWOOD

SPECIES APPROX % TOTAL MOISTURE MEAN DIMENSIONS

(Botanic name) (by weight) CONTENT

Species	Approx % Total Moisture	Mean Dimensions
_____	_____ Kg _____ %	_____
_____	_____ kg _____ %	_____
_____	_____ kg _____ %	_____
_____	_____ kg _____ %	_____

POTS USED

POT 1 POT 2 POT 3

Weight (empty, dry) _____ kg _____ kg _____ kg
 Maximum capacity _____ liters _____ liters _____ liters
 Diameter at rim _____ cm _____ cm _____ cm

Composition _____

SUMMARY OF TEST RESULTS

HIGH POWER PHASE LOW POWER PHASE

TEST BURNING RATE SFC BURNING RATE SFC OVERALL

NO. (kg/min) (kg/min) SFC

1	_____	_____	_____	_____	_____
2	_____	_____	_____	_____	_____
3	_____	_____	_____	_____	_____
4	_____	_____	_____	_____	_____
5	_____	_____	_____	_____	_____

(Full description of stove on reverse side)

(* This is an example of a form to summarize and report results from a series of water boiling tests. It is easily modified for cases where high and high-low power phases are run independently.

DESCRIPTION OF STOVE:

TOP VIEW PERSPECTIVE**CUTAWAY VIEW WITH POT(S) FRONT****DETAILS OF STOVE CONSTRUCTION**

CONTROLLED COOKING TEST

The Controlled Cooking Test is intermediate to the rather simple Water Boiling Test and the involved Kitchen Performance Test. It is intended to provide estimates of the fuel consumed by a set of specified cooking tasks.

Unlike the Water Boiling Tests with its rigidly fixed procedures, the Controlled Cooking Tests uses variable procedures depending on the types of meals cooked, the stove design, and the manner in which the stove is used. Results of Controlled Cooking Tests are comparable only when conducted in the same series using exactly the same procedures and conditions.

The primary objectives of the Controlled Cooking Test (CCT) are:

- * To compare the fuel consumed and the time spent in cooking a meal on different stoves; and

- * To determine whether a stove can effectively cook the range of meals normally prepared in the area where it is intended to be introduced.

The Controlled Cooking Test may also be used:

- * To compare different cooking practices on the same stove,,

- * To give a cook the opportunity to learn how to use the stove; and

- * To follow the Water Boiling Test in subjecting a stove to more realistic, but controlled, conditions.

The CCT is normally conducted in a laboratory or field demonstration center by trained stove testers with extension workers or potential users. The cook should be experienced in preparing traditional meals.

EQUIPMENT

- * A homogeneous mix of fuelwood as it is normally available locally, sufficient for the required number of tests (see Technical Note 5).

- * A selected type and amount of food sufficient for the required number of tests.

- * Weighing instrument accurate to 10 grams, with a recommended capacity of 5 to 10 kg, depending on the amount of food prepared in each test

(Technical Note 2) .

- * **Timing device.**
- * **The same pots, lids, and other cooking utensils to be used throughout the test.**
- * **Forms for recording data and calculations.**
- * **Optional: wire tongs for handling hot charcoal and wood; insulated gloves.**

PROCEDURE

1. **Establish a test design that accurately represents common local cooking procedures. (Procedural Note 1). It is advisable to test both new and traditional stoves simultaneously under the same weather conditions and using wood of similar quality and condition.**
2. **Remove any charcoal and ash from the stove to be tested. The stove should not be warm from a previous fire.**
3. **Record climatic conditions (Technical Note 8).**
4. **Take a quantity of wood not more than twice the estimated amount needed measure moisture content (Technical Notes 3, 4). Weigh it and record the weight on the Data and Calculation Form.**
5. **Weigh the pots with their lids (if lids are normally used) and record**

the weight.

6. Assemble, prepare and weigh the food to be cooked.
7. Light the fire and record the time (Technical Note 10).
8. Perform the defined cooking task.
9. When the cooking task is completed, record the time (Procedural Note 2).
10. Weigh separately the remaining wood and charcoal.
11. Weigh the food in its pots, including any lids.
12. Record comments from the cook on any problems encountered during the test, including qualitative differences between the tested stove and other stoves.
13. Repeat the same test at least three times for each type of meal cooked. More tests may be required if there is much variation in the results.
14. For each test calculate total test time and Specific Fuel Consumption. Then write a test report for each test using, if desired, the sample Data and Calculation Form on the following page. Include a description of:

* stoves and pots used in the test (Technical Note 9);

- * standard meal used in the test; and
- * standard procedure used to cook the meal.

PROCEDURAL NOTES

1. The CCT design is tailored to specific local meals. It is therefore important to specify the following conditions:

- * Pot types and sizes.

- * Fuelwood types and sizes.

- * One or two standard meals commonly prepared in the region. Where several types of meals are prepared, select no more than two for the test, one requiring long cooking time and the other short.

- * Exact cooking tasks and sequences required to cook the standard meal. For example: "Bring the first pot to a boil; switch the first and second pots; bring the second pot to a boil; reduce the fire by breaking off charred ends of fuel; remove the first pot and simmer the second until the food is cooked."

Establishing the test design may be done in either of two ways: 1.) by conducting a thorough survey of local cooking practices to collect the needed information; 2.) by having a team of three to five experienced local cooks define the one or two standard meals and the specific way they should be prepared and cooked for the test.

2. It is important to consider the criteria by which food will be considered

"done," since this determines the time at which the tests will be finished. It is best to determine the time objectively, such as "The skins come off the beans," or "The porridge loses all traces of graininess." However, even if the criteria used are very subjective ("The sauce tastes right"), they should still be mentioned in the test design. Whatever the criteria used, the cook must be encouraged to be very consistent in judgement.

3. Often the stove with its contents can be weighed together as a unit, and the weight of the empty stove subtracted later. It is not necessary to separate charcoal and ashes, since ash weight is usually insignificant.

CONTROLLED COOKING TEST

DATA AND CALCULATION FORM(*)

Test Number _____ Location _____

Date _____ Test conditions _____

Stove _____ Remarks _____

Cook _____

INITIAL FINAL

BASIC TEST DATA MEASUREMENTS MEASUREMENTS

Weight of wood (A) _____ kg (G) _____ kg

Weight of charcoal (H) _____ kg

Wt of Pot 1 (empty) (B) _____ kg (I) _____ kg (with cooked food)

Wt of Pot 2 (empty) (C) _____ kg (J) _____ kg (with cooked food)

Wt of Pot 3 (empty) (D) _____ kg (K) _____ kg (with cooked food)
 Time (E) _____ (L) _____
 Wood moisture content (F) _____

CALCULATIONS

(M) Weight of wood used A-G = _____ kg
 (N) Equivalent dry wood used $M / (1+F) - 1.5 H =$ _____ kg
 (P) Weight food cooked, Pot 1 I-B = _____ kg
 (Q) Weight food cooked, Pot 2 J-C = _____ kg
 (R) Weight food cooked, Pot 3 K-D = _____ kg
 (S) Total weight food cooked P+Q+R = _____ kg
 (T) Specific fuel consumption N/S = _____
 (U) Total testing time L-E = _____ min

Cook's comments about stove performance, ease of use, etc.:

(*) This is an example of a form to be used for each test that is run.

CONTROLLED COOKING TEST

DATA AND CALCULATION FORM(*)

Test Number _____ Location _____

Date _____ Test conditions _____

Stove _____ Remarks _____

Cook _____

INITIAL FINAL

BASIC TEST DATA MEASUREMENTS MEASUREMENTS

Weight of wood (A) _____ kg (G) _____ kg

Weight of charcoal (H) _____ kg

Wt of Pot 1 (empty) (B) _____ kg (I) _____ kg (with cooked food)

Wt of Pot 2 (empty) (C) _____ kg (J) _____ kg (with cooked food)

Wt of Pot 3 (empty) (D) _____ kg (K) _____ kg (with cooked food)

Time (E) _____ (L) _____

Wood moisture content (F) _____

CALCULATIONS

(M) Weight of wood used A-G = _____ kg

(N) Equivalent dry wood used $M / (1+F) - 1.5 H =$ _____ kg

(P) Weight food cooked, Pot 1 I-B = _____ kg

(Q) Weight food cooked, Pot 2 J-C = _____ kg

(R) Weight food cooked, Pot 3 K-D = _____ kg

(S) Total weight food cooked P+Q+R = _____ kg

(T) Specific fuel consumption N/S = _____

(U) Total testing time L-E = _____ min

Cook's comments about stove performance, ease of use, etc.:

(* This is an example of a form to be used for each test that is run.

CCT Series Reporting Form (continued)

Defined procedures for cooking the meal. _____

Summary of cook's comments, Stove #1 _____

Summary of cook's comments, Stove #2 _____

KITCHEN PERFORMANCE TEST

The Kitchen Performance Test (KPT) measures the relative rate of fuelwood consumed by two stoves as they are used in the normal household environment. It is a prolonged test conducted with the willing cooperation of individual families. Compared to the previously described tests, the results of the KPT can provide the most reliable indication of stove performance under actual household conditions. However, because of the large effort involved, it is normally conducted only after the more controlled tests have been completed.

The primary objectives of the KPT are:

- * To study the impact of a new stove on overall household energy use (Procedural Note 1); and
- * To demonstrate to potential users the fuel-saving quality of a new stove in the household, and to specific correct operating practices.

Variations of the Kitchen Performance Test may also be used in conjunction with a stove dissemination program (Procedural Note 2) or as part of a survey of household energy use (Procedural Note 3).

Kitchen Performance Tests should be carried out by an investigator who is accustomed to following instructions, is motivated to do so, and has certain basic numerical skills.

EQUIPMENT

- * Balance for weighing fuelwood. (Technical Note 2)
- * Forms for recording data and calculations
- * Pots, etc., to be supplied by household

PROCEDURE

1. Select households to participate in the test (Procedural Note 4). Explain to family members the purpose of the test, and arrange to measure their fuelwood each day. Encourage the family to use only a single stove throughout the testing period.
2. Gather any needed information about each participating household. For example: determine the sex and age of each person served meals, and use this information to calculate the number of standard adult persons served (Procedural Note 5); ask about the approximate cost of the fuelwood used, in terms of either money spent or time needed to collect it; and collect any other information that may help interpret the final data (Procedural Note 6).
3. Define an inventory area for fuel consumption measurement. Any fuel entering or leaving this area must be accounted for (Procedural Note 7). Weigh all wood and other fuels in the inventory area. Estimate or measure the moisture content of the wood (Technical Note 4).
4. Define the testing period of seven consecutive days. If it is not possible to measure for seven days, measure for at least five days.

Stop and start at the same hour each day (Procedural Note 8).

5. Visit the household at least daily, if possible, without being intrusive. Weigh wood remaining in the inventory area, and add to it if necessary. Inquire about the number of people being served each day, and confirm that the stove is operating properly.

6. Compile the results at the end of eight days. Calculate specific daily consumption for each household, and then the mean and standard deviation (Technical Note 12). Compare the results with those from households using other stoves.

7. Inform participating families of the results, and thank them for their cooperation.

PROCEDURAL NOTES

1. The introduction of a new stove may alter the amount and type of cooking done in the household. For example, the result may be a substantial improvement in the well-being of the family, but make little change in overall fuel use. Or it may be that a fire enclosed within the stove provides so little light that it becomes necessary to use a kerosene lamp.

2. It may be tempting to use the results of the KPT to estimate the fuel saving potential of a new stove before it is widely accepted and used. For this purpose, however, the test would have to be greatly expanded to include:

- * many more households, carefully selected to be representative of the regional population;
- * a period of time that includes all major seasons;
- * a study of stove deterioration rates and repair records; and
- * an economic analysis demonstrating the economic attractiveness of the stove to both the user and the producer.

3. A survey of cooking practices to determine current local cooking procedures, foods cooked and eaten, types of stoves used, etc., is a useful starting point for the development and dissemination of improved cook stoves. The survey may be accompanied in a number of households by a measurement of all the fuel used for cooking, such as is involved in the Kitchen Performance Test.

Later, new stoves can be introduced into these same households, and another KPT may be carried out after the households have had an opportunity to get acquainted with the new stoves. At that time the KPT may be accompanied by a user survey to determine how well the stoves are being received, with later surveys to evaluate other parameters such as stove durability. Later KPTs may be performed to evaluate whether the fuel savings have remained the same and if other factors have had a positive or negative influence on the stove's long-term acceptability.

4. For meaningful results:

* Households should be selected from approximately the same economic level. This will reduce variation and permit more reliable interpretation of the results.

* Participating families should use fuelwood for at least 90 percent of their household cooking needs.

* A minimum of five participating households is essential. Depending on the expected difference in fuel use between the two stoves tested, a larger number of households may be necessary.

5. For purposes of this test, the "standard adult" will be defined according to a simplified version of the widely used League of Nations formula as shown in Table I. (Guidelines for Woodfuel Surveys, for F.A.O. by Keith Openshaw).

TABLE I

"Standard adult" defined in terms of sex and age

Fraction of
Sex and age standard adult

Child, 0-14 years 0.5

Female, over 14 years 0.8

Male, 15-59 years 1.0

Male, over 59 years 0.8

6. Other information gathered for each family may include:

- * the number and types of any other stoves used regularly (for making tea, heating water, cooking manioc, etc.);
- * the major activity of the head of the household (a possible indication of family economic level);
- * easily observable indicators of social or economic status;
- * uses made of fuelwood other than for cooking food; and
- * tribal or cultural affiliation.

7. It is recommended that no more fuel be in the inventory area than is likely to be consumed during the one-week test period. If much more fuel is stored than will be used, define a smaller inventory area from which all fuel for the test is taken. Stress to household members that only wood from the small area be used during the test, and that if more wood is needed, the investigator should be present when it is added to the pile. The number of visits the investigator must make to the household to weigh the wood will depend on the size and adequacy of the initial inventory.

8. The recommended seven-consecutive-day test period recognizes that many family activities are conducted according to a weekly routine. Seven days is the shortest time likely to include market days, work days, and any weekly religious observances in their proper proportion.

It often happens that the person conducting the test is unwilling to

work on the day of weekly religious observance. In such a case, advance provision should be made for a substitute on that day, if possible.

Note that a seven-day test usually requires eight days of measurement (see Data and Calculation Reporting Form on the following page). Similarly, if only a five-day test is planned, measurements will be taken for six days.

9. Different types and sizes of wood used by different households may introduce unwanted variation to test results. To avoid this, the tester may consider providing uniform fuelwood to be used for the duration of the test. It is important, however, that this practice not encourage the household to use significantly more or less wood than it would normally.

KITCHEN PERFORMANCE TEST

DATA AND CALCULATION FORM(*)

Household No. _____ Family Name _____
Location _____

HOUSEHOLD

STANDARD ADULT

NUMBER EQUIVALENTS OTHER HOUSEHOLD INFORMATION

Children 0-14 years	_____	x 0.5 =	_____	_____
Women over 14 years	_____	x 0.8 =	_____	_____
Men aged 15-59 yrs.	_____	x 1.0 =	_____	_____

Men over 59 years _____ x 0.8 = _____

(A) TOTAL ADULT EQUIVALENTS: _____

FUELWOOD

SPECIES APPROX. % TOTAL MEAN MEAN
(Botanic name) (by weight) LENGTH DIAMETER

_____	_____	_____	_____	_____	_____
			cm		cm
_____	_____	_____	_____	_____	_____
			cm		cm
_____	_____	_____	_____	_____	_____
			cm		cm

Condition of fuelwood: (dry / damp / wet / green) _____

Fuelwood cost per kg: _____ OR _____ = \$ _____

estimated collection time local currency US dollars

ALTERNATE FUELS/STOVES

DESCRIPTION FUNCTION

Other fuels in use: _____

Other stoves in use: _____

TOTAL WOOD REMAINING WOOD ADDED TO
IN INVENTORY AREA INVENTORY AREA COMMENTS

Day 0 (None) kg _____ kg _____

Day 1 _____ kg _____ kg _____
 Day 2 _____ kg _____ kg _____
 Day 3 _____ kg _____ kg _____
 Day 4 _____ kg _____ kg _____
 Day 5 _____ kg _____ kg _____
 Day 6 _____ kg _____ kg _____
 Day 7 (B) _____ kg (None) kg _____

(C) TOTAL WOOD ADDED TO INVENTORY: _____ kg

(D) TOTAL WOOD CONSUMED: C-B = _____ kg

(E) TEST DURATION: _____ days

SPECIFIC DAILY CONSUMPTION: D/(AxE) = _____

(*) This is an example of a form to be used for each participating household.

KITCHEN PERFORMANCE TEST

TEST SERIES REPORTING FORM(*)

Organization conducting tests _____

Address _____

Names of stoves compared: (1) _____ (2) _____

Testing location _____

Testing period _____ Names of test supervisor _____ Name
 of test supervisor _____
 (months) (year)

STOVE #1

STANDARD ADULT SPECIFIC DAILY FUELWOOD

EQUIVALENTS CONSUMPTION COST / KG

ARITHMETIC MEAN: _____
 STANDARD DEVIATION: _____
 COEFFICIENT OF VARIATION: _____
 STANDARD ERROR _____
 95% CONFIDENCE INTERVAL: _____

STOVE #2

ARITHMETIC MEAN _____
 STANDARD DEVIATION: _____
 COEFFICIENT OF VARIATION: _____
 STANDARD ERROR: _____
 95% CONFIDENCE INTERVAL: _____
 (TOTAL NUMBER OF TESTS _____)

Specific Daily Consumption: t-Value= _____ at _____ % level of confidence
 and _____ degrees of freedom.

(Attach a full description of both stove models tested)

(* This is an example of a form used to summarize and report results from
 a series of tests of two stoves being compared.

TESTING PROCEDURES

1. Atmospheric pressure and boiling temperature

The normal boiling temperature of water depends on atmospheric pressure, which is mainly a function of altitude above sea level. At an altitude ((H)) the normal boiling temperature can be computed from

$$[T.\text{sub}.b] = (100 - H/300) [\text{degrees}] \text{ C}$$

when H is expressed in meters. For example, the normal boiling point is 100 [degrees] C at sea level, and 95 [degrees] C at 1500 m altitude.

When comparing high-power WBT results from different places this can be taken into account by using a simple temperature factor:

$$W'' = W' ([T.\text{sub}.b] - [T.\text{sub}.o])/100$$

where W'' is the corrected amount of water processed, [W.sub.o] is the weighed quantity of water, and [T.sub.o] is the starting temperature. The reference temperature difference is considered to be 100 [degrees] C.

Note that cooking times increase with reduced boiling temperatures at high altitudes. The cooking time is doubled for a temperature decrease of 5 [degrees] to 10 [degrees] C, depending on the kind of food. This may influence

Kitchen Performance Test results, but not Water Boiling Tests.

2. Weight (mass)

Weighing can be done with any good balance that is accurate to a minimum 1 percent of the full-scale reading. For field testing, direct

reading instruments are preferable, as no adjustments of weights are needed. Spring balances do a good job if they have a long reading scale and thus good resolution, and if they are used within 20 to 100 percent of the full capacity. Spring balances should occasionally be checked with calibrated weights (1 liter of water weighs 1 kg, etc.) A set of balances with different full-scale capacities should be used; for example, 1, 5, and 15 kg. Compare them with each other: they should give the same reading for the same load.

The weighing basket used with a balance should be as light as possible, since precision is lost when the difference between two weighings is relatively small.

3. Moisture content of wood.

The available heating energy of fuelwood is directly influenced by its moisture content. This is usually expressed on the basis of dry wood, according to

mass of moisture in wood sample

$$\text{Moisture content (x)} = \frac{\text{mass of moisture in wood sample}}{\text{mass of oven-dry wood sample}}$$

Thus the heating value of moist wood, [H.sub.x], can be calculated from the heating value of oven-dry wood, [H.sub.o], by

$$[\text{H.sub.o}] [\text{H.sub.x}] - \frac{\text{Ho}}{1 + x} \quad (*)$$

So-called "air-dried" wood is, in fact, moist. Its moisture content

varies with the average relative humidity and with the species of wood.

For example, in saturated air (RH = 1), 1.0 kg of dry wood will contain about 0.2 kg of water (possibly more). At a lower RH = 0.6, the moisture content X drops to about 0.12. Of course, RH and X can be expressed as percentages as well.

As a consequence, a larger quantity of moist wood [M.sub.x] is needed for a given job than of dry wood [M.sub.o]. This can be accounted for by computing an equivalent dry wood consumption from a measured moist wood quantity.

(equiv. dry wood) [M.sub.o] = (1 - X) . [M.sub.x] (moist wood)

(*) This is an approximate formula. For a more exact formula, see K. Krishna Prasad, "Wood-burning Stoves: Their Technology, Economics, and Deployment," Working Paper for World Employment Programme Research, International Labour Organization, Geneva, 1983.

4. Moisture measurements

The moisture content (X) of air-dried firewood can be estimated from the humidity RH (See Technical Note 3) ($X = 0.2 \text{ RH}$).

The most direct and precise procedure is to make a double weighing of a moist or air-dried sample: first as it is, and then after drying it in an oven (at 110 [degrees] C for 24 hours or more, depending on the sample size). With [M.sub.x] (moist weight) and [M.sub.o] (dry weight):

The precise weight of the wood sample can be recorded periodically. When there is no change in two successive weighings the sample is presumed to be oven-dry and its new weight, [M.sub.x], is recorded. The moisture content of the original sample is then given by

$$X = ([M.sub.x] - [M.sub.o]) / [M.sub.o]$$

where [M.sub.x] is moist weight and [M.sub.o] is oven-dry weight.

When a commercial drying oven is not available, it is possible to construct a simple substitute using electric light bulbs. For a description, see the article by Bill Stewart in Boiling Point, published by Intermediate Technology Development Group, April 1984.

An alternative method to determine moisture content is by use of a battery-powered moisture meter. These devices work on the principle that electrical conductivity of the wood varies with its moisture content. The results depend slightly on the species of wood and the quality of the instrument used. Generally they detect as little as $X < 0.3$.

5. Fuelwood variation

Different types, sizes, and conditions of fuelwood are a potential source of great variation in all the tests presented here. The following precautions can help minimize this variation:

* Use only wood that has been thoroughly air dried. For sticks 3 to 4

cm in diameter drying time may be 3 to 8 months, depending on temperature, relative humidity, degree of protection from rain and mists, amount of air circulating through the wood pile, and wood species. Hot water and steam escaping from the wood as it is burned are indications of very moist wood.

* Wood may be cut in a uniform size (3 x 3 cm, for example) and only this wood used for stove testing. While this gives uniformity, it is often difficult to ignite and maintain a fire without smaller or tapered pieces.

Alternatively, if a series of tests is planned, prepare in advance a stack of fuelwood to be used for each test. Stacks should be as similar as possible in terms of wood type and size. They should then be bound tightly to prevent loss of any pieces. Sealing each wood stack in a large plastic bag will protect the wood from outside moisture.

6. Temperature

Mercury thermometer are, in general, precise but breakable. The glass can break, and the liquid column can separate as well. Spare glass thermometers should be kept on hand. Metallic thermometers are more resistant but need periodic calibration, for example, by comparison with a good quality glass thermometer. Rechargeable battery-operated thermistors and thermocouples have proven very useful in field work, although models with digital readouts that are indistinct in direct sunlight should be avoided. In any case, look for instruments with a long scale, as they give better resolution and precision.

Before using a thermometer for stove testing, check it in visibly boiling water and look for a possible difference between the reading and the normal boiling point for that altitude:

altitude (meters)

Actual boiling point = $100 - \frac{\text{altitude}}{300}$

For Water Boiling Tests, simmering means that the water temperature is kept no lower than 5 [degrees] C below the actual boiling temperature. If water temperature does drop below this point, the test should be discontinued.

7. Volume

Volumes can be measured with graduated bottles. One can also use commercial bottles with known volumes (1/4, 1/3, 3/4, 1/1 liter). A balance can do the job, too, as 1 liter of water weighs 1 kg.

8. Climatic conditions

Among the climatic data to be reported during stove testing, the most important are: air temperature, wind conditions, and relative humidity.

* Air temperatures affects the rate of heat loss from stove and pots. It is also establishes initial water temperature in the Water Boiling Test. Ideally, air temperature measurements should be taken before and after each test so that a mean value can be estimated.

* Wind conditions affect the stove's draft and can have considerable influence on stove performance. Ideally, stove testing should be done only when conditions are calm. Where this is not possible, a windbreak should be erected around the stove to reduce air movement.

* Relative humidity provides one indication of the moisture content of air-dried firewood (see Technical Note 3). It is simple and useful condition to measure during stove testing. For this purpose, a small sling psychrometer, a hair hygrometer, or a similar instrument is satisfactory. Recalibrate a hygrometer frequently by wrapping it in a wet cloth, leaving it for five minutes, and adjusting it to 100 percent RH.

9. Pot and stove description

The test results are determined largely by dimensional relations between the stove and the pot. The internal dimensions of the stove are especially important. Therefore:

* Give a complete pot description (size, shape, weight, capacity, material, etc.).

* Give a functional stove description (inside dimensions, total weight, wall thickness, etc.). Sketches should show at least the top view, cutaway side view with placement of pots, and a perspective. Drawings should be clearly labeled and all dimensions should be marked.

10. Ignition

For Water Boiling Tests and Controlled Cooking Tests it is important to light the fire in the way it is normally done in the households of the area. For example, if kerosene (paraffin) is used as the ignition material, three pieces of wood can be dipped vertically into kerosene (about 8 cm deep) for about five seconds, and the excess kerosene tapped off. The kerosene-dipped wood should contain about 10 grams of kerosene (check it by weighing the wood before and after dipping). Or, a measured amount of kerosene (less than 10 grams) may simply be poured over the wood. The test's starting time coincides with the lighting of the kerosene-soaked wood pieces. If desired, the kerosene used may be considered as consumed fuel (1 gram of kerosene is equivalent to about 2 grams of wood); however, the energy involved is so small that it may safely be ignored in the calculations.

11. Calculation of power

Power refers to the rate at which energy is used. It may be expressed as the amount of fuel used per unit of time (for example, 3 kg wood/hour, or 50 grams/minute). A widely used unit of power is the watt, defined as one joule of energy per second. (one gram of air-dry wood yields about 20 joules).

Therefore, if a stove consumes 300 grams of wood in 5 minutes you may calculate the power level during that time as follows:

$$\frac{300 \times 20 \text{ joules}}{5 \text{ minutes}} = \frac{6000 \text{ joules}}{300 \text{ seconds}} = 20 \text{ joules/sec} = 20 \text{ watts}$$

5 x 60 seconds 300 seconds

12. Statistical Analysis of Test Results

Any set of tests yields many measurements of a few well-defined parameters. To get the maximum amount of information and insight about the system being tested, it is useful to make a few relatively simple statistical calculations. In principle, these can be carried out on all the tests described in these guidelines. In practice, the Water Boiling Tests and the Controlled Cooking Tests can be expected to be performed under laboratory-like conditions by technically trained personnel. Variations in test results can generally be attributed to either a faulty test design or deliberate changes introduced by the tester on the system or its operating conditions. Thus analysis of results is simple. However, the Kitchen Performance Test contains several variables that are not under the control of the test designer enter into the picture. This is the place where the statistical analysis becomes vital.

GLOSSARY

CONSUMPTION RATIO: An expression sometimes used in the WBT with multipot stoves. It describes the amount of water evaporated from the first pot relative to the water evaporated from all the pots on the stove and is calculated by $CR = [W.sub.1]/([W.sub.1] + [W.sub.2] + [W.sub.3] + \dots + [W.sub.n])$, where W is the amount of water evaporated.

CONTROLLED COOKING TEST (CCT): An intermediate laboratory test to compare fuel and time used to prepare a meal on different stoves, and

to determine the range of meals a stove can accommodate in a given area. See page 11.

HIGH POWER: Maximum stove power. WBT high power phase brings the water to boiling as rapidly as possible, and then maintains boiling at the same heat level for 15 minutes. See page 1.

KITCHEN PERFORMANCE TEST (KPT): A field test to measure fuel consumption in a normal household situation. See page 19.

LOW POWER: Minimum stove power. WBT low power phase requires the fire to be maintained at the lowest level necessary to simmer water for one hour. See page 1.

SPECIFIC FUEL CONSUMPTION (SFC): An expression of the total amount of food or water in the CCT or wet, divided by the total amount of wood used to cook it. See the Data and Calculation form on pages 7 and 15.

SPECIFIC DAILY CONSUMPTION (SDC): An expression used in the KPT to describe the amount of fuelwood (in kg) used for cooking per person served per day. See the KPT Data and Calculation Form on page 25.

STANDARD ADULT EQUIVALENT: A standard way to define and compare the number of people in a family group. See Table I, page 22.

WATER BOILING TEST (WBT): A simple laboratory test to measure the fuel and time necessary to cook a simulated meal. See page 1.

ABBREVIATIONS

C Celsius

CCT Controlled Cooking Test

cm centimeter

ISO International Standards Organization

kg kilogram

KPT Kitchen Performance Test

kW kilowatt

RH relative humidity

SDC Specific Day Consumption

SFC Specific Fuel Consumption

WBT Water Boiling Test

APPENDIXES

A. Concepts of Efficiency

B. Participants at Arlington Meeting

C. Participants at Louvain "Woodstoves Seminar"

D. Participants at Marseille Meeting

Appendix A

CONCEPTS OF EFFICIENCY


There are many different ways of looking at stove performance and of measuring stove efficiency. A widely used method compares the energy that goes into the stove with the energy that comes out, to determine Percentage of Heat Utilized (PHU). A broader concept of efficiency accounts for energy losses in evaporation. Once food reaches the boiling point, the amount of additional heat it absorbs is relatively small. In water-based cooking the pot requires only enough heat to maintain boiling temperatures--all else is excess. This excess heat is used to generate steam, which escapes from the pot without adding anything to the cooked food. Thus a stove that is regulated to maintain simmering temperature with at least production of steam is, in that respect, most efficient. This section will review some different ways of measuring

1. Energy losses

Figure 6 is an energy flow diagram for a woodburning

44p08.gif (600x600)

TIME/TEMPERATURE PLOT - HIGH POWER PHASE

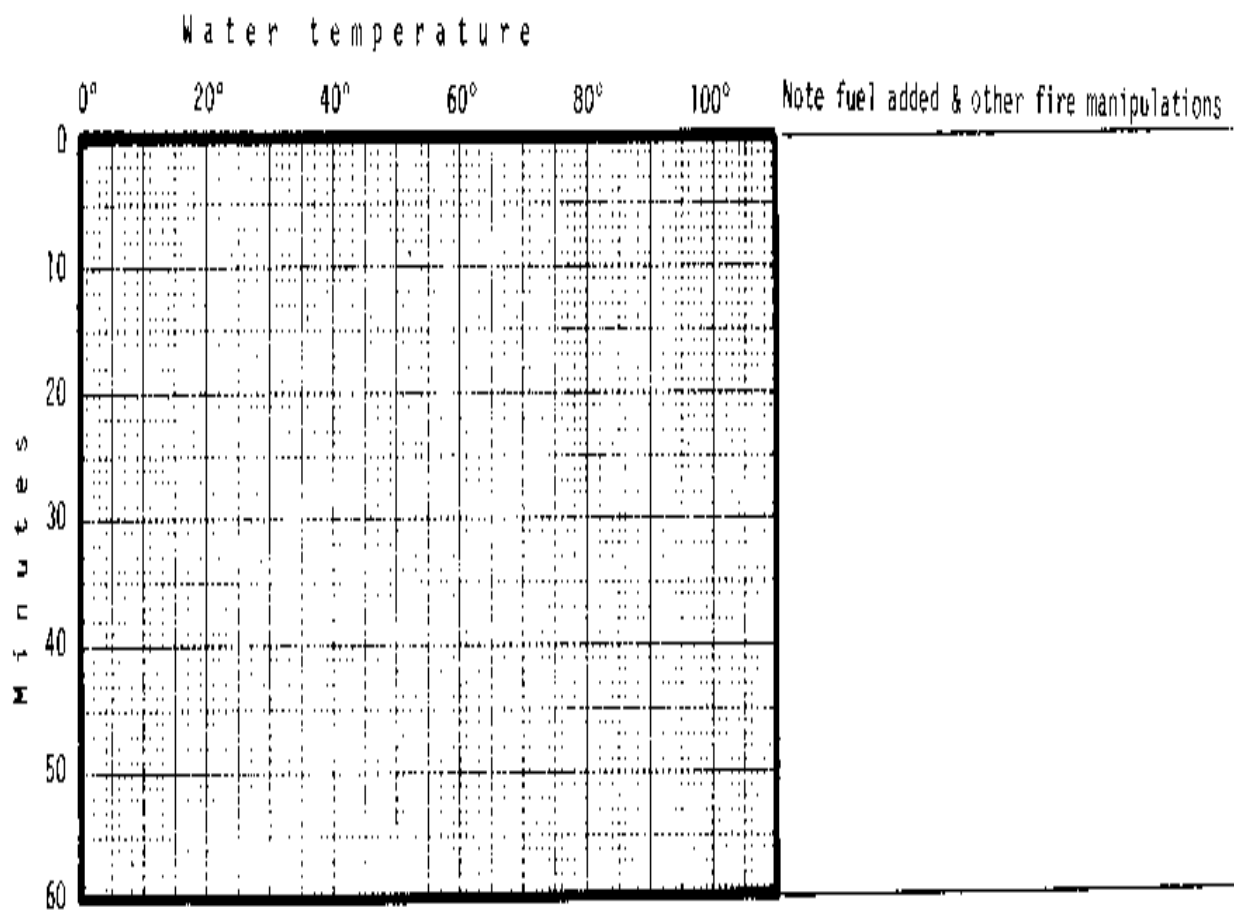

44p41.gif (600x600)

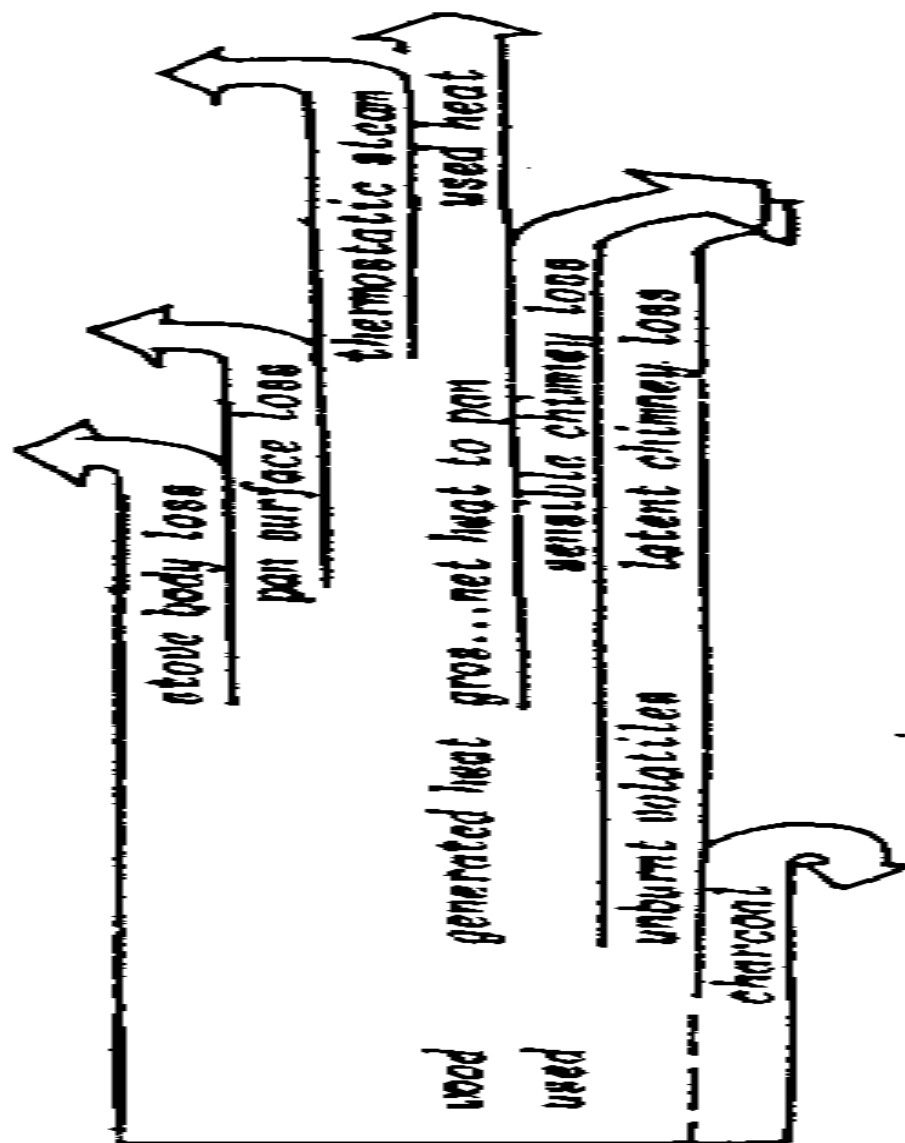


Figure A-1

cook stove. Useful heat is absorbed in the food, but heat losses are associated with:

- incomplete combustion of wood

- heat loss from the stove body to the environment
- heat loss from the pot surfaces (including lids)
- heat loss through the chimney
- thermostatic steam escaping from the pot due to excessive stove power.

2. Partial efficiencies

Different partial efficiencies can be suggested, for example:

* combustion efficiency

heat generated by combustion

$$[n.sub.c] = \frac{\text{energy potential in fuelwood}}{\text{energy potential in fuelwood}} -$$

o heat transfer efficiency

gross heat input to the pan

$$[n.sub.t] = \frac{\text{heat generated}}{\text{heat generated}}$$

<FIGURE A-1>

44p41.gif (437x437)

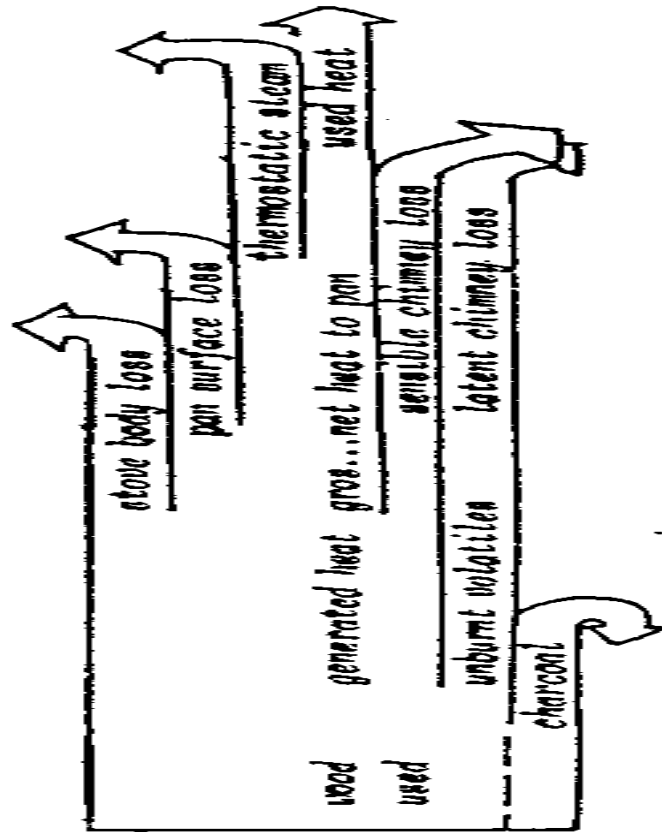


Figure A-1

* pot efficiency

[n.sub.p] = net heat input to pot = gross heat input - surface losses

gross heat input gross heat input

* control efficiency

[n.sub.r] = heat absorbed by the food

net heat input to the pot

These efficiencies can be associated with stoves operated in predictable or well-defined ways, such as at a single power level, or in defined cooking patterns.

3. Overall efficiency

An "overall stove efficiency" is often used. This is a product of the first three partial efficiencies described above.

n' = net heat input to pot

energy potential in fuelwood = $[n.sub.c] \cdot [n.sub.t] \cdot [n.sub.p]$

A cooking efficiency can be defined as:

* $[n.sub.c]$ = heat absorbed by the food

energy potential in fuelwood

This final efficiency level accounts for all the heat losses. It is the overall stove efficiency multiplied by control efficiency:

$n = [n.sub.c] \cdot [n.sub.t] \cdot [n.sub.p] \cdot [n.sub.r] = n' \cdot [n.sub.r]$

4. Specific consumption

Alternatively, stove performance can be expressed by specific consumption figures instead of efficiencies. For example, at the cooking efficiency level:

$$\text{SC} = \frac{\text{mass of consumed fuelwood}}{\text{mass of cooked food}}$$

There is a link with the cooking efficiency, as

$$n = \frac{\text{heat absorbed in cooked food}}{\text{energy potential in fuelwood}}$$

$$n = \frac{(\text{mass of cooked food}) \cdot c \cdot [\Delta] t}{(\text{mass of consumed wood}) \times \text{heating value}}$$

$$1 \cdot c \cdot [\Delta] t$$

$$\text{Thus: } n = \frac{\text{SC heating value}}{\text{heating value}}$$

when c represents the weighted-mean specific heat of the food (4.184 kJ/kg), and $[\Delta]t$ the temperature change (from ambient temperature to boiling temperature).

$$\text{SC} = \frac{1 \cdot c \cdot t}{n \text{ heating value}}$$

5. Efficiencies in Water Boiling Tests

The overall stove efficiency can be measured in Water Boiling Tests by heating the stove at high power, or by heating it at a controlled power level where steam generation simulates absorbed heat. A power-efficiency plot can be drawn, with power limits [P.sub.min] - [P.sub.max].

Cooking efficiency can be measured in a similar way. Note that in this case the steam generation is a loss. At simmering power levels the cooking efficiency is close to zero. The cooking efficiency concept therefore has been applied to a cycle that includes both the heating up period and simmering. In this case, however, the cooking efficiency drops as simmering times increase.

A better approach to this problem is to switch to specific consumption concepts:

$$1 \text{ c. } [\Delta] t = [\Delta] t \cdot c$$

$$SC = \frac{\text{---}}{n \text{ H.V. } \cdot n \text{ H.V.}}$$

When the efficiency goes to zero during simmering, the SC figure will not go to infinity (which is meaningless). The reason for this is that the temperature change $[\Delta]t$ is also zero.

For practical reasons a Water Boiling Test report should give not only the specific fuel consumption, but the power limits and evaporation as well. This will make it easier to predict cooking test results from

simple Water Boiling Tests.

Cooking efficiencies can more realistically be checked in Controlled Cooking Tests. Again, the concept should be applied to the entire cooking cycle. Note, however, that for the Controlled Cooking Test the specific consumption is very dependent on the meal cooked, and can only be used to compare two stoves that have cooked the same standard meal.

Table A-1 summarizes WBT data, and shows how data from WBT can be used to judge stove performance in actual cooking tests. The procedure indicated is valid only for one-pot-hole stoves. At the top of the table are the WBT data from two different stove models. Below that the WBT data are applied to two imaginary cooking situations. In the first test, 4 kg of food is heated to boiling, and then simmered for 90 minutes. The second test is the same except that the food is simmered only 15 minutes.

The quantity of food to be cooked is expressed as

$$W' = 4 \text{ kg}$$

The expected water evaporation $[W.\text{sub}.e]$ is computed from the evaporation rate in the WBT, and the duration of the cooking test. The initial food and water used is

$$W' + [W.\text{sub}.e] = W$$

The time to boil is expected to be roughly proportional to the initial food and water

initial food and water (CCT)

$[(\text{time to boil}).\text{sub.cooking}] = [(\text{time to boil}).\text{sub.wbt}] \times$

initial water (WBT)

* The expected wood consumption is the sum of

- wood to boil: burning rate at [P.sub.max] x time to boil

- wood to simmer: burning rate at [P.sub.min] x simmer time

* The expected specific consumption derives from

wood to boil + wood to simmer

SC =

water vaporized, pot #1

The above approach gives an estimate--not a guarantee. Wood consumption might be higher than shown due to limited dynamic flexibility, poor stove control, or other reasons.

Table A-1

Using Water Boiling Test results to calculate expected stove performance in a Controlled Cooking Test.

WBT data: Stove 1 Stove 2

Power P 2 - 4 kW 1 - 4 kW

(0.4 - 0.8 kg/h) (0.2 - 0.8 kg/h)

Flexibility

(Pmax/Pmin 2 kW 3 kW)

Initial water W' 5 kg 5kg
 Water left W' 4.05 kg 4.68 kg
 Evaporation We 0.95 kg/h 0.32 kg/h
 Time to boil [t.sub.b] 20 min. 30 min.
 [SSC.sub.1] 0.055 0.080
 [SSC.sub.2] 0.167 0.127

Cooking Test 1

(4 kg x 90 min simmer)

Cooked food W' 4 kg 4 kg
 Evaporated water We $0.95 \times 90 / 60 = 1.43$ kg $0.32 \times 90 / 60 = 0.48$
 Initial food and water W 5.43 kg 4.48 kg

Time to boil [t.sub.b] $5.43 / 5 \text{kg} \times 20 \text{min} = 22 \text{min}$ $4.48 / 5 \times 30 = 27$ min
 Wood: to heat (kg) $(22 / 60) \times 0.8 \text{kg/h} = 0.293$ $(27 / 60) \times 0.8 \text{kg/h} = 0.360$
 Wood: to simmer (kg) $(90 / 60) \times 0.4 \text{kg/h} = 0.600$ $(90 / 60) \times 0.2 \text{kg/h} = 0.300$

0.893 0.660

Specific consumption 0.224 0.165

Cooking Test 2

(4 kg x 90 min simmer)

Cooked food W' 4 kg 4 kg
 Evaporated water [W.sub.e] $0.95 \times 90 / 60 = 1.43$ kg $0.32 \times 90 / 60 = 0.48$
 Initial food and water W 4.236 kg 4.08 kg

Time to boil [t.sub.b] $4.236 / 5 \times 20 = 17$ min $4.08 / 5 \times 30 = 24.5$ min

Wood: to heat (kg) $(17/60) \times 0.8 \text{ kg/h} = 0.225$ $(24.5/6) \times 0.8 \text{ kg/h} = 0.327$

Wood: to simmer (kg) $(15/60) \times 0.4 \text{ kg/h} = 0.100$ $(15/60) \times 0.2 \text{ kg/h} = 0.050$

0.325 0.377

Specific consumption 0.081 0.094

APPENDIX B

Participants at Arlington Meeting

Dr. Samuel Baldwin Mr. Hamata Ag Hantafaye
 CILSS/VITA Laboratoire d'Energie Solaire
 B.P. 3826 B.P. 134
 Ouagadougou, Upper Volta Bamako, Mali

Prof. dr. ir. G. de Leppeleire Mr. Stephen Joseph
 Laboratorium voor Koeltechniek Intermediate Technology Development
 en Klimaatregeling Group
 Katholieke Universiteit 9 King Street
 Leuven Celestijnenlaan 300 London WC2E 8HN
 3030 Heverlee, Belgium United Kingdom

Dr. Dhammika de Silva Ms. Karen Kennedy
 Wood and Cellulose Section Aprovecho Institute
 Ceylon Institute for 442 Monroe Street
 Scientific and Industrial Eugene, Oregon 97402 USA
 Research
 P.O. Box 787 Prof. dr. K. Krishna Prasad
 363 Baudhaloka Mawatha University of Technology, W&S

Colombo 7, Sri Lanka P.O. Box 513
5600 MB Eindhoven, The Netherlands
Dr. Gautam S. Dutt
Center for Energy and Ing. Marco Augusto Recinos
Environmental Studies Proyecto Le a
Princeton, NJ 08544 USA ICAITI
Apartado Postal 1552
Mr. Howard Geller Avenida 1a Reforma 4-47, Zona 10
American Council for an Guatemala, Guatemala, C.A.
Energy-Efficient Economy
1001 Connecticut Ave., N.W. Mr. Sylvain Strasfogel
Suite 530 Association Bois de Feu/GRET
Washington, DC 20036 USA 73, Avenue Corot
13013 Marseille, France
Dr. C.L. Gupta
TERI Field Research Unit Dr. Timothy S. Wood
c/o Sri Aurobindo Ashram VITA
Pondicherry 605002 India 1815 North Lynn Street
Suite 200
P.O. Box 12438
Arlington, Virginia 22209-8438 USA

APPENDIX C

Participants at Louvain "Woodstoves Seminar"

- Michel Christiaens
- G. de Lepeleire

Laboratorium voor Koeltechniek en Klimaatregeling

Katholieke Universiteit Leuven (Louvain)
Celestijnenlaan 300A
B-3030 Heverlee, Belgium
Tel.: 016-23.49.31

- **Beatrix Westhoff**
- **Franz Zinner**

Sozietat fur Entwicklungsplanung (SFE)

Friedrichstrasse 38

D-6000 Frankfurt am Main 1, West Germany

- **Van der Spek Alexander**
- **P. Bussman**
- **K. Krishna Prasad**
- **Vermeer Nord-Jan**
- **C. Nieuwelt**
- **M. O. Sielcken**
- **P. Verhaart**
- **P. Visser**
- **P.T. Smulders**
- **S.F. Laperre**
- **N. Eossche**

Technische Hogeschool Eindhoven (THE)

Postbus 513

5600 MB Eindhoven, The Netherlands

Tel: 47.38.30/47.21.47

- **D.L.M. Baay**
- **Eric Ferguson**

- W.F. Sulilatu

TON/MT

Postbus 342

7300 AH Apeldoorn, The Netherlands

- Robert Celaire

GRET/GERES, 34 rue Dumont d'Urville, 75116 Paris France

Tel: 502.10.10

Centre St. Jer me

13397 Marseille Cedex 13, France

Tel: 98.90.10, ext 367, code 264

- P. Dunn

Department of Mechanical Engineering

University of Reading

Whiteknights

Reading RG6 2AH, United Kingdom

- H.E. Huynink

Populierendreef 257

2272 RE Voorburg

The Netherlands

- Yvonne Shanahan

- Stephen Joseph

ITDG Power Unit

A.R.S. Shinfield

University of Reading

Whiteknights

Reading RG6 2AH, United Kingdom

**- Wacław L. Micuta
Bellerive Foundation
5, rue du Vidollet
CH-1202 Geneva, Switzerland
Telex: 427993, tel: (22)33.74.22**

**- Rainer Geppert
- Cornelia Sepp
GTZ GmbH
Deutsche Gesellschaft für Technische Zusammenarbeit
Postfach 5180
Dag-Hammerskjoldweg 1
D-6236 Eschborn 1, West Germany**

**- Peter Pluschke
GATE (German Appropriate Technology Exchange)
Postfach 5180
D-6236 Eschborn 1, West Germany**

**- Gunter Salzmann
Friedrichstrasse 38
D-6000 Frankfurt/Main**

**- Ianto Evans
Aprovecho Institute
442 Monroe Street
Eugene, Oregon 97402 USA**

Tel: 503/683-2776

- Robert Chom
- Anne Spirlet
- Michel Taymans

Agence Internationale du D veloppement Rural (AIDR)
Handelsstraat 20
B-1040 Brussels, Belgium

- Alice Guidicelli
- CEE-D veloppement/Energie
Berlament 995
B-1049 Brussels, Belgium
Tel: 02/735.00.40, ext. 3771

- J.A. Boer
- Ministry Foreign Affairs
Muzensstraat 30
The Hague, The Netherlands

- Dr. Timothy Wood
- VITA
1815 North Lynn Street, Suite 200
P.O. BOx 12438
Arlington, Virginia 22209-8438 USA
Tel: (703) 276-1800

- Bernard Kauffmann
- GRDPR

145, rue St. Dominique
75007 Paris, France
Tel: 705.16.29

- Louis Vroonen
ABGS (Ministry of Developing Countries)
Maraveldplein 5
1050 Brussels, Belgium

- Sylvain Strasfogel
Association Bois de Feu/GRET
73, avenue Corot
13013 Marseille, France
Tel: (91) 70.92.93

- J.B. Roggeman
Club du Sahel
13-15 Chaus e de la Muette
75016 Paris, France

- Vera Van Eenoo
Zeeptstraat 50
B-2850 Keerbergen, Belgium

- Donaat Cosaert
- Chris Avondts
ATOL
Plijde Inkomststrzat 9
B-3000 Louvain, Belgium

- Luc Vandaele
Werkgroep Zachte Technologie
St. Janshuis
Celestijnenlaan
B-3030 Heverlee, Belgium

- Joseph Melotte
Zandheuvel 1, Appt. 123
B-8401 Bredene, Belgium
APPENDIX D

Participants at Marseille meeting, 12 - 14 May 1982

Beatrix Westhoff
Sozietat fur Entwicklungsplanung (SFE)
Friedrichstrasse 38,
6000 Frankfort, West Germany

Elisabeth Gern
Karen Kennedy
Aprovecho Institute
442 Monroe St.
Eugene, Oregon 97402 USA

Ralph Royer
Church World Service
B.P. 11624
Niamey, Niger

Michel Taymans
Agence Internationale du D veloppement Rural (AIDR)
20, rue du Commerce
B-1040 Brussels, Belgium

Beauchesne Patrick
CTFT
45 bis Bd. Belle Gabrielle
94130 Nogeret/Marne, France

Annette Legris
FIEF
5, av. Porte Braucion
75015 Paris, France

Patrick Hauser
Etudiant
16, rue des Samfoins
77380 Combe la Ville, France

Bernard Kauffmann
GRDRP
145, rue St. Dominique
75007 Paris, France

Pedro Costez
ICADA-Choqui
Apartado postal 159

Quetzaltenango, Guatemala, C.A.

Roberto Caceres

ICAITI

Apartado Postal 1552

Avenida la Reforma 4-47, Zona 10

Guatemala, Guatemala, C.A.

Malcolm Lillywhite

D.T.I.

Box 2043

Philippe Simonis

G.T.Z.

Postfach 5180

Dag-Hammerskjoldweg

Eschborn 1, West Germany

Yvonne Shanahan

Stephen Joseph

ITDG

A.R.S. Shinfield

University of Reading

Whiteknights

Reading RG6 2AH, United Kingdom

Sylvain Strasfogel

Association Bois de Feu/GRET

73, avenue Corot

13013 Marseille, France

**G. de Lepeleire
Katholieke Universiteit Leuven
Waversebaan 178
B-3030 Heverlee, Belgium**

**Woodstove Group
Technische Hogeschool Eindhoven (THE)
Postbus 513
5600 MB Eindhoven, The Netherlands**

**Mr. W.J. Weerakoon
T.D.A.U.
University of Zambia
P.O. Box 32379
Lusaka, Zambia**

**Mme. Seck
CERER
B.P. 476
Dakar, Senegal**

**E. Ferguson
van Dormaalstraat 15
Eindhoven, The Netherlands**

**Alice Guidicelle
200, rue de la Loi**

B-1049 Brussels, Belgium

Cherif Zaouch

ITTA

Sidi-Bau-Ali

4040 Tunisie

L. Van Daele

ATOL

Holsbeeksesteenweg 117

B-3200 Keseel-Lo, Belgium

FEISEAP

Faculty of Engineering

Chulalongkorn University

Bangkok 5, Thailand

Tata Research Institute

Bombay House

24, Homi Mody Street

Bombay 400023, India

=====
=====