

Power Systems

Progress codes

IBM

Power Systems

Progress codes

IBM

Note

Before using this information and the product it supports, read the information in “Safety notices” on page v, “Notices” on page 121, the *IBM Systems Safety Notices* manual, G229-9054, and the *IBM Environmental Notices and User Guide*, Z125-5823.

This edition applies to IBM Power Systems™ servers that contain the POWER8® processor and to all associated models.

© Copyright IBM Corporation 2014, 2018.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Contents

Safety notices	v
Progress codes overview	1
AIX IPL progress codes	1
AIX diagnostic load progress indicators	40
Dump progress indicators (dump status codes)	43
AIX crash progress codes (category 1)	43
AIX crash progress codes (category 2)	43
AIX crash progress codes (category 3)	45
(C1xx) Service processor progress codes	45
(C2xx) Virtual service processor progress codes	70
(C3xx, C5xx, C6xx) IPL status progress codes	74
(C7xx) Server firmware IPL status progress codes	82
(C9xx) IPL status progress codes	82
(CAxx) Partition firmware progress codes	84
(CBxx) Kernel-based virtual machine progress codes	100
(CCxx) Boot firmware progress codes	101
(CF00) Linux kernel boot progress codes	108
(D1xx) Service processor firmware progress codes	108
(D1xx) Service processor status progress codes	110
(D1xx) Service processor dump status progress codes	110
(D1xx) Platform dump status progress codes	113
(D2xx) Partition status progress codes	115
(D6xx) General status progress codes	118
(D9xx) General status progress codes	120
Notices	121
Accessibility features for IBM Power Systems servers	122
Privacy policy considerations	123
Trademarks	124
Electronic emission notices	124
Class A Notices	124
Class B Notices	128
Terms and conditions	131

Safety notices

Safety notices may be printed throughout this guide:

- **DANGER** notices call attention to a situation that is potentially lethal or extremely hazardous to people.
- **CAUTION** notices call attention to a situation that is potentially hazardous to people because of some existing condition.
- **Attention** notices call attention to the possibility of damage to a program, device, system, or data.

World Trade safety information

Several countries require the safety information contained in product publications to be presented in their national languages. If this requirement applies to your country, safety information documentation is included in the publications package (such as in printed documentation, on DVD, or as part of the product) shipped with the product. The documentation contains the safety information in your national language with references to the U.S. English source. Before using a U.S. English publication to install, operate, or service this product, you must first become familiar with the related safety information documentation. You should also refer to the safety information documentation any time you do not clearly understand any safety information in the U.S. English publications.

Replacement or additional copies of safety information documentation can be obtained by calling the IBM Hotline at 1-800-300-8751.

German safety information

Das Produkt ist nicht für den Einsatz an Bildschirmarbeitsplätzen im Sinne § 2 der Bildschirmarbeitsverordnung geeignet.

Laser safety information

IBM® servers can use I/O cards or features that are fiber-optic based and that utilize lasers or LEDs.

Laser compliance

IBM servers may be installed inside or outside of an IT equipment rack.

DANGER: When working on or around the system, observe the following precautions:

Electrical voltage and current from power, telephone, and communication cables are hazardous. To avoid a shock hazard:

- If IBM supplied the power cord(s), connect power to this unit only with the IBM provided power cord. Do not use the IBM provided power cord for any other product.
- Do not open or service any power supply assembly.
- Do not connect or disconnect any cables or perform installation, maintenance, or reconfiguration of this product during an electrical storm.
- The product might be equipped with multiple power cords. To remove all hazardous voltages, disconnect all power cords.
 - For AC power, disconnect all power cords from their AC power source.
 - For racks with a DC power distribution panel (PDP), disconnect the customer's DC power source to the PDP.
- When connecting power to the product ensure all power cables are properly connected.

- For racks with AC power, connect all power cords to a properly wired and grounded electrical outlet. Ensure that the outlet supplies proper voltage and phase rotation according to the system rating plate.
- For racks with a DC power distribution panel (PDP), connect the customer’s DC power source to the PDP. Ensure that the proper polarity is used when attaching the DC power and DC power return wiring.
- Connect any equipment that will be attached to this product to properly wired outlets.
- When possible, use one hand only to connect or disconnect signal cables.
- Never turn on any equipment when there is evidence of fire, water, or structural damage.
- Do not attempt to switch on power to the machine until all possible unsafe conditions are corrected.
- Assume that an electrical safety hazard is present. Perform all continuity, grounding, and power checks specified during the subsystem installation procedures to ensure that the machine meets safety requirements.
- Do not continue with the inspection if any unsafe conditions are present.
- Before you open the device covers, unless instructed otherwise in the installation and configuration procedures: Disconnect the attached AC power cords, turn off the applicable circuit breakers located in the rack power distribution panel (PDP), and disconnect any telecommunications systems, networks, and modems.

DANGER:

- Connect and disconnect cables as described in the following procedures when installing, moving, or opening covers on this product or attached devices.

To Disconnect:

1. Turn off everything (unless instructed otherwise).
2. For AC power, remove the power cords from the outlets.
3. For racks with a DC power distribution panel (PDP), turn off the circuit breakers located in the PDP and remove the power from the Customer's DC power source.
4. Remove the signal cables from the connectors.
5. Remove all cables from the devices.

To Connect:

1. Turn off everything (unless instructed otherwise).
2. Attach all cables to the devices.
3. Attach the signal cables to the connectors.
4. For AC power, attach the power cords to the outlets.
5. For racks with a DC power distribution panel (PDP), restore the power from the Customer's DC power source and turn on the circuit breakers located in the PDP.
6. Turn on the devices.

Sharp edges, corners and joints may be present in and around the system. Use care when handling equipment to avoid cuts, scrapes and pinching. (D005)

(R001 part 1 of 2):

DANGER: Observe the following precautions when working on or around your IT rack system:

- Heavy equipment–personal injury or equipment damage might result if mishandled.
- Always lower the leveling pads on the rack cabinet.
- Always install stabilizer brackets on the rack cabinet.
- To avoid hazardous conditions due to uneven mechanical loading, always install the heaviest devices in the bottom of the rack cabinet. Always install servers and optional devices starting from the bottom of the rack cabinet.
- Rack-mounted devices are not to be used as shelves or work spaces. Do not place objects on top of rack-mounted devices. In addition, do not lean on rack mounted devices and do not use them to stabilize your body position (for example, when working from a ladder).



- Each rack cabinet might have more than one power cord.
 - For AC powered racks, be sure to disconnect all power cords in the rack cabinet when directed to disconnect power during servicing.
 - For racks with a DC power distribution panel (PDP), turn off the circuit breaker that controls the power to the system unit(s), or disconnect the customer's DC power source, when directed to disconnect power during servicing.
- Connect all devices installed in a rack cabinet to power devices installed in the same rack cabinet. Do not plug a power cord from a device installed in one rack cabinet into a power device installed in a different rack cabinet.
- An electrical outlet that is not correctly wired could place hazardous voltage on the metal parts of the system or the devices that attach to the system. It is the responsibility of the customer to ensure that the outlet is correctly wired and grounded to prevent an electrical shock.

(R001 part 2 of 2):

CAUTION:

- Do not install a unit in a rack where the internal rack ambient temperatures will exceed the manufacturer's recommended ambient temperature for all your rack-mounted devices.
- Do not install a unit in a rack where the air flow is compromised. Ensure that air flow is not blocked or reduced on any side, front, or back of a unit used for air flow through the unit.
- Consideration should be given to the connection of the equipment to the supply circuit so that overloading of the circuits does not compromise the supply wiring or overcurrent protection. To provide the correct power connection to a rack, refer to the rating labels located on the equipment in the rack to determine the total power requirement of the supply circuit.
- *(For sliding drawers.)* Do not pull out or install any drawer or feature if the rack stabilizer brackets are not attached to the rack. Do not pull out more than one drawer at a time. The rack might become unstable if you pull out more than one drawer at a time.



- *(For fixed drawers.)* This drawer is a fixed drawer and must not be moved for servicing unless specified by the manufacturer. Attempting to move the drawer partially or completely out of the rack might cause the rack to become unstable or cause the drawer to fall out of the rack.

CAUTION:

Removing components from the upper positions in the rack cabinet improves rack stability during relocation. Follow these general guidelines whenever you relocate a populated rack cabinet within a room or building.

- Reduce the weight of the rack cabinet by removing equipment starting at the top of the rack cabinet. When possible, restore the rack cabinet to the configuration of the rack cabinet as you received it. If this configuration is not known, you must observe the following precautions:
 - Remove all devices in the 32U position (compliance ID RACK-001 or 22U (compliance ID RR001) and above.
 - Ensure that the heaviest devices are installed in the bottom of the rack cabinet.
 - Ensure that there are little-to-no empty U-levels between devices installed in the rack cabinet below the 32U (compliance ID RACK-001 or 22U (compliance ID RR001) level, unless the received configuration specifically allowed it.
- If the rack cabinet you are relocating is part of a suite of rack cabinets, detach the rack cabinet from the suite.
- If the rack cabinet you are relocating was supplied with removable outriggers they must be reinstalled before the cabinet is relocated.
- Inspect the route that you plan to take to eliminate potential hazards.
- Verify that the route that you choose can support the weight of the loaded rack cabinet. Refer to the documentation that comes with your rack cabinet for the weight of a loaded rack cabinet.
- Verify that all door openings are at least 760 x 230 mm (30 x 80 in.).
- Ensure that all devices, shelves, drawers, doors, and cables are secure.
- Ensure that the four leveling pads are raised to their highest position.
- Ensure that there is no stabilizer bracket installed on the rack cabinet during movement.
- Do not use a ramp inclined at more than 10 degrees.
- When the rack cabinet is in the new location, complete the following steps:
 - Lower the four leveling pads.
 - Install stabilizer brackets on the rack cabinet.
 - If you removed any devices from the rack cabinet, repopulate the rack cabinet from the lowest position to the highest position.
- If a long-distance relocation is required, restore the rack cabinet to the configuration of the rack cabinet as you received it. Pack the rack cabinet in the original packaging material, or equivalent. Also lower the leveling pads to raise the casters off of the pallet and bolt the rack cabinet to the pallet.

(R002)

(L001)



DANGER: Hazardous voltage, current, or energy levels are present inside any component that has this label attached. Do not open any cover or barrier that contains this label. (L001)

(L002)



DANGER: Rack-mounted devices are not to be used as shelves or work spaces. (L002)

(L003)



or




or



or



or

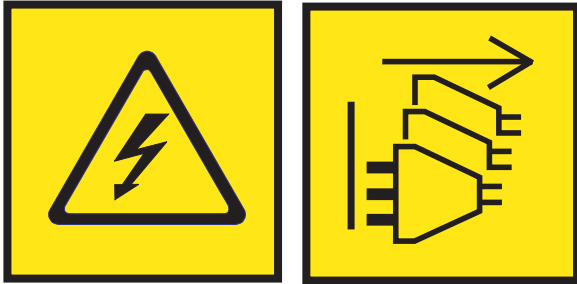

DANGER: Multiple power cords. The product might be equipped with multiple AC power cords or multiple DC power cables. To remove all hazardous voltages, disconnect all power cords and power cables. (L003)

(L007)



CAUTION: A hot surface nearby. (L007)

(L008)



CAUTION: Hazardous moving parts nearby. (L008)

All lasers are certified in the U.S. to conform to the requirements of DHHS 21 CFR Subchapter J for class 1 laser products. Outside the U.S., they are certified to be in compliance with IEC 60825 as a class 1 laser product. Consult the label on each part for laser certification numbers and approval information.

CAUTION:

This product might contain one or more of the following devices: CD-ROM drive, DVD-ROM drive, DVD-RAM drive, or laser module, which are Class 1 laser products. Note the following information:

- **Do not remove the covers. Removing the covers of the laser product could result in exposure to hazardous laser radiation. There are no serviceable parts inside the device.**
- **Use of the controls or adjustments or performance of procedures other than those specified herein might result in hazardous radiation exposure.**

(C026)

CAUTION:

Data processing environments can contain equipment transmitting on system links with laser modules that operate at greater than Class 1 power levels. For this reason, never look into the end of an optical fiber cable or open receptacle. Although shining light into one end and looking into the other end of a disconnected optical fiber to verify the continuity of optic fibers may not injure the eye, this procedure is potentially dangerous. Therefore, verifying the continuity of optical fibers by shining light into one end and looking at the other end is not recommended. To verify continuity of a fiber optic cable, use an optical light source and power meter. (C027)

CAUTION:

This product contains a Class 1M laser. Do not view directly with optical instruments. (C028)

CAUTION:

Some laser products contain an embedded Class 3A or Class 3B laser diode. Note the following information: laser radiation when open. Do not stare into the beam, do not view directly with optical instruments, and avoid direct exposure to the beam. (C030)

CAUTION:

The battery contains lithium. To avoid possible explosion, do not burn or charge the battery.

Do Not:

- **Throw or immerse into water**
- **Heat to more than 100°C (212°F)**
- **Repair or disassemble**

Exchange only with the IBM-approved part. Recycle or discard the battery as instructed by local regulations. In the United States, IBM has a process for the collection of this battery. For information, call 1-800-426-4333. Have the IBM part number for the battery unit available when you call. (C003)

CAUTION:

Regarding IBM provided VENDOR LIFT TOOL:

- Operation of LIFT TOOL by authorized personnel only.
- LIFT TOOL intended for use to assist, lift, install, remove units (load) up into rack elevations. It is not to be used loaded transporting over major ramps nor as a replacement for such designated tools like pallet jacks, walkies, fork trucks and such related relocation practices. When this is not practicable, specially trained persons or services must be used (for instance, riggers or movers).
- Read and completely understand the contents of LIFT TOOL operator's manual before using. Failure to read, understand, obey safety rules, and follow instructions may result in property damage and/or personal injury. If there are questions, contact the vendor's service and support. Local paper manual must remain with machine in provided storage sleeve area. Latest revision manual available on vendor's web site.
- Test verify stabilizer brake function before each use. Do not over-force moving or rolling the LIFT TOOL with stabilizer brake engaged.
- Do not move LIFT TOOL while platform is raised, except for minor positioning.
- Do not exceed rated load capacity. See LOAD CAPACITY CHART regarding maximum loads at center versus edge of extended platform.
- Only raise load if properly centered on platform. Do not place more than 200 lb (91 kg) on edge of sliding platform shelf also considering the load's center of mass/gravity (CoG).
- Do not corner load the platform tilt riser accessory option. Secure platform riser tilt option to main shelf in all four (4x) locations with provided hardware only, prior to use. Load objects are designed to slide on/off smooth platforms without appreciable force, so take care not to push or lean. Keep riser tilt option flat at all times except for final minor adjustment when needed.
- Do not stand under overhanging load.
- Do not use on uneven surface, incline or decline (major ramps).
- Do not stack loads.
- Do not operate while under the influence of drugs or alcohol.
- Do not support ladder against LIFT TOOL.
- Tipping hazard. Do not push or lean against load with raised platform.
- Do not use as a personnel lifting platform or step. No riders.
- Do not stand on any part of lift. Not a step.
- Do not climb on mast.
- Do not operate a damaged or malfunctioning LIFT TOOL machine.
- Crush and pinch point hazard below platform. Only lower load in areas clear of personnel and obstructions. Keep hands and feet clear during operation.
- No Forks. Never lift or move bare LIFT TOOL MACHINE with pallet truck, jack or fork lift.
- Mast extends higher than platform. Be aware of ceiling height, cable trays, sprinklers, lights, and other overhead objects.
- Do not leave LIFT TOOL machine unattended with an elevated load.
- Watch and keep hands, fingers, and clothing clear when equipment is in motion.
- Turn Winch with hand power only. If winch handle cannot be cranked easily with one hand, it is probably over-loaded. Do not continue to turn winch past top or bottom of platform travel. Excessive unwinding will detach handle and damage cable. Always hold handle when lowering, unwinding. Always assure self that winch is holding load before releasing winch handle.
- A winch accident could cause serious injury. Not for moving humans. Make certain clicking sound is heard as the equipment is being raised. Be sure winch is locked in position before releasing handle. Read instruction page before operating this winch. Never allow winch to unwind freely. Freewheeling will cause uneven cable wrapping around winch drum, damage cable, and may cause serious injury. (C048)

Power and cabling information for NEBS (Network Equipment-Building System) GR-1089-CORE

The following comments apply to the IBM servers that have been designated as conforming to NEBS (Network Equipment-Building System) GR-1089-CORE:

The equipment is suitable for installation in the following:

- Network telecommunications facilities
- Locations where the NEC (National Electrical Code) applies

The intrabuilding ports of this equipment are suitable for connection to intrabuilding or unexposed wiring or cabling only. The intrabuilding ports of this equipment *must not* be metalically connected to the interfaces that connect to the OSP (outside plant) or its wiring. These interfaces are designed for use as intrabuilding interfaces only (Type 2 or Type 4 ports as described in GR-1089-CORE) and require isolation from the exposed OSP cabling. The addition of primary protectors is not sufficient protection to connect these interfaces metalically to OSP wiring.

Note: All Ethernet cables must be shielded and grounded at both ends.

The ac-powered system does not require the use of an external surge protection device (SPD).

The dc-powered system employs an isolated DC return (DC-I) design. The DC battery return terminal *shall not* be connected to the chassis or frame ground.

The dc-powered system is intended to be installed in a common bonding network (CBN) as described in GR-1089-CORE.

Progress codes overview

Progress codes (or checkpoints) offer information about the stages involved in powering on and performing initial program load (IPL). Progress codes do not always indicate an error. Use progress code information if your server has paused indefinitely without displaying a system reference code. The information provided indicates the most appropriate action for that progress code.

Use this information for reference only. To perform any service action, use the management console.

AIX IPL progress codes

This section provides descriptions for the numbers and characters that display on the operator panel and descriptions of the location codes used to identify a particular item.

Note: The AIX® IPL progress codes occur only when running the AIX operating system or booting standalone diagnostics. The codes do not occur on servers running the Linux operating system or on Linux partitions.

Operator panel display numbers

This section contains a list of the various numbers and characters that display in the operator panel display. There are three categories of numbers and characters.

- The first group tracks the progress of the configuration program.
- The second group tracks the progress of the diagnostics.
- The third group provides information about messages that follow an 888 sequence.

AIX configuration program indicators

The numbers in this list display on the operator panel as the system loads the AIX operating system and prepares the hardware by loading software drivers.

Note: Some systems may produce 4-digit codes. If the leftmost digit of a 4-digit code is 0, use the three rightmost digits.

02E6

Explanation: The PCI Differential Ultra SCSI adapter or the Universal PCI Differential Ultra SCSI adapter being configured.

02E7

Explanation: Configuration method unable to determine if the SCSI adapter type is SE or DE type.

0440

Explanation: 9.1GB Ultra SCSI Disk Drive being identified or configured.

0441

Explanation: 18.2 GB Ultra SCSI Disk Drive being identified or configured.

0444

Explanation: 2-Port Multiprotocol PCI Adapter (ASIC) being identified or configured.

0447

Explanation: PCI 64-bit Fibre Channel Arbitrated Loop Adapter being configured.

0458

Explanation: 36 GB DAT72 Tape Drive

0459

045D • 0526

Explanation: 36 GB DAT72 Tape Drive

045D

Explanation: 200 GB HH LTO2 Tape drive

0500

Explanation: Querying Standard I/O slot.

0501

Explanation: Querying card in Slot 1.

0502

Explanation: Querying card in Slot 2.

0503

Explanation: Querying card in Slot 3.

0504

Explanation: Querying card in Slot 4.

0505

Explanation: Querying card in Slot 5.

0506

Explanation: Querying card in Slot 6.

0507

Explanation: Querying card in Slot 7.

0508

Explanation: Querying card in Slot 8.

0510

Explanation: Starting device configuration.

0511

Explanation: Device configuration completed.

0512

Explanation: Restoring device configuration files from media.

0513

Explanation: Restoring basic operating system installation files from media.

0516

Explanation: Contacting server during network boot.

0517

Explanation: Mounting client remote file system during network IPL.

0518

Explanation: Remote mount of the **root (/)** and **/usr** file systems failed during network boot.

0520

Explanation: Bus configuration running.

0521

Explanation: **/etc/init** invoked **cfgmgr** with invalid options; **/etc/init** has been corrupted or incorrectly modified (irrecoverable error).

0522

Explanation: The configuration manager has been invoked with conflicting options (irrecoverable error).

0523

Explanation: The configuration manager is unable to access the ODM database (irrecoverable error).

0524

Explanation: The configuration manager is unable to access the **config.rules** object in the ODM database (irrecoverable error).

0525

Explanation: The configuration manager is unable to get data from a customized device object in the ODM database (irrecoverable error).

0526

Explanation: The configuration manager is unable to get data from a customized device driver object in the ODM database (irrecoverable error).

0527

Explanation: The configuration manager was invoked with the phase 1 flag; running phase 1 at this point is not permitted (irrecoverable error).

0528

Explanation: The configuration manager cannot find sequence rule, or no program name was specified in the ODM database (irrecoverable error).

0529

Explanation: The configuration manager is unable to update ODM data (irrecoverable error).

0530

Explanation: The **savebase** program returned an error.

0531

Explanation: The configuration manager is unable to access the PdAt object class (irrecoverable error).

0532

Explanation: There is not enough memory to continue (malloc failure); irrecoverable error.

0533

Explanation: The configuration manager could not find a configuration method for a device.

0534

Explanation: The configuration manager could not find a configuration method for a device.

0535

Explanation: HIPPI diagnostics interface driver being configured.

0536

Explanation: The configuration manager encountered more than one sequence rule specified in the same phase (irrecoverable error).

0537

Explanation: The configuration manager encountered an error when invoking the program in the sequence rule.

0538

Explanation: The configuration manager is going to invoke a configuration method.

0539

Explanation: The configuration method has terminated, and control has returned to the configuration manager.

0541

Explanation: A DLT tape device is being configured.

0542

Explanation: 7208-345 60 GB tape drive, 7334-410 60 GB tape drive

0549

Explanation: Console could not be configured for the Copy a System Dump Menu.

0551

Explanation: IPL vary-on is running.

0552

Explanation: IPL vary-on failed.

0553

Explanation: IPL phase 1 is complete.

0554

Explanation: The boot device could not be opened or read, or unable to define NFS swap device during network boot.

0555

Explanation: An ODM error occurred when trying to vary-on the rootvg, or unable to create an NFS swap device during network boot.

0556

Explanation: Logical Volume Manager encountered error during IPL vary-on.

0557

Explanation: The root file system does not mount.

0558

Explanation: There is not enough memory to continue the system IPL.

0559

Explanation: Less than 2 MB of good memory are available to load the AIX kernel.

0569

Explanation: FCS SCSI protocol device is being configured (32 bits).

0570

Explanation: Virtual SCSI devices being configured.

0571

Explanation: HIPPI common function device driver being configured.

0572

Explanation: HIPPI IPI-3 master transport driver being configured.

0573

Explanation: HIPPI IPI-3 slave transport driver being configured.

0574

Explanation: HIPPI IPI-3 transport services user interface device driver being configured.

0575

Explanation: A 9570 disk-array driver being configured.

0576

Explanation: Generic async device driver being configured.

0577

Explanation: Generic SCSI device driver being configured.

0578

Explanation: Generic commo device driver being configured.

0579

Explanation: Device driver being configured for a generic device.

0580

Explanation: HIPPI TCP/IP network interface driver being configured.

0581

Explanation: Configuring TCP/IP.

0582

Explanation: Configuring Token-Ring data link control.

0583

Explanation: Configuring an Ethernet data link control.

0584

Explanation: Configuring an IEEE Ethernet data link control.

0585

Explanation: Configuring an SDLC MPQP data link control.

0586

Explanation: Configuring a QLLC X.25 data link control.

0587

Explanation: Configuring a NETBIOS.

0588

Explanation: Configuring a Bisync Read-Write (BSCRW).

0589

Explanation: SCSI target mode device being configured.

0590

Explanation: Diskless remote paging device being configured.

0591

Explanation: Configuring an LVM device driver.

0592

Explanation: Configuring an HFT device driver.

0593

Explanation: Configuring SNA device drivers.

0594

Explanation: Asynchronous I/O being defined or configured.

0595

Explanation: X.31 pseudo-device being configured.

0596

Explanation: SNA DLC/LAPE pseudo-device being configured.

0597

Explanation: OCS software being configured.

0598

Explanation: OCS hosts being configured during system reboot.

0599

Explanation: Configuring FDDI data link control.

059B

Explanation: FCS SCSI protocol device being configured (64 bits).

05C0

Explanation: Streams-based hardware drive being configured.

05C1

Explanation: Streams-based X.25 protocol being configured.

05C2

Explanation: Streams-based X.25 COMIO emulator driver being configured.

05C3

Explanation: Streams-based X.25 TCP/IP interface driver being configured.

05C4

Explanation: FCS adapter device driver being configured.

05C5

Explanation: SCB network device driver for FCS being configured.

05C6

Explanation: AIX SNA channel being configured.

0600

Explanation: Starting network boot portion of `/sbin/rc.boot` .

0602

Explanation: Configuring network parent devices.

0603

Explanation: `/usr/lib/methods/defsys` , `/usr/lib/methods/cfgsys` , or `/usr/lib/methods/cfgbus` failed.

0604

Explanation: Configuring physical network boot device.

0605

Explanation: Configuration of physical network boot device failed.

0606

Explanation: Running `/usr/sbin/ifconfig` on logical network boot device.

0607

Explanation: `/usr/sbin/ifconfig` failed.

0608

Explanation: Attempting to retrieve the `client.info` file with `tftp`. **Note:** Note that a flashing 608 indicates multiple attempt(s) to retrieve the `client_info` file are occurring.

0609

Explanation: The `client.info` file does not exist or it is zero length.

060B

Explanation: 18.2 GB 68-pin LVD SCSI Disk Drive being configured.

0610

Explanation: Attempting remote mount of NFS file system.

0611

Explanation: Remote mount of the NFS file system failed.

0612

Explanation: Accessing remote files; unconfiguring network boot device.

0613

Explanation: 8 mm 80 GB VXA-2 tape device

0614

Explanation: Configuring local paging devices.

0615

Explanation: Configuration of a local paging device failed.

0616

Explanation: Converting from diskless to dataless configuration.

0617

Explanation: Diskless to dataless configuration failed.

0618

Explanation: Configuring remote (NFS) paging devices.

0619

Explanation: Configuration of a remote (NFS) paging device failed.

061B

Explanation: 36.4 GB 80-pin LVD SCSI Disk Drive being configured.

061D

Explanation: 36.4 GB 80-pin LVD SCSI Disk Drive being configured.

061E

Explanation: 18.2 GB 68-pin LVD SCSI Disk Drive being configured.

0620

Explanation: Updating special device files and ODM in permanent file system with data from boot RAM file system.

0621

Explanation: 9.1 GB LVD 80-pin SCSI Drive being configured.

0622

Explanation: Boot process configuring for operating system installation.

0625

Explanation: Creating directory for local NIM mount points.

062D

Explanation: 9.1 GB 68-pin LVD SCSI Disk Drive being configured.

062E

Explanation: 9.1GB 68-pin LVD SCSI Disk Drive being configured.

0636

Explanation: TURBOWAYS™ 622 Mbps PCI MMF ATM Adapter.

0637

Explanation: Dual Channel PCI-2 Ultra2 SCSI Adapter being configured.

0638

Explanation: 4.5 GB Ultra SCSI Single Ended Disk Drive being configured.

0639

Explanation: 9.1 GB 10K RPM Ultra SCSI Disk Drive (68-pin).

063A

Explanation: See 62D.

063B

Explanation: 9.1 GB 80-pin LVD SCSI Disk Drive being configured.

063C

Explanation: See 60B.

063D

Explanation: 18.2 GB 80-pin LVD SCSI Disk Drive being configured.

063E

Explanation: 36.4 GB 68-pin LVD SCSI Disk Drive being configured.

063F

Explanation: See 61B.

0640

Explanation: 9.1 GB 10K RPM Ultra SCSI Disk Drive (80-pin).

0643

Explanation: 18.2 GB LVD 80-pin SCA-2 connector SCSI Disk Drive being configured.

0646

Explanation: High-Speed Token-Ring PCI Adapter being configured.

064A

Explanation: See 62E.

064B

Explanation: 9.1 GB 80-pin LVD SCSI Disk Drive being configured.

064C

Explanation: See 61E.

064D

Explanation: 18.2 GB LVD 80-pin Drive/Carrier being configured.

064E

Explanation: 36.4 GB 68-pin LVD SCSI Disk Drive being configured.

064F

Explanation: See 61D.

0650

Explanation: SCSD disk drive being configured.

0653

Explanation: 18.2 GB Ultra-SCSI 16-bit Disk Drive being configured.

0655

Explanation: GXT130P Graphics adapter being configured.

0657

Explanation: GXT2000P graphics adapter being configured.

0658

Explanation: 2102 Fibre Channel Disk Subsystem Controller Drawer being identified or configured.

0663

Explanation: The ARTIC960RxD Digital Trunk Quad PCI Adapter or the ARTIC960RxF Digital Trunk Resource Adapter being configured.

0664

Explanation: 32x (MAX) SCSI-2 CD-ROM drive being configured.

0667

Explanation: PCI 3-Channel Ultra2 SCSI RAID Adapter being configured.

0669

Explanation: PCI Gigabit Ethernet Adapter being configured.

066A

Explanation: PCI Gigabit Ethernet Adapter being configured.

066C

Explanation: 10/100/1000 Base-T Ethernet PCI Adapter.

066D

Explanation: PCI 4-Channel Ultra-3 SCSI RAID Adapter.

066E

Explanation: 4.7 GB DVD-RAM drive.

0674

Explanation: ESCON™ Channel PCI Adapter being configured.

0678

Explanation: 12 GB 4 mm SCSI tape drive

067B

Explanation: PCI Cryptographic Coprocessor being configured.

0682

Explanation: 20x0 (MAX) SCSI-2 CD-ROM Drive being configured.

0689

Explanation: 4.5 GB Ultra SCSI Single Ended Disk Drive being configured.

068C

Explanation: 20 GB 4-mm Tape Drive being configured.

068E

Explanation: POWER GXT6000P PCI Graphics Adapter.

0690

Explanation: 9.1 GB Ultra SCSI Single Ended Disk Drive being configured.

069B

Explanation: 64-bit/66 MHz PCI ATM 155 MMF PCI adapter being configured.

069D

Explanation: 64-bit/66 MHz PCI ATM 155 UTP PCI adapter being configured.

06CC

Explanation: SSA disk drive being configured.

0700

Explanation: A 1.1 GB 8-bit SCSI disk drive being identified or configured.

0701

Explanation: A 1.1 GB 16-bit SCSI disk drive being identified or configured.

0702

Explanation: A 1.1 GB 16-bit differential SCSI disk drive being identified or configured.

0703

Explanation: A 2.2 GB 8-bit SCSI disk drive being identified or configured.

0704

Explanation: A 2.2 GB 16-bit SCSI disk drive being identified or configured.

0705

Explanation: The configuration method for the 2.2 GB 16-bit differential SCSI disk drive is being run. If an irrecoverable error occurs, the system halts.

0706

Explanation: A 4.5 GB 16-bit SCSI disk drive being identified or configured.

0707

Explanation: A 4.5 GB 16-bit differential SCSI disk drive being identified or configured.

0708

Explanation: An L2 cache being identified or configured.

0709

Explanation: 128 port ISA adapter being configured

0710

Explanation: POWER GXT150M graphics adapter being identified or configured.

0711

Explanation: Unknown adapter being identified or configured.

0712

Explanation: Graphics slot bus configuration is executing.

0713

Explanation: The IBM ARTIC960 device being configured.

0714

Explanation: A video capture adapter being configured.

0717

Explanation: TP Ethernet Adapter being configured.

0718

Explanation: GXT500 Graphics Adapter being configured.

0720

Explanation: Unknown read/write optical drive type being configured.

0721

Explanation: Unknown disk or SCSI device being identified or configured.

0722

Explanation: Unknown disk drive being identified or configured.

0723

Explanation: Unknown CD-ROM drive being identified or configured.

0724

Explanation: Unknown tape drive being identified or configured.

0725

Explanation: Unknown display adapter being identified or configured.

0726

Explanation: Unknown input device being identified or configured.

0727

Explanation: Unknown async device being identified or configured.

0728

Explanation: Parallel printer being identified or configured.

0729

Explanation: Unknown parallel device being identified or configured.

0730

Explanation: Unknown diskette drive being identified or configured.

0731

Explanation: PTY being identified or configured.

0732

Explanation: Unknown SCSI initiator type being configured.

0733

Explanation: 7 GB 8-mm tape drive being configured.

0734

Explanation: 4x SCSI-2 640 MB CD-ROM Drive being configured.

0736

Explanation: Quiet Touch keyboard and speaker cable being configured.

0741

Explanation: 1080 MB SCSI Disk Drive being configured.

0745

Explanation: 16 GB 4-mm Tape Auto Loader being configured.

0746

Explanation: SCSI-2 Fast/Wide PCI Adapter being configured.

0747

Explanation: SCSI-2 Differential Fast/Wide PCI Adapter being configured.

0749

Explanation: 7331 Model 205 Tape Library being configured.

0751

Explanation: SCSI 32-bit SE F/W RAID Adapter being configured.

0754

Explanation: 1.1 GB 16-bit SCSI disk drive being configured.

0755

Explanation: 2.2 GB 16-bit SCSI disk drive being configured.

0756

Explanation: 4.5 GB 16-bit SCSI disk drive being configured.

0757

Explanation: External 13 GB 1/4-inch tape being configured.

0763

Explanation: SP Switch MX Adapter being configured.

0764

Explanation: SP System Attachment Adapter being configured.

0772

Explanation: 4.5 GB SCSI F/W Disk Drive being configured.

0773

Explanation: 9.1 GB SCSI F/W Disk Drive being configured.

0774

Explanation: 9.1 GB External SCSI Disk Drive being configured.

0776

Explanation: PCI Token-Ring Adapter being identified or configured.

0777

Explanation: 10/100 Ethernet Tx PCI Adapter being identified or configured.

0778

Explanation: POWER GXT3000P 3D PCI Graphics adapter being configured.

077B

Explanation: 4-Port 10/100 Ethernet Tx PCI Adapter being identified or configured.

077C

Explanation: A 1.0 GB 16-bit SCSI disk drive being identified or configured.

0783

Explanation: 4-mm DDS-2 Tape Autoloader being configured.

0789**Explanation:** 2.6 GB External Optical Drive being configured.

078B**Explanation:** POWER GXT4000P PCI Graphics Adapter.

078D**Explanation:** GXT300P 2D Graphics adapter being configured.

0790**Explanation:** Multi-bus Integrated Ethernet Adapter being identified or configured.

0797**Explanation:** TURBOWAYS 155 UTP/STP ATM Adapter being identified or configured.

0798**Explanation:** Video streamer adapter being identified or configured.

0799**Explanation:** 2-Port Multiprotocol PCI adapter being identified or configured.

079C**Explanation:** ISA bus configuration executing.

07C0**Explanation:** CPU/System Interface being configured.

07C1**Explanation:** Business Audio Subsystem being identified or configured.

07CC**Explanation:** PCMCIA bus configuration executing.

0800**Explanation:** TURBOWAYS 155 MMF ATM Adapter being identified or configured.

0803**Explanation:** 7336 Tape Library robotics being configured.

0804**Explanation:** 8x Speed SCSI-2 CD-ROM Drive being configured.

0806**Explanation:** POWER GXT800 PCI Graphics adapter being configured.

0807**Explanation:** SCSI Device Enclosure being configured.

080C**Explanation:** SSA 4-Port Adapter being identified or configured.

0811**Explanation:** Processor complex being identified or configured.

0812**Explanation:** Memory being identified or configured.

0813**Explanation:** Battery for time-of-day, NVRAM, and so on being identified or configured, or system I/O control logic being identified or configured.

0814**Explanation:** NVRAM being identified or configured.

0815**Explanation:** Floating-point processor test.

0816**Explanation:** Operator panel logic being identified or configured.

0817**Explanation:** Time-of-day logic being identified or configured.

0819

Explanation: Graphics input device adapter being identified or configured.

0821

Explanation: Standard keyboard adapter being identified or configured.

0823

Explanation: Standard mouse adapter being identified or configured.

0824

Explanation: Standard tablet adapter being identified or configured.

0825

Explanation: Standard speaker adapter being identified or configured.

0826

Explanation: Serial Port 1 adapter being identified or configured.

0827

Explanation: Parallel port adapter being identified or configured.

0828

Explanation: Standard diskette adapter being identified or configured.

0831

Explanation: 3151 adapter being identified or configured, or Serial Port 2 being identified or configured.

0834

Explanation: 64-port async controller being identified or configured.

0835

Explanation: 16-port async concentrator being identified or configured.

0836

Explanation: 128-port async controller being identified or configured.

0837

Explanation: A 128-port remote asynchronous node (RAN) is being identified or configured.

0838

Explanation: Network Terminal Accelerator Adapter being identified or configured.

0839

Explanation: 7318 Serial Communications Server being configured.

0840

Explanation: PCI Single-Ended Ultra SCSI Adapter being configured.

0841

Explanation: 8-port async adapter (EIA-232) being identified or configured.

0842

Explanation: 8-port async adapter (EIA-422A) being identified or configured.

0843

Explanation: 8-port async adapter (MIL-STD-188) being identified or configured.

0844

Explanation: 7135 RAIDiant Array disk drive subsystem controller being identified or configured.

0845

Explanation: 7135 RAIDiant Array disk drive subsystem drawer being identified or configured.

0846

Explanation: RAIDiant Array SCSI 1.3 GB Disk Drive being configured.

0847

Explanation: 16-port serial adapter (EIA-232) being identified or configured.

0848

Explanation: 16-port serial adapter (EIA-422) being identified or configured.

0849

Explanation: X.25 Interface Coprocessor/2 adapter being identified or configured.

0850

Explanation: Token-Ring network adapter being identified or configured.

0851

Explanation: T1/J1 Portmaster adapter being identified or configured.

0852

Explanation: Ethernet adapter being identified or configured.

0854

Explanation: 3270 Host Connection Program/6000 connection being identified or configured.

0855

Explanation: Portmaster Adapter/A being identified or configured.

0857

Explanation: FSLA adapter being identified or configured.

0858

Explanation: 5085/5086/5088 adapter being identified or configured.

0859

Explanation: FDDI adapter being identified or configured.

085C

Explanation: Token-Ring High-Performance LAN adapter being identified or configured.

0861

Explanation: Optical adapter being identified or configured.

0862

Explanation: Block Multiplexer Channel Adapter being identified or configured.

0865

Explanation: ESCON Channel Adapter or emulator being identified or configured.

0866

Explanation: SCSI adapter being identified or configured.

0867

Explanation: Async expansion adapter being identified or configured.

0868

Explanation: SCSI adapter being identified or configured.

0869

Explanation: SCSI adapter being identified or configured.

0870

Explanation: Serial disk drive adapter being identified or configured.

0871

Explanation: Graphics subsystem adapter being identified or configured.

0872

Explanation: Grayscale graphics adapter being identified or configured.

0874

Explanation: Color graphics adapter being identified or configured.

0875

Explanation: Vendor generic communication adapter being configured.

0876

Explanation: 8-bit color graphics processor being identified or configured.

0877

Explanation: POWER Gt3/POWER Gt4 being identified or configured.

0878

Explanation: POWER Gt4 graphics processor card being configured.

0879

Explanation: A 24-bit color MEV2 type graphics card is being configured.

0880

Explanation: POWER Gt1 adapter being identified or configured.

0887

Explanation: POWER Gt1 adapter being identified or configured.

0889

Explanation: SCSI adapter being identified or configured.

0890

Explanation: SCSI-2 Differential Fast/Wide and Single-Ended Fast/Wide Adapter/A being configured.

0891

Explanation: Vendor SCSI adapter being identified or configured.

0892

Explanation: Vendor display adapter being identified or configured.

0893

Explanation: Vendor LAN adapter being identified or configured.

0894

Explanation: Vendor async/communications adapter being identified or configured.

0895

Explanation: Vendor IEEE 488 adapter being identified or configured.

0896

Explanation: Vendor VME bus adapter being identified or configured.

0897

Explanation: S/370 Channel Emulator adapter being identified or configured.

0898

Explanation: POWER Gt1x graphics adapter being identified or configured.

0899

Explanation: 3490 attached tape drive being identified or configured.

089C

Explanation: A multimedia SCSI CD-ROM being identified or configured.

0900

Explanation: GXT110P Graphics Adapter being identified or configured.

0901

Explanation: Vendor SCSI device being identified or configured.

0902

Explanation: Vendor display device being identified or configured.

0903

Explanation: Vendor async device being identified or configured.

0904

Explanation: Vendor parallel device being identified or configured.

0905

Explanation: A vendor (non-IBM) adapter is being identified or configured.

0908

Explanation: POWER GXT1000™ Graphics subsystem being identified or configured.

0910

Explanation: 1/4 GB Fiber Channel/266 Standard Adapter being identified or configured.

0911

Explanation: Fiber Channel/1063 Adapter Short Wave being configured.

0912

Explanation: 2.0 GB SCSI-2 differential disk drive being identified or configured.

0913

Explanation: 1.0 GB differential disk drive being identified or configured.

0914

Explanation: 5 GB 8-mm differential tape drive being identified or configured.

0915

Explanation: 4 GB 4-mm tape drive being identified or configured.

0916

Explanation: A generic (non-IBM) Non-SCSI tape drive adapter is being identified or configured.

0917

Explanation: A 2.0 GB 16-bit differential SCSI disk drive being identified or configured.

0918

Explanation: A 2.0 GB 16-bit single-ended SCSI disk drive being identified or configured.

0920

Explanation: Bridge Box being identified or configured.

0921

Explanation: 101 keyboard being identified or configured.

0922

Explanation: 102 keyboard being identified or configured.

0923

Explanation: Kanji keyboard being identified or configured.

0924

Explanation: Two-button mouse being identified or configured.

0925

Explanation: Three-button mouse being identified or configured.

0926

Explanation: 5083 tablet being identified or configured.

0927

Explanation: 5083 tablet being identified or configured.

0928

Explanation: Standard speaker being identified or configured.

0929

Explanation: Dials being identified or configured.

0930

Explanation: Lighted program function keys (LPEK) being identified or configured.

0931

Explanation: IP router being identified or configured.

0933

Explanation: Async planar being identified or configured.

0934

Explanation: Async expansion drawer being identified or configured.

0935

Explanation: 3.5-inch diskette drive being identified or configured.

0936

Explanation: 5.25-inch diskette drive being identified or configured.

0937

Explanation: An HIPPI adapter being configured.

0938

Explanation: Serial HIPPI PCI adapter being configured.

0942

Explanation: Serial HIPPI PCI adapter being configured.

0943

Explanation: A 3480 or 3490 control unit attached to a System/370 Channel Emulator/A adapter are being identified or configured.

0944

Explanation: 100 MB ATM adapter being identified or configured.

0945

Explanation: 1.0 GB SCSI differential disk drive being identified or configured.

0946

Explanation: A generic (non-IBM) Serial Port 3 adapter is being identified or configured.

0947

Explanation: A 730 MB SCSI disk drive being configured.

0948

Explanation: Portable disk drive being identified or configured.

0949

Explanation: Unknown direct bus-attach device being identified or configured.

0950

Explanation: Missing SCSI device being identified or configured.

0951

Explanation: 670 MB SCSI disk drive being identified or configured.

0952

Explanation: 355 MB SCSI disk drive being identified or configured.

0953

Explanation: 320 MB SCSI disk drive being identified or configured.

0954

Explanation: 400 MB SCSI disk drive being identified or configured.

0955

Explanation: 857 MB SCSI disk drive being identified or configured.

0956

Explanation: 670 MB SCSI disk drive electronics card being identified or configured.

0957

Explanation: 120 MB DBA disk drive being identified or configured.

0958

Explanation: 160 MB Database Administrator (DBA) disk drive being identified or configured.

0959

Explanation: 160 MB SCSI disk drive being identified or configured.

0960

Explanation: 1.37 GB SCSI disk drive being identified or configured.

0964

Explanation: Internal 20 GB 8-mm tape drive identified or configured.

0968

Explanation: 1.0 GB SCSI disk drive being identified or configured.

0970

Explanation: Half-inch, 9-track tape drive being identified or configured.

0971

Explanation: 150 MB 1/4-inch tape drive being identified or configured.

0972

Explanation: 2.3 GB 8-mm SCSI tape drive being identified or configured.

0973

Explanation: Other SCSI tape drive being identified or configured.

0974

Explanation: CD-ROM drive being identified or configured.

0975

Explanation: An optical disk drive being identified or configured.

0977

Explanation: M-Audio Capture and Playback Adapter being identified or configured.

0981

Explanation: 540 MB SCSI-2 single-ended disk drive being identified or configured.

0984

Explanation: 1 GB 8-bit disk drive being identified or configured.

0985

Explanation: M-Video Capture Adapter being identified or configured.

0986

Explanation: 2.4 GB SCSI disk drive being identified or configured.

0987

Explanation: An Enhanced SCSI CD-ROM drive being identified or configured.

0989

Explanation: 200 MB SCSI disk drive being identified or configured.

0990

Explanation: 2.0 GB SCSI-2 single-ended disk drive being identified or configured.

0991

Explanation: 525 MB 1/4-inch cartridge tape drive being identified or configured.

0994

Explanation: 5 GB 8-mm tape drive being identified or configured.

0995

Explanation: 1.2GB 1/4-inch cartridge tape drive being identified or configured.

0996

Explanation: A single-port, multiprotocol communications adapter being identified or configured.

0997

Explanation: FDDI adapter being identified or configured.

0998

Explanation: 2.0 GB 4-mm tape drive being identified or configured.

0999

Explanation: 7137 or 3514 Disk Array Subsystem being configured.

0D46

Explanation: Token-Ring cable.

0D81

Explanation: T2 Ethernet Adapter being configured.

2000

Explanation: Dynamic LPAR CPU Addition

2001

Explanation: Dynamic LPAR CPU Removal

2002

Explanation: Dynamic LPAR Memory Addition

2003

Explanation: Dynamic LPAR Memory Removal

2004

Explanation: DLPAR Maximum Memory size too large

2005

Explanation: Partition migration operation in progress

2006

Explanation: Partition hibernation phase in progress

2007

Explanation: Dynamic LPAR Encryption Accelerator operation in progress

2009

Explanation: AIX Live Update operation in progress

2010

Explanation: HTX miscompare

2011

Explanation: Configuring device model 2107 fcp

2012

Explanation: Configuring device model 2107 iscsi

2013

Explanation: Configuring MR-1750 (device model 1750) fcp

2014

Explanation: Configuring MR-1750 (device model 1750) iscsi

2015

Explanation: Configuring SVC (device model 2145) fcp

2016

Explanation: Configuring SVCCISCO (device model 2062) fcp

2017

Explanation: Configuring SVCCISCO (device model 2062) iscsi

2018

Explanation: Configuring Virtual Management Channel driver

2019

Explanation: Configuring vty server

201B

Explanation: Configuring a virtual SCSI optical device

201D

Explanation: Configuring USB Serial Device

2020

Explanation: Configuring InfiniBand™ ICM kernel component

2021

Explanation: Configuring TCP InfiniB and Interface kernel component

2022

Explanation: Configuring PCI Express bus

2023

Explanation: Configuring InfiniBand adapter configured as PCI Memory Controller

2024

Explanation: Configuring InfiniBand adapter PCI Memory Controller w/ alt PCI Device ID

2025

Explanation: Configuring VASI (Virtual Asynchronous Services Interface) Adapter

2026

Explanation: Configuring nfso option in rc.boot

2027

Explanation: Configuring MPIO DS4K Device

2028

Explanation: Boot process searching for cluster repository disk

2029

Explanation: Configuring Virtual NIC Server device

202B

Explanation: Configuring viosvnic pseudo-device

2030

Explanation: Configuring USB Audio Device

2040

Explanation: Configuring device model DS3/4K fcp

2041

Explanation: Configuring device model DS3/4K isci

2042

Explanation: Configuring device model DS3/4K sas

2064

Explanation: Attempt to configure 64-bit environment failed

2070

Explanation: Configuring Virtio Core Driver

2071

Explanation: Configuring Virtio SCSI Device

2072

Explanation: Configuring Virtio Ethernet Device

2501

Explanation: Configuring Common Character Mode (CCM) enabled graphic adapter

2502

Explanation: Configuring PCI-X 266 Planar 3 GB SAS integrated adapter

2503

Explanation: Configuring PCI-X 266 Planar 3 GB SAS RAID integrated adapter

2504

Explanation: Configuring a PCIe x1 Auxiliary Cache adapter

2505

Explanation: Configuring a PCI-X266 Planar 3Gb SAS RAID Adapter

2506

Explanation: Configuring JS12/JS23 PCI-X266 Planar 3Gb SAS Adapter

2507

Explanation: Configuring JS22 PCI-X266 Planar 3Gb SAS Adapter

2508

Explanation: Configuring PCIe FPGA Accelerator Adapter

2509

Explanation: Configuring PCIe3 x8 Cache SAS RAID Internal Adapter 6Gb

250B

Explanation: Configuring PCIe3 x8 SAS RAID Internal Adapter 6Gb

250D

Explanation: Configuring PCIe3 x8 SAS RAID Internal Adapter 6Gb

2512

Explanation: Configuring PCI-X DDR quad channel Ultra320 SCSI RAID adapter

2513

Explanation: Configuring PCI-X DDR quad channel Ultra320 SCSI RAID adapter

2514

Explanation: Configuring PCI-X DDR quad channel Ultra320 SCSI RAID adapter

2515

Explanation: Configuring a PCI-X DDR JBOD SAS adapter

2516

Explanation: Configuring a PCI-X Express DDR JBOD SAS adapter

2517

Explanation: Configuring PCI-XDDR RAID SAS adapter

2518

Explanation: Configuring PCIe RAID SAS adapter

2519

Explanation: Configuring PCI-X DDR RAID Adapter

251B

Explanation: Configuring PCI-Express High End RAID Adapter

251D

Explanation: Configuring PCI-X DDR Auxiliary Cache Controller

251E

Explanation: Configuring PCI-Express Auxiliary Write Cache Controller

2520

Explanation: PCI Dual-Channel Ultra-3 SCSI adapter being identified or configured.

2521

Explanation: Configuring Integrated Dual Channel Ultra 3 SCSI

 2522

Explanation: PCI-X Dual Channel Ultra320 SCSI Adapter

2523

Explanation: PCI-X Ultra320 SCSI RAID Adapter

2524

Explanation: Configuring Integrated DART (Cog)

2525

Explanation: Configuring integrated PCI-X dual channel U320 SCSI RAID enablement card.

2526

Explanation: PCI-X Ultra320 SCSI RAID Battery Pack

2527

Explanation: PCI-X Quad Channel U320 SCSI RAID Adapter

2528

Explanation: PCI-X Dual Channel Ultra320 SCSI adapter

2529

Explanation: PCI-X Dual Channel Ultra320 SCSI RAID adapter

252B

Explanation: PCI-X Dual Channel Ultra320 SCSI RAID adapter

252D

Explanation: PCI-X DDR Dual Channel Ultra320 SCSI RAID adapter

252E

Explanation: Configuring PCI-X DDR Auxiliary Cache Adapter

2530

Explanation: 10/100 Mbps Ethernet PCI Adapter II being configured.

2531

Explanation: Configuring 10 Gigabit-LR Ethernet PCI-X adapter

2532

Explanation: Configuring 10 Gigabit-SR Ethernet PCI-X adapter

2533

Explanation: 10 GB Ethernet -SR PCI-X 2.0 DDR adapter being configured

2534

Explanation: 10 GB Ethernet -LR PCI-X 2.0 DDR adapter being configured

2535

Explanation: 4-Port 10/100/1000 Base-TX Ethernet PCI-X Adapter being configured.

2536

Explanation: Configuring Gigabit Ethernet-SX adapter

2537

Explanation: Configuring Ethernet-SX PCIe Adapter

2538

Explanation: Configuring Ethernet-TX PCIe Adapter

2539

Explanation: Configuring PCI Express 10Gb Ethernet-SX adapter

253B

Explanation: Configuring 15000 rpm 292 GB FC Disk

253D

Explanation: Configuring 7200 rpm 400 GB FC-NL Disk

253E

Explanation: Configuring 7200 rpm 400 GB FC-NL Disk

 2540

Explanation: Configuring 10K rpm 300 GB FC Disk

2541

Explanation: Configuring 10K rpm 146 GB FC Disk

2542

Explanation: Configuring 10K rpm 73 GB FC Disk

2543

Explanation: Reserved

2544

Explanation: Configuring 15K rpm 146 GB FC Disk

2545

Explanation: Configuring 15K rpm 73 GB FC Disk

2546

Explanation: Configuring 15K rpm 36 GB FC Disk

2547

Explanation: Generic 522 bites per sector SCSI JBOD (not osdisk) Disk Drive

2548

Explanation: Configuring 36 GB 2.5 inch SCSD SFF HDD

2549

Explanation: Configuring 73 GB 2.5 inch SCSD SFF HDD

254A

Explanation: Configuring 4-port FCS adapter

254B

Explanation: Configuring enclosure for FCS adapter

254C

Explanation: Configuring 2-port FCS adapter

 254D

Explanation: Configuring enclosure for FCS adapter

254E

Explanation: Fibre Channel Expansion Card

254F

Explanation: Configuring FCS SCSI Protocol device

2550

Explanation: Configuring a POWER GXT4500P graphics adapter

2551

Explanation: Configuring a POWER GXT6500P graphics adapter

2552

Explanation: Configuring 36 GB SAS 2.5 inch SFF HDD

2553

Explanation: Configuring 73 GB SAS 2.5 inch SFF HDD

2554

Explanation: Configuring 36 GB SAS 3.5 inch HDD

2555

Explanation: Configuring 73 GB SAS 3.5 inch HDD

2556

Explanation: Configuring 146 GB SAS 3.5 inch HDD

2557

Explanation: Configuring 300 GB SAS 3.5 inch HDD

2558

Explanation: Configuring 15K rpm 300 GB SCSI HDD (80 pin)

2559

Explanation: Configuring 15K rpm 36 GB SCSI HDD

255B
Explanation: Configuring 15K rpm 73 GB SCSI HDD

255D
Explanation: Configuring 15K rpm 146 GB SCSI HDD

255E
Explanation: Configuring 15K rpm 300 GB SCSI HDD

2560
Explanation: Configuring USB Keyboard

2561
Explanation: Configuring USB Mouse

2562
Explanation: Keyboard/Mouse Attachment Card-PCI being configured.

2563
Explanation: All USB Busses are being enumerated

2564
Explanation: Keyboard/Mouse Attachment Card-PCI being configured.

2565
Explanation: Configuring adapter or native EHCI USB

2566
Explanation: USB 3.5 inch Micro Diskette Drive

2567
Explanation: Configuring JS20 integrated OHCI USB adapter

2568
Explanation: Generic USB CD-ROM Drive

2569
Explanation: Configuring USB DVDROM drive

256B
Explanation: Configuring USB 3D mouse

256D
Explanation: 4Gb Fibre Channel adapter being configured

256E
Explanation: Configuring a 4-port 10/100/1000 Base-TX PCI express adapter

2570
Explanation: Configuring an IBM cryptographic accelerator PCI adapter

2571
Explanation: 2-Port PCI Asynchronous EIA-232 Adapter

2572
Explanation: PCI-X Cryptographic Coprocessor Card

2573
Explanation: Configuring 146 GB SAS SFF HDD

2574
Explanation: Configuring 15K rpm 36 GB SAS SFF HDD

2575
Explanation: Configuring 15K rpm 73GB SAS SFF HDD

2576
Explanation: Configuring 4-port PCIe Serial Adapter

2577
Explanation: Battery: IBM Cryptographic PCI-X Adapter

2578
Explanation: Configuring IBM Y4 Cryptographic Coprocessor PCIe Adapter

2579**Explanation:** Battery: IBM Y4 Cryptographic PCIe Adapter

257B**Explanation:** Configuring 4-port FC-AL RAID Adapter

257D**Explanation:** Configuring 8-port FC-AL RAID Adapter

257E**Explanation:** Configuring IBM 4746 PCIe3 Cryptographic Coprocessor

2580**Explanation:** Configuring a SCSI accessed fault-tolerant enclosure (SAF-TE) device

2581**Explanation:** 1 GB iSCSI TOE PCI-X adapter is being configured (copper connector)

2582**Explanation:** iSCSI protocol device associated with an iSCSI adapter is being configured

2583**Explanation:** 1 GB iSCSI TOE PCI-X adapter being configured (copper connector)

2584**Explanation:** IDE DVD-RAM drive being configured

2585**Explanation:** IDE DVD-ROM drive being configured

2586**Explanation:** Configuring host Ethernet adapter

2587**Explanation:** Configuring a Slimline DVD-ROM drive

2588**Explanation:** Configuring a 4.7 GB Slimline DVD-RAM drive

2589**Explanation:** Configuring the common SCSI protocol driver

258B**Explanation:** Configuring Logical Host Ethernet Adapter

258D**Explanation:** Configuring MPT2 Common SCSI protocol driver

2590**Explanation:** IDE CD-ROM drive being configured

2591**Explanation:** IDE DVD-ROM drive being configured.

2592**Explanation:** IDE DVD-ROM drive being configured.

2593**Explanation:** IDE DVD-RAM drive being configured.

2594**Explanation:** 4.7 GB IDE Slimline DVD-RAM drive

2595**Explanation:** IDE Slimline DVD-ROM drive

2596**Explanation:** Configuring USB CDROM drive

2597**Explanation:** Configuring USB DVDROM drive

2598**Explanation:** Configuring USB CDROM drive

2599**Explanation:** Configuring USB DVDROM

259B

Explanation: Configuring Slimline UBE IDE DVD/DRAM drive

259D

Explanation: Configuring Slimline UBE IDE DVD/DRAM drive

25A0

Explanation: I/O Planar Control Logic for IDE devices

25A1

Explanation: Configuring USB Mass Storage Device

25A2

Explanation: Configuring USB DVD-RAM

25A3

Explanation: Configuring PCIe Integrated Serial Adapter

25A4

Explanation: Configuring PCIe 2-port Serial Adapter

25A5

Explanation: Configuring USB Library Interface Device

25B0

Explanation: Configuring iSCSI protocol device

25B1

Explanation: Configuring Tivoli Storage Manager FC asynchronous event protocol driver

25B2

Explanation: Configuring Virtual I/O Ethernet Adapter

25B3

Explanation: Configuring VSCSI client adapter

25B4

Explanation: Configuring VSCSI virtual disk

25B5

Explanation: Configuring VSCSI virtual CDROM

25B6

Explanation: Configuring Virtual I/O Bus

25B7

Explanation: Configuring VSCSI virtual SCSI server driver

25B8

Explanation: Configuring VSCSI virtual target device

25B9

Explanation: Ethernet Adapter (Fiber)

25BB

Explanation: Configuring Slimline UBE IDE DVD/ROM Drive

25BD

Explanation: Configuring Slimline UBE IDE DVD/ROM Drive

25C0

Explanation: Gigabit Ethernet-SX PCI-X adapter

25C1

Explanation: 10/100/1000 base-TX Ethernet PCI-X adapter

25C2

Explanation: Dual Port Gigabit SX Ethernet PCI-X Adapter

25C3

Explanation: 10/100/1000 Base-TX Dual Port PCI-Adapter

25C4

Explanation: Broadcom Dual-Port Gigabit Ethernet PCI-X Adapter

25D0

Explanation: Configuring a PCI audio adapter

25D1

Explanation: Configuring ATI controller

25D2

Explanation: LSI SAS adapter

25D3

Explanation: Configuring 2-port 6Gb LSI SAS Expansion adapter

25D4

Explanation: Configuring 2-port 6Gb LSI SAS Expansion CFFe Adapter

25D5

Explanation: Configuring 4-port 6Gb LSI SAS Expansion adapter

25E0

Explanation: Configuring Switch network interface adapter

25E1

Explanation: Configuring Switch network interface adapter

25E2

Explanation: Configuring Switch network interface adapter

25E3

Explanation: Configuring Switch network interface adapter

25E4

Explanation: Configuring GXT7000e Advanced 3D PCI Express Graphics Adapter

25E5

Explanation: Configuring PCI-E 2D Graphics Adapter

25E6

Explanation: Configuring Low Profile PCI-E 2D Graphics Adapter

25E7

Explanation: Reserved

25E8

Explanation: Configuring PCI-X 2D Graphics Adapter

25F0

Explanation: Configuring SCSD iSCSI Disk Drive

25F1

Explanation: Configuring SCSD iSCSI CDROM Drive

25F2

Explanation: Configuring SCSD iSCSI Read/Write Optical Device

25F3

Explanation: Configuring OEM iSCSI Disk Drive

25F4

Explanation: Configuring OEM iSCSI CD-ROM Drive

25F5

Explanation: Configuring OEM iSCSI Read/Write Optical Device

25F6

Explanation: Configuring iSCSI SCSD Tape Drive

25F7

Explanation: Configuring iSCSI ost Tape Drive

25F8

Explanation: Configuring a 1 GB PCI-X iSCSI TOE Ethernet adapter (copper)

25F9

Explanation: Reserved

25FA**Explanation:** Reserved

2600**Explanation:** PCI 64-bit Fibre Channel Arbitrated Loop Adapter being configured.

2601**Explanation:** PCI 64-bit Fibre Channel Arbitrated Loop Adapter being configured.

2602**Explanation:** PCI 64-Bit 4 GB fibre channel adapter

2603**Explanation:** Configuring 4Gb PCIe Fibre Channel Adapter

2604**Explanation:** Configuring Emulex FC daughter card (SFF)

2605**Explanation:** Configuring Emulex 8Gb PCIe 1-port FC adapter

2606**Explanation:** Configuring 8Gb FC Dual Port PCIe Adapter

2607**Explanation:** Configuring Emulex 8Gb PCIe 2-port FC daughter card

2608**Explanation:** Configuring 8Gb PCIe 4-port FC adapter

2609**Explanation:** Configuring Emulex 16Gb PCIe2 2-port FC adapter

260B**Explanation:** Configuring Emulex SLI-4 FC SCSI protocol driver

2610**Explanation:** Configuring Quantum SDLT320 tape drive

2611**Explanation:** 36/72 GB 4 mm internal tape drive

2612**Explanation:** 80/160 GB internal tape drive with VXA2 technology

2613**Explanation:** 200/400 GB LTO2 Tape drive

2614**Explanation:** VXA3 160/320 GB Tape Drive

2615**Explanation:** Configuring a DAT160 80GB tape drive

2616**Explanation:** Configuring a 36/72GB 4mm Internal Tape Drive

2617**Explanation:** Configuring a LTO3 400 GB tape drive

2618**Explanation:** Configuring a SAS 400 GB/1.6 TB Ultrium 4 tape drive

2619**Explanation:** Configuring 3.5 inch 80GB DAT160 SAS Tape Drive

2620**Explanation:** Configuring InfiniBand adapter

2621**Explanation:** PCI-X Dual-port 4x HCA Adapter being configured

2622**Explanation:** Configuring InfiniBand Device

2623**Explanation:** Configuring 4x InfiniBand PCI-E adapter

2624**Explanation:** Configuring 4X PCIe DDR InfiniB and Host Channel adapter

2625**Explanation:** Configuring 4X PCIe QDR InfiniBand Host Channel adapter

2626**Explanation:** Configuring 4X PCIe QDR InfiniBand Host Channel Blade adapter

2627**Explanation:** Configuring 4X PCIe QDR InfiniBand Host Channel Mezz adapter

2628**Explanation:** Configuring PCIe RoCE Adapter

2629**Explanation:** Identifying PCIe QDR Host Channel Adapter

262B**Explanation:** Configuring PCIe RoCE Adapter

262E**Explanation:** Configuring 4X PCIe FDR Infiniband ConnectX-3 Pro Host Channel Adapter

2630**Explanation:** Configuring integrated IDE controller

2631**Explanation:** Integrated IDE controller

2632**Explanation:** Configuring RoHS compliant 73GB 80pin 15Krpm ATX carrier

2633**Explanation:** Configuring RoHS compliant 146GB 80pin 15Krpm ATX carrier

2634**Explanation:** Configuring RoHS compliant 300GB 80pin 15Krpm ATX carrier

2640**Explanation:** IDE Disk Drive, 2.5 inch

2641**Explanation:** 73 GB SCSI disk drive 68 pin 10K rpm being identified or configured.

2642**Explanation:** 73 GB SCSI disk drive 80 pin 10K rpm with u3 carrier being identified or configured.

2643**Explanation:** 73 GB SCSI disk drive 80 pin 10K rpm with u3 carrier being identified or configured. (For OpenPower™ systems)

2644**Explanation:** 146 GB SCSI disk drive 68 pin 10K rpm being identified or configured.

2645**Explanation:** 146 GB SCSI disk drive 80 pin 10K rpm with u3 carrier being identified or configured.

2646**Explanation:** 146 GB SCSI disk drive 80 pin 10K rpm with u3 carrier being identified or configured. (For OpenPower systems)

2647**Explanation:** 300 GB SCSI disk drive 68 pin 10K rpm being identified or configured.

2648**Explanation:** 300 GB SCSI disk drive 80 pin 10K rpm with u3 carrier being identified or configured.

2649

Explanation: 300 GB SCSI disk drive 80 pin 10K rpm with u3 carrier being identified or configured. (For OpenPower systems)

264B

Explanation: 36 GB SCSI disk drive 80 pin 15K rpm with u3 carrier being identified or configured.

264D

Explanation: 36 GB SCSI disk drive 80 pin 15K rpm with u3 carrier being identified or configured. (For OpenPower systems)

264E

Explanation: 73 GB SCSI disk drive 80 pin 15K rpm with u3 carrier being identified or configured.

2650

Explanation: ESS iSCSI devices being identified or configured.

2651

Explanation: SVC being identified or configured.

2652

Explanation: SVCCISCOi being identified or configured.

2653

Explanation: 73 GB SCSI disk drive 80 pin 15K rpm with u3 carrier being identified or configured. (For HV systems)

2654

Explanation: 146 GB SCSI disk drive 80 pin 15K rpm with u3 carrier being identified or configured.

2655

Explanation: 146 GB SCSI disk drive 80 pin 15K rpm with u3 carrier being identified or configured. (For OpenPower systems)

2656

Explanation: 73 GB SCSI disk drive 80 pin 15K rpm being identified or configured.

2657

Explanation: 146 GB SCSI disk drive 80 pin 15K rpm being identified or configured.

2658

Explanation: 73 GB SCSI disk drive 80 pin 10K rpm being identified or configured.

2659

Explanation: 146 GB SCSI disk drive 80 pin 10K rpm being identified or configured.

265B

Explanation: 300 GB SCSI disk drive 80 pin 10K rpm being identified or configured.

265D

Explanation: Configuring generic SATA Attached IDE DVDROM

265E

Explanation: Configuring generic SATA Attached IDE DVDROM Device

2660

Explanation: Configuring generic SATA DVDROM Device

2661

Explanation: Configuring generic SATA DVDROM Device

2662

Explanation: Configuring generic SATA Optical Device

2663

Explanation: Configuring generic SAS SCSD Disk Drive

2664

Explanation: Configuring generic SAS Disk Drive

2665

Explanation: Configuring generic SAS RAID Array

2666
Explanation: Configuring generic SAS PDISK

2667
Explanation: An electronics tray, also known as the enclosure services manager is being identified or configured

2668
Explanation: Configuring generic Virtual SAS SCSI Enclosure Services Device

2669
Explanation: Configuring generic SAS Target Mode Device

266B
Explanation: Configuring generic SAS Other Target Mode Device

266D
Explanation: Configuring generic SAS SCSD Tape Drive

266E
Explanation: Configuring generic SAS Tape Drive

2670
Explanation: 73 GB SFF SAS Disk Drive 10K rpm being identified or configured

2671
Explanation: 146 GB SFF SAS Disk Drive 10K rpm being identified or configured

2672
Explanation: 300 GB SFF SAS Disk Drive 10K rpm being identified or configured

2673
Explanation: Configuring 73 GB 3.5 inch SAS DASD

2674
Explanation: Configuring 146 GB 3.5 inch SAS DASD

2675
Explanation: Configuring 300 GB 3.5 inch SAS DASD

2676
Explanation: Configuring 7200 rpm 750 GB FC-NL Disk

2677
Explanation: Configuring 7200 rpm 1000 GB FC-NL Disk

2678
Explanation: Configuring 36GB 3.5 inch SAS DASD

2679
Explanation: Configuring Slimline SATA DVDRAM drive

267B
Explanation: Configuring Slimline SATA DVDRAM drive

267D
Explanation: Configuring 15K rpm 450 GB FC Disk

2680
Explanation: A generic SAS adapter is being identified or configured

2681
Explanation: DVD tray assembly.

2682
Explanation: Configuring 450 GB 15K RPM 3.5 inch SAS Disk Drive

2684
Explanation: Configuring 73 GB 15K RPM SFF Disk Drive

2685
Explanation: Configuring 146 GB 15K RPM SFF Disk Drive

2687**Explanation:** Configuring 73 GB SAS SFF Solid State Drive

2690**Explanation:** Configuring 600 GB 15K RPM SAS Disk Drive

2691**Explanation:** Configuring 15K rpm 600 GB FC Disk

2692**Explanation:** Configuring 146 GB 15K RPM SFF SAS HDD

2693**Explanation:** Configuring 300 GB 15K RPM SFF SAS HDD

2694**Explanation:** Configuring 146 GB 10K rpm 2.5 inch SFF SAS HDD

2695**Explanation:** Configuring 300 GB 10K rpm 2.5 inch SFF SAS HDD

2696**Explanation:** Configuring 73 GB 15K RPM SFF SAS Drive

2697**Explanation:** Configuring 146 GB 15K RPM SFF SAS Drive

2698**Explanation:** Configuring 7200 rpm 2TB SATA Drive

2699**Explanation:** Configuring 600 GB 10K RPM SAS SFF Disk Drive

269B**Explanation:** Configuring 450 GB 10K RPM SFF SAS Hard Drive

269D**Explanation:** Configuring 600 GB 10K RPM SFF SAS Hard Drive

26B0**Explanation:** Configuring 73 GB 3.5 inch FC-AL Solid State Drive

26B1**Explanation:** Configuring 146 GB 3.5 inch FC-AL Solid State Drive

26B2**Explanation:** Configuring 292 GB 3.5 inch FC-AL Solid State Drive

26B3**Explanation:** Configuring 100 GB SATA 1.8 inch Solid State Drive

26B4**Explanation:** Configuring 200 GB SATA Solid State Drive

26B5**Explanation:** Configuring 400 GB SATA 1.8 inch Solid State Drive

26B6**Explanation:** Configuring 300 GB SAS SFF Solid State Drive

26B7**Explanation:** Configuring 600 GB FC 3.5 inch Solid State Drive

26B8**Explanation:** Configuring 200 GB 2.5 inch Smart Modular SSD

26B9**Explanation:** Configuring 400 GB 2.5 inch SFF SAS SSD

26BD

Explanation: Reserved

26D0

Explanation: Configuring DAT320 160GB SAS Tape Drive

26D1

Explanation: Configuring DAT320 160GB USB Tape Drive

26D2

Explanation: Configuring 600 GB 10K RPM SFF SAS Disk Drive

26D3

Explanation: Configuring 300 GB 15K RPM SFF SAS Disk Drive

26D4

Explanation: Configuring 900 GB 2.5 inch 10K RPM SFF SAS HDD

26D5

Explanation: Configuring 300 GB 2.5 inch 15K RPM SFF SAS HDD

26D6

Explanation: Configuring 450 GB 2.5 inch 15K RPM SFF SAS HDD

26D7

Explanation: Configuring 900 GB 10K RPM SAS SFF Disk Drive

26D8

Explanation: Configuring 1 TB 7.2K RPM 3.5 inch SAS HDD

26D9

Explanation: Configuring 2 TB 7.2K RPM 3.5 inch SAS HDD

26DB

Explanation: Configuring 3 TB 7.2K RPM 3.5 inch SAS HDD

26DD

Explanation: Configuring 900 GB 10K RPM 2.5 inch SFF SAS HDD

26E0

Explanation: Configuring Internal RDX USB Dock

26E1

Explanation: Configuring External RDX USB Dock

26E2

Explanation: Reserved

26E3

Explanation: Reserved

26E4

Explanation: Reserved

26E5

Explanation: Configuring SAS HH LTO-5 Tape Drive

26E6

Explanation: Configuring USB Tape Drive

26E7

Explanation: Configuring Enhanced Internal RDX USB Dock

26E9

Explanation: Configuring Enhanced External RDX USB Dock

26EB

Explanation: Reserved

26ED

Explanation: Reserved

2700

Explanation: Configuring NPIV FC SCSI protocol device

 2701

Explanation: Configuring NPIV FC SCSI protocol device

2702

Explanation: Boot failed due to insufficient VRM

2703

Explanation: Configuring Paging Device - Logical Volume

2704

Explanation: Configuring Paging Device - Disk

2705

Explanation: Configuring Virtual Tape

2706

Explanation: Configuring Pool Device

2707

Explanation: Configuring Virtual Fiber Channel (vfc) Host Device

2708

Explanation: Configuring VSCSI Virtual Tape

2709

Explanation: Configuring Virtual Block Storage Device

270B

Explanation: Configuring Cluster Storage Framework

270D

Explanation: Configuring Virtual SCSI Log

2710

Explanation: Configuring OHCI USB Native or 4-port PCIe Adapter

2711

Explanation: Configuring Loopback Device

2714

Explanation: Configuring Integrated xHCI USB 3.0 Adapter

2715

Explanation: Configuring PCIe2 4-Port USB 3.0 Adapter

2720

Explanation: Configuring Slimline SATA DVDRAM Drive

2722

Explanation: Configuring 2.5 TB SAS HH LTO-6 Tape Drive

2723

Explanation: Configuring 2.5 TB FC HH LTO-6 Tape Drive

2730

Explanation: Configuring VIOS Object

2731

Explanation: Configuring VIOS Cluster Object

2732

Explanation: Configuring VIOS LPM Pseudo device

2740

Explanation: Configuring 400 GB 2.5 inch SFF SAS SSD

2741

Explanation: Reserved

2742

Explanation: Configuring Interposer w/ 400 GB SATA 1.8 inch SSD

2743

Explanation: Configuring 800 GB SAS SFF SSD

274E**Explanation:** Configuring 400 GB SAS small-form factor solid-state drive

2750**Explanation:** Configuring 16Gb PCIe2 2-port FC Mezz adapter

2751**Explanation:** Configuring Copper 10Gb PCIe2 2-port FCoE Adapter

2752**Explanation:** Configuring Copper 10Gb PCIe2 2-port FCoE VF

2753**Explanation:** Configuring SR 10Gb PCIe2 2-port FCoE Adapter

2754**Explanation:** Configuring SR 10Gb PCIe2 2-port FCoE VF

2755**Explanation:** Configuring 16Gb PCIe2 4-port FC NGP Mezz Adapter

2756**Explanation:** Configuring 16Gb PCIe2 2-port FC adapter

2757**Explanation:** Configuring 16Gb PCIe2 2-port FC adapter

2765**Explanation:** Configuring 1.6 TB 2.5" SAS SSD

2770**Explanation:** Configuring 2-port 10Gb RoCE Mezz Adapter

2771**Explanation:** Configuring 2-port 10Gb RoCE Mezz Adapter

2776**Explanation:** Configuring ConnectX3-EN 40G PCIe Gen-3 RoCE Adapter

2777**Explanation:** Configuring PCIe QDR InfiniBand adapter

2778**Explanation:** Configuring ConnectX-3 Pro 10Gb RoCE SFP+ Slot Adapter

2779**Explanation:** Configuring ConnectX-3 Pro 10Gb RoCE SR Slot Adapter

277B**Explanation:** Configuring ConnectX-4 2-port 100GbE RoCE QSFP28 PCIe 3.0 x16 Adapter

2780**Explanation:** Configuring 300 GB SAS interface small form factor 15,000 rpm disk drive

2782**Explanation:** Configuring 600 GB SAS interface small form factor 15,000 rpm disk drive

2785**Explanation:** Configuring 2 TB 3.5" 7200 RPM LFF SAS Hard Disk Drive

2786**Explanation:** Configuring 4 TB 3.5" 7200 RPM LFF SAS Hard Disk Drive

2787**Explanation:** Configuring 6 TB 3.5" 7200 RPM LFF SAS Hard Disk Drive

27D2**Explanation:** 1.2 TB SFF SAS Disk Drive 10K rpm being identified or configured

27E3

Explanation: Configuring 400 GB SAS 1.8 inch form factor solid state drive

27E4

Explanation: Configuring 200 GB 1.8" Read Intensive SAS SSD

27E5

Explanation: Configuring 200 GB 1.8" Read Intensive 4K SAS SSD

27E6

Explanation: Configuring 8 TB 3.5" 7200 RPM LFF SAS Hard Disk Drive

27E7

Explanation: Configuring 1.6 TB 2.5" SAS 4K Block SSD

27E8

Explanation: Configuring 1.6 TB 2.5" SAS 5xx Block SSD

27E9

Explanation: Configuring 1.86 TB 2.5" SAS 4K Block RI SSD

27EB

Explanation: Configuring 400 GB 1.8" SAS 4K Block SSD

27ED

Explanation: Configuring 800 GB 1.8" SAS 4K Block SSD

27EE

Explanation: Configuring 10 TB 3.5" 7200 RPM LFF SAS Hard Disk Drive

2800

Explanation: Configuring virtual suspend device

2801

Explanation: Configuring virtual suspend adapter

2811

Explanation: Configuring CAPI Flash Adapter (1410f0041410f004)

2812

Explanation: Configuring CAPI Flash Disk

2820

Explanation: Configuring 960 GB 2.5" SAS 4K Block RI SSD

2821

Explanation: Configuring 3.94 TB 2.5" SAS 4K Block RI SSD

2822

Explanation: Configuring 300GB 15K RPM SFF 4K High Performance Hard Disk Drive

2824

Explanation: Configuring 600 GB 15K RPM SFF 4K High Performance Hard Disk Drive

2D00

Explanation: Reserved

2D01

Explanation: PCI-X Quad Channel U320 SCSI RAID Battery Pack

2D02

Explanation: Generic USB Reference to Controller/Adapter

2D03

Explanation: Reserved

2D04

Explanation: Reserved

2D05

Explanation: PCI-X266 Planar 3 GB SAS RAID adapter battery pack

2D06

Explanation: Reserved

2D07

Explanation: Configuring a PCI X DDR Auxiliary Cache adapter

2D08

Explanation: Configuring PCI Express x8 Ext Dual-x4 3Gb SAS RAID Adapter

2D09

Explanation: Configuring PCI-X Ext x2 3Gb SAS RAID Adapter

2D0B

Explanation: PCI express x8 Ext Dual-x4 3Gb SAS RAID adapter being configured.

2D0D

Explanation: Configuring PCI Express x8 Ext. Dual-x4 3Gb SAS RAID Adapter

2D0E

Explanation: Reserved

2D10

Explanation: Configuring RSSM Storage Device

2D11

Explanation: Configuring PCIe3 RAID SAS Adapter Quad-port 6Gb x8

2D12

Explanation: Configuring PCIe2 SAS Adapter Quad-port 6Gb

2D13

Explanation: Configuring PCIe2 SAS Adapter Quad-port 6Gb

2D14

Explanation: PCI express x8 Planar 3Gb SAS Adapter being configured.

2D15

Explanation: PCI express x8 Planar 3Gb SAS RAID Adapter being configured.

2D16

Explanation: PCI-X DDR Planar 3Gb SAS Adapter

2D17

Explanation: PCI-X DDR Planar 3Gb SAS RAID Adapter

2D18

Explanation: PCI-X DDR Planar 3Gb SAS RAID Adapter

2D19

Explanation: Reserved

2D1B

Explanation: Reserved

2D1D

Explanation: Configuring PCIe2 RAID SAS Adapter Dual-port 6Gb

2D1F

Explanation: PCIe2 1.8GB Cache RAID SAS Adapter Tri-port 6Gb

2D20

Explanation: PCIe2 1.8GB Cache RAID SAS Adapter Tri-port 6Gb

2D21

Explanation: Configuring PCIe3 12GB Cache RAID SAS Adapter Quad-port 6Gb x8

2D22

Explanation: Configuring PCIe2 3.6GB Cache RAID SAS Adapter Quad-port 6Gb

2D23

Explanation: Configuring PCIe x1 Planar 3Gb SAS Adapter

2D24

Explanation: Configuring PCIe2 3.6GB Cache RAID SAS Enclosure 6Gb

2D25

Explanation: Configuring PCIe x4 Planar 3Gb SAS Adapter

2D26

Explanation: Configuring PCIe x4 Planar 3Gb SAS RAID Adapter

2D27

Explanation: Configuring PCIe x4 Internal 3Gb SAS Adapter

2D28

Explanation: Configuring PCIe x4 Internal 3Gb SAS RAID Adapter

2D29

Explanation: Configuring PCIe x8 Internal 3Gb SAS Adapter

2D30

Explanation: Configuring PCIe2 1.8GB RAID and SSD SAS Adapter 6Gb

2D31

Explanation: Configuring PCIe2 3.6GB RAID and SSD SAS Adapter 6Gb

2D35

Explanation: Configuring PCIe3 x8 SAS RAID Internal Adapter 6Gb

2D36

Explanation: Configuring PCIe3 x8 Cache SAS RAID Internal Adapter 6Gb

2D40

Explanation: Configuring PCIe RAID and SSD SAS 3Gb Adapter

2D41

Explanation: Reserved

2E00

Explanation: Configuring SLIM Expansion Gb Ethernet-SX PCI-X Adapter

2E01

Explanation: 10Gb Ethernet-SR PCIe Adapter

2E02

Explanation: 10Gb Ethernet-LR PCIe Adapter

2E03

Explanation: Configuring 10Gb Ethernet-SR PCIe Host Bus Adapter

2E04

Explanation: Configuring 10Gb Ethernet-CX4 PCIe Host Bus Adapter

2E08

Explanation: Configuring 4X Copper Twinax 10Gb PCIe Ethernet Adapter

2E09

Explanation: Configuring 4X Copper Twinax 1Gb PCIe Ethernet Adapter

2E0B

Explanation: Configuring 4X SR SFP+ 10Gb PCIe Ethernet Adapter

2E0D

Explanation: Configuring 4X SR SFP+ 1Gb PCIe Ethernet Adapter

2E10

Explanation: Configuring Qlogic 2432 FC Adapter

2E11

Explanation: Configuring Qlogic 8Gb PCIe FC Adapter

2E12

Explanation: 8 Gb Fibre Channel adapter being configured

2E13

Explanation: Configuring Qlogic 4Gb PCIe FC Blade Expansion Adapter

2E14

Explanation: Configuring Qlogic 8Gb PCIe FC Blade Expansion Adapter

2E15

Explanation: Configuring Qlogic 8Gb PCIe FC Blade Expansion Adapter

2E16

Explanation: Configuring Qlogic 8Gb 2-port PCIe FC Mezz Card

2E17

Explanation: Configuring low-profile 8Gb 4-port PCIe2 FC Adapter

2E18

Explanation: Reserved Configuring Qlogic 8Gb 2-port PCIe2 FC Adapter

2E19

Explanation: Configuring Qlogic 8Gb 2-port PCIe2 FC Adapter

2E20

Explanation: Configuring 10Gb PCIe FCoE CNA Slot FC Adapter

2E21

Explanation: Configuring Qlogic 10Gb PCIe FCoE CNA FC Daughtercard

2E22

Explanation: Configuring 10Gb PCIe FCoE CNA Slot Ethernet Adapter

2E23

Explanation: Configuring 10Gb PCIe2 FCoE VF

2E28

Explanation: Configuring 10Gb PCIe2 FCoE ITE Mezz VF

2E30

Explanation: Configuring 10Gb PCIe SFP+ SR Ethernet Adapter

2E31

Explanation: Configuring 10Gb PCIe SFP+ Twinax Ethernet Adapter

2E32

Explanation: Configuring 1Gb PCIe UTP Ethernet Adapter

2E33

Explanation: Configuring 1Gb 4-port PCIe Ethernet Adapter

2E34

Explanation: Configuring 1Gb 2-port PCIe Ethernet Adapter

2E35

Explanation: Configuring PCIe Combo 8Gb FC with 1Gb Ethernet

2E36

Explanation: Configuring 1Gb 2-port PCIe Integrated Ethernet Adapter

2E37

Explanation: Configuring PCIe2 4-port 10GbE Mezz Adapter

2E38

Explanation: Configuring Int Multifunction Adapter w/ SR Optical 10GbE

2E39

Explanation: Configuring Int Multifunction Adapter w/ Copper SFP+ 10GbE

2E3B

Explanation: Configuring Int Multifunction Adapter w/ Base-TX 10/100/1000 1GbE

2E3D

Explanation: Configuring 1Gb 2-port PCIe Ethernet Adapter

2E40

Explanation: Configuring 1Gb 2-port PCIe Ethernet Adapter

2E41

Explanation: Configuring 1Gb 2-port PCIe Ethernet Adapter

2E42

Explanation: Configuring PCIe2 2-Port 10GbE Base-T Adapter

2E43

Explanation: Configuring PCIe2 4-Port (10GbE SFP+ and 1GbE RJ45) Adapter

2E44

Explanation: Configuring PCIe3 4-Port 10GbE SR Adapter

2E45

Explanation: Configuring PCIe3 4-Port 10GbE VF SR Adapter

2E46

Explanation: Configuring PCIe3 4-Port 10GbE Cu Adapter

2E47

Explanation: Configuring PCIe3 4-Port 10GbE VF Cu Adapter

2E52

Explanation: Configuring 10GbE 8-port NGP Mezz adapter

2E53

Explanation: Configuring 10GbE-SR 4-port adapter

2E55

Explanation: Configuring 10GbE-SR/1GBaseT 4-port adapter

2E57

Explanation: Configuring 10GbE-SR 4-port Integrated adapter

2E59

Explanation: Configuring PCIe2 10GbE Short Range 4-port Integrated Adapter

2E5D

Explanation: Configuring 10GbE-Cu 4-port Integrated adapter

2E60

Explanation: Configuring PCIe2 10GbE Copper 4-port Integrated Adapter

2E62

Explanation: Configuring PCIe2 10GbaseT Copper 4-port Integrated Adapter

2E63

Explanation: Configuring 10GbE 2-port GX++ Gen2 adapter

2E70

Explanation: Configuring PCIe2 10Gb Long Range 4-port FCoE Slot Adapter

2E72

Explanation: Configuring PCIe2 10Gb Copper 4-port FCoE Slot Adapter

2E80

Explanation: Configuring PCIe2 10Gb Long Range 4-port Slot Network Adapter

2E81

Explanation: Configuring PCIe2 10Gb Long Range 4-port Slot Network VF Adapter

2E82

Explanation: Configuring PCIe2 1GbaseT Long Range 4-port Slot Network Adapter

2E83

Explanation: Configuring PCIe2 1GbaseT Long Range 4-port Slot Network VF Adapter

2E84

Explanation: Configuring PCIe2 10Gb Copper 4-port Slot Network Adapter

2E85

Explanation: Configuring PCIe2 10Gb Copper 4-port Slot Network VF Adapter

2E86

Explanation: Configuring PCIe2 1GbaseT Copper 4-port Slot Network Adapter

2E87

Explanation: Configuring PCIe2 1GbaseT Copper 4-port Slot Network VF Adapter

2F00

Explanation: Configuring BluRay Writer

2F01

Explanation: Configuring BluRay Reader

3000

Explanation: GPFS Raid Services

AIX diagnostic load progress indicators

This section contains a list of the various numbers and characters that display in the operator panel display that track the progress of diagnostics.

Note: Some systems might produce 4-digit codes. If the leftmost digit of a 4-digit code is 0, use the three rightmost digits.

0C00

Explanation: AIX Install/Maintenance loaded successfully.

0C01

Explanation: Insert the first diagnostic diskette.

0C02

Explanation: Diskettes inserted out of sequence.

0C03

Explanation: The wrong diskette is in diskette drive.

0C04

Explanation: The loading stopped with an irrecoverable error.

0C05

Explanation: A diskette error occurred.

0C06

Explanation: The `rc.boot` configuration shell script is unable to determine type of boot.

0C07

Explanation: Insert the next diagnostic diskette.

0C08

Explanation: RAM file system started incorrectly.

0C09

Explanation: The diskette drive is reading or writing a diskette.

0C10

Explanation: Unknown system platform

0C20

Explanation: An unexpected halt occurred, and the system is configured to enter the kernel debug program instead of entering a system dump.

0C21

Explanation: The `ifconfig` command was unable to configure the network for the client network host.

0C22

Explanation: The `tftp` command was unable to read client's `ClientHostName.info` file during a client network boot.

0C24

Explanation: Unable to read client's `ClientHostName.info` file during a client network boot.

0C25

Explanation: Client did not mount remote miniroot during network install.

0C26

Explanation: Client did not mount the `/usr` file system during the network boot.

0C29

Explanation: The system was unable to configure the network device.

0C31

Explanation: Select the console display for the diagnostics. To select No console display, set the key mode switch to Normal, then to Service. The diagnostic programs then load and run the diagnostics automatically. If you continue to get the message, check the cables and make sure you are using the serial port.

0C32

Explanation: A directly attached display (HFT) was selected.

0C33

Explanation: A TTY terminal attached to serial ports S1 or S2 was selected.

0C34

Explanation: A file was selected. The console messages store in a file.

0C35

Explanation: No console found.

0C40

Explanation: Configuration files are being restored.

0C41

Explanation: Could not determine the boot type or device.

0C42

Explanation: Extracting data files from diskette.

0C43

Explanation: Cannot access the boot/install tape.

0C44

Explanation: Initializing installation database with target disk information.

0C45

Explanation: Cannot configure the console.

0C46

Explanation: Normal installation processing.

0C47

Explanation: Could not create a physical volume identifier (PVID) on disk.

0C48

Explanation: Prompting you for input.

0C49

Explanation: Could not create or form the JFS log.

0C50

Explanation: Creating root volume group on target disks.

0C51

Explanation: No paging devices were found.

0C52

Explanation: Changing from RAM environment to disk environment.

0C53

Explanation: Not enough space in the `/tmp` directory to do a preservation installation.

0C54

Explanation: Installing either BOS or additional packages.

0C55

Explanation: Could not remove the specified logical volume in a preservation installation.

0C56

Explanation: Running user-defined customization.

0C57

Explanation: Failure to restore BOS.

0C58

Explanation: Displaying message to turn the key.

0C59

Explanation: Could not copy either device special files, device ODM, or volume group information from RAM to disk.

0C61

Explanation: Failed to create the boot image.

0C62

Explanation: Loading platform dependent debug files.

0C63

Explanation: Loading platform dependent data files.

0C64

Explanation: Failed to load platform dependent data files.

0C70

Explanation: Problem Mounting diagnostic boot media. An example of the boot media would be a CD-ROM disc.

0C71

Explanation: A IX diagnostics are not supported on this system, or there is not enough memory to run the diagnostics.

0C72

Explanation: There is a problem copying files from the diagnostic boot media into the RAM file system. An example of the boot media would be a CD-ROM disc.

0C99

Explanation: Diagnostics have completed. This code is only used when there is no console.

Dump progress indicators (dump status codes)

The following dump progress indicators, or dump status codes, are part of a Type 102 message.

Note: When a lowercase c is listed, it displays in the lower half of the character position. Some systems produce 4-digit codes. The two leftmost positions can have blanks or zeros. Use the two rightmost digits.

00C0

Explanation: The dump completed successfully.

00C1

Explanation: The dump failed due to an I/O error.

00C2

Explanation: A dump, requested by the user, is started.

00C3

Explanation: The dump is inhibited.

00C4

Explanation: The dump device is not large enough.

00C5

Explanation: The dump did not start, or the dump crashed.

00C6

Explanation: Dumping to a secondary dump device.

00C7

Explanation: Reserved.

00C8

Explanation: The dump function is disabled.

00C9

Explanation: A dump is in progress.

00CB

Explanation: A firmware-assisted system dump is in progress

00CC

Explanation: Unknown dump failure.

AIX crash progress codes (category 1)

Crash codes produce a Type 102 message. A Type 102 message indicates that a software or hardware error occurred during system execution of an application.

For category 1 crash codes, dump analysis is the appropriate first action in Problem Determination. Begin the Problem Determination process with software support.

888-102-300

Explanation: Data storage interrupt from the processor.

888-102-32X

Explanation: Data storage interrupt because of an I/O exception from IOCC.

888-102-38X

Explanation: Data storage interrupt because of an I/O exception from SLA.

888-102-400

Explanation: Instruction storage interrupt.

888-102-700

Explanation: Program interrupt.

AIX crash progress codes (category 2)

Crash codes produce a Type 102 message. A Type 102 message indicates that a software or hardware error occurred during system execution of an application.

888-102-200 • 888-102-800

For category 2 crash codes, dump analysis most likely will not aid in Problem Determination. Begin the Problem Determination process with hardware support.

888-102-200

Explanation: Machine check because of a memory bus error.

888-102-201

Explanation: Machine check because of a memory timeout.

888-102-202

Explanation: Machine check because of a memory card failure.

888-102-203

Explanation: Machine check because of an out of range address.

888-102-204

Explanation: Machine check because of an attempt to write to ROS.

888-102-205

Explanation: Machine check because of an uncorrectable address parity.

888-102-206

Explanation: Machine check because of an uncorrectable ECC error.

888-102-207

Explanation: Machine check because of an unidentified error.

888-102-208

Explanation: Machine check due to an L2 uncorrectable ECC.

888-102-500

Explanation: External interrupt because of a scrub memory bus error.

888-102-501

Explanation: External interrupt because of an unidentified error.

888-102-51X

Explanation: External interrupt because of a DMA memory bus error.

888-102-52X

Explanation: External interrupt because of an IOCC channel check.

888-102-53X

Explanation: External interrupt from an IOCC bus timeout; x represents the IOCC number.

888-102-54X

Explanation: External interrupt because of an IOCC keyboard check.

888-102-800

Explanation: Floating point is not available.

AIX crash progress codes (category 3)

Crash codes produce a Type 102 message. A Type 102 message indicates that a software or hardware error occurred during system execution of an application.

For category 3 crash codes, both software and hardware support may be needed in Problem Determination. Go to the 888 sequence in the operator panel display to assist in problem isolation.

888-102-000

Explanation: Unexpected system interrupt.

Explanation: AIX 4.3.3.3 and above: Alignment Interrupt. If pre-AIX 4.3.3.3: AIX has crashed because the Portability Assist Layer (PAL) for this machine type has detected a problem.

888-102-558

Explanation: There is not enough memory to continue the system IPL.

888-102-605

Explanation: AIX 4.3.3.3 and above: AIX has crashed because the Portability Assist Layer (PAL) for this machine type has detected a problem.

888-102-600

(C1xx) Service processor progress codes

C10010XX

Explanation: Pre-standby

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1001FFF

Explanation: Pre-standby: completed initial transition file

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1001F00

Explanation: Pre-standby: starting initial transition file

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009003

Explanation: Istep 0.3 - Update HW Model - Update software models for any changes in HW state.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1001F0D

Explanation: Pre-standby: discovery completed in initial transition file.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009004

Explanation: Istep 0.4 - Alignment Check - For RFSP systems, validate the optimal FSP is booting the system

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

Problem determination: While this checkpoint is being displayed, the service processor card is reading the system VPD; this may take as long as 15 minutes (on systems with maximum configurations or many disk drives) before displaying the next checkpoint. You should wait at least 15 minutes for this checkpoint to change before deciding that the system is hung.

C1001F0F

Explanation: Pre-standby: waiting for standby synchronization from initial transition file

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009005

Explanation: Istep 0.5 - Set Ref Clock - Setup chip reference clocks in the system

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009006

Explanation: Istep 0.6 - Proc Clock Test - Validate reference clocks

C1009007 • C1009481

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009007

Explanation: Istep 0.7 - Proc Prep IPL - Setup hardware for boot

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009008

Explanation: Istep 0.8 - DRAM Repair - Apply L3 and L2 line deletes as needed

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009009

Explanation: Istep 0.9 - Asset Protection - Ensure appropriate config to boot

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100900A

Explanation: Istep 0.10 - Proc select boot master - Select proper chip to boot firmware from

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100900B

Explanation: Istep 0.11 - HB Config Update - Write required information out for Hostboot firmware to boot

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100900C

Explanation: Istep 0.12 - SBE Config Update - Write required information out for the SBE to boot

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100900D

Explanation: Istep 0.13 - SBE Start - Kick off boot by starting the SBE

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100900E

Explanation: Istep 0.14 - Start PRD - Start runtime diagnostics component to start monitoring for hw failures

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009441

Explanation: Istep 17.1 - The service processor progress code which indicates it's waiting for Hostboot to complete previous steps

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009442

Explanation: Istep 17.2 - The service processor updates any microcode in the PLX chips that is needed

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009443

Explanation: Istep 17.4 - The service processor initializes the PSI bus

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009444

Explanation: Istep 17.5 - The service processor tests the PSI bus

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009481

Explanation: Istep 18 - The service processor initializes SMP bus's between nodes (when applicable)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009491

Explanation: Istep 18 - The service processor initializes SMP bus's between nodes (when applicable)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009502

Explanation: Istep 20.2 - The service processor Loads the payload into main memory (PHYP or OPAL)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C10096C1

Explanation: The service processor and PHYP loads and starts the OCC

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X01

Explanation: Hardware object manager: (HOM): the cancontinue flag is being cleared.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X02

Explanation: Hardware object manager: (HOM): erase HOM IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X04

Explanation: Hardware object manager: (HOM): build cards IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X08

Explanation: Hardware object manager: (HOM): build processors IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X0C

Explanation: Hardware object manager: (HOM): build chips IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X10

Explanation: Hardware object manager: (HOM): initialize HOM.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X14

Explanation: Hardware object manager: (HOM): validate HOM.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X18

Explanation: Hardware object manager: (HOM): GARD in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X1C

Explanation: Hardware object manager: (HOM): clock test in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X20

Explanation: Frequency control IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X24

Explanation: Asset protection IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X28

Explanation: Memory configuration IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X2C

Explanation: Processor CFAM initialization in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X30

Explanation: Processor self-synchronization in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X34

Explanation: Processor mask attentions being initializaed.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X38

Explanation: Processor check ring IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X39

Explanation: Processor L2 line delete in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X3A

Explanation: Load processor gpnr IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X3C

Explanation: Processor ABIST step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X40

Explanation: Processor LBIST step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X44

Explanation: Processor array initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X46

Explanation: Processor AVP initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X48

Explanation: Processor flush IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X4C

Explanation: Processor wiretest IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X50

Explanation: Processor long scan IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X54

Explanation: Start processor clocks IPL step in progress.

Response: Perform isolation procedure FSPSPC1. To

C1009X58 • C1009X84

locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X58

Explanation: Processor SCOM initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X5C

Explanation: Processor interface alignment procedure in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X5E

Explanation: Processor AVP L2 test case in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X60

Explanation: Processor random data test in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X64

Explanation: Processor enable machine check test in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X66

Explanation: Concurrent initialization in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X68

Explanation: Processor fabric initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X6C

Explanation: Processor PSI initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X70

Explanation: ASIC CFAM initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X74

Explanation: ASIC mask attentions being set up.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X78

Explanation: ASIC check rings being set up.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X7C

Explanation: ASIC ABIST test being run.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X80

Explanation: ASIC LBIST test being run.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X82

Explanation: ASIC RGC being reset.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X84

Explanation: ASIC being flushed.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

C1009X88

Explanation: ASIC long scan initialization in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X8C

Explanation: ASIC start clocks in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X90

Explanation: Wire test in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X92

Explanation: ASIC restore erepair in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X94

Explanation: ASIC transmit/receive initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X98

Explanation: ASIC wrap test in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X9C

Explanation: ASIC SCOM initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009X9E

Explanation: ASIC HSS set up in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XA0

Explanation: ASIC onyx BIST in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XA4

Explanation: ASIC interface alignment step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XA8

Explanation: ASIC random data test in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XAC

Explanation: ASIC enable machine check step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XB0

Explanation: ASIC I/O initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XB4

Explanation: ASIC DRAM initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XB8

Explanation: ASIC memory diagnostic step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XB9

Explanation: PSI diagnostic step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XBB

Explanation: Restore L3 line delete step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XBD

Explanation: AVP memory test case in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XC0

Explanation: Node interface alignment procedure in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XC4

Explanation: Dump initialization step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XC8

Explanation: Start PRD step in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XCC

Explanation: Message passing waiting period has begun.

Response: Perform isolation procedure FSPSPC1. To

locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XD0

Explanation: Message passing waiting period has begun.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1009XD4

Explanation: EI (Elastic Interface) calibration step in progress .

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100B101

Explanation: Firmware update via the USB port on the service processor: the firmware image is being installed on one side of the flash.

C100B102

Explanation: Firmware update via the USB port on the service processor: the firmware image is being installed on the other side of the flash.

C100B103

Explanation: Firmware update via the USB port on the service processor: the firmware installation has been completed successfully. This checkpoint will stay in the control (operator) panel's display for about 10 seconds after the installation is complete, then it will be cleared.

C100B104

Explanation: Firmware update via the USB port on the service processor: the firmware installation has failed.

C100C100

Explanation: Starting power-up.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C102

Explanation: Network initialization complete; waiting on VPD from processor.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

C100C103

Explanation: Waiting on VPD from processor.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C104

Explanation: Processor VPD collection is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C106

Explanation: Checking of the number of processors is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C107

Explanation: Waiting on VPD from sensors.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C108

Explanation: Sensor VPD collection is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C10A

Explanation: Waiting for BPC's IP addresses to be sent from the HMC. The control panel toggles between C100C10A and C100C10B every 5 seconds or so until the addresses are received.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C10B

Explanation: Waiting for BPC's IP addresses to be sent from the HMC.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C10C

Explanation: Waiting for the BPC to come up to standby and turn off block power. The control panel toggles between C100C10C and C100C10D every 5 seconds or so until the BPC is at standby and the block power has been turned off.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C10D

Explanation: Waiting for the BPC to come up to standby and turn off block power.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C110

Explanation: Waiting for serial polling. The control panel toggles between C100C110 and C100C111 every 5 seconds or so until valid PBC UART data is received from the DCAs.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C111

Explanation: Waiting for serial polling.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C112

Explanation: Collecting the TMS is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C114

Explanation: Waiting for the BPC to respond to the TMS command from SPCN. The control panel toggles between C100C114 and C100C115 every 5 seconds or so until the BPC has responded.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C115

Explanation: Waiting for the BPC to respond to the TMS command from SPCN.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C116

Explanation: Waiting for the BPC to respond to the enclosure TMS command from SPCN. The control panel toggles between C100C116 and C100C117 every 5 seconds or so until the BPC has responded.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C117

Explanation: Waiting for the BPC to respond to the enclosure TMS command from SPCN.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C118

Explanation: Waiting for the BPC to respond to the secure VPD command from SPCN. The control panel toggles between C100C118 and C100C119 every 5 seconds or so until the BPC has responded.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C119

Explanation: Waiting for the BPC to respond to the secure VPD command from SPCN.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C120

Explanation: Waiting for power off delay to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C121

Explanation: Waiting for power off delay to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C122

Explanation: Power off delay is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C128

Explanation: Waiting for the processor subsystem to show up in the BPC polling data. The control panel toggles between C100C128 and C100C129 every 5 seconds or so until the processor subsystem is present in the polling data.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C129

Explanation: Waiting for the processor subsystem to show up in the BPC polling data.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C140

Explanation: Checking the voltage adjustment.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C142

Explanation: Checking of the voltage adjustment is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C14E

Explanation: Waiting for the voltage adjustment delay to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C14F

Explanation: Waiting for the voltage adjustment delay to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C150

Explanation: Checking the VRM voltage adjustment.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C152

Explanation: Waiting for the VRM voltage adjustment delay to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C153

Explanation: Waiting for the VRM voltage adjustment delay to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C154

Explanation: Checking of the VRM voltage adjustment is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C160

Explanation: Power check in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C162

Explanation: Checking for power supply power.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C164

Explanation: Waiting for the power supply power to come up.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C165

Explanation: Waiting for the power supply power to come up.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C166

Explanation: REGS power check in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C168

Explanation: Waiting for the REGS power check to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C169

Explanation: Waiting for the REGS power check to be complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C170

Explanation: Waiting for the BPC's response to the power-on request.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C171

Explanation: Waiting for the BPC's response to the power-on request.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C172

Explanation: BPC's response to the power-on request has been received; waiting on all processor subsystems to respond with **powered up** to BPC's polling query. The control panel toggles between C100C172 and C100C173 every 5 seconds or so until all processor subsystems report that they are powered up.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C173

Explanation: Waiting on all processor subsystems to respond with **powered up** to BPC's polling query.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C174

Explanation: Waiting for the BPC to report why power-on failed. The control panel toggles between C100C174 and C100C175 every 5 seconds or so until the report is received.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C175

Explanation: Waiting for the BPC to report why power-on failed.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C180

Explanation: Activating the power good signals.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C182

Explanation: The power in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C184

Explanation: The power-on delay is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1A0

Explanation: Waiting on the power good signals.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1A1

Explanation: Waiting on the power good signals.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1A2

Explanation: Waiting on the power good signal is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B0

Explanation: Waiting to power down.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B1

Explanation: Waiting to power down.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B2

Explanation: The power down delay is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B4

Explanation: The SPCN is waiting for power down.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B5

Explanation: The SPCN is waiting for power down.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B6

Explanation: Powering down the device is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B7

Explanation: Reserved.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1B8

Explanation: The request to power off the processor subsystem is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1BA

Explanation: Waiting on the BPC to respond to the power-off command to the I/O drawers from SPCN. The control panel toggles between C100C1BA and C100C1BB every 5 seconds or so until the I/O drawers respond.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1BB

Explanation: Waiting on the BPC to respond to the power-off command to the I/O drawers from SPCN.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1BE

Explanation: The power down operation is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1CF

Explanation: A critical fault has occurred. An SRC will be posted and logged soon.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C1FF

Explanation: The power-on process is complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C100C300

Explanation: The service processor firmware has started the digital power system sweep (DPSS) download application.

C100C301

Explanation: The digital power system sweep (DPSS) download application is waiting for appropriate interface devices to be configured and ready.

C100C302

Explanation: The digital power system sweep (DPSS) download application is reading the DPSS image information for system type and revision checks.

C100C303

Explanation: The digital power system sweep (DPSS) download application has determined that this system type has a single DPSS.

C100C304

Explanation: The digital power system sweep (DPSS) download application has determined that this system type has multiple DPSS devices.

C100C310

Explanation: The digital power system sweep (DPSS) download application has started checking if a DPSS device will require an image download.

C100C311

Explanation: The digital power system sweep (DPSS) download application is reading the revision information from a DPSS device.

C100C312

Explanation: The digital power system sweep (DPSS) download application is checking the system power state (on or off).

C100C313

Explanation: The digital power system sweep (DPSS) download application is resetting the DPSS download lockout line to allow an image to be written.

C100C314

Explanation: The digital power system sweep (DPSS) download application is configuring the interfaces used to write the DPSS image.

C100C315

Explanation: The digital power system sweep (DPSS) download application is locking out other service processor applications from DPSS IIC communications.

C100C320

Explanation: The digital power system sweep (DPSS) download application is writing the DPSS image on a single DPSS system type.

C100C321

Explanation: The digital power system sweep (DPSS) download application has successfully written the DPSS image on a single DPSS system type.

C100C330

Explanation: The digital power system sweep (DPSS) download application is writing the DPSS image via SPI interface (one of multiple DPSS devices).

C100C331

Explanation: The digital power system sweep (DPSS) download application has successfully written a DPSS image via the SPI interface.

C100C340

Explanation: The digital power system sweep (DPSS) download application is unlocking the DPSS IIC interface to allow other FSP applications to communicate with the DPSS.

C100C350

Explanation: The digital power system sweep (DPSS) download application is verifying that the new DPSS image is written correctly and functioning.

C100C360

Explanation: The digital power system sweep (DPSS) download application is updating the service processor registry information to indicate current DPSS revision(s) and type(s).

C100C3FA

Explanation: The digital power system sweep (DPSS) download application has encountered a failure in communicating with a DPSS or updating a DPSS image.

C100C3FF

Explanation: The digital power system sweep (DPSS) download application has finished and is exiting normally.

C100D009

Explanation: Licensed Internal Code (system) running initialization

C1011F00

Explanation: Pre-standby: starting independent initial transition file (primary/secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1011FFF

Explanation: Pre-standby: completed independent initial transition file (primary/secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1021F00

Explanation: Pre-standby: starting primaryInitial transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1021FFF

Explanation: Pre-standby: completed primaryInitial transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1031F00

Explanation: Pre-standby: starting secondaryInitial transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1031FFF

Explanation: Pre-standby: completed secondaryInitial transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A100

Explanation: Not CEC Services

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A1XX

Explanation: Hypervisor code modules are being transferred to system storage

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A200

Explanation: Connection monitoring failover: starting survfailover/backup/failover-runtime transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A2XX

Explanation: Hypervisor data areas are being built in system storage

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A300

Explanation: Not CEC Services

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A3XX

Explanation: Hypervisor data structures are being transferred to system storage

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A400

Explanation: Special purpose registers are loaded and instructions are started on the system processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103A401

Explanation: Instructions have been started on the system processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C103C2XX

Explanation: The service processor is waiting for the batteries in the uninterruptible power supply (UPS) to charge prior to automatic power on-IPL. The last byte (xx) will increment while waiting on the UPS batteries.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1041F00

Explanation: Pre-standby: starting GardedInitial transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1041FFF

Explanation: Pre-standby: completed GardedInitial transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C104550X

Explanation: The system reboot is waiting until the sibling service processor reaches the termination state. The last nibble (x) will toggle between 0 and 1.

C10F2000

Explanation: Halt: starting halt transition file

C10F20FF

Explanation: Halt: completing halt transition file

C1112000

Explanation: Power on: starting Standby-PowerOnTransition transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C11120FF

Explanation: Power on: completed Standby-PowerOnTransition transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1122000

Explanation: Power on: starting PowerOnTransition-PoweredOn transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C11220FF

Explanation: Power on: completed PowerOnTransition-PoweredOn transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1132000

Explanation: Power on: starting PoweredOn-IplTransition transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C11320FF

Explanation: Power on: completed PoweredOn-IplTransition transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C115E300

Explanation: Checking the status of vital product data (VPD) collection.

Response: Perform isolation procedure FSPSPC1 only if this progress code does not appear to be updating after an hour or more. To locate the isolation procedure go to the Isolation Procedures chapter in your host server service guide.

C115E359

Explanation: Vital product data (VPD) collection in progress. This progress code may be displayed for a long time on large systems.

Response: Perform isolation procedure FSPSPC1 only if this progress code does not appear to be updating after an hour or more. To locate the isolation procedure go to the Isolation Procedures chapter in your host server service guide.

C116C2XX

Explanation: System power interface is listening for power fault events from SPCN. The last byte (xx) will increment up from 00 to 1F every second while it waits.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C11DE4FF

Explanation: Vital product data (VPD) recollection complete.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1202000

Explanation: IPL transition: starting PowerOn/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12020FF

Explanation: IPL transition: completed
PowerOn/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12040XX

Explanation: IPL lock time left until expiration. The last byte (xx) will count down as the IPL lock time runs out (FF-00).

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1212000

Explanation: IPL transition: starting
Standard/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12120FF

Explanation: IPL transition: completed
Standard/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1222000

Explanation: IPL transition: starting
Flash/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12220FF

Explanation: IPL transition: completed
Flash/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1232000

Explanation: IPL transition: starting
PostDump/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12320FF

Explanation: IPL transition: completed
PostDump/IplTransition-Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1242000

Explanation: IPL transition: starting
Idle/IplTransition-Ipl transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12420FF

Explanation: IPL transition: completed
Idle/IplTransition-Ipl transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1252000

Explanation: IPL transition: starting
Standby/IplTransition-Ipl transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C12520FF

Explanation: IPL transition: completed
Standby/IplTransition-Ipl transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1382000

Explanation: IPL: starting HostStarted-BcuSwitched transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C13820FF

Explanation: IPL: completed HostStarted-BcuSwitched transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1392000

Explanation: IPL: starting BcuSwitched-Runtime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C13920FF

Explanation: IPL: completed BcuSwitched-Runtime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1402000

Explanation: IPL: starting Normal/fast/Ipl-HostStarted transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14020FF

Explanation: IPL: completed Normal/fast/Ipl-HostStarted transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1412000

Explanation: IPL: starting Normal/slow/Ipl-HostStarted transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14120FF

Explanation: IPL: completed Normal/slow/Ipl-HostStarted transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1422000

Explanation: IPL: starting PostDump/Ipl-HostStarted transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14220FF

Explanation: IPL: completed PostDump/Ipl-HostStarted transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1432000

Explanation: IPL: starting Ipl-IdleTransition transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14320FF

Explanation: IPL: completed Ipl-IdleTransition transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1442000

Explanation: IPL: starting IdleTransition-Idle transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14420FF

Explanation: IPL: completed IdleTransition-Idle transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1452000

Explanation: IPL: starting Ipl-StandbyVerificationTransition transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14520FF

Explanation: IPL: completed Ipl-StandbyVerificationTransition transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1462000

Explanation: IPL: starting StandbyVerificationTransition-Standby transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14620FF

Explanation: IPL: completed StandbyVerificationTransition-Standby transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1472000

Explanation: IPL: starting normal/ipl-hoststarted transition file (master)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14720FF

Explanation: IPL: completing normal/ipl-hoststarted transition file (master)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1482000

Explanation: IPL: starting normal/backup/ipl-hoststarted transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14820FF

Explanation: IPL: completing normal/backup/ipl-hoststarted transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14DE400

Explanation: Vital Product Data (VPD) recollection is in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C14DE4FF

Explanation: The recollection of vital product data (VPD) is ending

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C162E402

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the service processor.

Failing Item:

- SVCPROC
-

C162E403

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the operator panel.

Failing Item:

- CTLPNL
-

C162E405

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the VPD card.

Failing Item:

- CAPACTY
-

C162E408

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the system backplane.

Failing Item:

- SYSBKPL
-

C162E410

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from a processor.

Failing Item:

- ANYPROC
-

C162E41C

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the system.

Failing Item:

- CAPACTY
-

C162E41E

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the enclosure.

Failing Item:

- SYSBKPL
-

C162E420

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the IO backplane.

Failing Item:

- IO_HUB
-

C162E421

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the IO hub.

Failing Item:

- IO_HUB
-

C162E430

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from SPCN.

Failing Item:

- SVCPROC
-

C162E4A0

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from the VSBP Starting Point.

Failing Item:

- CAPACTY
-

C162E4D0

Explanation: If the system hangs on this checkpoint, the service processor is unable to collect VPD from memory DIMM.

Failing Item:

- MEMDIMM
-

C1645300

Explanation: Starting a data synchronization operation between the primary service processor and the secondary service processor.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

C1645301

Explanation: Completed a data synchronization operation between the primary service processor and the secondary service processor.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1645304

Explanation: Redundancy enablement in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1645305

Explanation: Redundancy enablement in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1645306

Explanation: Redundancy enablement in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C16453XX

Explanation: A large data synchronization operation from the primary service processor to the secondary service processor is taking place. The last nibble (x) will toggle between 2 and 3.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1802000

Explanation: Termination: starting
TerminationTransition-Termination transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C18020FF

Explanation: Termination: completed
TerminationTransition-Termination transition file (primary)

Response: Perform isolation procedure FSPSPC1. To

locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1902000

Explanation: Power off: starting Any-Dpo transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C19020FF

Explanation: Power off: completed Any-Dpo transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1912000

Explanation: Power off: starting Any-PowerOffTransition transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C19120FF

Explanation: Power off: completed Any-PowerOffTransition transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1922000

Explanation: Power off: starting PowerOffTransition-PoweredOff transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C19220FF

Explanation: Power off: completed PowerOffTransition-PoweredOff transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C02000

Explanation: Secondary VERIFICATION: starting Standby-StandbyVerification transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C020FF

Explanation: Secondary verification: completed Standby-StandbyVerification transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C12000

Explanation: Secondary verification: starting StandbyVerification-Standby transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C120FF

Explanation: Secondary verification: completed StandbyVerification-Standby transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C22000

Explanation: Secondary verification: starting Runtime-secondaryVerification transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C220FF

Explanation: Secondary verification: completed Runtime-secondaryVerification transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C32000

Explanation: Secondary verification: starting secondaryVerification-Runtime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C320FF

Explanation: Secondary verification: completed secondaryVerification-Runtime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C3C218

Explanation: The service processor is polling the system power control network (SPCN) firmware looking for power fault events.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C42000

Explanation: Failover: starting failover/failover-termination transition file (master)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C420FF

Explanation: Failover: completed failover/failover-termination transition file (master)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C52000

Explanation: Failover: starting failover/backup/failover-termination transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C520FF

Explanation: Failover: completed failover/backup/failover-termination transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C62000

Explanation: Failover: starting failover/failover-runtime transition file (master).

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C620FF

Explanation: Failover: completed failover/failover-runtime transition file (master).

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C72000

Explanation: Failover: starting failover/backup/failover-standby transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1C720FF

Explanation: Failover: completed failover/backup/failover-standby transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CA2000

Explanation: Connection monitoring failover: starting survfailover/backup/failover-runtime transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CA20FF

Explanation: Connection monitoring failover: completed survfailover/backup/failover-runtime transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CB2000

Explanation: Connection monitoring failover: starting survfailover/backup/failover-termination transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CB20FF

Explanation: Connection monitoring failover: completed survfailover/backup/failover-termination transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To

locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE200

Explanation: VPD collection in progress

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE2FF

Explanation: VPD collection ending

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE300

Explanation: Checking the status of VPD collection

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE3FF

Explanation: The end of checking the status of VPD collection

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE400

Explanation: VPD recollection is in progress.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE401

Explanation: VPD recollection because of a change in the VPD is in progress

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE402

Explanation: The old VPD values are being cleared from memory

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE403

Explanation: The RLCA is being initialized during VPD recollection

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE404

Explanation: VPD is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE405

Explanation: VPD is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE406

Explanation: VPD is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE407

Explanation: The recollected VPD is being validated

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE408

Explanation: The VPD tables are being rebuilt with the recollected data

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE409

Explanation: The NVRAM VPD data is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE40A

Explanation: The RLCA VPD data is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE40B

Explanation: The recollected RLCA VPD data is being written to memory

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE40C

Explanation: The recollected HVAT VPD data is being written to memory

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE40D

Explanation: The registers are being updated with the recollected VPD

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE40E

Explanation: The module table is being rewritten with the recollected VPD

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE40F

Explanation: The LED table is being rewritten with the recollected VPD

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE410

Explanation: The LED table is being rewritten with the recollected VPD

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE411

Explanation: The security of the recollected VPD is being verified

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE4FE

Explanation: The state is being updated during VPD recollection

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE4FF

Explanation: The recollection of VPD is ending

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE500

Explanation: The VPD of a single FRU is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE600

Explanation: The VPD of a single FRU module is being recollected

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CBE6FF

Explanation: The VPD recollection from a single FRU is ending

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CC2000

Explanation: Connection monitoring failover: starting survfailover/backup/failover-standby transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1CC20FF

Explanation: Connection monitoring failover: completed survfailover/backup/failover-standby transition file (secondary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1D22000

Explanation: Dump: starting DumpTransition-Dump transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1D2200D

Explanation: Dump: calling hardware dump from DumpTransition-Dump transition file (master)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1D2200F

Explanation: Dump: calling main store dump from DumpTransition-Dump transition file (master)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1D220FF

Explanation: Dump: completed DumpTransition-Dump transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1E82000

Explanation: Exit error: starting ExitError/Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1E820FF

Explanation: Exit error: completed ExitError/Ipl transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1E92000

Explanation: Extract exit error: starting ExtractExitError/ipl transition file (master)

C1E920FF

Explanation: Extract exit error: completed ExtractExitError/ipl transition file (master)

C1EA2000

Explanation: Extract exit error: starting ExtractExitError/Backup/ipl transition file (secondary)

C1EA20FF

Explanation: Extract exit error: completed ExtractExitError/Backup/ipl transition file (secondary)

C1F120FF

Explanation: Completed rebuild of hardware model.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1F22000

Explanation: Reset/reload: starting Reset/Ipl-LimitedRuntime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1F220FF

Explanation: Reset/reload: completed Reset/Ipl-LimitedRuntime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1F32000

Explanation: Reset/reload: starting Reset/Ipl-Runtime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1F320FF

Explanation: Reset/reload: completed Reset/Ipl-Runtime transition file (primary)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1F42000

Explanation: Reset/reload: starting
Reset/Ipl-TerminationTransition transition file (master).

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

C1F420FF

Explanation: Reset/reload: completed
Reset/Ipl-TerminationTransition transition file (master).

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

(C2xx) Virtual service processor progress codes

The C2xx progress codes indicate the progress of a partition IPL that is controlled by the virtual service processor.

The codes represent normal events which do not require any action to be taken. If a partition IPL stalls at a C2xxxxxx progress code, a problem has occurred. Collect all of the SRC words and contact your next level of support.

C2001000

Explanation: Partition auto-IPL during a platform IPL

C2001010

Explanation: IPL source

C2001100

Explanation: Adding partition resources to the secondary configuration

C20011FF

Explanation: Partition resources added successfully

C2001200

Explanation: Checking if IPL is allowed

C20012FF

Explanation: Partition IPL is allowed to proceed

C2001300

Explanation: Initializing ISL roadmap

C20013FF

Explanation: ISL roadmap initialized successfully

C2001400

Explanation: Initializing SP Communication Area #1

C2001410

Explanation: Initializing IPL parameters

C20014FF

Explanation: IPL parameters initialized successfully

C2002100

Explanation: Power on SPCN racks

C2002110

Explanation: Issuing a rack power on command

C200211F

Explanation: Rack power on command successful

C20021FF

Explanation: SPCN rack power on phase complete

C2002200

Explanation: Begin acquiring slot locks

C20022FF

Explanation: End acquiring slot locks

C2002300

Explanation: Begin acquiring VIO slot locks

C20023FF

Explanation: End acquiring VIO slot locks

C2002400

Explanation: Begin powering on slots

C2002450

Explanation: Waiting for power on of slots to complete

C20024FF**Explanation:** End powering on slots

C2002500**Explanation:** Begin power on VIO slots

C20025FF**Explanation:** End powering on VIO slots

C2003100**Explanation:** Validating ISL command parameters

C2003111**Explanation:** Waiting for Bus object to become operational

C2003112**Explanation:** Waiting for bus unit to become disabled

C2003115**Explanation:** Waiting for creation of bus object

C2003150**Explanation:** Sending ISL command to bus unit

C20031FF**Explanation:** Waiting for ISL command completion

C20032FF**Explanation:** ISL command complete successfully

C2003300**Explanation:** Start SoftPOR of a failed ISL slot

C2003350**Explanation:** Waiting for SoftPOR of a failed ISL slot

C20033FF**Explanation:** Finish SoftPOR of a failed ISL slot

C2004100**Explanation:** Waiting for load source device to enlist

C2004130**Explanation:** Waiting for retry. A valid load source device was not found.

C2004200**Explanation:** Load source device has enlisted

C2004300**Explanation:** Preparing connection to load source device

C20043FF**Explanation:** Load source device is connected

C2005100**Explanation:** Preparing to initiate MSD phase

C2005110**Explanation:** Loading SID 82 from load source device

C2005115**Explanation:** MSD Phase I

C2005120**Explanation:** Writing processor registers into SID 82

C2005125**Explanation:** MSD Phase II

C2005130**Explanation:** Writing main store pages to the load source device

C2005133**Explanation:** Writing hardware page table to the load source device

C2005135**Explanation:** MSD Phase III

C2005140**Explanation:** Storing (final) SID 82 back to the load source device

C2005150 • C2008060

C2005150

Explanation: Allocating the hardware page table

C20051FF

Explanation: MSD processing complete

C2005245

Explanation: Writing mainstore pages for MSD

C2006000

Explanation: Locating First LID information on the load source

C2006005

Explanation: Clearing all partition main store

C2006010

Explanation: Locating Next LID information on the load source

C2006020

Explanation: Verifying LID information

C2006030

Explanation: Priming LP Configuration LID

C2006040

Explanation: Preparing to initiate LID load from load source

C2006050

Explanation: LP Configuration LID primed successfully

C2006060

Explanation: Waiting for LID load to complete

C20060F0

Explanation: The license information document (LID) was read without the aid of a input output processor (IOP).

C2006100

Explanation: LID load completed successfully

C2006200

Explanation: Loading raw kernel memory image

C20062FF

Explanation: Loading raw kernel memory image completed successfully

C2007100

Explanation: Disconnecting from load source device

C2007103

Explanation: Removing load source device from LID Manager object

C2007105

Explanation: Preparing to remove the load source IP from the primary partition

C2007110

Explanation: Preparing to remove the load source IOP from the primary partition

C2007120

Explanation: Non-load source IOP has been successfully removed from the primary partition

C2007125

Explanation: Load source IOP has been successfully removed from the primary partition

C2007130

Explanation: Calling fatal error on the Transport Manager bus unit object

C20071FF

Explanation: Load source is successfully disconnected

C2008040

Explanation: Begin transfer slot locks to partition

C2008060

Explanation: End transfer slot locks to partition

C2008080

Explanation: Begin transfer VIO slot locks to partition

C20080A0

Explanation: End transfer VIO slot locks to partition

C20080FF

Explanation: Hypervisor low level session manager object is ready

C2008100

Explanation: Initializing SP Communication Area #2

C2008104

Explanation: Loading data structures into main store

C2008110

Explanation: Initializing event paths

C2008120

Explanation: Starting processors

C2008130

Explanation: Begin associate of system ports.

C2008138

Explanation: Associating system ports to the RPA partition.

C200813F

Explanation: End associate of system ports.

C20081FF

Explanation: Processors started successfully, now waiting to receive the continue acknowledgement from System Licensed Internal Code

C2008200

Explanation: Continue acknowledgement received from System Licensed Internal Code

C20082FF

Explanation: VSP IPL complete successfully

C200XXXX

Explanation: Any other Virtual Service Processor Progress Code not listed here.

(C3xx, C5xx, C6xx) IPL status progress codes

A server that stalls during an initial program load (IPL) of the operating system indicates a problem with the operating system code or hardware configuration.

In this case, your only service action is to call your next level of support. If the problem is in the operating system code or hardware configuration, exchanging any hardware FRU will not fix the problem.

Notes:

- The following table contains the C3xxxxxx, C5xxxxxx, and C6xxxxxx IPL status progress codes. Some of these codes can appear on your control panel or management console display. Depending on the system activity and disk configuration the duration of time that each code is displayed can vary. Eventually the system will continue to the next progress code until the IPL status is complete, or if an error is detected an SRC other than a C3xxxxxx, C5xxxxxx, or C6xxxxxx will be displayed.
- There are instances when multiple tasks might be happening at the same time, so the progress code on the panel may not reflect the code module having problems.

The mode of the IPL (A, B, or D) determines, in part, which status SRCs are displayed. The different types of IPL use different progress codes, so you will not see all of the progress codes in the table below when you perform an IPL.

The list of IPL status progress codes uses the following format:

- The message number contains characters that represent a particular action your server performs during initialization of the supported operating system.
- The description identifies the action or procedure that produced the progress code.

C3YXXXXX

Explanation: System Processor or Main Storage Diagnostic in progress.

C500C935

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C901

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C936

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C920

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C93F

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C92B

Explanation: Waiting for console device - error condition only if console not found.

C500C940

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C92F

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C941

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C930

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C945

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C947

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C94F

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C950

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C95F

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C960

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C96F

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C970

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C980

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C981

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C999

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500C9F0

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E200

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E201

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E204

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E208

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E210

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E218

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E220

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E228

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E238

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E240

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E248

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E250 • C6003916

C500E250

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E258

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E260

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E268

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E270

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E278

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E280

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E288

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E28C

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E299

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C500E2D0

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C5YXXXXX

Explanation: Licensed Internal Code system hardware initialization.

C6001800

Explanation: Licensed Internal Code SPCN setup.

C6003900

Explanation: SP transfer control of Bus 1 (BCU Switch) to Licensed Internal Code is Complete and Licensed Internal Code Machine Facilities component is initialized. IPL of Bus 1 is in progress.

C6003910

Explanation: Licensed Internal Code has initiated PCI Bus Reset to all Bus 1 devices except the SP.

C6003911

Explanation: Licensed Internal Code has initiated self test of all Bus 1 devices except the SP.

C6003912

Explanation: Licensed Internal Code is initiating IPL of the Load Source IOP, waiting for the IOP to signal internal reset complete (Immediate Status Acknowledge Bit set to '1').

C6003913

Explanation: Licensed Internal Code is initializing the Load Source IOP messaging functions.

C6003914

Explanation: Licensed Internal Code has detected a Load Source IOP problem and is resetting the IOP, or the IOP has requested a reset after an internal Flash memory Licensed Internal Code update.

C6003915

Explanation: Licensed Internal Code has initiated the Load Source IOP self-load.

C6003916

Explanation: During self-load, the Load Source IOP signalled Licensed Internal Code that it is initiating an internal Flash Memory update or other critical function.

C6003917

Explanation: The Load Source IOP has completed IPL of its operational load, Licensed Internal Code is waiting for the IOP to report its attached IO resources. This is the last progress code normally displayed regarding Load Source IPL.

C60039XX

Explanation: The typical sequence for an A/B mode IPL is 3900, 3910, 3911 (warm IPL only), 3912 (warm IPL only), 3913, 3915, 3917, and then other System Licensed Internal Code IPL progress codes. The others are seen when an IOP flash update occurs, usually on a D mode and possibly on a side (source) switch between A and B.

C6004001

Explanation: Static paging.

C6004002

Explanation: Start limited paging, call LID manager.

C6004003

Explanation: Initialize IPL/Termination (IT) data area / set up node address communication area (NACA) pointer.

C6004004

Explanation: Check and update MSD SID.

C6004005

Explanation: Initialize event management is executing.

C6004006

Explanation: IPL all buses.

C6004007

Explanation: Start SLID.

C6004008

Explanation: Initialize I/O service.

C6004009

Explanation: Initialize I/O machine.

C6004010

Explanation: Initialization step.

C6004011

Explanation: Initialize remote services.

C6004012

Explanation: Initialize RMAC component data values.

C6004013

Explanation: Initialize context management.

C6004014

Explanation: Initialize RM (component) seize lock.

C6004015

Explanation: Initialize MISR.

C6004016

Explanation: Set time of day.

C6004017

Explanation: Initialize RM (component) process management.

C6004018

Explanation: Initialize error log.

C6004019

Explanation: Re-initialize the service processor.

C6004020

Explanation: Initialize machine services.

C6004021

Explanation: Initialize performance data collector.

C6004022

Explanation: Initialize event management.

C6004023

Explanation: Create MI boundary manager tasks.

C6004024 • C6004073

C6004024

Explanation: Disable CPM.

C6004025

Explanation: Initializes battery test.

C6004026

Explanation: Hardware card checkout.

C6004027

Explanation: IBM i IPL status SRC. LIC and hardware initialization.

C6004028

Explanation: Start DST.

C6004029

Explanation: Make IPL task not critical.

C6004030

Explanation: Free static storage.

C6004031

Explanation: Destroy IPL task, DST has been started.

C6004033

Explanation: Guest Partition Virtual I/O Initialization Complete.

C6004050

Explanation: Storage management recovery is executing.

C6004051

Explanation: Start LOG is executing.

C6004052

Explanation: Trace table initialization is executing.

C6004053

Explanation: Context rebuild is executing. Module called: #RCRBCTX.

C6004054

Explanation: Start Product Activity Log and APPN is executing.

C6004055

Explanation: Authority recovery is executing.

C6004056

Explanation: Journal recovery is executing.

C6004057

Explanation: Data base recovery is executing.

C6004058

Explanation: Journal synchronization is executing.

C6004059

Explanation: Commit recovery is executing.

C6004060

Explanation: Data base initialization is executing.

C6004061

Explanation: Journal IPL clean up is executing.

C6004062

Explanation: Commit initialization is executing.

C6004064

Explanation: System Object Model (SOM) recovery is executing.

C6004065

Explanation: Start operating system is executing.

C6004072

Explanation: Storage Management Recovery is complete.

C6004073

Explanation: Queuing was notified that full paging is available.

C6004074

Explanation: Breakpoint Manager initialization phase 2 complete.

C6004075

Explanation: Volume stats initialized.

C6004076

Explanation: Lid Manager was notified that full paging is available.

C6004077

Explanation: Recovery directory structure created.

C6004078

Explanation: Link loader was notified that full paging is available.

C6004079

Explanation: Clean up SLIC install structures.

C600407A

Explanation: Initialize database storage.

C600407B

Explanation: Initialize IFS storage.

C600407C

Explanation: HRI was notified that full paging is available.

C600407D

Explanation: Authority was notified that full paging is available.

C600407E

Explanation: Initialize I/O structures.

C600407F

Explanation: Initialize cryptography structures.

C6004100

Explanation: Searching for Load Source Candidate (D-mode only).

C6004101

Explanation: Opening media-file to install Licensed Internal Code service displays with proper National Language Version.

C6004102

Explanation: Loading and linking from media-file to install Licensed Internal Code service displays with proper National Language Version.

C60041F0

Explanation: Removable Media IOPless LoadSource Detected.

C60041F1

Explanation: Removable Media Load Source Activation Status.

C60041F2

Explanation: Removable Media NFS Backed Load Source mount of NFS Directory.

C60041F3

Explanation: Removable Media NFS Backed Load Source activation.

C60041F4

Explanation: Removable Media Load Source HWD enrolled with LID MGR.

C60041F5

Explanation: Error reported by removeable media load source.

C6004201

Explanation: Storage management recovery.

C6004204

Explanation: Synchronization of mirrored MSD.

C6004205

Explanation: Synchronization of mirrored data (where xx is percent complete).

C6004240 • C6004405

C6004240

Explanation: Reclaim main storage.

C6004250

Explanation: Storage management subset directory recovery.

C6004255

Explanation: Defragmentation utility.

C6004260

Explanation: Storage management directory recovery.

C6004272

Explanation: ASP overflow recovery.

C6004275

Explanation: Moving data on Load Source to increase reserved area.

C6004300

Explanation: Static paging is available for the link/loader.

C6004301

Explanation: Applying temporary PTFs. If the IPL is terminated at this point, the Licensed Internal Code might need to be installed again.

C6004302

Explanation: Applying modules. If the IPL is terminated at this point, the Licensed Internal Code might need to be installed again.

C6004303

Explanation: Temporarily applied PTFs have reached the static paging phase.

C6004304

Explanation: Delayed LID is being requested.

C6004305

Explanation: Delayed LID has loaded successfully.

C600432A

Explanation: Resolving references to run Mode A. The system can be safely terminated while this work is being done.

C600432B

Explanation: Resolving references to run Mode B. The system may be safely terminated while this work is being done.

C6004330

Explanation: Full paging is available; workstation HRI processing.

C6004331

Explanation: Freeing unused nucleus pages.

C6004332

Explanation: Permanently applying PTFs. If the IPL is terminated at this point, the Licensed Internal Code might need to be installed again.

C6004400

Explanation: Main Storage Dump Manager started (where xx is the number of minutes elapsed waiting for DASD to report in).

C6004401

Explanation: Some DASD failed to report in.

C6004402

Explanation: Storage Management Recovery started.

C6004403

Explanation: Storage Management Recovery ended.

C6004404

Explanation: Licensed Internal Code log started. If Auto Copy in progress, xx is the percent complete. Module called: MsdStartSf.

C6004405

Explanation: Dump auto copy completed successfully. Module called: MsdStartSf.

C6004406

Explanation: Shutdown/Programmed IPL started (MSD related). Module called: MsdStartSf, MsdInit.

C6004500

Explanation: Verifying network attributes.

C6004501

Explanation: Looking for the console.

C6004502

Explanation: Starting DST display task (SSP only).

C6004503

Explanation: Checking possible MRI on media (SSP only).

C6004504

Explanation: Verifying system serial number.

C6004505

Explanation: Verifying system type.

C6004506

Explanation: Verifying system-unique ID.

C6004507

Explanation: Starting 'before DST' DASD checker.

C6004508

Explanation: Reading the console configuration from disk or verifying that all disks have reported in.

C6004509

Explanation: Starting DASD migration function (only if migrating).

C600450A

Explanation: Starting 'after DST' DASD checker.

C6004A57

Explanation: Parallel database recovery and is at Pass 1.

C6004A60

Explanation: Parallel database initialization is at Pass 1.

C6004B57

Explanation: Parallel database recovery is at Pass 2.

C6004B60

Explanation: Parallel database initialization is at Pass 2.

C6004C57

Explanation: Parallel database recovery is at Pass 3.

C6004C60

Explanation: Parallel database initialization is at Pass 3.

C6004F57

Explanation: The system is recovering all database objects. This step can take several hours.

C6004F60

Explanation: The system is examining all objects during database initialization.

C6xx1800

Explanation: Licensed Internal Code SPCN setup.

C6xx4205

Explanation: Synchronization of mirrored data (where xx is percent complete).

C6xx4400

Explanation: Main Storage Dump Manager started (where xx is the number of minutes elapsed waiting for DASD to report in).

C6xx4404

Explanation: Licensed Internal Code log started. If Auto Copy in progress, xx is the percent complete. Module called: MsdStartSf.

(C7xx) Server firmware IPL status progress codes

A server that stalls during an initial program load (IPL) of the server firmware indicates a problem with the server firmware code.

Server firmware IPL status progress codes enable your service provider and next level of support to more easily identify the server firmware component causing the problem.

Note: If the problem is in the server firmware code, exchanging any hardware FRU will not fix the problem.

C7004091

Explanation: This is the final IPL status progress code to be displayed before the system reaches standby state. When standby is reached, C7004091 will no longer be displayed.

Explanation: If the system stalls during an initial program load (IPL) of the server firmware, a problem has occurred with the server firmware code. Exchanging any hardware FRU will not fix the problem.

Problem determination: Collect information on words 3 and 4 of the SRC, and call your next level of support.

C700XXXX

(C9xx) IPL status progress codes

Learn about IPL status progress codes that have a format of C9xxxxxx.

As your server performs an IPL, the control panel displays progress codes that indicate the status of the IPL. Often, you can use these progress codes to help you perform problem analysis. The following list offers information on the IPL status progress codes that have a format of C9xxxxxx.

C9002810

Explanation: Reclaim machine context.

Explanation: Library and object information repository (OIR) cleanup.

C9002820

Explanation: Resolve system objects.

C9002925

Explanation: Verify POSIX** root directories.

C9002825

Explanation: Convert Work Control Block Table.

C9002930

Explanation: Database cross-reference.

C9002830

Explanation: System value object.

C9002940

Explanation: Console configuration.

C90028C0

Explanation: Prepare SPCF job.

C9002950

Explanation: Install complex objects.

C90028C5

Explanation: Initialize system objects.

C9002960

Explanation: Sign on processing.

C9002910

Explanation: Start system logging.

C9002965

Explanation: Software Management Services (SMS) initialization.

C9002920

C9002967

Explanation: Applying PTFs.

C9002968

Explanation: IPL options.

C9002970

Explanation: Database recovery part 1, journal recovery part 1.

C9002973

Explanation: This recovery step attempts to perform any needed recovery for database files that were being changed, created or deleted when an abnormal system end occurred.

C9002976

Explanation: This recovery step verifies the object recovery list performs any needed recovery for journals and journal receivers.

C9002978

Explanation: This progress code displays after progress codes C9002A70 through C9002976 have been completed.

C9002980

Explanation: Storage requirements.

C9002990

Explanation: Performance adjustments.

C90029A0

Explanation: System control block.

C90029B0

Explanation: Spool initialization.

C90029C0

Explanation: Work control block table.

C9002A80

Explanation: Before starting system jobs.

C9002A85

Explanation: Bringing up POSIX SAG.

C9002A87

Explanation: POSIX SAG restart and signals initialization.

C9002A90

Explanation: Starting system jobs.

C9002A95

Explanation: Abnormal Work Control Block Table cleanup.

C9002AA0

Explanation: Damage notification.

C9002AA1

Explanation: This recovery step either rolls back or completes certain uncompleted database operations that were run under commitment control.

C9002AA2

Explanation: This recovery completes certain journal operations that were in progress when the system ended processing.

C9002AA3

Explanation: This recovery sends messages to QHST for database files that may have been damaged by a system end.

C9002AA4

Explanation: This progress code displays after progress codes C9002AA0 - C9002AA3 have been completed.

C9002AA5

Explanation: Integrated File System/New File System (NFS) directory recovery.

C9002AAA

Explanation: IPL status SRC for spool initialization part 2.

C9002AAC

Explanation: Integrated File System conversion.

C9002AB0

Explanation: Database recovery part 2.

C9002AC0

Explanation: Document Library Object (DLO) recovery.

C9002B10

Explanation: Establish event monitors.

C9002B30

Explanation: QLUS job.

C9002B40

Explanation: Device configuration.

C9002C10

Explanation: After system arbiter.

C9002C20

Explanation: SNADS recovery.

C9002C25

Explanation: ZMF component (Mail Enablement (OeDS) Framework) recovery.

C9002C40

Explanation: Work Control Block Table cleanup.

C9002CF0

Explanation: Reclaim storage.

C9002F00

Explanation: IPL complete.

(CAxx) Partition firmware progress codes

Partition firmware progress codes offer information about the progress of partition firmware as it is initializing.

In some cases, a server might hang (or stall) at one of these progress codes without displaying an 8-character system reference code (SRC). Only during such a hang condition should you take any service action related to the progress code.

Note: If the control panel displays more than eight characters, use only the first eight characters to find the error in the list. Characters that display after the first eight represent a location code that assists you in diagnosing the problem.

CA000000

Explanation: Process control now owned by partition firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA000020

Explanation: Checking the firmware levels

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA000030

Explanation: Attempting to establish a communication link by using lpevents

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA000032

Explanation: Attempting to register lpevent queues

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA000034

Explanation: Attempting to exchange cap and allocate lpevents

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000038

Explanation: Attempting to exchange virtual continue events

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000040

Explanation: Attempting to obtain RTAS code lid details

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000050

Explanation: Attempting to load RTAS firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000060

Explanation: Attempting to obtain open firmware details

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000070

Explanation: Attempting to load open firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000080

Explanation: Preparing to start open firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000090

Explanation: Open firmware package corrupted (phase 1).

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA000091

Explanation: Attempting to load open firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA0000A0

Explanation: Open firmware package corrupted (phase 2)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA0000A1 • CA00D010

Failing Item:

- FWFLASH

CA0000A1

Explanation: Unable to allocate memory for Memory Police Log.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Collect a Partition Resource Dump.
- Check for and apply any System Firmware update.
- Contact your next level of support for assistance.

CA00D001

Explanation: PCI probe completed, create PCI bridge interrupt routing properties

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00D002

Explanation: PCI adapter nvram hint created; system is rebooting

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00D003

Explanation: PCI probing complete

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00D004

Explanation: Start of install-console, loading GUI package

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00D008

Explanation: Initialize console and flush queues

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00D00C

Explanation: The partition firmware is about to search for an NVRAM script.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- NEXTLVL

CA00D00D

Explanation: Evaluating NVRAM script.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00D010

Explanation: First pass open firmware initialization complete; establish parameters for restart

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00D011

Explanation: First pass open firmware initialization complete; control returned to initialization firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00D012

Explanation: Second pass open firmware initialization complete; control returned to initialization firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00D013

Explanation: Run-time open firmware initialization complete; control returned to initialization firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00D020

Explanation: The partition firmware is about to download and run the SLIC loader

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00D021

Explanation: The partition firmware is about to download and run the I/O reporter to collect VPD

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E101

Explanation: Create RTAS node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E102

Explanation: Load/initialize RTAS

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E105

Explanation: Transfer control to the operating system (normal boot)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E10A

Explanation: Load RTAS device tree

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E10B

Explanation: Set RTAS device properties

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E110

Explanation: Create the kdump properties

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E130

Explanation: Build device tree

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E131

Explanation: Create the root node properties

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E134

Explanation: Create memory node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E136

Explanation: Create BSR node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E138

Explanation: Create options node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E139

Explanation: Create aliases node and system aliases

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E13A

Explanation: Create packages node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E140

Explanation: Loading the operating system

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E141

Explanation: Synchronize the operating system bootlist to the management module bootlist

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E142

Explanation: Management module bootlist is being set from the operating system boot list

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E143

Explanation: Operating system bootlist is being set from the management module bootlist

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E149

Explanation: Create boot mgr node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E14C

Explanation: Create terminal emulator node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E14D

Explanation: Load boot image

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E150

Explanation: Create host (primary) PCI controller node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E151

Explanation: Probing PCI bus

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E152

Explanation: Probing for adapter FCODE; evaluate if present

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E153

Explanation: End adapter FCODE probing and evaluation

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E155

Explanation: Probing PCI bridge secondary bus

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E156

Explanation: Create plug-in PCI bridge node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00E157

Explanation: Probe for virtual function (VF) Fcode; evaluate if present

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00E158

Explanation: End probing for, and evaluation of, for virtual function (VF) Fcode

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00E15B

Explanation: Transfer control to Operating System (service mode boot)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E15F

Explanation: Adapter VPD evaluation

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00E170

Explanation: Start of PCI BUS probe

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00E172

Explanation: First pass PCI device probe

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5

CA00E174

Explanation: Establishing host connection

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWHOST

CA00E175

Explanation: BootP request

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWHOST

CA00E176

Explanation: TFTP file transfer

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E177

Explanation: Transfer failure due to TFTP error condtion

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E178

Explanation: Initiating TFTP file transfer

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E179

Explanation: Closing BOOTP

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E17B

Explanation: Processor clock speed measurement

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- NEXTLVL
-

CA00E198

Explanation: Rebooting partition to enact changes specified in ibm,client-archtitecture-support.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E199

Explanation: The partition is rebooting to enact changes that were specified the ELF header of the boot image.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E19A

Explanation: NVRAM auto-boot? variable not found - assume FALSE

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E19B

Explanation: NVRAM menu? variable not found - assume FALSE

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E19D

Explanation: Create NVRAM node

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E19E

Explanation: Real-time clock (RTC) initialization

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1A0

Explanation: User requested boot to SMS menus by using keyboard entry

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

CA00E1A1 • CA00E1AB

- FWFLASH

CA00E1A1

Explanation: User requested boot to open firmware prompt by using keyboard entry

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1A2

Explanation: User requested boot using default service mode boot list by using keyboard entry

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1A3

Explanation: User requested boot using customized service mode boot list by using keyboard entry

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1A4

Explanation: User requested boot to SMS menus by using the Hardware Management Console or a service processor command

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1A5

Explanation: User requested boot to open firmware prompt by using the HMC or a service processor command

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1A6

Explanation: User requested boot using default service mode boot list by using the HMC or a service processor command

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1A7

Explanation: User requested boot using customized service mode boot list by using the HMC or a service processor command.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1AA

Explanation: System boot check for NVRAM Settings

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1AB

Explanation: System booting using the default service mode boot list

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E1AC

Explanation: System booting using the customized service mode boot list

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1AD

Explanation: System booting to the operating system

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1AE

Explanation: System booted to SMS multiboot menu by using NVRAM settings

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWMBOOT
-

CA00E1AF

Explanation: System booted to SMS utilities menu by using NVRAM settings

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1B0

Explanation: Process HMC-specified boot device specifier

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1B1

Explanation: System booting with HMC or hosting-partition directed boot-device repair

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1B2

Explanation: XOFF received, waiting for XON

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWVTHMC
-

CA00E1B3

Explanation: XON received

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E1B4

Explanation: HMC or hosting-partition directed boot-string did not load an operating system repair

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- NEXTLVL
-

CA00E1B5

Explanation: Checking for iSCSI disk aliases

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E1D3 • CA00E1F8

Failing Item:

- FWPCI5
-

CA00E1D3

Explanation: Create SCSI block device node (SD)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E1D4

Explanation: Create SCSI byte device node (ST)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E1DC

Explanation: On a Linux or AIX system or partition, the partition firmware (the System Management Services, or SMS) is waiting for a firmware console to be selected. If the system is managed by a management console, open a VTERM and select it as the console. If the system is not managed by a management console, insure that a console is attached, then select that console when prompted.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWCONS
-

CA00E1F0

Explanation: Start out-of-box experience

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1F1

Explanation: Start selftest sequence on one or more devices

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1F5

Explanation: Build boot device list

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E1F6

Explanation: Determine boot device sequence

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E1F7

Explanation: Boot invalid or stopped

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E1F8

Explanation: Build boot device list for SCSI adapters (displays the location code of the SCSI adapter being scanned)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWPCI5
-

CA00E1F9

Explanation: Build boot device list for Fibre Channel adapters (displays the location of the SAN adapter being scanned)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWPCI5

CA00E1FA

Explanation: Building device list for SCSI adapters (displays the device ID and device LUN of the devices being scanned)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWPCI5

CA00E1FB

Explanation: Scan SCSI bus for attached devices

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWSCSIH

CA00E1FE

Explanation: Building device list for Fibre Channel (SAN) adapters (displays the WWPN of the fibre-channel adapter being scanned)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E1FF

Explanation: Build device list for Fibre Channel (SAN) adapters (displays the LUN for each device being scanned)

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA00E440

Explanation: Validate NVRAM, initialize partitions as needed

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWFLASH

CA00E441

Explanation: Generate /options node NVRAM configuration variable properties

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWFLASH

CA00E442

Explanation: Validate NVRAM partitions

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWFLASH

CA00E443

Explanation: Generate NVRAM configuration variable dictionary words

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:
• FWFLASH

CA00E444

Explanation: NVRAM size is less than 8K bytes

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

CA00E701 • CA00E875

- FWFLASH

CA00E701

Explanation: Create memory VPD

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E800

Explanation: Initialize gdata for the control (operator) panel

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E830

Explanation: Initializing event scan

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E840

Explanation: Initializing hot plug

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E843

Explanation: Initializing interface/aix access

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E850

Explanation: Initializing dynamic reconfiguration

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E860

Explanation: Initializing sensors

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E865

Explanation: Initializing VPD

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E870

Explanation: Initializing pfds memory manager

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E875

Explanation: Initializing rtas_last_error

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA00E876

Explanation: Initializing rtas_error_inject

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E877

Explanation: Initialize dump interface

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E879

Explanation: Initialize the platform-assisted kdump interface

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E880

Explanation: Send firmware version data to the hypervisor

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E885

Explanation: Initializing set-power-level

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E886

Explanation: Initializing exit2c

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E887

Explanation: Initialize gdata for activate_firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E890

Explanation: Starting to initialize open firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E891

Explanation: Finished initializing open firmware

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA00E8A0

Explanation: Initializing the pinned page manager

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH
-

CA060203

Explanation: An alias was modified or created

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA060400

Explanation: Boot list changed to network interface with specified MAC address.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA060401

Explanation: Boot list "network-all" override specified.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA060410

Explanation: Begin Advanced Bootlist Management processing.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA060411

Explanation: No-default mode boot requested. If boot-device list is empty, a default list will not be created.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA060412

Explanation: System booting to SMS Menus via request to override creation of default boot device list.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA060414

Explanation: Processing source= bootlist management request.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA060415

Explanation: Processing shadow= bootlist management request.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Check for and apply any system firmware update.
- Contact your next level of support for assistance.

CA15D00F

Explanation: DMA read length workaround employed.

Response: No action needed.

CA160100

Explanation: Enumerating USB devices.

Response: No repair action steps prior to working the failing item list.

Problem determination: Check for system firmware update.

CA26FFFF

Explanation: An extended amount of time was required while waiting for lpevent to complete.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA26TTSS

Explanation: Waiting for lpevent of type tt and subtype ss

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

Failing Item:

- FWFLASH

CA279001

Explanation: The firmware update image contains an update module that is not present in the current image.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA2799FD

Explanation: The service processor is receiving a server firmware update module

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA2799FF

Explanation: The service processor is writing a server firmware update module.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA330005

Explanation: Unable to repair Memory Chain Corruption.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- Collect a Partition Resource Dump
- Check for and apply any System Firmware update
- Contact your next level of support for assistance.

CA340000

Explanation: Start of integrated fabric management processing.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340001

Explanation: Successfully acquired integrated fabric management lock.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340002

Explanation: Partition not authorized to use integrated fabric management.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340003

Explanation: Platform not enabled for integrated fabric management support.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA34000F

Explanation: Successfully completed read of integrated fabric management data.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340010

Explanation: Begin integrated fabric management address assignment processing for given I/O adapter function.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340011

Explanation: Integrated fabric management function requested I/O adapter to revert to using its manufacturing assigned network addresses from user-assigned addresses.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340012

Explanation: Integrated fabric management function successfully deployed user-assigned address..

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA340020

Explanation: Integrated fabric management processing complete - write data result data to service processor.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA3400FF

Explanation: Released integrated fabric management lock.

Response: No repair action steps prior to working the failing item list.

Problem determination: No additional problem determination.

CA350000

Explanation: Begin input/output reporting (IOR) execution.

Response: No repair action steps prior to working the failing item list.

Problem determination:

(CBxx) Kernel-based virtual machine progress codes

The CBxx progress codes indicate the progress of an IPL that is controlled by the kernel-based virtual machine (KVM).

The codes represent normal events which do not require any action to be taken. If a partition IPL stalls at a CBxxxxx progress code, a problem has occurred. Collect all of the SRC words and contact your next level of support.

- Check for and apply any available firmware update
 - Contact service support.
-

CA350009

Explanation: Begin data collection for PCI device.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- A hang with this code may indicate a problem with the device identified by the location code.
 - Contact service support.
-

CA350010

Explanation: Execute input/output reporting (IOR) device driver.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- A hang with this code may indicate a problem with the device identified by the location code.
 - Contact service support.
-

CA350011

Explanation: Input/Output reporting (IOR) device driver execution completed.

Response: No repair action steps prior to working the failing item list.

Problem determination:

- A hang with this code may indicate a problem with the IOR code device tree processing.
 - Check for and apply any available firmware update.
 - Contact service support.
-

CA35FFFF

Explanation: Execution of input/output reporting (IOR) complete.

Response: No repair action, this code indicates normal completion.

CB010000

Explanation: Dump initialization in progress.

CB010001

Explanation: Control panel initialization in progress.

CB010002

Explanation: Connection monitoring initialization in progress.

CB010003

Explanation: Sensor access initialization in progress.

CB010004

Explanation: LED initialization in progress.

CB010005

Explanation: Diag events initialization in progress.

CB010006

Explanation: Console initialization in progress.

CB010007

Explanation: Non-Volatile RAM (NVRAM) initialization in progress.

CB010008

Explanation: Real Time Clock (RTC) initialization in progress.

CB010009

Explanation: Code update initialization in progress.

CB01000A

Explanation: Boot loader initialization in progress.

CB01000B

Explanation: Device Tree blob initialization in progress.

CB01000C

Explanation: Starting the bootloader process.

(CCxx) Boot firmware progress codes

The CCxx progress codes indicate the progress of an IPL that is controlled by boot firmware.

The codes represent normal events which do not require any action to be taken. If an IPL stalls at a CCxxxxxx progress code, a problem has occurred. Collect all of the SRC words and contact your next level of support.

CC009183

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009184

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009185

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

CC009186

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009187

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009188

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009189

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00918A

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00918B

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00918C

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00918D

Explanation: Istep 6 - Hostboot does initial setup and validates hardware

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C1

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C2

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C3

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C4

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C5

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C6

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C7

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C8

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0091C9

Explanation: Istep 7 - Hostboot configures all nest chiplets (bus's and pll's)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009201

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009202

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009203

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009204

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009205

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009206

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009207

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009208

Explanation: Istep 8 - Hostboot configures Fabric and Elastic Interfaces

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009241

Explanation: Istep 9 - Hostboot configures the PowerBus and updates the SBE's if needed

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009242

Explanation: Istep 9 - Hostboot configures the PowerBus and updates the SBE's if needed

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009281

Explanation: Istep 10 - Hostboot does memory chip initialization

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009282

Explanation: Istep 10 - Hostboot does memory chip initialization

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009283

Explanation: Istep 10 - Hostboot does memory chip initialization

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009305

Explanation: Istep 12 - Hostboot does memory controller initialization

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009341

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009342

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009343

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009344

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009345

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009346

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009347

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009348

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009349

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00934A

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00934B

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00934C

Explanation: Istep 13 - Hostboot does memory training

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009381

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009382

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009383

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009384

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009385

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009386

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009387

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009388

Explanation: Istep 14 - Hostboot does memory initialization and testing

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0093C1

Explanation: Istep 15 - Hostboot builds up data images required to do final inits on the processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0093C2

Explanation: Istep 15 - Hostboot builds up data images required to do final inits on the processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC0093C3

Explanation: Istep 15 - Hostboot builds up data images required to do final inits on the processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009401

Explanation: Istep 16 - Hostboot runs the images from the previous step and does final inits on all processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009402

Explanation: Istep 16 - Hostboot runs the images from the previous step and does final inits on all processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009403

Explanation: Istep 16 - Hostboot runs the images from the previous step and does final inits on all processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009404

Explanation: Istep 16 - Hostboot runs the images from the previous step and does final inits on all processors

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00948D

Explanation: This is a hostboot synch point with the service processor, you can ignore these progress codes

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC00948E

Explanation: This is a hostboot synch point with the service processor, you can ignore these progress codes

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC009543

Explanation: Istep 21.3 - Hostboot starts the payload.

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

CC10948D

Explanation: Sets up A bus BAR windows for full system topology (for performance)

Response: Perform isolation procedure FSPSPC1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

(CF00) Linux kernel boot progress codes

CF000012

Explanation: Set up initialization.

Problem determination: If the system or partition does not progress past this code, contact your Linux provider.

CF000015

Explanation: Set up is complete.

Problem determination: If the system or partition does not progress past this code, contact your Linux provider.

CF000020

Explanation: External interrupt controller server initialization.

Problem determination: If the system or partition does not progress past this code, contact your Linux provider.

CF000021

Explanation: External interrupt controller server complete.

Problem determination: If the system or partition does not progress past this code, contact your Linux provider.

CF000100

Explanation: Memory manager initialization.

Problem determination: If the system or partition does not progress past this code, contact your Linux provider.

(D1xx) Service processor firmware progress codes

A D1xx reference code indicates that an event or exception occurred in service processor firmware.

To resolve any D1xx reference code, determine if the SRC requires a service action or if it is for tracking purposes only.

Diagnostics analyze an event when it occurs to determine if the event requires service or if the event will only be recorded for tracking purposes and future reference. The determination is based on machine type, model, installed features, configuration, topology and activations at the time of the event.

If you do not find the SRC in a serviceable event view then it is a tracking event only and does not require service. Tracking events appear as **informational** or **Misc.** or **temp** in the IBM i product activity log and the Advanced System Manage Interface (ASMI).

D1XXC351

Explanation: The CEC server firmware aborted.

Response: Determine if this is a tracking or serviceable event. If this is a tracking event, no service actions are required. Otherwise, use the FRU and

procedure callouts detailed with the SRC to determine service actions.

D1XXCA01

Explanation: Informational message: Items that were

deconfigured by the system were guarded out.

D1XXCA02

Explanation: Informational message: items that were deconfigured by the user via the ASMI menus were guarded out.

D1XXCA03

Explanation: Informational message: The guard data has been cleared.

D1XXCA04

Explanation: Informational message: There is a new version of the guard data.

D1XXCA05

Explanation: Informational message: The guard data was corrupted, and has been rebuilt.

D1XXCA06

Explanation: Informational message: There was an error when opening a file.

D1XXCA07

Explanation: Informational message: There was an error when reading a file.

D1XXCA08

Explanation: Informational message: There was an error when writing a file.

D1XXCA09

Explanation: Informational message: There was an error when closing a file.

D1XXCA0A

Explanation: Informational message: There was an link file error.

D1XXCA0B

Explanation: Informational message: Failure when setting the DIMM status in the hardware object manager.

D1XXCA0C

Explanation: Informational message: Failure when setting the status of a device other than a DIMM.

D1XXCA0D

Explanation: Informational message: Failure when reading the system type.

D1XXCA0E

Explanation: Informational message: Failure when reading a registry entry.

D1XXCA0F

Explanation: Informational message: Failure when getting VPD data.

D1XXCA10

Explanation: Informational message: Items that had been guarded out were recovered.

D1XXCA11

Explanation: Informational message: The resource ID was not found in the list.

D1XXCA12

Explanation: Informational message: Manual configuration or deconfiguration is not allowed.

D1XXCA13

Explanation: Informational message: The buffer size is invalid.

D1XXCA14

Explanation: Informational message: Unable to return a valid guard state for the requested resource.

D1XXCA15

Explanation: Informational message: The guard action that was requested is not allowed.

D1XXCA16

Explanation: Informational message: Items that were deconfigured by the system (but are eligible for resource recovery) were guarded out.

(D1xx) Service processor status progress codes

D1xx status reference codes, posted by the service processor, offer information about the state of the service processor during a power-off operation.

D1XX900C

Explanation: Breakpoint set in CPU controls has been hit

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XXB0FF

Explanation: Request to initiate power-off program has been sent

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XXC000

Explanation: Indicates a message is ready to send to the server firmware to power off

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XXC001

Explanation: Waiting for the server firmware to acknowledge the delayed power off notification

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XXC002

Explanation: Waiting for the server firmware to send the power off message

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XXC003

Explanation: Server firmware handshaking is complete

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

(D1xx) Service processor dump status progress codes

D1xx service processor dump status codes

Service processor dump status codes use the format of D1yy1xxx, where:

- yy indicates the type of data that is being dumped.
- xxx is a counter that increments each time the server stores 4K of data. When these codes occur during a service processor dump, they appear in the control panel display.

D1001XXX

Explanation: Dump error data

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1011XXX

Explanation: Dump sai_header Hardware Management Console (HMC) file

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D101C00F

Explanation: No power off to allow debugging for CPU controls

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1021XXX

Explanation: Dump sai_header directory

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1031XXX

Explanation: Dump sai_header fips header

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1041XXX

Explanation: Dump sai_header entry header

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1051XXX

Explanation: Dump core file for failing component

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1061XXX

Explanation: Dump all NVRAM

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1071XXX

Explanation: Dump component trace for failing component

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1081XXX

Explanation: Dump component data from /opt/p0

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1091XXX

Explanation: Dump /opt/p1/**

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1111XXX

Explanation: Dump /opt/p0/*

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1121XXX

Explanation: Dump /opt/p1/*

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1131XXX

Explanation: Dump all traces

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1141XXX

Explanation: Dump code version

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1151XXX

Explanation: Dump all /opt/p3 except rtbl

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1161XXX

Explanation: Dump pddcustomize -r command

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1171XXX

Explanation: Dump registry -l command

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1181XXX

Explanation: Dump all /core/core.* files

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1191XXX

Explanation: Dump BDMP component trace (after dump if enough space)

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D11A1XXX

Explanation: Dump any state information before dumping starts

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

D11B1XXX

Explanation: Dump /proc filesystem.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D11C1XXX

Explanation: Dump mounted filesystem statistics.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D11D1XXX

Explanation: Dump environment.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1231XXX

Explanation: Dump update dump headers

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1241XXX

Explanation: Dump CRC1 calculation off

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1251XXX

Explanation: Dump CRC1 calculation on

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1261XXX

Explanation: Dump CRC2 calculation off

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1271XXX

Explanation: Dump CRC2 calculation on

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

D1281XXX

Explanation: Dump output the calculated CRC1 (sai_headers)

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1291XXX

Explanation: Dump output the calculated CRC2 (data and data headers)

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D12A1XXX

Explanation: Jump to the position in dump directly after CRC1

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D12B1XXX

Explanation: Initialize the headers dump time and serial numbers

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D12C1XXX

Explanation: Display final SRC to panel

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D12D1XXX

Explanation: Remove /core/core.app.time.pid

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D12E1XXX

Explanation: Remove /core/core.*

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D12F1XXX

Explanation: Display beginning SRC to panel

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1301XXX

Explanation: Turn off error log capture into dump

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1311XXX

Explanation: Turn on error log capture into dump

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1321XXX

Explanation: Store information about existing core files

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1381XXX

Explanation: Invalidate the dump

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1391XXX

Explanation: Check for valid dump sequence

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D13A1XXX

Explanation: Get dump identity sequence

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D13B1XXX

Explanation: Get dump length sequence

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1FF1XXX

Explanation: Dump complete

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

(D1xx) Platform dump status progress codes

D1xx platform dump status codes

Platform dump status codes use the format of D1xx3yzz, where:

- xx is the cage or node ID that the dump component is processing. This varies depending on the node the hardware data is being collected from. It will be set to 0xFF when collecting the mainstore memory data.
- y increments from 0x0 to 0xF (to indicate that the system is not hung).
- zz is the command that is being processed (see the list below).

D1XX3Y01

Explanation: Get SCOM.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y02

Explanation: Get scan ring.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation

Procedures chapter in your host server Service Guide.

D1XX3Y03

Explanation: Get array values.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y04

Explanation: Stop the clocks.

D1XX3Y05 • D1XX3YF2

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y05

Explanation: Flush the cache.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y06

Explanation: Get CFAM.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y07

Explanation: Put SCOM.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y08

Explanation: Send command.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y09

Explanation: Get optimized cache.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y0A

Explanation: Get GP register.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y0B

Explanation: Processor clean-up.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y0C

Explanation: Get JTAG register.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3Y0D

Explanation: Stop clocks without quiescing.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3YF0

Explanation: Memory collection set-up.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3YF1

Explanation: Memory collection DMA step.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

D1XX3YF2

Explanation: Memory collection cleanup.

Response: Perform isolation procedure FSPSPD1. To locate the isolation procedure go to the Isolation Procedures chapter in your host server Service Guide.

(D2xx) Partition status progress codes

D2xxxxxx progress codes are posted by the Virtual Service Processor (VSP) when powering off a partition.

D200A100

Explanation: Received MSD SP attention

D200A110

Explanation: Received CPM SP attention

D200A120

Explanation: Received LL SP attention

D200A130

Explanation: Received RPA end-of-life event

D200A200

Explanation: Begin partition power down. SRC word 3 contains the reason for the power off.

Problem determination: SRC word 3 power down reasons

- 1: White button power down (also known as delayed power off)
- 2: Partition requested power down
- 3: Partition requested end of life
- 4: System wide shutdown
- 5: Attention link loader
- 6: Attention MSD
- 7: Panel function 3 requested
- 8: Panel function 8 requested
- 9: Panel function 22 requested
- A: Panel function 34 requested
- B: Force Firehose Dump
- C: SP Attention PECCR
- D: EOL Power Off
- E: EOL Reboot
- F: Programmed IPL CE Message
- 10: SP Attention MSD No Dump
- 11: Function 22 RPA
- 12: Timeout
- 13: HV Reset

D200A210

Explanation: Re-initialize firmware resources due to parent resource power off

D200A220

Explanation: Re-initialize for firmware update

D200A250

Explanation: Active partition migration started on source CEC

D200AFFE

Explanation: A partition migration operation is transferring data for a failover. The firmware will resume the partition on the source.

D200AFFF

Explanation: Partition migration is being aborted

D200B040

Explanation: Begin transfer of CAPI slot locks to VSP

D200B04F

Explanation: End transfer of CAPI slot locks to VSP

D200B050

Explanation: Begin transfer slot locks to VSP

D200B05F

Explanation: End transfer slot locks to VSP

D200B060

Explanation: Begin transfer VIO slot locks to VSP

D200B06F

Explanation: End transfer VIO slot locks to VSP

D200B070

Explanation: Begin reset slots

D200B077

Explanation: Waiting for reset slots

D200B07F

Explanation: End reset slots

D200B080

D200B08F • D200C40F

Explanation: Begin reset VIO slots

D200B08F

Explanation: End reset VIO slots

D200B090

Explanation: Begin soft POR slots

D200B097

Explanation: Waiting soft POR slots

D200B09F

Explanation: End soft POR slots

D200B100

Explanation: Sending Hypervisor reset

D200B1FF

Explanation: Hypervisor reset successfully sent

D200B200

Explanation: Begin forced LP reset (after the 1 second timeout)

D200B210

Explanation: Send CSP/FSP soft processor reset command (word 3 processor ID, word 4 thread ID)

D200B280

Explanation: Begin check migration memory for dump

D200B28F

Explanation: End check migration memory for dump

D200B2FF

Explanation: End forced LP reset

D200B300

Explanation: Closing Hypervisor events paths

D200B310

Explanation: Deactivating panel functions

D200B3FF

Explanation: Hypervisor reset complete successfully

D200C100

Explanation: Sending Hypervisor I/O reset

D200C1FF

Explanation: Hypervisor I/O reset sent successfully

D200C200

Explanation: Deallocating events

D200C240

Explanation: IOP-less restore data from save area start

D200C24F

Explanation: IOP-less restore data from save area end

D200C250

Explanation: IOP-less restore hardware page table from save area start

D200C25F

Explanation: IOP-less restore hardware page table from save area end

D200C2FF

Explanation: Hypervisor I/O reset complete successfully

D200C300

Explanation: Begin VRM reset memory

D200C301

Explanation: End VRM reset memory

D200C400

Explanation: Begin clear paging space processor ownership

D200C40F

Explanation: End clear paging space processor ownership

D200D000

Explanation: Begin release paging space processor resources

D200D010

Explanation: Begin release LP processors

D200D01F

Explanation: End release LP processors

D200D020

Explanation: Begin uninitialized LP memory

D200D02F

Explanation: End uninitialized LP memory

D200D0FF

Explanation: End release paging space processor resources

D200D100

Explanation: Removing partition configuration resources

D200D1FF

Explanation: Partition resources removed successfully

D200E030

Explanation: Begin power off and reset of CAPI slots

D200E032

Explanation: Waiting for power off of CAPI VF slots

D200E034

Explanation: Waiting for reset of CAPI VF slots

D200E036

Explanation: Waiting for power off of CAPI slots

D200E038

Explanation: Waiting for reset of CAPI slots

D200E03F

Explanation: End power off and reset of CAPI slots

D200E050

Explanation: Begin power off slots

D200E057

Explanation: Waiting power off slots

D200E05F

Explanation: End power off slots

D200E060

Explanation: Begin power off VIO slots

D200E06F

Explanation: End power off VIO slots

D200E070

Explanation: Begin release of CAPI slot locks

D200E07F

Explanation: End release of CAPI slot locks

D200E080

Explanation: Begin release slot locks

D200E08F

Explanation: End release slot locks

D200E090

Explanation: Begin release VIO slot locks

D200E09F

Explanation: End release VIO slot locks

D200E0A0

Explanation: Begin unassociate of system ports

D200E0A8

Explanation: Unassociate system ports from an RPA partition

D200E0AF

Explanation: End unassociate of system ports

D200E100

Explanation: Power off SPCN racks

D200E110

Explanation: Issuing a rack power off command

D200E120

Explanation: Rack power off command complete successfully

D200E1FF

Explanation: SPCN racks powered off phase complete

(D6xx) General status progress codes

Learn about general status progress codes with a format of D6xxxxxx.

The following list contains general status progress codes with a format of D6xxxxxx in numeric order. The xx after D6 in each progress code represents two hexadecimal numbers that further define the progress code.

D6000298

Explanation: Managed system power down started.

D6000299

Explanation: Managed system power down status.

D6000483

Explanation: Power failed; delay timer is running.

D6000484

Explanation: MI run in progress.

D600430A

Explanation: Operating system service partition power down status; indicates that a server firmware code update is in progress for the P-side (permanent) of the managed system.

Problem determination: Your server may display this progress code for an extended period of time where the "xx" increments periodically. Allow the server to complete the processing. Do not interrupt this process.

D600430B

Explanation: Operating system service partition power down status indicates that a server firmware code update is in progress for the T-side (temporary) of the managed system.

Problem determination: Your server may display this progress code for an extended period of time where the "xx" increments periodically. Allow the server to complete the processing. Do not interrupt this process.

D60043BA

Explanation: Operating system service partition power down status indicates that a server firmware code update is in progress to copy the server firmware from the T-side (temporary) of the managed system to the P-side (permanent).

Problem determination: Your server may display this progress code for an extended period of time. Allow the server to complete the processing. Do not interrupt this process.

D6005500

Explanation: Managed system power down status; attempting to delete information from the disk subsystem cache.

D6005501

Explanation: Managed system power down status; indicates that the information from the disk subsystem cache was deleted successfully.

D6005502

Explanation: Managed system power down status; indicates that the system failed to delete information from the disk subsystem cache.

D6005503

Explanation: Managed system power down status, which indicates the information from the disk subsystem cache was deleted with qualified success.

D6xx0298

Explanation: Managed system power down started.

D6xx0299

Explanation: Managed system power down status.

D6xx0483

Explanation: Power failed; delay timer is running.

D6xx0484

Explanation: MI run in progress.

D6xx430A

Explanation: Operating system service partition power down status: indicates that a server firmware code update is in progress for the P-side (permanent) of the managed system.

Problem determination: Your server may display this progress code for an extended period of time where the "xx" increments periodically. Allow the server to complete the processing. Do not interrupt this process.

D6xx430B

Explanation: Operating system service partition power down status indicates that a server firmware code update is in progress for the T-side (temporary) of the managed system.

Problem determination: Your server may display this progress code for an extended period of time where the "xx" increments periodically. Allow the server to complete the processing. Do not interrupt this process.

D6xx43BA

Explanation: Operating system service partition power down status indicates that a server firmware code update is in progress to copy the server firmware from the T-side (temporary) of the managed system to the P-side (permanent).

Problem determination: Your server may display this progress code for an extended period of time. Allow the server to complete the processing. Do not interrupt this process.

D6xx5500

Explanation: Managed system power down status; attempting to delete information from the disk subsystem cache.

D6xx5501

Explanation: Managed system power down status; indicates that the information from the disk subsystem cache was deleted successfully.

D6xx5502

Explanation: Managed system power down status; indicates that the system failed to delete information from the disk subsystem cache.

D6xx5503

Explanation: Managed system power down status, which indicates the information from the disk subsystem cache was deleted with qualified success.

(D9xx) General status progress codes

The D9xx progress codes indicate the progress of powering-off a partition.

Not all progress codes below apply to all operating systems.

D9002740

Explanation: Power off immediate.

D9002750

Explanation: All subsystems ended.

D9002760

Explanation: Device configuration shutdown.

D9002770

Explanation: QLUJ job ending.

D9002780

Explanation: Close database cross-reference files.

D9002790

Explanation: QSYSARB job ending.

D90027C0

Explanation: System jobs are ending.

Notices

This information was developed for products and services offered in the US.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

*IBM Director of Licensing
IBM Corporation
North Castle Drive, MD-NC119
Armonk, NY 10504-1785
US*

INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you provide in any way it believes appropriate without incurring any obligation to you.

The performance data and client examples cited are presented for illustrative purposes only. Actual performance results may vary depending on specific configurations and operating conditions.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

Statements regarding IBM's future direction or intent are subject to change or withdrawal without notice, and represent goals and objectives only.

All IBM prices shown are IBM's suggested retail prices, are current and are subject to change without notice. Dealer prices may vary.

This information is for planning purposes only. The information herein is subject to change before the products described become available.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to actual people or business enterprises is entirely coincidental.

If you are viewing this information in softcopy, the photographs and color illustrations may not appear.

The drawings and specifications contained herein shall not be reproduced in whole or in part without the written permission of IBM.

IBM has prepared this information for use with the specific machines indicated. IBM makes no representations that it is suitable for any other purpose.

IBM's computer systems contain mechanisms designed to reduce the possibility of undetected data corruption or loss. This risk, however, cannot be eliminated. Users who experience unplanned outages, system failures, power fluctuations or outages, or component failures must verify the accuracy of operations performed and data saved or transmitted by the system at or near the time of the outage or failure. In addition, users must establish procedures to ensure that there is independent data verification before relying on such data in sensitive or critical operations. Users should periodically check IBM's support websites for updated information and fixes applicable to the system and related software.

Homologation statement

This product may not be certified in your country for connection by any means whatsoever to interfaces of public telecommunications networks. Further certification may be required by law prior to making any such connection. Contact an IBM representative or reseller for any questions.

Accessibility features for IBM Power Systems servers

Accessibility features assist users who have a disability, such as restricted mobility or limited vision, to use information technology content successfully.

Overview

The IBM Power Systems servers include the following major accessibility features:

- Keyboard-only operation
- Operations that use a screen reader

The IBM Power Systems servers use the latest W3C Standard, WAI-ARIA 1.0 (www.w3.org/TR/wai-aria/), to ensure compliance with US Section 508 (www.access-board.gov/guidelines-and-standards/communications-and-it/about-the-section-508-standards/section-508-standards) and Web Content Accessibility Guidelines (WCAG) 2.0 (www.w3.org/TR/WCAG20/). To take advantage of accessibility features, use the latest release of your screen reader and the latest web browser that is supported by the IBM Power Systems servers.

The IBM Power Systems servers online product documentation in IBM Knowledge Center is enabled for accessibility. The accessibility features of IBM Knowledge Center are described in the Accessibility section of the IBM Knowledge Center help (www.ibm.com/support/knowledgcenter/doc/kc_help.html#accessibility).

Keyboard navigation

This product uses standard navigation keys.

Interface information

The IBM Power Systems servers user interfaces do not have content that flashes 2 - 55 times per second.

The IBM Power Systems servers web user interface relies on cascading style sheets to render content properly and to provide a usable experience. The application provides an equivalent way for low-vision users to use system display settings, including high-contrast mode. You can control font size by using the device or web browser settings.

The IBM Power Systems servers web user interface includes WAI-ARIA navigational landmarks that you can use to quickly navigate to functional areas in the application.

Vendor software

The IBM Power Systems servers include certain vendor software that is not covered under the IBM license agreement. IBM makes no representation about the accessibility features of these products. Contact the vendor for accessibility information about its products.

Related accessibility information

In addition to standard IBM help desk and support websites, IBM has a TTY telephone service for use by deaf or hard of hearing customers to access sales and support services:

TTY service
800-IBM-3383 (800-426-3383)
(within North America)

For more information about the commitment that IBM has to accessibility, see IBM Accessibility (www.ibm.com/able).

Privacy policy considerations

IBM Software products, including software as a service solutions, (“Software Offerings”) may use cookies or other technologies to collect product usage information, to help improve the end user experience, to tailor interactions with the end user, or for other purposes. In many cases no personally identifiable information is collected by the Software Offerings. Some of our Software Offerings can help enable you to collect personally identifiable information. If this Software Offering uses cookies to collect personally identifiable information, specific information about this offering’s use of cookies is set forth below.

This Software Offering does not use cookies or other technologies to collect personally identifiable information.

If the configurations deployed for this Software Offering provide you as the customer the ability to collect personally identifiable information from end users via cookies and other technologies, you should seek your own legal advice about any laws applicable to such data collection, including any requirements for notice and consent.

For more information about the use of various technologies, including cookies, for these purposes, see IBM’s Privacy Policy at <http://www.ibm.com/privacy> and IBM’s Online Privacy Statement at <http://www.ibm.com/privacy/details> the section entitled “Cookies, Web Beacons and Other Technologies” and the “IBM Software Products and Software-as-a-Service Privacy Statement” at <http://www.ibm.com/software/info/product-privacy>.

Trademarks

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the web at Copyright and trademark information at www.ibm.com/legal/copytrade.shtml.

INFINIBAND, InfiniBand Trade Association, and the INFINIBAND design marks are trademarks and/or service marks of the INFINIBAND Trade Association.

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Electronic emission notices

When attaching a monitor to the equipment, you must use the designated monitor cable and any interference suppression devices supplied with the monitor.

Class A Notices

The following Class A statements apply to the IBM servers that contain the POWER8 processor and its features unless designated as electromagnetic compatibility (EMC) Class B in the feature information.

Federal Communications Commission (FCC) Statement

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

Properly shielded and grounded cables and connectors must be used in order to meet FCC emission limits. IBM is not responsible for any radio or television interference caused by using other than recommended cables and connectors or by unauthorized changes or modifications to this equipment. Unauthorized changes or modifications could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Industry Canada Compliance Statement

CAN ICES-3 (A)/NMB-3(A)

European Community Compliance Statement

This product is in conformity with the protection requirements of EU Council Directive 2014/30/EU on the approximation of the laws of the Member States relating to electromagnetic compatibility. IBM cannot accept responsibility for any failure to satisfy the protection requirements resulting from a non-recommended modification of the product, including the fitting of non-IBM option cards.

European Community contact:
IBM Deutschland GmbH
Technical Regulations, Abteilung M456
IBM-Allee 1, 71139 Ehningen, Germany
Tel: +49 800 225 5426
email: halloibm@de.ibm.com

Warning: This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

VCCI Statement - Japan

この装置は、クラスA 情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI-A

The following is a summary of the VCCI Japanese statement in the box above:

This is a Class A product based on the standard of the VCCI Council. If this equipment is used in a domestic environment, radio interference may occur, in which case, the user may be required to take corrective actions.

Japan Electronics and Information Technology Industries Association Statement

This statement explains the Japan JIS C 61000-3-2 product wattage compliance.

(一社) 電子情報技術産業協会 高調波電流抑制対策実施
要領に基づく定格入力電力値 : Knowledge Centerの各製品の
仕様ページ参照

This statement explains the Japan Electronics and Information Technology Industries Association (JEITA) statement for products less than or equal to 20 A per phase.

高調波電流規格 JIS C 61000-3-2 適合品

This statement explains the JEITA statement for products greater than 20 A, single phase.

高調波電流規格 JIS C 61000-3-2 準用品

本装置は、「高圧又は特別高圧で受電する需要家の高調波抑制対策ガイドライン」対象機器（高調波発生機器）です。

- 回路分類 : 6 (単相、PFC回路付)
- 換算係数 : 0

This statement explains the JEITA statement for products greater than 20 A per phase, three-phase.

高調波電流規格 JIS C 61000-3-2 準用品

本装置は、「高圧又は特別高圧で受電する需要家の高調波抑制対策ガイドライン」対象機器（高調波発生機器）です。

- 回路分類 : 5 (3相、PFC回路付)
- 換算係数 : 0

Electromagnetic Interference (EMI) Statement - People's Republic of China

声 明

此为 A 级产品,在生活环境中,该产品可能会造成无线电干扰。在这种情况下,可能需要用户对其干扰采取切实可行的措施。

Declaration: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user may need to perform practical action.

Electromagnetic Interference (EMI) Statement - Taiwan

警告使用者：

這是甲類的資訊產品，在居住的環境中使用時，可能會造成射頻干擾，在這種情況下，使用者會被要求採取某些適當的對策。

The following is a summary of the EMI Taiwan statement above.

Warning: This is a Class A product. In a domestic environment this product may cause radio interference in which case the user will be required to take adequate measures.

IBM Taiwan Contact Information:

台灣IBM 產品服務聯絡方式：
台灣國際商業機器股份有限公司
台北市松仁路7號3樓
電話：0800-016-888

Electromagnetic Interference (EMI) Statement - Korea

이 기기는 업무용 환경에서 사용할 목적으로 적합성평가를 받은 기기로서 가정용 환경에서 사용하는 경우 전파간섭의 우려가 있습니다.

Germany Compliance Statement

Deutschsprachiger EU Hinweis: Hinweis für Geräte der Klasse A EU-Richtlinie zur Elektromagnetischen Verträglichkeit

Dieses Produkt entspricht den Schutzanforderungen der EU-Richtlinie 2014/30/EU zur Angleichung der Rechtsvorschriften über die elektromagnetische Verträglichkeit in den EU-Mitgliedsstaaten und hält die Grenzwerte der EN 55022 / EN 55032 Klasse A ein.

Um dieses sicherzustellen, sind die Geräte wie in den Handbüchern beschrieben zu installieren und zu betreiben. Des Weiteren dürfen auch nur von der IBM empfohlene Kabel angeschlossen werden. IBM übernimmt keine Verantwortung für die Einhaltung der Schutzanforderungen, wenn das Produkt ohne Zustimmung von IBM verändert bzw. wenn Erweiterungskomponenten von Fremdherstellern ohne Empfehlung von IBM gesteckt/eingebaut werden.

EN 55022 / EN 55032 Klasse A Geräte müssen mit folgendem Warnhinweis versehen werden: "Warnung: Dieses ist eine Einrichtung der Klasse A. Diese Einrichtung kann im Wohnbereich Funk-Störungen verursachen; in diesem Fall kann vom Betreiber verlangt werden, angemessene Maßnahmen zu ergreifen und dafür aufzukommen."

Deutschland: Einhaltung des Gesetzes über die elektromagnetische Verträglichkeit von Geräten

Dieses Produkt entspricht dem "Gesetz über die elektromagnetische Verträglichkeit von Geräten (EMVG)". Dies ist die Umsetzung der EU-Richtlinie 2014/30/EU in der Bundesrepublik Deutschland.

Zulassungsbescheinigung laut dem Deutschen Gesetz über die elektromagnetische Verträglichkeit von Geräten (EMVG) (bzw. der EMC Richtlinie 2014/30/EU) für Geräte der Klasse A

Dieses Gerät ist berechtigt, in Übereinstimmung mit dem Deutschen EMVG das EG-Konformitätszeichen - CE - zu führen.

Verantwortlich für die Einhaltung der EMV Vorschriften ist der Hersteller:
International Business Machines Corp.
New Orchard Road

Armonk, New York 10504
Tel: 914-499-1900

Der verantwortliche Ansprechpartner des Herstellers in der EU ist:
IBM Deutschland GmbH
Technical Relations Europe, Abteilung M456
IBM-Allee 1, 71139 Ehningen, Germany
Tel: +49 (0) 800 225 5426
email: HalloIBM@de.ibm.com

Generelle Informationen:

Das Gerät erfüllt die Schutzanforderungen nach EN 55024 und EN 55022 / EN 55032 Klasse A.

Electromagnetic Interference (EMI) Statement - Russia

ВНИМАНИЕ! Настоящее изделие относится к классу А.
В жилых помещениях оно может создавать
радиопомехи, для снижения которых необходимы
дополнительные меры

Class B Notices

The following Class B statements apply to features designated as electromagnetic compatibility (EMC) Class B in the feature installation information.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult an IBM-authorized dealer or service representative for help.

Properly shielded and grounded cables and connectors must be used in order to meet FCC emission limits. Proper cables and connectors are available from IBM-authorized dealers. IBM is not responsible for any radio or television interference caused by unauthorized changes or modifications to this equipment. Unauthorized changes or modifications could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Industry Canada Compliance Statement

CAN ICES-3 (B)/NMB-3(B)

European Community Compliance Statement

This product is in conformity with the protection requirements of EU Council Directive 2014/30/EU on the approximation of the laws of the Member States relating to electromagnetic compatibility. IBM cannot accept responsibility for any failure to satisfy the protection requirements resulting from a non-recommended modification of the product, including the fitting of non-IBM option cards.

European Community contact:
IBM Deutschland GmbH
Technical Regulations, Abteilung M456
IBM-Allee 1, 71139 Ehningen, Germany
Tel: +49 800 225 5426
email: halloibm@de.ibm.com

VCCI Statement - Japan

この装置は、クラスB情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。

取扱説明書に従って正しい取り扱いをして下さい。 VCCI-B

Japan Electronics and Information Technology Industries Association Statement

This statement explains the Japan JIS C 61000-3-2 product wattage compliance.

(一社) 電子情報技術産業協会 高調波電流抑制対策実施
要領に基づく定格入力電力値 : Knowledge Centerの各製品の
仕様ページ参照

This statement explains the Japan Electronics and Information Technology Industries Association (JEITA) statement for products less than or equal to 20 A per phase.

高調波電流規格 JIS C 61000-3-2 適合品

This statement explains the JEITA statement for products greater than 20 A, single phase.

高調波電流規格 JIS C 61000-3-2 準用品

本装置は、「高圧又は特別高圧で受電する需要家の高調波抑制対策ガイドライン」対象機器（高調波発生機器）です。

- 回路分類 : 6 (単相、PFC回路付)
- 換算係数 : 0

This statement explains the JEITA statement for products greater than 20 A per phase, three-phase.

高調波電流規格 JIS C 61000-3-2 準用品

本装置は、「高圧又は特別高圧で受電する需要家の高調波抑制対策ガイドライン」対象機器（高調波発生機器）です。

- 回路分類 : 5 (3相、PFC回路付)
- 換算係数 : 0

IBM Taiwan Contact Information

台灣IBM 產品服務聯絡方式：
台灣國際商業機器股份有限公司
台北市松仁路7號3樓
電話：0800-016-888

Germany Compliance Statement

Deutschsprachiger EU Hinweis: Hinweis für Geräte der Klasse B EU-Richtlinie zur Elektromagnetischen Verträglichkeit

Dieses Produkt entspricht den Schutzanforderungen der EU-Richtlinie 2014/30/EU zur Angleichung der Rechtsvorschriften über die elektromagnetische Verträglichkeit in den EU-Mitgliedsstaaten und hält die Grenzwerte der EN 55022/ EN 55032 Klasse B ein.

Um dieses sicherzustellen, sind die Geräte wie in den Handbüchern beschrieben zu installieren und zu betreiben. Des Weiteren dürfen auch nur von der IBM empfohlene Kabel angeschlossen werden. IBM übernimmt keine Verantwortung für die Einhaltung der Schutzanforderungen, wenn das Produkt ohne Zustimmung von IBM verändert bzw. wenn Erweiterungskomponenten von Fremdherstellern ohne Empfehlung von IBM gesteckt/eingebaut werden.

Deutschland: Einhaltung des Gesetzes über die elektromagnetische Verträglichkeit von Geräten

Dieses Produkt entspricht dem "Gesetz über die elektromagnetische Verträglichkeit von Geräten (EMVG)". Dies ist die Umsetzung der EU-Richtlinie 2014/30/EU in der Bundesrepublik Deutschland.

Zulassungsbescheinigung laut dem Deutschen Gesetz über die elektromagnetische Verträglichkeit von Geräten (EMVG) (bzw. der EMC Richtlinie 2014/30/EU) für Geräte der Klasse B

Dieses Gerät ist berechtigt, in Übereinstimmung mit dem Deutschen EMVG das EG-Konformitätszeichen - CE - zu führen.

Verantwortlich für die Einhaltung der EMV Vorschriften ist der Hersteller:
International Business Machines Corp.
New Orchard Road
Armonk, New York 10504
Tel: 914-499-1900

Der verantwortliche Ansprechpartner des Herstellers in der EU ist:
IBM Deutschland GmbH
Technical Relations Europe, Abteilung M456
IBM-Allee 1, 71139 Ehningen, Germany
Tel: +49 (0) 800 225 5426
email: HalloIBM@de.ibm.com

Generelle Informationen:

Das Gerät erfüllt die Schutzanforderungen nach EN 55024 und EN 55022/ EN 55032 Klasse B.

Terms and conditions

Permissions for the use of these publications are granted subject to the following terms and conditions.

Applicability: These terms and conditions are in addition to any terms of use for the IBM website.

Personal Use: You may reproduce these publications for your personal, noncommercial use provided that all proprietary notices are preserved. You may not distribute, display or make derivative works of these publications, or any portion thereof, without the express consent of IBM.

Commercial Use: You may reproduce, distribute and display these publications solely within your enterprise provided that all proprietary notices are preserved. You may not make derivative works of these publications, or reproduce, distribute or display these publications or any portion thereof outside your enterprise, without the express consent of IBM.

Rights: Except as expressly granted in this permission, no other permissions, licenses or rights are granted, either express or implied, to the publications or any information, data, software or other intellectual property contained therein.

IBM reserves the right to withdraw the permissions granted herein whenever, in its discretion, the use of the publications is detrimental to its interest or, as determined by IBM, the above instructions are not being properly followed.

You may not download, export or re-export this information except in full compliance with all applicable laws and regulations, including all United States export laws and regulations.

IBM MAKES NO GUARANTEE ABOUT THE CONTENT OF THESE PUBLICATIONS. THE PUBLICATIONS ARE PROVIDED "AS-IS" AND WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, AND FITNESS FOR A PARTICULAR PURPOSE.

