

Idea (1A)

- Communication Scheduling
-

Copyright (c) 2012 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".


Please send corrections (or suggestions) to youngwlim@hotmail.com.

This document was produced by using OpenOffice and Octave.

The Butterfly Operations

$$x'_0 = x_0 + \omega^k x_1$$

$$x'_1 = x_0 - \omega^k x_1$$

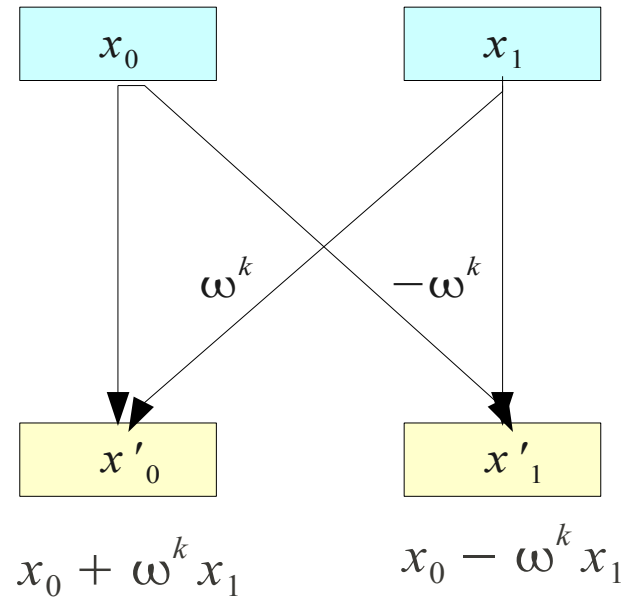

The Butterfly Operations

$$\begin{cases} x'_0 = x_0 + \omega^k x_1 \\ x'_1 = x_0 - \omega^k x_1 \end{cases}$$


$$x'_0 = x_0 + \omega^k x_1$$

$$x_0 = x'_0 - \omega^k x_1$$

$$x'_1 = x_0 - \omega^k x_1$$

$$\rightarrow x'_1 = x'_0 - \omega^k x_1 - \omega^k x_1$$

$$x'_1 = x'_0 - 2\omega^k x_1$$

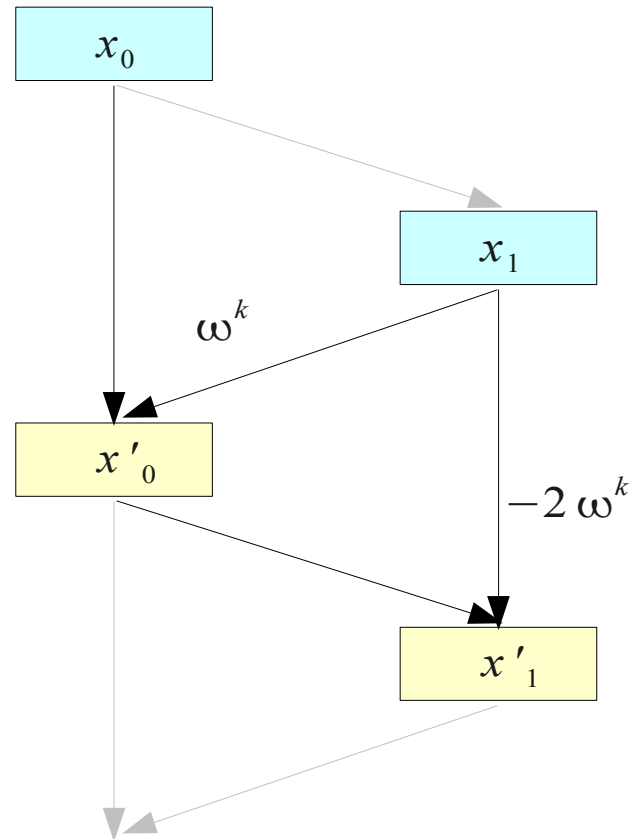

Communication Patterns




MPI_Sendrecv

To avoid deadlock, there must be lower level communication scheduling overhead?


Unless real duplex communication link → Shared Bandwidth

Communication Scheduling

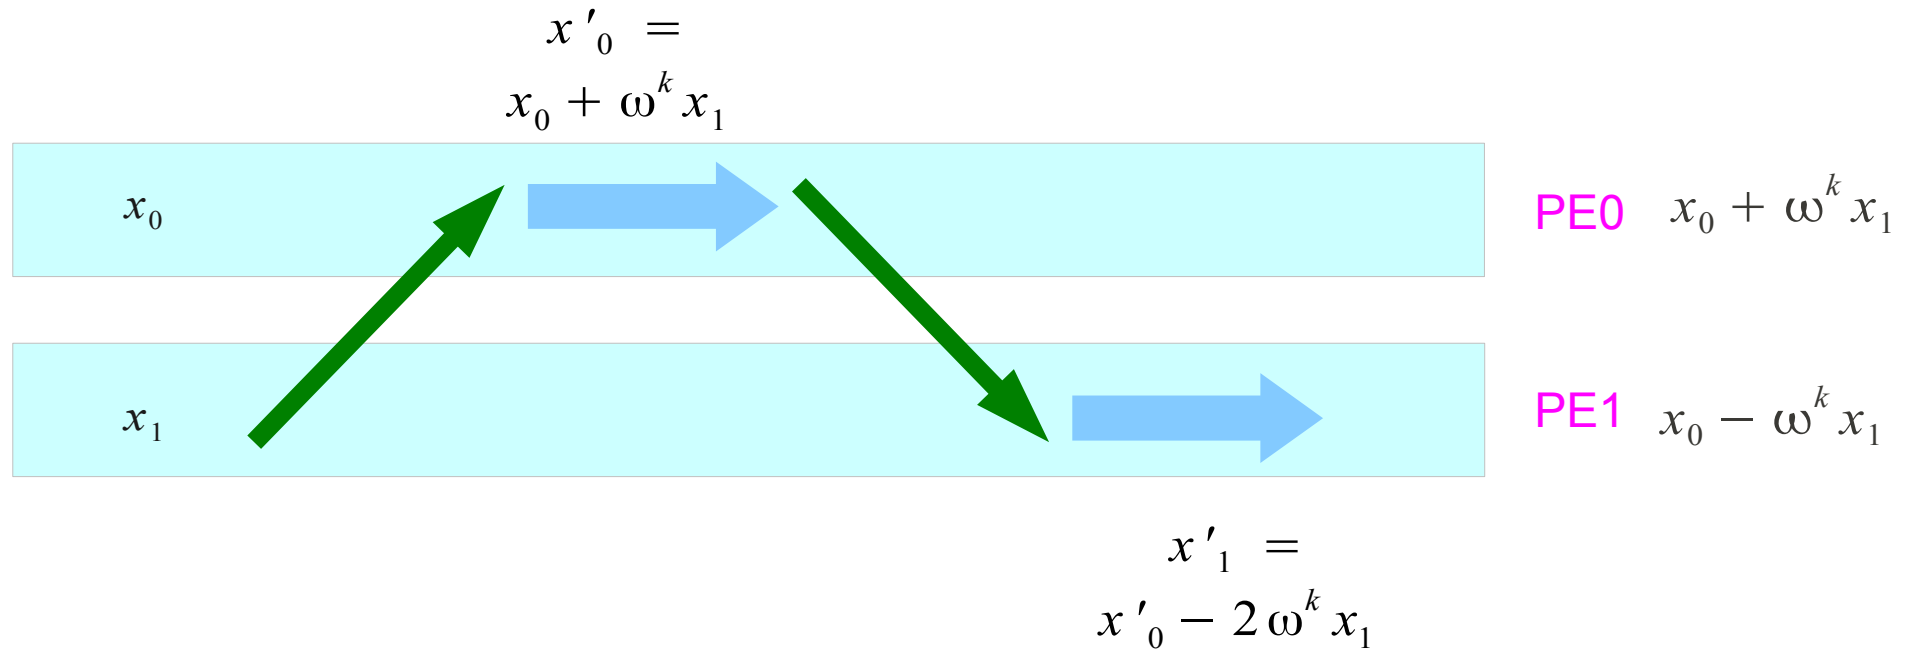


Swapping communication pattern can be avoided

Communication Latency Hiding (1)

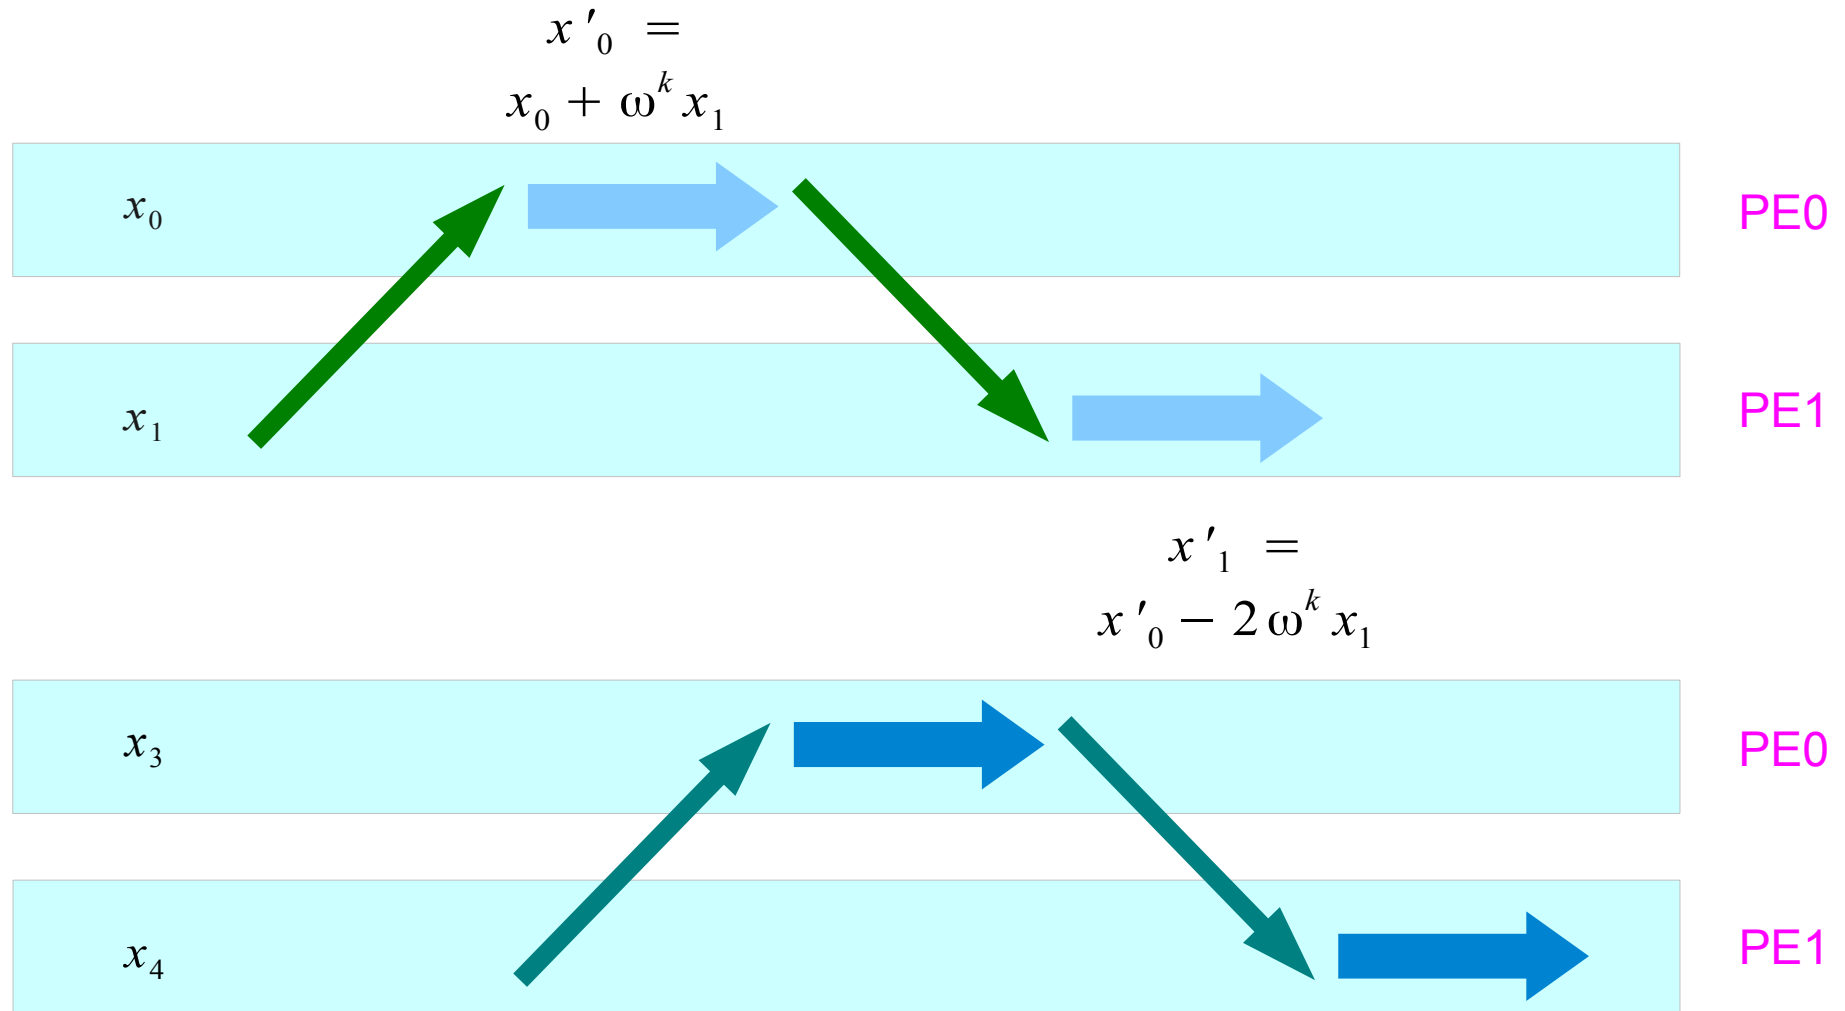

Communication Latency Hiding (2)

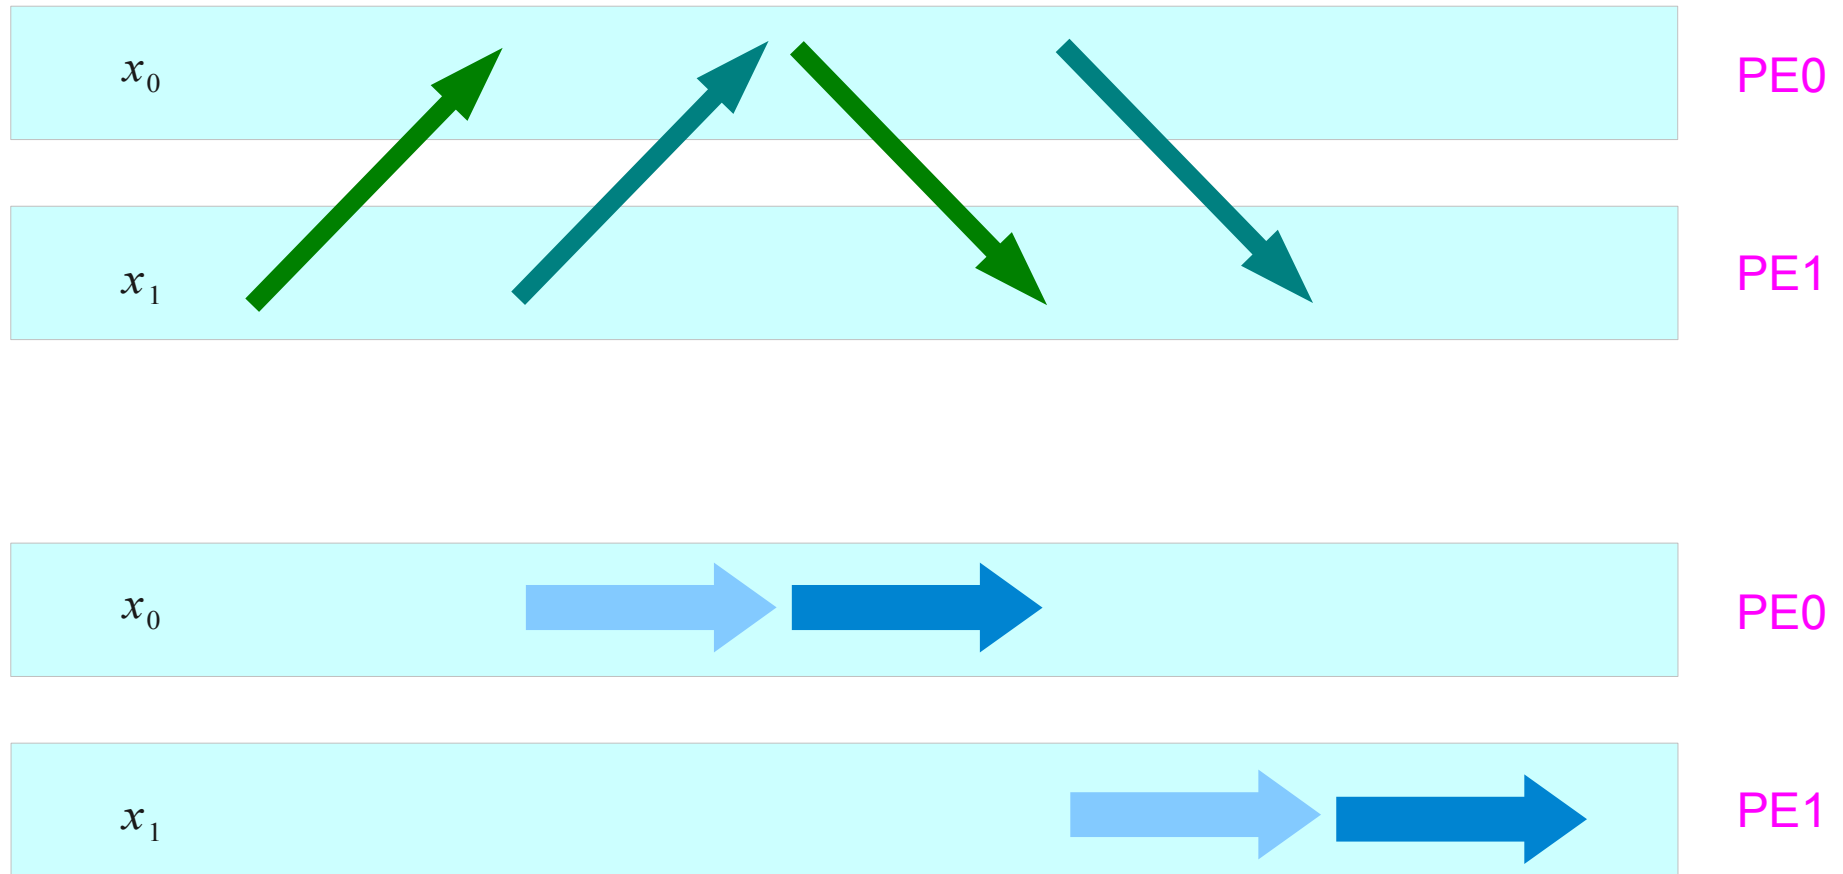

Speed Up ?

Ratio of Comp time to Comm time?

References

[1] <http://en.wikipedia.org/>

[2]