

WebSphere. Lombardi Edition 7.2

Windows



.....	1
.....	2
Lombardi	2
Lombardi	2
Lombardi	5
Lombardi	6
Lombardi	6
Lombardi	6
.....	7
Lombardi	7
.....	8
Lombardi	9
Microsoft SQL Server	9
Oracle	10
DB2	10
.....	11
.....	11
.....	15
.....	15
.....	24
ANT	24
.....	25
.....	25
가	26
.....	32
Lombardi	32
LDAP	34
Lombardi	35
Lombardi	36
.....	39
Lombardi	40
Lombardi	40
Process Center	41
Process Server	42
Performance Data Warehouse Process Server	43
.....	44
.....	44
Lombardi	45
.....	46
.....	46
.....	47

© Copyright International Business Machines Corporation 2010. All Rights Reserved.

IBM WebSphere Lombardi Edition 7.2.0 Licensed Materials - Property of IBM. U. S. Government Users
Restricted Rights - Use, duplication, or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

Data Warehouse) Process Server Process App Lombardi Process Server Performance (:
 . Lombardi Lombardi


Lombardi

IBM® WebSphere® Lombardi Edition

Process Center	Process Center Console Lombardi Authoring Environment . Process Center Process Center Server Performance Data Warehouse가 Process App
Process Server	Lombardi Authoring Environment Process Center
Performance Data Warehouse	Lombardi Authoring Environment
Process Center Console	Lombardi Process App, Snapshot Process Server Process App
Authoring Environment	Lombardi Authoring Environment 가
Process Portal	가 Process Portal Process Server (:) Process Center Server
Process Admin Console	가 (:) Lombardi Process Server Process Center Server
Performance Admin Console	가 (:) Lombardi Performance Data Warehouse Process Center Performance Data Warehouse

Lombardi

IBM WebSphere Lombardi Edition

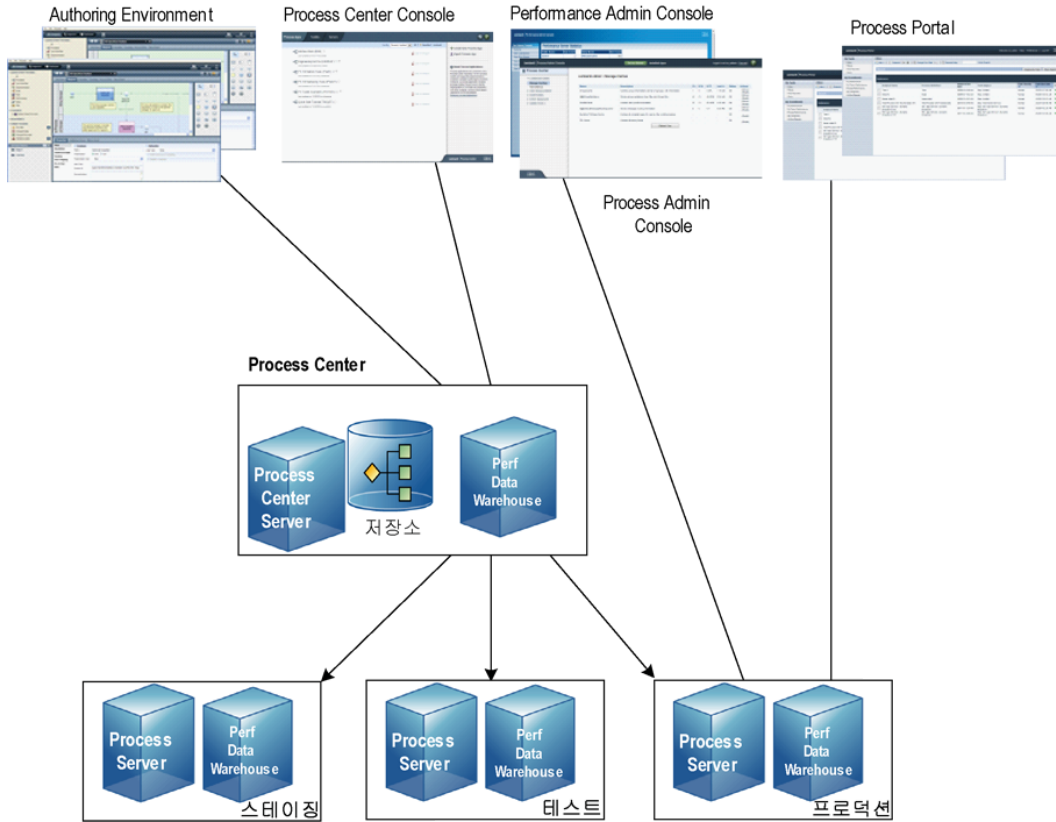

- Lombardi Authoring Environment 가 Process Center
- Lombardi Authoring Environment 가 Process Center (Process App) , Authoring Environment Process Center
- Process Center Environment Process Center Server 가 Performance Data Warehouse가 Lombardi Authoring Process App
- Process Center Console 가 Process Server 가 Process App
- Process Center Console 가 Process App
- Process Portal 가 Process Server Process App Process Center
- , Process Portal 가 Process Center Server Process Server
- Lombardi Performance Data Warehouse 가 Process Server Process Center Server Lombardi Authoring Environment Process Portal

- Process Admin Console Performance Admin Console Lombardi

Lombardi

Lombardi Process Center
Server 7.0

Lombardi

WebSphere® Application
Lombardi

Lombardi

	Lombardi Authoring Environment(Windows®)	<i>Lombardi Authoring Environment</i>
	Lombardi Process Center(Process Center Server, Performance Data Warehouse Authoring Environment)	<i>Lombardi Process Center</i>
Lombardi ()	Lombardi (Process Server Performance Data Warehouse)	<i>Lombardi</i>
DB2 Express Lombardi Process Center	Lombardi Lombardi Process Center (Windows)	<i>Lombardi Express</i>
Lombardi Process Center	Lombardi Process Center	<i>Lombardi Process Center</i>
Lombardi	Lombardi	Lombardi

Lombardi

Lombardi

Lombardi
Lombardi

Lombardi

Lombardi
가 Lombardi
Lombardi
Lombardi

- Process Server
- Process Admin Console
- Process Portal
- Performance Data Warehouse
- Performance Admin Console

Lombardi Process Server Process Center
Process Center Console
Process App Snapshot . Process Center가
Lombardi
Lombardi Process Server

Lombardi

가



Lombardi


1.

1.	Lombardi
2.	
3. Lombardi Process Server Lombardi Performance Data Warehouse	Lombardi

2.

1. Lombardi	
2.	
3. install.properties	
4.	

3.

Deployment		
Manager	가	가
Lombardi Toolkit, 		
Lombardi Process Server Warehouse	Lombardi Performance Data	Lombardi
		LDAP
Lombardi		Lombardi
		Lombardi

Lombardi

Lombardi

Lombardi



Lombardi






.TMP TEMP

Windows "temp"

Lombardi	(1.3GHz) 2.2GHz
3GB 가 RAM	
Lombardi ,	4GB
가	2GB

Lombardi	
	10GB

Lombardi

Windows	<p>Microsoft® Windows Server 2003(64 32)</p> <p>Microsoft Windows Server 2008(64 32)</p> <p>Microsoft Windows Server 2003 R2(64 32)</p> <p>Microsoft Windows Server 2008 R2(64 32)</p>
DB2®	<p>DB2 Enterprise Server Edition 9.7 1</p> <p>DB2 Workgroup Server Edition 9.7 1</p> <p>DB2 Express Edition 9.7 1</p> <p> DB2 Express Edition</p> <p>http://www.ibm.com/ibm/press/pressreleases/970622/ibm956906.doc</p>
Microsoft SQL Server	<p>Microsoft SQL Server 2005 SP3</p> <p>Microsoft SQL Server 2008 R1 R2</p> <p> SQL 가 SQL</p>
Oracle	<p>Oracle Enterprise 11g 1</p> <p>Oracle Standard 11g 1</p> <p>Oracle Enterprise 11g 2</p> <p>Oracle Standard 11g 2</p> <p> Oracle XA</p> <p> Oracle Enterprise 11g 2 July 2010 Critical Patch가 (1089044.1: http://www.oracle.com/technology/deploy/security/critical-patch-updates/cpuijul2010.html</p>
	<p>Microsoft Internet Explorer 6, 7 8</p> <p> Internet Explorer 8</p> <p>Mozilla Firefox 3</p>



Lombardi

WebSphere Application Server 7.0
Lombardi

Lombardi

Lombardi
Performance Data Warehouse
Lombardi

Lombardi Process Server

Lombardi

Microsoft SQL Server

Lombardi SQL

1. **SQL**

2. > >
Lombardi (Lombardi
lombardi .)



3. Lombardi Process Server twProcessDB Lombardi Process Server



ASCII Process Server

<http://msdn.microsoft.com/en-us/library/ms144250.aspx>

4. Lombardi Performance Data Warehouse twPerformanceDB Performance Data Warehouse Lombardi



Lombardi 가 2
가 6

5. > >

6. > db_owner

7. > 가 lombardi 2

lombardi

Microsoft SQL Server 2005

- SQL-Server-Performance.com: *SQL Server 2005* : http://www.sql-server-performance.com/articles/dba/authorization_2005_p1.aspx
- Microsoft TechNet: *SQL Server 2005* <http://technet.microsoft.com/en-us/library/ms143516.aspx>
- Microsoft TechNet: <http://technet.microsoft.com/en-us/library/ms175037.aspx>

Oracle

Lombardi Oracle Lombardi

1. Oracle Enterprise Manager Lombardi Process Server
2. Process Server Lombardi (Lombardi lombardi .)
3. Process Server DBA 가
4. Oracle Enterprise Manager Lombardi Performance Data Warehouse
5. Performance Data Warehouse Lombardi (Lombardi lombardi .)
6. Performance Data Warehouse DBA 가



WebSphere Lombardi Edition Oracle Unicode
가 WebSphere Lombardi Edition AL32UTF8

DB2

IBM DB2



DB2 DB2
<http://publib.boulder.ibm.com/infocenter/db2luw/v9r7/index.jsp>

- 8 lombardi Lombardi
가 , lombardiusr
- 가 32KB
- ASCII Unicode(UTF-8)

- 가 32KB
- 32KB
- 32KB

Lombardi

2



Lombardi
Lombardi

1. Lombardi
- 2.
- 3.
- 4.

Lombardi



Lombardi Automated

ANT

Lombardi

Lombardi

. Windows

- 가 Lombardi ()
install.properties
- 가
install.properties ()
install.properties
- Warehouse Lombardi Process Server Lombardi Performance Data
가

1. WebSphere Lombardi Edition

	Windows	32	64	Windows
---	---------	----	----	---------

2.


가 10GB

3. Lombardi

4.

5. Lombardi

6.

	Performance Data Warehouse Data Warehouse	Process Server Process Server	Performance
--	--	----------------------------------	-------------

7.

Lombardi Process Server Performance Data Warehouse가

8.

	Lombardi
HTTP	Lombardi 19086
SMTP	Lombardi SMTP

9.

Process Center Process Center Process Server

Lombardi Process Server Process Server Process Center Lombardi Process
 Process Center Console Process Center가
 Process App Snapshot Process Center가
 Lombardi



Process Center

Process Center	Process Center가
Process Center HTTP	Process Center가

10.

가 가



가 Lombardi


가 (Deployment Manager)

11.

Lombardi



가

	Lombardi Process Server Performance Data Warehouse
	Lombardi
?	<p>) 가 Lombardi (</p> <p>Lombardi</p>  <p>가 가 Lombardi</p> <p>가</p>
Process Server	Lombardi Process Server twProcessDB

Process Server	. Lombardi lombardi
Process Server	가 . Lombardi
Performance Data Warehouse	Performance Data Warehouse . Lombardi twPerformanceDB
Performance Data Warehouse	. Lombardi lombardi
Performance Data Warehouse	가 . Lombardi

가 가 가 가

12. WebSphere Lombardi Edition

Shift

Ctrl

Lombardi Process Portal, Process Admin Console
가 . WebSphere Lombardi Edition

Lombardi

Lombardi



Lombardi

가

13. Lombardi



가

가

Lombardi

14. 가

Lombardi

가



가 가

Lombardi

15.

가

가

Lombardi



9

가

가

가

16. Lombardi



Lombardi

installvariables.properties

[Lombardi_home]/UninstallerData

Lombardi

가

Lombardi

가

install.properties

Lombardi

가

Lombardi

가

install.properties		
build-install.dita	ANT	ANT
	build-setup.dita	

root
Lombardi
install.properties

Lombardi
install.properties

. Lombardi

가
. install.properties
Java™
가 Lombardi

Lombardi

install.properties
Runtime Server

Lombardi

install.properties

Lombardi



ANT

Lombardi



install.properties

,ANT \'

'

/'

4. Lombardi

deploy.target.base	Lombardi 가  Lombardi
target.os	Lombardi . Microsoft Windows win , UNIX linux
temp.dir	Lombardi (/)
install.ps	Center Process Server Process false Lombardi Process Server true . Process Server [Lombardi_home]/process-server
install.ts	Lombardi Performance Data Warehouse true . Performance Data Warehouse [Lombardi_home]/performance-data-warehouse
install.pcs	Lombardi Process Center Server false
install.reporting	Lombardi NetCharts true Lombardi false NetCharts Lombardi
install.examples	true [Lombardi_home]/web-api Lombardi API Java .NET
install.web.files	true [Lombardi_home]/tw_web_files
install.setup.type	Express Custom .Simple
language.packs	Lombardi Process Center Console, Authoring Environment, Process Portal Process Admin Console 가  Lombardi
run.twinit	Toolkit 가 true (: false)

smtp.server	Lombardi SMTP URL
startup.failure.to	.
startup.failure.from	.
startup.failure.name	.
em.enable	<pre> true false (:). </pre>
em.paused	<p>Process Server가 Lombardi 가 false Process Server 가 true IBM WebSphere Lombardi Edition 7.2</p>
em.smtp.server	SMTP URL
em.failure.email	.
em.notify.error	Lombardi
em.user	Lombardi
em.password	Lombardi
stage.jdk.home	Java 가

5. Lombardi

iip.home.dir	Lombardi WebSphere (IIP)가 [Lombardi_Auto_Installer_directory]/was-iip WebSphere IIP
websphere.platform.name	WebSphere Application Server
appserver.root	가 root (bin profiles)_\${deploy.target.base}/AppServer
server.jvm.path	Lombardi Java 가 \${appserver.root}/java
websphere.profile	WebSphere Application Server
websphere.cluster.enabled.checked	true
websphere.cluster.add	가 true Deployment Manager websphere.cluster.enabled.checked가 true
appserver.jndiFactory	Java
appserver.envname	
appserver.envname.description	Process Server Performance Data Warehouse
appserver.cell	Process Server 가 WebSphere Application Server WebSphere
appserver.node	Process Server 가 Process Server WebSphere Application Server WebSphere
appserver.servername	Process Server WebSphere Application Server Process Server 가 가.
appserver.virtualhost	Process Server WebSphere Application Server 가
appserver.dmgr.profile	Lombardi Process Server WebSphere Application Server Deployment Manager
script.websphere.twinit	Toolkit run.twinit 가



Center

WebSphere Application Server 7.0 Information

6. Lombardi Process Server

ps.database	Process Server Lombardi db2, mssql oracle11g
ps.database.use_windows_auth	ps.database가 mssql true Microsoft SQL Server Windows
ps.database.url	Process Server JDBC URL URL Lombardi Process Server
ps.database.username	Process Server
ps.database.password	가 Process Server
ps.database.additionalXaProperties	Process Server
ps.database.driver	JDBC
ps.database.jar.file	JDBC 가 JAR
ps.host	: Process Server localhost localhost Process Server
ps.port	: Process Server 9086
ps.jndiPort	2812
ps.url	Process Server HTTP URL http://[ps.host]:[ps.port]
ps.jndiUrl	Process Server URL .corbaname:iiop:[ps.host]:[ps.jndiPort]
ps.loglevel	ps.logpath
ps.initpool	가 2
ps.maxpool	Process Server 15
ps.logpath	Process Server \${appserver.root}/logs
ps.minmem	Process Server Java (MB)
ps.maxmem	Process Server Java (MB)
ps.enablePerformanceServerComm	Performance Data Warehouse true true Performance Data Warehouse ts.jndiUrl
script.websphere.ps.config	Process Server 가
script.websphere.ps.deploy	Process Server 가


script.websphere.ps.coppolicy	WebSphere Application Server	WAR
	가	.

7. Lombardi Performance Data Warehouse

ts.database	Performance Data Warehouse db2, mssql oracle11g
ts.database.use_windows_auth	ts.database가 mssql true Microsoft SQL Server Windows
ts.database.url	Performance Data Warehouse JDBC URL URL Lombardi Performance Data Warehouse
ts.database.username	Performance Data Warehouse
ts.database.password	가 Performance Data Warehouse
ts.database.additionalXaProperties	
ts.database.driver	JDBC
ts.database.jar.file	JDBC 가 JAR
ts.host	: Performance Data Warehouse localhost localhost
ts.port	: Performance Data Warehouse 9085
ts.jndiPort	2811
ts.url	Performance Data Warehouse HTTP URL http://[ts.host]:[ts.port]
ts.jndiUrl	Performance Data Warehouse URL . corbaname:iiop:[ts.host]:[ts.jndiPort]
ts.loglevel	ts.logpath
ts.initpool	가 2
ts.maxpool	Performance Data Warehouse 15
ts.logpath	Performance Data Warehouse \${appserver.root}/logs
ts.minmem	Performance Data Warehouse Java (MB)
ts.maxmem	Performance Data Warehouse Java (MB)
twperfserver.servername	Performance Data Warehouse WebSphere Application Server 가 가.

twperfserver.virtualhost	Performance Data Warehouse 가	WebSphere Application Server
script.websphere.ts.config	Performance Data Warehouse	가
script.websphere.ts.deploy	Performance Data Warehouse	가

8. Lombardi Process Center Server

pcs.host	Lombardi Process Center Server가	Process Server
pcs.port	Lombardi Process Center Server가 Process Server	Process Center Server HTTP
pcs.jndiPort		Process Center Server
pcs.url	Process Center Server HTTP http://[pcs.host]:[pcs.port]	URL
pcs.jndiUrl	Process Center Server jnp://[pcs.host]:[pcs.jndiPort]	URL
ps.heartbeat.interval	Process Server 	Process Center Server 0 -1



Process Center

Process Server

0

install.properties

9.

install.was	true
appserver.home	.
websphere.home	.
appserver.clienthome	.
target.queuemanager	.
mq.host	.
mq.port	.
mq.channel	.
ps.ear.expanded	.
ts.ear.expanded	.
ps.portal.expanded	.

```
install.properties ( )
Lombardi
```

1. 가 root
2. install.bat Lombardi 가

ANT

```
Lombardi ANT
Lombardi ANT ANT Java
. ANT
가 ANT build-install.xml Lombardi
XML .build-install.xml
```

```
install.properties
```

1. 가
2. install target 3

```
ant -buildfile build-install.xml
```



root build-install.xml

unpack-was-iip-jdk	.
--------------------	---

auto-install-was	JAVA_HOME [auto_install_root]/was-iip-jdk .
install	JAVA_HOME [auto_install_root]/was-iip-jdk .

Lombardi 가 ANT (:) ,
install-ps:
ANT
Lombardi Lombardi

Apache ANT
<http://ant.apache.org/>

Lombardi 가 Lombardi
Lombardi 가 [Lombardi_home]

Lombardi Deployment Manager 가 가
Deployment Manager
websphere.cluster.enabled.checked true

- Lombardi 가 Deployment Manager
[Lombardi_home]/AppServer/profiles/Dmgr01/bin/startManager.bat
- Deployment Manager가 Deployment Manager
[Lombardi_home]/AppServer/profiles/Lombardi/bin/syncNode.bat [DM_host]
[DM_SOAP_Connector_port] -user tw_user -password tw_user

[DM_host]	Deployment Manager가 .
[DM_SOAP_connector_port]	(Deployment Manager가) Deployment Manager SOAP Deployment Manager SystemOut.log SOAP connector is available at port

-user	. tw_user
-password	. tw_user tw_user

3.

4. mbardi [Lombardi](#)

가

가



가

가

Lombardi	
install.properties	install.properties
가	Lombardi WebSphere 가
가	HTTP
	가
Lombardi	
Lombardi	Lombardi

Lombardi

Lombardi

- Lombardi
- Lombardi

install.properties

Runtime Server [install.properties](#)

- `websphere.cluster.enabled.checked` `websphere.cluster.add` true
true

- | | | |
|----------------|-----------|------------------------------|
| appserver.cell | | WebSphere Application Server |
| | WebSphere | |
- | | | |
|----------------|----------------|------------------------------|
| appserver.node | Process Server | WebSphere Application Server |
| | | WebSphere |
- | | | |
|----------------------|-------------------------|--|
| appserver.servername | twperfserver.servername | |
|----------------------|-------------------------|--|

가

가

Lombardi

가



Lombardi

Deployment Manager가

1. Lombardi

가

```
[Lombardi_home]/AppServer/profiles/Lombardi/bin/addNode.bat [DM_host]
[DM_SOAP_Connector_port] -noagent -user tw_user -password tw_user
```

[DM_host]	Deployment Manager가
[DM_SOAP_connector_port]	(Deployment Manager가 Manager SOAP Manager SystemOut.log is available at port Deployment SOAP connector
-noagent	addNode Node Agent 가 Node Agent
-user	tw_user
-password	tw_user

2. WebSphere

가

Lombardi Process Server Performance Data Warehouse

Lombardi

WebSphere

가

- install.properties
- [install.properties](#)

•

•

가

HTTP

3.

1. [Lombardi_home]/process-server/bin

2.

```
configure_cluster_member.cmd -cell [cell_name] -name [cluster_member_name]
-schema [schema_name] {-conntype [SOAP|RMI] -host [host_name] -port [port]
-user [user_name] -password [password]}
```

:

[cell_name]	
[cluster_member_name]	(가) 가
[schema_name]	가 SIB
-conntype	
-host	
-port	
-user	. tw_user
-password	. tw_user tw_user

```
configure_cluster_member.cmd -cell milesc-w500Cell01 -name twprocsvr2 -schema
schemanode02 -conntype SOAP -host localhost -port 8879 -user tw_user -password
tw_user
```

3. [Lombardi_home]/performance-data-warehouse/bin

4.

```
configure_cluster_member.cmd -cell [cell_name] -name [cluster_member_name]
-schema [schema_name] {-conntype [SOAP|RMI] -host [host_name] -port [port]
-user [user_name] -password [password]}
```

:

[cell_name]	
[cluster_member_name]	(가) 가
[schema_name]	가 SIB
-conntype	
-host	
-port	
-user	. tw_user
-password	. tw_user tw_user

```
configure_cluster_member.cmd -cell miles-c-w500Cell101 -name twperfsvr2 -schema
schemanode02 -conntype SOAP -host localhost -port 8879 -user tw_user -password
tw_user
```

가

HTTP

1. WebSphere > > **WebSphere Application Server** > **[your_new_server]**
> > **[default_inbound_transport_chain]** >
[inbound_channel] >
2. (: WCInboundDefault) 가



WebSphere 가 > 가 > **[your virtual host]** >

- Lombardi Process Server > > **WebSphere Application**
Server > **twprocsvr** > > **WCInboundDefault** > **TCP**
(TCP_2) >



(: WC_defaulthost)가 가
가

Lombardi Process Server Lombardi
Performance Data Warehouse

1. WebSphere > **JMS** >
2. (: **TWClientConnectionFactory**).
- JMS (node1_host:port
)
)
3. node1_host:port,node2_host:port



SIB_ENDPOINT_ADDRESS > > **WebSphere Application**
Server > **[server_name]** > >

- 4.
5. WebSphere > **JMS** >
6. (: **QueueConnectionFactory**).

7.

8.

Lombardi

가 , Lombardi

- JNDI URL 가
- PO

```

    가                                00Static.xml
    <performance-server-communication><provider><url>                JNDI URL

```

```
corbaname:iiop:[your_host1]:[bootstrap_port1],: [your_host2]:[bootstrap_port2]
```

WebSphere Application Server > [server_name] > > WebSphere >

```

    100Custom.xml                Lombardi
    [Lombardi_home]/process-server/config/system/00Static.xml

```

```

    [Lombardi_home]/process-server/config/100Custom.xml                가                . Lombardi
    100Custom.xml                . Lombardi

```

Lombardi Process Server

```
[Lombardi_home]/process-server/config/100Custom.xml
```

```

<properties>
  <common merge="mergeChildren">
    <performance-server-communication merge="mergeChildren">
      <provider merge="mergeChildren">
        <url merge="replace">corbaname:iiop:Paris.mycompany.com:3811,:Rome.mycompany.com:3811</url>
      </provider>
    </performance-server-communication>
  </common>
</properties>

```

```
( ) [Lombardi_home]/process-server/config/100Custom.xml
```

```

<properties>
  <common merge="mergeChildren">
    <cache-jms-jndi-lookups merge="replace">false</cache-jms-jndi-lookups>
  </common>
</properties>

```

```
PO [Lombardi_home]/process-server/config/100Custom.xml
```



```

<!-- set unversioned-po-caching-enable to false for clustering
<common merge="mergeChildren">
  <environment-name merge="replace">My Environment</environment-name>
  <default-unversioned-po-cache-size merge="replace">500</default-unversioned-po-cache-size>
  <default-versioned-po-cache-size merge="replace">500</default-versioned-po-cache-size>
  <unversioned-po-caching-enable merge="replace">false</unversioned-po-caching-enable>
  <default-webapi-userid-cache-size merge="replace">500</default-webapi-userid-cache-size>
</common>
-->
</environment-name>
</default-unversioned-po-cache-size>
</default-versioned-po-cache-size>
500).

```

Lombardi

Lombardi

1. / 가 / Deployment Manager

```
[Lombardi_home]/AppServer/profiles/Lombardi/bin/stopNode.bat
```

```
[Lombardi_home]/AppServer/profiles/Dmgr01/bin/stopManager.bat -user tw_user
-password tw_user
```

2. Deployment Manager

```
[Lombardi_home]/AppServer/profiles/Dmgr01/bin/startManager.bat
```

3. Deployment Manager가 Deployment Manager

```
[Lombardi_home]/AppServer/profiles/Lombardi/bin/syncNode.bat [DM_host]
[DM_SOAP_Connector_port] -user tw_user -password tw_user
```

[DM_host]	Deployment Manager가
[DM_SOAP_connector_port]	(Deployment Manager가) Deployment Manager SOAP Deployment Manager SystemOut.log SOAP connector is available at port
-user	. tw_user
-password	. tw_user tw_user

4. Lombardi

5. Lombardi . Lombardi

Lombardi

가 , 가 Toolkit Process App Snapshot

1. [Lombardi_home]\twinit

2. twinit.cmd

가

가 twinit\logs

가

3. lsw_ 가 가 Lombardi (: [schema_name].lsw_usr).

Lombardi

Lombardi



Lombardi

Windows

Microsoft Management Console

Lombardi

Lombardi

Process Server Performance Data Warehouse



Lombardi

Node Agent가

Process Server Performance Data Warehouse

1. [Lombardi_home]/bin

2. startLombardi.cmd

Process Server Performance Data Warehouse

1. [Lombardi_home]/bin

2. stopLombardi.cmd

가

```
stopLombardi.cmd -user tw_user -password tw_user
```

Lombardi Process Server

```
1. [Lombardi_home]/AppServer/profiles/Lombardi/bin
```

```
2. startNode.bat
```

Process Server

```
1. [Lombardi_home]/process-server/bin
```

```
2. startProcessServer.cmd
```

```
1. [Lombardi_home]/AppServer/profiles/Lombardi/bin
```

```
2. stopNode.bat
```

Process Server

```
1. [Lombardi_home]/process-server/bin
```

```
2. stopProcessServer.cmd
```

Lombardi Performance Data Warehouse

```
1. [Lombardi_home]/AppServer/profiles/Lombardi/bin
```

```
2. startNode.bat
```

Performance Data Warehouse

```
1. [Lombardi_home]/performance-data-warehouse/bin
```

```
2. startPerformanceDataWarehouse.cmd
```

1. [Lombardi_home]/AppServer/profiles/Lombardi/bin

2. stopNode.bat

Performance Data Warehouse

1. [Lombardi_home]/performance-data-warehouse/bin

2. stopPerformanceDataWarehouse.cmd

LDAP

WebSphere Lombardi Edition

Lombardi

가 LDAP

가

WebSphere

LDAP

(: Microsoft Active Directory)

1. WebSphere tw_user tw_user tw_user

2. >

3. 가

4.

5.

6. 가 가 가 Microsoft Active Directory 가

ID	SALOMLDAP // change to suit
	Microsoft Windows Active Directory
	10.1.5.18
	cn=LDAP_USER,CN=Users,DC=COMPANYQA,DC=com
	pwsaaswp

7.

8. 가

	cn=Users,DC=COMPANYQA,DC=com
	cn=Users,DC=COMPANYQA,DC=com

9.

10.

11. Lombardi . Lombardi

12. Lombardi 가 WebSphere Lombardi Edition 가

13. Lombardi . [Lombardi](#) 가

Lombardi

IBM WebSphere Lombardi Edition Lombardi
 가 Lombardi WebSphere Application Server
 (:LDAP) ([LDAP](#)).
 Lombardi Lombardi




Lombardi tw_admin tw_admins
 Lombardi tw_admin [Lombardi](#)
 Lombardi 가 , Lombardi tw_admins, Lombardi
 Lombardi 가 가 가
 가 , Lombardi 가



Process Admin Console Lombardi *Lombardi*

Lombardi

1. http://[host_name]:[port]/ProcessAdmin Process Admin Console (tw_admin) (tw_admin)	Process Admin Console	<i>Lombardi</i> <i>Process Admin Console</i>
2. () Lombardi	Process Admin Console	<i>Lombardi</i>
3. Lombardi 가 (:LDAP) Lombardi 가	Process Admin Console	<i>Lombardi</i>
4. http://[host_name]:[port]/ProcessCenter Process Center Console (tw_admin) (tw_admin) 가 가 Process App Toolkit	Process Center Console	<i>Authoring Environment</i> <i>Process Center</i>

 <p>Lombardi tw_authors 가 가</p>		

Lombardi

Lombardi 가 Process Admin Console
 . tw_admin

1. Admin Console http://[host_name]:[port]/ProcessAdmin Process
 (tw_admin) (tw_admin)

2. Process Admin Console

3.

4. >

Lombardi *Lombardi*

5.

6.

Lombardi Lombardi Lombardi
 EncryptPassword



tw_admin tw_user
<http://www-01.ibm.com/support/docview.wss?uid=swg21448216>

가 가

Lombardi

. tw_admin

Lombardi

- Lombardi
- Lombardi

Lombardi

1. (tw_admin) Process Admin Console tw_admin Process Admin Console
Lombardi

2. Process Admin Console

3. Lombardi Process Server Lombardi

- 4.

5. [Lombardi_home]/process-server/config/system/99Local.xml
[Lombardi_home]/process-server/config/100Custom.xml

```
<system-lane users> merge="replace" 가  
(password-encrypted true )
```

```
<server merge="mergeChildren">  
  <bpd-engine merge="mergeChildren">  
    <system-lane-users merge="replace">  
      <!-- Use java -cp utility.jar com.lombardisoftware.utility.EncryptPassword <password> -->  
      <!-- to generate encrypted password -->  
      <user login="tw_admin" password-encrypted="true" password="new-password"/>  
    </system-lane-users>  
  </bpd-engine>  
</server>
```



100Custom.xml

merge

Lombardi

6. [Lombardi_home]/process-server/config/system/80EventManager.xml
[Lombardi_home]/process-server/config/100Custom.xml

```
<password> merge="replace" 가 <password>  
<password-encrypted> true
```


```
<event-manager merge="mergeChildren">  
  <password merge="replace">[new-password]</password>  
  <password-encrypted merge="replace">true</password-encrypted>  
</event-manager>
```

7. 100Custom.xml

```
<properties>
  <server merge="mergeChildren">
    <bpd-engine merge="mergeChildren">
      <system-lane-users merge="replace">
        <!-- Use java -cp utility.jar com.lombardisoftware.utility.EncryptPassword <password> -->
        <!-- to generate encrypted password -->
        <user login="tw_admin" password-encrypted="true" password="new-password]"/>
      </system-lane-users>
    </bpd-engine>
  </server>
  <event-manager merge="mergeChildren">
    <password merge="replace">[new-password]</password>
    <password-encrypted merge="replace">true</password-encrypted>
  </event-manager>
</properties>
```

8. Lombardi Process Server . Lombardi).
Lombardi

Lombardi

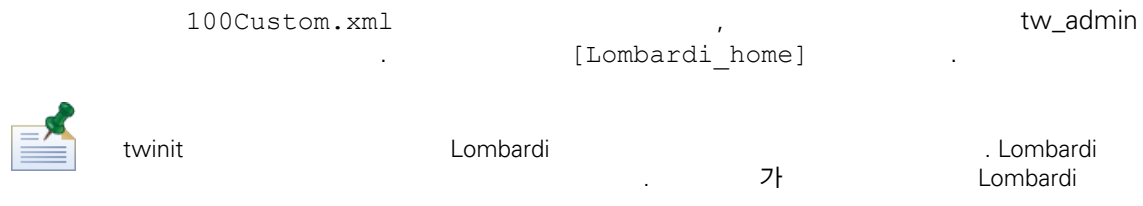

tools/process-installer/process-installer.properties	pcs.encrypted ps.encrypted
twinit/tw-init.xml	bootstrap.password
twinit/resources/config/system/99Local.xml	system-lane-users true . <password-encrypted>
twinit/resources/config/system/80EventManager.xml	event-manager true . <password-encrypted>

Lombardi

Lombardi EncryptPassword

1. [Lombardi_home]/twinit/lib

```
java -cp utility.jar com.lombardisoftware.utility.EncryptPassword <password>
  <password>
:
java -cp utility.jar com.lombardisoftware.utility.EncryptPassword JohnDoe
```


taVCmTLTWWgkTvfvavu/7g==:sROM4ZbvqRDFYMobWXqvwg==

가 utility.jar utility.jar

ClassNotFound 가 Java
[Lombardi_home]/AppServer/java/bin/java

java -cp c:\[Lombardi_home]\twinit\lib\utility.jar
com.lombardisoftware.utility.EncryptPassword JohnDoe



EncryptPassword

2. Lombardi (: [Lombardi_home]/process-server/config/100Custom.xml)



98Database.xml, 80EventManager.xml 99Local.xml Lombardi
100Custom.xml

WebSphere Lombardi Edition Kerberos (SSO)
WebSphere Lombardi Edition Windows
. Kerberos Lombardi
(Process Center Console, Process Portal, Process Admin Console Performance Admin Console
)

<http://www-01.ibm.com/support/docview.wss?uid=swg21448203>

Lombardi

Lombardi

Lombardi

Lombardi

[Lombardi_home]/process-server/config/system/00Static.xml

[Lombardi_home]/process-server/config/100Custom.xml 가 .Lombardi

100Custom.xml



100Custom.xml
Lombardi

100Custom.xml

100Custom.xml
.merge

Lombardi

merge

"append"	가
"mergeChildren"	
"replace"	

100Custom.xml

99Local.xml

1. Lombardi Process Server . [Lombardi](#)
2. [Lombardi_home]/process-server/config/system/99Local.xml

```
<properties>
...
  <common merge="mergeChildren">
    ...
    <environment-name>[existing_name]</environment-name>
    ...
  </common>
...
</properties>
```

3. 100Custom.xml

```
<properties>
  <common merge="mergeChildren">
    <environment-name merge="replace">[new_name]</environment-name>
  </common>
</properties>
```

4. Lombardi Process Server . [Lombardi](#)
Lombardi



Lombardi가

.bak

Process Center

Lombardi Process Server Process Center Lombardi
 Process Center Console Snapshot Process Center가 Lombardi Process Server

Process Server Process Center 가 Process Server Process
 Center Lombardi Process Center

1. Lombardi Process Server (Lombardi).
2. [Lombardi_home]/process-server/config/system/99Local.xml

3.

```
<repository-server-url>http://[process-center-host-name]:[port]/ProcessCenter</repository-server-url>
<repository-server-user>tw_runtime_server</repository-server-user>
<repository-server-password>XDfGSzXrZ7nYglKiB:yMR2XQwJXzQACE</repository-server-password>
<repository-server-password-encrypted>true</repository-server-password-encrypted>
<repository-server-designated-user>tw_author</repository-server-designated-user>
<repository-server-designated-password>fZN75qYgnZ1l0MCV80AAhA--</repository-server-designated-password>
<repository-server-designated-password-encrypted>true</repository-server-designated-password-encrypted>
<repository-server-interval>5</repository-server-interval>
```

Process Center <repository-server-url>

4. <repository-server-url> 가
[Lombardi_home]/process-server /config/100Custom.xml
5. <repository-server-url> , http:// [process-center-host-name] : [port]
Process Center . 100Custom.xml
merge="replace"

```
<repository-server-url  
merge="replace">[http://process-center-host-name:port]/ProcessCenter</repository-server-url>
```



100Custom.xml
Lombardi

merge

6.

repository-server-user	Process Server Lombardi tw_runtime_server 가 Process Center
------------------------	---

repository-server-password	Process Server Lombardi tw_runtime_server 가
repository-server-password-encrypted	Process Center
repository-server-designated-user	(1) Lombardi Authoring Environment Inspector BPD (2) Process App Snapshot Process Server Inspector BPD Process Server Lombardi tw_author Process App Snapshot Server tw_authors 가 Process
repository-server-designated-password	Lombardi Authoring Environment Inspector BPD Process Server 가 Lombardi tw_author
repository-server-designated-password-encrypted	
repository-server-interval	Process Server가 Process Center () Process Center



7. 100Custom.xml Process Center
Server (tw_runtime_server)

```
<properties>
<common merge="mergeChildren">
<repository-server-url merge="replace">[http://process-center-host-name:port/ProcessCenter]</repository-server-url>
<repository-server-password merge="replace">[new_password]</repository-server-password>
</common>
</properties>
```

8.

9. Lombardi Process Server . Lombardi

Process Server

Lombardi Authoring Environment

Process App



Process Server

1. Lombardi Process Server . [Lombardi](#) .
2. [Lombardi_home]/process-server/config/system/99Local.xml
3. [Lombardi_home]/process-server/config/100Custom.xml

```
<environment-type>TEST</environment-type>
```
4. <environment-type> . 100Custom.xml

```
merge="replace"
```

```
<environment-type merge="replace">STAGING</environment-type>
```



100Custom.xml merge
[Lombardi](#)

5. 100Custom.xml

```
<properties>
  <common merge="mergeChildren">
    <environment-type merge="replace">STAGING</environment-type>
  </common>
</properties>
```
- 6.
7. Lombardi Process Server . [Lombardi](#)).

Performance Data Warehouse Process Server

Process Server Performance Data Warehouse
 Lombardi Performance Data Warehouse . Performance
 Data Warehouse Process Server



1. [Lombardi_home]/process-server/config/100Custom.xml
2. 가

```
<common> <performance-data-warehouse-communication> <enabled  

merge="replace">false</enabled> </performance-data-warehouse-communication>  

</common>
```
3. Lombardi Process Server . Performance Data Warehouse Process Server

UCA(Undercover Agent) (BPD)
BPD, UCA

[Lombardi_home]/process-server/config/100Custom.xml

[Lombardi_home]/process-server/config/system/80EventManager.xml



가

Lombardi

[Lombardi](#)

Lombardi Process Portal

tw_admin

[Lombardi_home]/process-server/config/system/99Local.xml

1. [Lombardi_home]/process-server/config/100Custom.xml

<common> 가

<common merge="mergeChildren">

<user-to-create-task

merge="replace">[custom_task_sender_name]</user-to-create-task>

</common>

2.

3. Lombardi

Lombardi

Lombardi

Lombardi

:

-

- Lombardi Windows
Windows

- IBM WebSphere Application Server v7.0 - ProcessCenter01 Windows

1. [Lombardi_home]\uninstall\uninstall.bat
Windows

2. Lombardi Windows

3. 가 가

IBM 가
IBM IBM
IBM IBM
IBM IBM
IBM IBM

135-700

467-12

: 080-023-8080

2

(DBCS)

IBM

*IBM World Trade Asia Corporation
Licensing
2-31 Roppongi 3-chome, Minato-ku
Tokyo 106-0032, Japan*

가
IBM) " " 가
가
IBM /
IBM
IBM 가
IBM 가
(i) () (ii)

135-700

467-12

()
 , IBM 가 (IPLA) 가 가 IBM IBM
 가
 IBM , IBM . IBM
 IBM , IBM
 IBM
 가
 가
 :
 가 (API)
 IBM 가
 가

© () (). IBM Corp. ©
 Copyright IBM Corp. _enter the year or years_. All rights reserved.

가

IBM, IBM ibm.com 가 International Business Machines Corporation
 IBM 가 가 (® ™)
 IBM
 가 IBM
 " () . [http://www.ibm.com/legal/copytrade.shtml].

Linux 가 Linus Torvalds

Microsoft	Windows	가	Microsoft Corporation
UNIX		가	The Open Group
Java	Java	가	Sun Microsystems, Inc.