




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)



Corporate Specification

C-H 3-3220-030

© Copyright IBM Corp. 1999

1999-04

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Contents

Introduction	1	9. DBCS-PC Specification	354
1. Scope	1	9.1 Format of DBCS-PC Specification Tables	354
1.1 Abstract	1	9.2 Non-Hangeul/Hanja Set	354
1.2 Objective	1	9.3 Hangeul Set	373
1.3 Application	1	9.4 Hanja Set	591
1.4 Effective Date	1	Supplementary Information	686
2. Document Administration	1	10. Definition of Terms	686
2.1 Originating Area and Responsibility	1	10.1 Product	686
2.2 Authorization	1	10.2 Graphic Character	686
2.3 Compliance	1	10.3 User Definable Character	686
3. Related Documents	2	10.4 Graphic Character Global Identifier (GCGID)	686
3.1 Superseded Documents	2	10.5 Graphic Character UCS Identifier (GCUID)	686
3.2 Referenced External Documents	2	10.6 Universal Multiple-Octet Coded Character Set (UCS)	686
3.3 Referenced IBM Documents	2	10.7 Graphic Character Set	686
3.4 Copyright Permission	2	10.8 Byte	686
Requirements	2	10.9 Unrestricted Graphic Character Set	686
4. External Standards	2	10.10 Restricted Graphic Character Set	686
4.1 ISO Standard	2	10.11 Graphic Character Set Global Identifier (GCSGID)	686
4.2 The Korean Industrial Standard	2	10.12 Code	686
4.3 Relation of IBM and KS X 1001 Character Set	2	10.13 Code Point	686
4.3.1 Character Coverage	2	10.14 Code Page	686
4.3.2 Code Scheme	3	10.15 Registered Code Page	686
4.3.3 User Definable Character (UDC) Area	3	10.16 Unrestricted Code Page	686
4.4 Relation of IBM and KS X 1005-1 Character Set	3	10.17 Restricted Code Page	686
4.4.1 Character Coverage	3	10.18 Code Page Global Identifier (CPGID)	686
4.4.2 Code Scheme	3	10.19 Coded Graphic Character	686
5. Specification of Character Repertoire	3	10.20 Coded Graphic Character Set	686
5.1 Identification of Graphic Characters	3	10.21 Registered Coded Graphic Character Set	687
5.2 Algorithm of GCGID	3	10.22 Registered Code Page Translation Correspondences	687
6. Character Sets and Code Pages	3	10.23 Coded Graphic Character Set Global Identifier (CGCSGID)	687
6.1 Registration of GCSGID and CPGID	3	10.23.1 EBCDIC	687
6.2 Structure of Korean DBCS-Host	5	10.23.2 PC Code	687
6.3 Structure of Korean DBCS-PC	6	10.23.3 SBCS	687
7. Code Translation Correspondences, Host-PC	8	10.24 DBCS	687
7.1 Code Translation Correspondence of Non-Hangeul/Hanja, Hangeul and Hanja Sets	8	10.25 DBCS-Host	687
7.2 Code Translation Correspondence of UDC	8	10.26 DBCS-PC	687
8. DBCS-Host Specification	8	10.27 Ward	687
8.1 Format of DBCS-Host Specification Tables	8	11. History of KS X 1001 (former KS C 5601)	687
8.2 Non-Hangeul/Hanja Set	9	12. History of KS X 1005-1 (former KS C 5700)	687
8.2.1 Non-Hangeul/Hanja Set (except Hangeul Jamo)	9	13. Difference from the Former Specification	688
8.2.2 Hangeul Jamo	27	13.1 From the C-H 3-3220-125 1992-09 to C-H 3-3220-030 1997-09	688
8.3 Hanja Set	32	13.1.1 Abstract	688
8.4 Hangeul Set	134	13.1.2 Character Coverage	688
8.5 Hangeul Jamo	352	13.2 From the revision 1997-09 of C-H 3-3220-030 to this revision 1999-03	688
		13.2.1 Abstract	688
		13.2.2 Character Coverage	688
		14. Graphic Character Representation	688



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Tables

1. Registration of GCSGID and CPGID for the IBM Korean Graphic Character Set	4	15. Hangeul Set, DBCS-Host	208
2. Structure of DBCS-Host	5	16. Hangeul Set, DBCS-Host	245
3. Structure of DBCS-PC	6	17. Hangeul Set, DBCS-Host	282
4. Structure of Hangeul Character Set of DBCS-PC	6	18. Hangeul Set, DBCS-Host	319
5. Number of DBCS-HOST unique character	8	19. Hangeul Jamo, DBCS-Host	352
6. UDC Correspondence	8	20. Non-Hangeul/Hanja Set, DBCS-PC	354
7. Format of DBCS-Host Specification Tables	8	21. Hangeul Set, DBCS-PC	373
8. Non-Hangeul/Hanja Set, DBCS-Host	9	22. Hangeul Set, DBCS-PC	410
9. Hangeul Jamo Set, DBCS-Host	27	23. Hangeul Set, DBCS-PC	447
10. Hanja Set, DBCS-Host	32	24. Hangeul Set, DBCS-PC	484
11. Hanja Set, DBCS-Host	65	25. Hangeul Set, DBCS-PC	521
12. Hanja Set, DBCS-Host	102	26. Hangeul Set, DBCS-PC	558
13. Hangeul Set, DBCS-Host	134	27. Hanja Set, DBCS-PC	591
14. Hangeul Set, DBCS-Host	171	28. Hanja Set, DBCS-PC	622
		29. Hanja Set, DBCS-PC	653



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Introduction

1. Scope

1.1 Abstract

This document is a registry of the IBM Korean Graphic Character Set, in which the following items are set forth:

- the repertoire of the IBM Korean Graphic Character Sets is specified.
- each graphic character of the repertoire is identified by a Graphic Character Global Identifier (GCGID) or Graphic Character UCS Identifier (GCUID).
- graphic character sets, which are the subsets of the repertoire are specified and identified by Graphic Character Set Global IDs (GCSGID).
- two code pages, Double-Byte Character Set (DBCS)-Host and DBCS-PC for the graphic character sets are specified and identified by Code Page Global IDs (CPGID).
- code translation correspondences between DBCS-Host and DBCS-PC are specified.

1.2 Objective

The objectives of this document are:

- 1) to make available to all developers supporting Korean the specification of the Korean *graphic character sets* and *code pages*.
- 2) to ensure consistent implementation of the Korean *DBCS Graphic Character Sets* and *code pages* and the code correspondence between *DBCS-Host* and *DBCS-PC*.

Note: This document is one of a set of documents defined in C-S 3-3220-019, *Coded Character Sets Implementation*. The reader should be familiar with the requirements specified in C-S 3-3220-019 which describe the relationship of the documents. Note also that the requirements for compliance with this specification is described in C-S 3-3220-019.

Terms in italics (except in headings) are defined in the Supplementary Information section.

X'nn' or X'nnnn' represents a hexadecimal notation.

“DBCS-PC” will be synonymously used for “DBCS-PC (For Windows Environment).”

1.3 Application

This specification is applicable to all IBM products which implement the IBM Korean *Graphic Character Set* specified in this specification and which are announced or released to production (whichever occurs first) after date of publication.

1.4 Effective Date

This document takes effect with its publication.

2. Document Administration

2.1 Originating Area and Responsibility

This document is maintained by the Standards Project Authority (SPA) for:

- SIRS Code:** 029 (Double-Byte Character Set)
- Location Code:** 93K (Yamato)
- Division:** AP
- SCRL Group:** None
- Page Count:** 688

2.2 Authorization

Publication of this document was approved by the Standards Authorities of the affected operating units.

2.3 Compliance

Compliance with the requirements of this document is recommended unless it is called out as a requirement in a standard or equivalent document. It then assumes the same compliance requirements as that document.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

3. Related Documents

3.1 Superseded Documents

C-H 3-3220-030 dated 1997-09.

Note: Changes in this edition are indicated by the character "|" (vertical bar) in the revision column.

3.2 Referenced External Documents

ISO 646

Information technology - ISO Standard for 7-Bit coded character set for information interchange

ISO 2022

Information processing - ISO Standard for 7-bit and 8-bit coded characters sets - code extension techniques

ISO/IEC 10646-1

Information technology - Universal Multiple-Octet Coded Character Set (UCS), Part 1: Architecture and Basic Multilingual Plane

KS X 1001 (former KS C 5601)

Korean Industrial Standard Code for Information Interchange(Hangeul and Hanja)

KS X 1005-1 (former KS C 5700)

Korean Industrial Standard

Information technology - Universal Multiple-Octet Coded Character Set (UCS), Part 1: Architecture and Basic Multilingual Plane

3.3 Referenced IBM Documents

C-S 3-3220-002

Extended BCD Interchange Code (EBCDIC)

C-S 3-3220-019

Coded Character Sets, Implementation

C-H 3-3220-050

REGISTRY, Graphic Character Sets and Code Pages

C-H 3-3220-055

Graphic Character Identification System

C-S 3-3220-102

Double-Byte Character Set (DBCS)

C-H 3-3220-125

IBM Korean Graphic Character Set

3.4 Copyright Permission

Not applicable.

Requirements

4. External Standards

4.1 ISO Standard

ISO/IEC 10646-1:1993, ("ISO 10646-1" hereinafter) specifies the Universal Multiple-Octet Coded Character Set(UCS). It is applicable to the representation, transmission, interchange, processing, storage, input and presentation of the written form of the language of the world as well as additional symbols. It contains 20,902 CJK unified ideographs.

KS X 1001:1998, *Korean Industrial Standard Code for Information Interchange (Hangeul and Hanja)* defines total 8226 characters, 988 Special characters, 2350 Hangeul characters and 4888 Hanja characters based on ISO 2022 extension method.

KS X 1005-1:1995 (former KS C 5700-1995), *Korean Industrial Standard Code for Information Interchange* is equivalent to ISO 10646-1 including 11172 Hangeul characters.

4.2 The Korean Industrial Standard

KS X 1001:1989 (former KS C 5601:1989), *Korean Industrial Standard Code for Information Interchange* defines total 8224 characters, 986 Special characters, 2350 Hangeul characters and 4888 Hanja characters based on ISO 2022 extension method.

4.3 Relation of IBM and KS X 1001 Character Set

4.3.1 Character Coverage. The IBM Korean *Graphic Character Set* is a superset of KS X 1001.

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

4.3.2 Code Scheme. The code schemes for the IBM Korean *Graphic Character Set* are *DBCS-Host* and *DBCS-PC*, which are defined C-S 3-3220-102 and independent of the code scheme of KS X 1001.

4.3.3 User Definable Character (UDC) Area. This standard has 188 *DBCS-PC* UDCs which is the same number as KS X 1001, and 1880 *DBCS-Host* UDCs by providing additional 1692 UDCs compared with KS X 1001.

4.4 Relation of IBM and KS X 1005-1 Character Set

4.4.1 Character Coverage. The IBM Korean *Graphic Character Set* now defines all of 11 172 Hangeul characters on KS X 1005-1.

4.4.2 Code Scheme. The code schemes for the IBM Korean *Graphic Character Set* are *DBCS-Host* and *DBCS-PC*, which are defined C-S 3-3220-102 and independent of the code scheme of KS X 1005-1.

5. Specification of Character Repertoire

5.1 Identification of Graphic Characters

This document specifies the repertoire of the Korean *graphic character sets*. Each *graphic character* of the repertoire is identified by a unique *Graphic Character Global ID (GCGID)* and *Graphic Character UCS Identifier (GCUID)*.

In Korean *graphic character sets*, GCGIDs for Hangeul and Hanja take the form 'Fzzz0080', and those for *user definable characters* take the form 'Xzzz0080', following the specification of C-H 3-3220-055.

The GCUID format is for defining additional characters and sets of characters that (mostly) exist in UCS-4 and need to be used on IBM code pages. The format allows all current and future characters from UCS-2 and at least the first sixteen additional planes from UCS-4 to be described. It also allows glyph variants not defined in UCS to be defined as well as allowing for the glyph variants of unified Han area of UCS-2.

5.2 Algorithm of GCGID

zzz value for 'Fzzz0080' and 'Xzzz0080' is calculated by the following algorithm:

- 1) Assign virtual *codes* starting with the first *code point* of *EBCDIC* code range sequentially to the *graphic character set* of the proper collating.
- 2) Convert both *bytes* of the *code* from hexadecimal to decimal.
- 3) Subtract 64 from both numbers.
- 4) Multiply the high-order number by 192 and add the low-order number to the result.
- 5) Convert the resulting number to a base 36 number, where the values from 0 through 35 are 0 through 9, followed by A through Z. (The conversion algorithm is essentially the same as would be used to convert from decimal to hexadecimal.) The resulting value will be a three digit value. For Korean, it must be between 2DD (for code point X'5041') and NEL (for code point X'DDFD').

6. Character Sets and Code Pages

6.1 Registration of GCSGID and CPGID

This specification registers subsets of the IBM Korean *Graphic Character Set* and identifies them by *Graphic Character Set Global Identifier (GCSGID)*.

It also specifies relevant *code pages* for those *registered graphic character set*; *DBCS-Host* and *DBCS-PC*, and identifies them by *Code Page Global Identifier (CPGID)*.

Table 1 on page 4 specifies the *GCSGIDs* and *CPGIDs* of the *registered coded graphic character sets* of Korean.

The registration category “U” means “Unrestricted,” which implies that *graphic character sets* and *code pages* in this category have potential broad implementation in information processing *products*.

Note: See C-H 3-3220-050 for the detail of registration categories of *graphic character sets* and *code pages*.

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 1. Registration of GCSGID and CPGID for the IBM Korean Graphic Character Set					
CGCSGID GCSGID	CPGID	Name	Set Size	Reference in Table 2 on page 5 and Table 3 on page 6	Category of Regis- tration
65535	00834	DBCS-Host including 1880 UDCs Wards 40 to DD	19551 (Mini - mum)	area 1, 2, 4, 6, 7 of Table 2	U
01097	00834	DBCS-Host including 1880 UDCs excluding Euro currency sign(Ward 49) and Registered sign(Ward 49) Wards 40 to DD	19549	area 1, 2, 4, 6, 7 of Table 2(*)	U
01098	00834	DBCS-Host excluding 1880 UDCs including Euro currency sign(Ward 49) and Registered sign(Ward 49) Wards 40 to D3	17671	area 1, 2, 4, 6 of Table 2	U
01094	00834	DBCS-Host excluding 1880 UDCs and Euro currency sign(Ward 49) and Registered sign(Ward 49) Wards 40 to D3	17669	area 1, 2, 4, 6 of Table 2(*)	U
01093	00834	DBCS-Host excluding 623 unique characters and 1880 UDCs and Euro currency sign(Ward 49) and Registered sign(Ward 49) (Common Set with DBCS-PC) Wards 40 to D3	17046	area 1, 2, 4, 6 of Table 2(*)	U
65535	01362	DBCS-PC including 188 UDCs Wards 81 to FE	17236 (Mini - mum)	area 1, 3, 4, 5, 6 of Table 3	U
01093	01362	DBCS-PC excluding 188 UDCs and Euro currency sign(Ward A2) and Registered sign(Ward A2) Wards 81 to C8 and CA to FD	17046	area 1, 3, 5 of Table 3(**)	U
<p>Note:</p> <p><i>DBCS-PC</i> on this standard is implemented by the application supporting Windows environment in Korea. Therefore, code structure and its character set in <i>DBCS-PC</i> are the same as those defined in the Windows code page.</p> <p>(*) Area 2 here does not include Euro currency and Registered sign.</p> <p>(**) Area 1 here does not include Euro currency and Registered sign.</p>					

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

6.2 Structure of Korean DBCS-Host

The *coded graphic character set* of the Korean DBCS-Host is structured as shown in Table 2.

The specification of the *coded graphic character set* is shown in Table 8 on page 9 to Table 14 on page 171.

Table 2. Structure of DBCS-Host

Area	Wards in Hex	Content	Number of Characters
1	40	Unassignable (except for SPACE in 4040) (See Table 8 on page 9)	1
2	41 to 4E	Non-Hangeul/Hanja Set (See Table 8 on page 9 and Table 9 on page 27) <ul style="list-style-type: none"> • Special Symbol (Ward 41) • Alphanumeric (Ward 42) • Old Jamo (Ward 43) • Hiragana (Ward 44) • Katakana (Ward 45) • Greek, Roman Digits (Ward 46) • Grid Lines (Ward 47) • Units (Ward 48) • Special Symbols (Ward 49) • Euro currency sign (Ward 49) • Registered sign (Ward 49) • Russian (Ward 4A) • Latin (Ward 4B) • Jamo (Ward 4C to 4E) 	1181
3	4F	Reserved for Future IBM Assignments	
4	50 to 6C	Hanja Set (See Table 10 on page 32 and Table 11 on page 65 and Table 12 on page 102)	5265
5	6D to 83	Reserved for Future IBM Assignments	
6	84 to D3	Hangeul Set (See Table 13 on page 134 through Table 18 on page 319)	11172
		Jamo (See Table 19 on page 352)	52
7	D4 to DD	User Definable Characters Area	1880*
8	DE to FE	Reserved for Future IBM Assignments	
Note: * The maximum number of <i>user definable characters</i> .			

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

6.3 Structure of Korean DBCS-PC

The *coded graphic character set* of the Korean DBCS-PC is structured as shown in Table 3 and Figure 1 on page 7.

The specification of the *coded graphic character set* is shown in Table 20 on page 354 to Table 29 on page 653.

Area	Wards in Hex	Content	Number of Characters
1	A1 to AC	Non-Hangeul/Hanja Set (See Table 20 on page 354) <ul style="list-style-type: none"> • Space (Ward A1) • Special Symbols (Ward A1,A2) • Euro currency sign (Ward A2) • Registered sign (Ward A2) • Alphanumeric (Ward A3) • Jamo, Old Jamo (Ward A4) • Greek, Roman Digits (Ward A5) • Grid Lines (Ward A6) • Units (Ward A7) • Latin (Ward A8) • Special Symbols (Ward A9) • Hiragana (Ward AA) • Katakana (Ward AB) • Russian (Ward AC) 	988
2	AD to AF	Reserved Area	
3	81 to C6, B0 to C8	Hangeul Set (See Table 21 on page 373 through Table 26 on page 558)	11 172
4	C9	User Definable Characters Area	94*
5	CA to FD	Hanja Set (See Table 27 on page 591 and Table 28 on page 622 and Table 29 on page 653)	4 888
6	FE	User Definable Characters Area	94*

Note: * The maximum number of *user definable characters*.

Character Set	First Byte	Second Byte	Number of Character
Hangeul Characters in KS X 1001	B0 - C8	A1 - FE	2 350
Extended Hangeul Characters	81 - C5 81 - C5 81 - C5 81 - A0 C6	41 - 5A 61 - 7A 81 - A0 A1 - FE 41 - 52	8 822

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

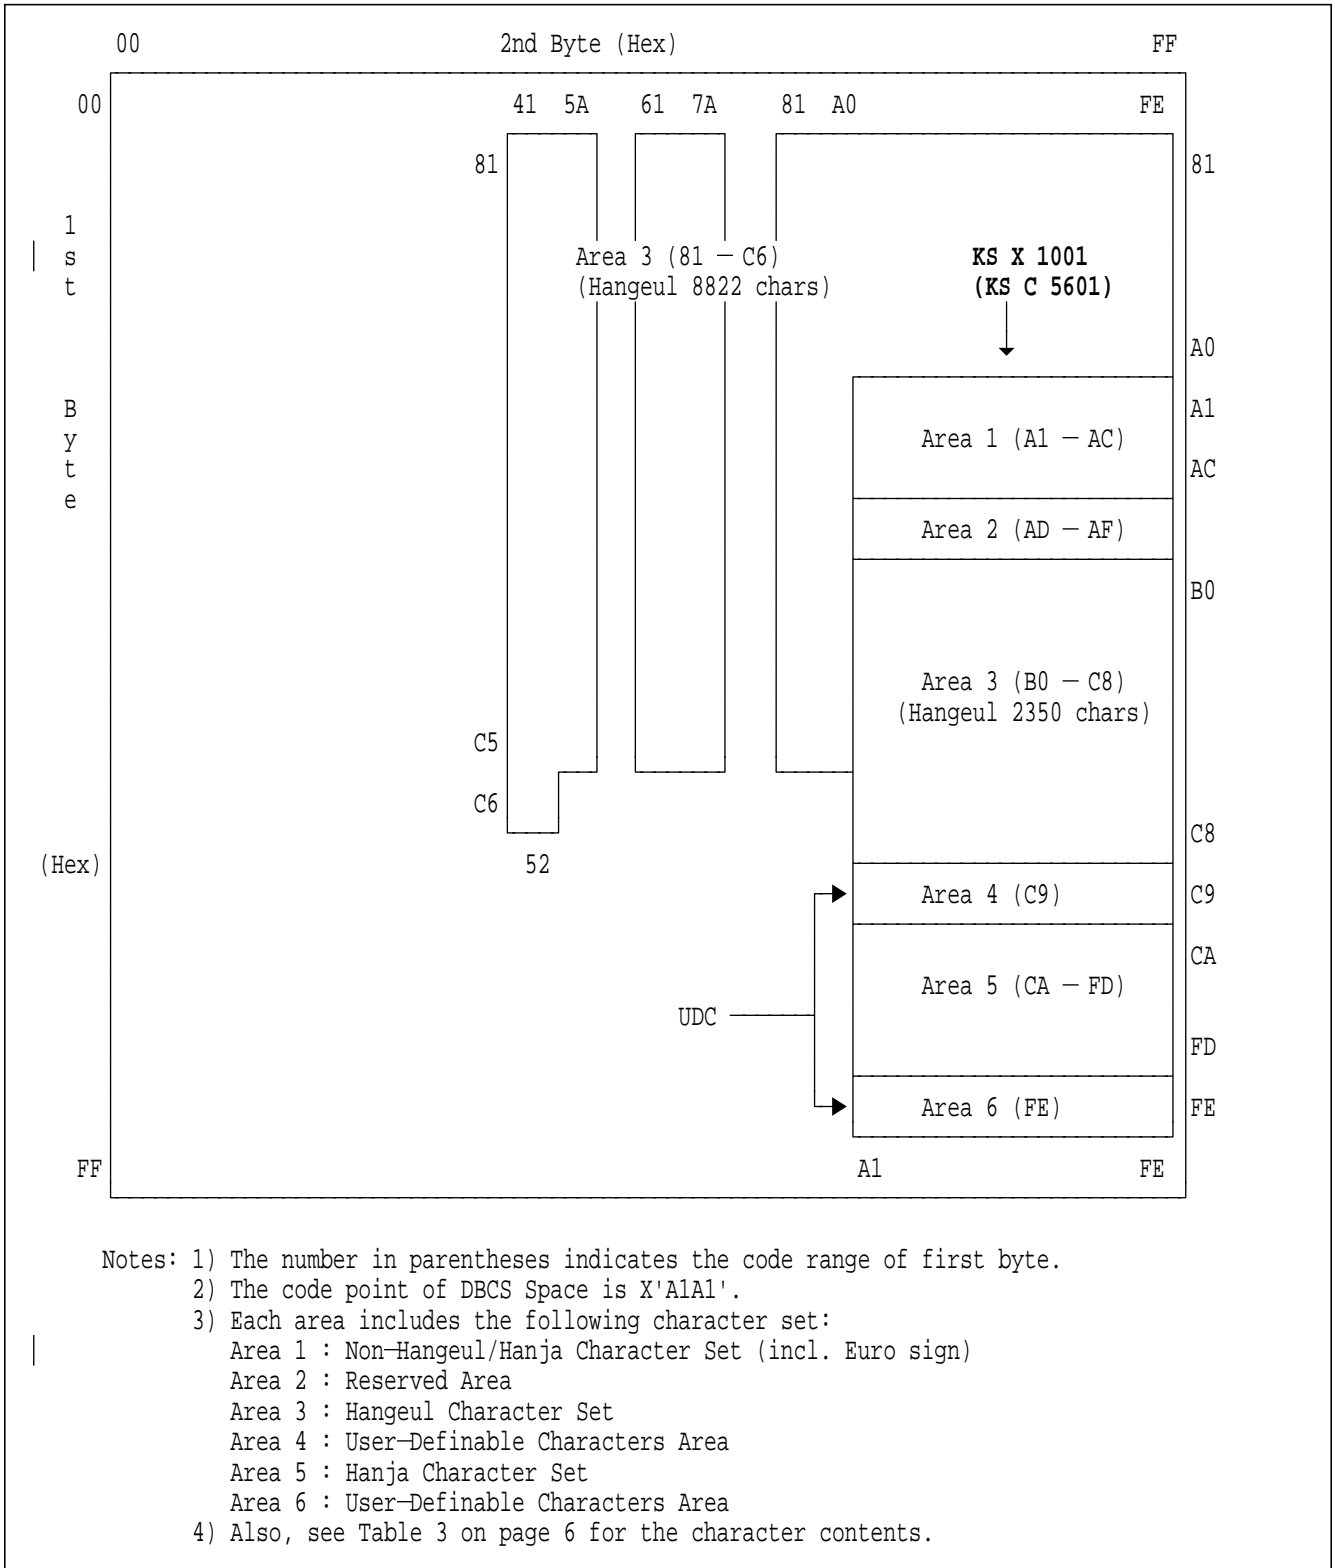


Figure 1. Code Structure for DBCS-PC

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

7. Code Translation Correspondences, Host-PC

Code translation correspondences of *DBCS-Host* and *DBCS-PC* are defined in this specification.

7.1 Code Translation Correspondence of Non-Hangeul/Hanja, Hangeul and Hanja Sets

In the code translation correspondence of Non-Hangeul/Hanja, Hangeul and Hanja Sets between Korean *DBCS-Host* and *DBCS-PC*, logical conversion is not applicable, therefore all code translation correspondences are shown in the specification tables in Sections 8 and 9 on page 354.

In Section 8, the corresponding *DBCS-PC code points* for translation from *DBCS-Host code points* are defined.

In Section 9 on page 354, the corresponding *DBCS-Host code points* for translation from *DBCS-PC code points* are defined.

The character set between *DBCS-Host* and *DBCS-PC* is different. *DBCS-Host* has 623 unique characters as specified in Table 5. 623 *DBCS-Host* unique code points are left open in the specification tables since no *DBCS-PC* code points correspond to them.

Character Set	Number of character
Non-Hangeul/Hanja	246
Hanja	377

7.2 Code Translation Correspondence of UDC

For *User Definable Characters*, the default code correspondence between *DBCS-Host* and *DBCS-PC* is logically given from the *code point* of the source in both translation of *DBCS-Host* to *DBCS-PC* and *DBCS-PC* to *DBCS-Host*.

The default code translation correspondence between *DBCS-Host* and *DBCS-PC* is sequentially given after mapping the first *code point* of the *DBCS-Host* User Definable Character (X'D441') and the first *code point* of the *DBCS-PC* User Definable Character (X'C9A1') as shown in the UDC correspondence table below. The *DBCS-Host* UDC code points whose second byte is X'80' or X'FE' in each ward are just the open code points.

DBCS-PC Code Points (Hex)	DBCS-HOST Code Points (Hex)
C9A1 to C9FE	D441 to D49F
FEA1 to FEFE	D4A0 to D4FD

8. DBCS-Host Specification

8.1 Format of DBCS-Host Specification Tables

In this section, the specification of the Korean *DBCS-Host coded graphic character sets* is provided by tables. The tables list the *coded graphic character sets* in ascending order of the *Host code point* value. They are formatted as illustrated in Table 7.

Column				
1	2	3	4	5
Line No. (Decimal)	Graphic	Host Code (Hex)	PC Code (Hex)	GCGID
XXXXX	X	XXXX	XXXX	XXXXXXXXX

Note: Line numbers in column 1 are the serial numbers of the listed *graphic characters* in the area for the better legibility.

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

8.2 Non-Hangeul/Hanja Set

8.2.1 Non-Hangeul/Hanja Set (except Hangeul Jamo)

Table 8 (Page 1 of 18). Non-Hangeul/Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1		4040	A1A1	SP010080
2	,	4141	A1A2	JQ730080
3	o	4142	A1A3	JQ700080
4	•	4143	A1A4	SD630080
5	••	4144	A1A5	SV430080
6	...	4145	A1A6	SV440080
7	“	4146	A1A7	SD170080
8	//	4147	A1A8	SV090081
9	—	4148	A1A9	SP320080
10	—	4149	A1AA	SM120080
11		414A	A1AB	SA340080
12	\	414B	A1AC	SM070080
13	—	414C	A3FE	SM150080
14	‘	414D	A1AE	SP190080
15	’	414E	A1AF	SP200080
16	“	414F	A1B0	SP210080
17	”	4150	A1B1	SP220080
18	[4151	A1B2	SP060081
19]	4152	A1B3	SP070081
20	<	4153	A1B4	SP060082
21	>	4154	A1B5	SP070082
22	◀	4155	A1B6	SP060083
23	▶	4156	A1B7	SP070083
24	┌	4157	A1B8	JQ710080

Table 8 (Page 1 of 18). Non-Hangeul/Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
25	└	4158	A1B9	JQ720080
26	┐	4159	A1BA	JQ710081
27	┘	415A	A1BB	JQ720081
28	【	415B	A1BC	SP060084
29	】	415C	A1BD	SP070084
30	±	415D	A1BE	SA020080
31	×	415E	A1BF	SA070080
32	÷	415F	A1C0	SA060080
33	≠	4160		SA540080
34	≦	4161		SA520082
35	≧	4162		SA530082
36	∞	4163	A1C4	SA450080
37	∴	4164	A1C5	SA370080
38	°	4165	A1C6	SM190080
39	’	4166	A1C7	SM500080
40	”	4167	A1C8	SM510080
41	°C	4168	A1C9	SM440080
42	ℓ	4169		F06H0080
43	^	416A	A3DE	SD150080
44	£	416B	A1CC	SC020080
45	¥	416C	A1CD	SC050080
46	ℓ	416D	A7A2	F06L0080
47	dl	416E	A7A3	F06M0080
48	Q	416F	A7A4	SM160080
49	cc	4170	A7A6	SS870080
50	mm	4171	A7AE	SS810080
51	cm	4172	A7AF	SS820080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
52	km	4173	A7B0	SS830080
53	mg	4174	A7B7	SS850080
54	kg	4175	A7B8	SS860080
55	§	4176	A1D7	SM240080
56	※	4177	A1D8	SM040088
57	☆	4178	A1D9	SS570080
58	★	4179	A1DA	SS580080
59	○	417A	A1DB	SM750080
60	●	417B	A1DC	SM580080
61	◎	417C	A1DD	SM810080
62	◇	417D	A1DE	SA660080
63	◆	417E	A1DF	SM610080
64	□	417F	A1E0	SM450080
65	■	4180	A1E1	SM470080
66	△	4181	A1E2	SM730080
67	▲	4182	A1E3	SM600080
68	▽	4183	A1E4	SM740080
69	▼	4184	A1E5	SV040080
70	→	4185	A1E6	SM310080
71	←	4186	A1E7	SM300080
72	↑	4187	A1E8	SM320080
73	↓	4188	A1E9	SM330080
74	↔	4189	A1EA	SM780080
75	=	418A	A1EB	SS750080
76	[418B	A3DB	SM060080
77]	418C	A3DD	SM080080
78	≠	418D	A1C1	F07H0080

Line Number	Graphic	Host Code	PC Code	GCGID
79	≤	418E	A1C2	SA520080
80	≥	418F	A1C3	SA530080
81	Å	4190	A1CA	SM220080
82	♁	4191	A1CE	SM280080
83	♀	4192	A1CF	SM290080
84	∠	4193	A1D0	SA350088
85	⊥	4194	A1D1	SA780080
86	⌒	4195	A1D2	SV420080
87	∅	4196	A1D3	SA490080
88	▽	4197	A1D4	SL030080
89	≡	4198	A1D5	SA480080
90	≡	4199	A1D6	SA700081
91	≪	419A	A1EC	SA730080
92	≫	419B	A1ED	SA740080
93	√	419C	A1EE	SA800080
94	↻	419D	A1EF	SA830080
95	¢	424A	A1CB	SC040080
96	.	424B	A3AE	SP110080
97	<	424C	A3BC	SA030080
98	(424D	A3A8	SP060080
99	+	424E	A3AB	SA010080
100		424F	A3FC	SM130080
101	&	4250	A3A6	SM030080
102	!	425A	A3A1	SP020080
103	\$	425B	A3A4	SC030080
104	※	425C	A3AA	SM040080
105)	425D	A3A9	SP070080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
106	;	425E	A3BB	SP140080
107	ㄱ	425F	A1FE	SM660080
108	—	4260	A3AD	SP100080
109	/	4261	A3AF	SP120080
110	!	426A		SM650080
111	,	426B	A3AC	SP080080
112	%	426C	A3A5	SM020080
113	—	426D	A3DF	SP090080
114	>	426E	A3BE	SA050080
115	?	426F	A3BF	SP150080
116	`	4279	A3E0	SD130080
117	:	427A	A3BA	SP130080
118	#	427B	A3A3	SM010080
119	@	427C	A3C0	SM050080
120	·	427D	A3A7	SP050080
121	=	427E	A3BD	SA040080
122	"	427F	A3A2	SP040080
123	a	4281	A3E1	LA010080
124	b	4282	A3E2	LB010080
125	c	4283	A3E3	LC010080
126	d	4284	A3E4	LD010080
127	e	4285	A3E5	LE010080
128	f	4286	A3E6	LF010080
129	g	4287	A3E7	LG010080
130	h	4288	A3E8	LH010080
131	i	4289	A3E9	LI010080
132	j	4291	A3EA	LJ010080

Line Number	Graphic	Host Code	PC Code	GCGID
133	k	4292	A3EB	LK010080
134	l	4293	A3EC	LL010080
135	m	4294	A3ED	LM010080
136	n	4295	A3EE	LN010080
137	o	4296	A3EF	LO010080
138	p	4297	A3F0	LP010080
139	q	4298	A3F1	LQ010080
140	r	4299	A3F2	LR010080
141	~	42A1	A1AD	SA160080
142	s	42A2	A3F3	LS010080
143	t	42A3	A3F4	LT010080
144	u	42A4	A3F5	LU010080
145	v	42A5	A3F6	LV010080
146	w	42A6	A3F7	LW010080
147	x	42A7	A3F8	LX010080
148	y	42A8	A3F9	LY010080
149	z	42A9	A3FA	LZ010080
150	{	42C0	A3FB	SM110080
151	A	42C1	A3C1	LA020080
152	B	42C2	A3C2	LB020080
153	C	42C3	A3C3	LC020080
154	D	42C4	A3C4	LD020080
155	E	42C5	A3C5	LE020080
156	F	42C6	A3C6	LF020080
157	G	42C7	A3C7	LG020080
158	H	42C8	A3C8	LH020080
159	I	42C9	A3C9	LI020080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
160	}	42D0	A3FD	SM140080
161	J	42D1	A3CA	LJ020080
162	K	42D2	A3CB	LK020080
163	L	42D3	A3CC	LL020080
164	M	42D4	A3CD	LM020080
165	N	42D5	A3CE	LN020080
166	O	42D6	A3CF	LO020080
167	P	42D7	A3D0	LP020080
168	Q	42D8	A3D1	LQ020080
169	R	42D9	A3D2	LR020080
170	₩	42E0	A3DC	SC140080
171	S	42E2	A3D3	LS020080
172	T	42E3	A3D4	LT020080
173	U	42E4	A3D5	LU020080
174	V	42E5	A3D6	LV020080
175	W	42E6	A3D7	LW020080
176	X	42E7	A3D8	LX020080
177	Y	42E8	A3D9	LY020080
178	Z	42E9	A3DA	LZ020080
179	0	42F0	A3B0	ND100080
180	1	42F1	A3B1	ND010080
181	2	42F2	A3B2	ND020080
182	3	42F3	A3B3	ND030080
183	4	42F4	A3B4	ND040080
184	5	42F5	A3B5	ND050080
185	6	42F6	A3B6	ND060080
186	7	42F7	A3B7	ND070080

Line Number	Graphic	Host Code	PC Code	GCGID
187	8	42F8	A3B8	ND080080
188	9	42F9	A3B9	ND090080
189	ㄹ	4341	A4D5	FOG10080
190	ㄺ	4342	A4D6	FOG20080
191	ㄻ	4343	A4D7	FOG30080
192	ㄼ	4344	A4D8	FOG40080
193	ㅇ	4345	A4D9	FOG50080
194	ㅁ	4346	A4DA	FOG60080
195	ㅂ	4347	A4DB	FOG70080
196	ㅅ	4348	A4DC	FOG80080
197	ㅇ	4349	A4DD	FOG90080
198	ㅈ	434A	A4DE	FOGA0080
199	ㅊ	434B	A4DF	FOGB0080
200	ㅋ	434C	A4E0	FOGC0080
201	ㆁ	434D	A4E1	FOGD0080
202	ㆂ	434E	A4E2	FOGE0080
203	ㆃ	434F	A4E3	FOGF0080
204	ㆄ	4350	A4E4	FOGG0080
205	ㆅ	4351	A4E5	FOGH0080
206	ㆆ	4352	A4E6	FOGI0080
207	ㆇ	4353	A4E7	FOGJ0080
208	ㆈ	4354	A4E8	FOGK0080
209	ㆉ	4355	A4E9	FOGL0080
210	ㆊ	4356	A4EA	FOGM0080
211	ㆋ	4357	A4EB	FOGN0080
212	ㆌ	4358	A4EC	FOGO0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
213	ㅅ	4359	A4ED	F0GP0080
214	ㅆ	435A	A4EE	F0GQ0080
215	△	435B	A4EF	F0GR0080
216	ㅇ	435C	A4F0	F0GS0080
217	ㅇ	435D	A4F1	F0GT0080
218	ㅅ	435E	A4F2	F0GU0080
219	ㅅ	435F	A4F3	F0GV0080
220	ㅅ	4360	A4F4	F0GW0080
221	ㅅ	4361	A4F5	F0GX0080
222	ㅅ	4362	A4F6	F0GY0080
223	ㅅ	4363	A4F7	F0GZ0080
224	ㅅ	4364	A4F8	F0H00080
225	ㅅ	4365	A4F9	F0H10080
226	ㅅ	4366	A4FA	F0H20080
227	ㅅ	4367	A4FB	F0H30080
228	ㅅ	4368	A4FC	F0H40080
229	·	4369	A4FD	F0H50080
230	·	436A	A4FE	F0H60080
231	ㅏ	4441	AAA1	RA010080
232	ㅑ	4442	AAA2	RA000080
233	ㅓ	4443	AAA3	RI010080
234	ㅕ	4444	AAA4	RI000080
235	ㅗ	4445	AAA5	RU010080
236	ㅛ	4446	AAA6	RU000080
237	ㅝ	4447	AAA7	RE010080
238	ㅟ	4448	AAA8	RE000080

Line Number	Graphic	Host Code	PC Code	GCGID
239	ㅛ	4449	AAA9	RO010080
240	ㅜ	444A	AAAA	RO000080
241	ㅞ	444B	AAAB	RK100080
242	ㅠ	444C	AAAC	RG100080
243	ㅢ	444D	AAAD	RK200080
244	ㅣ	444E	AAAE	RG200080
245	ㅤ	444F	AAAF	RK300080
246	ㅥ	4450	AAB0	RG300080
247	ㅦ	4451	AAB1	RK400080
248	ㅧ	4452	AAB2	RG400080
249	ㅨ	4453	AAB3	RK500080
250	ㅩ	4454	AAB4	RG500080
251	ㅪ	4455	AAB5	RS100080
252	ㅫ	4456	AAB6	RZ100080
253	ㅬ	4457	AAB7	RS200080
254	ㅭ	4458	AAB8	RZ200080
255	ㅮ	4459	AAB9	RS300080
256	ㅯ	445A	AABA	RZ300080
257	ㅰ	445B	AABB	RS400080
258	ㅱ	445C	AABC	RZ400080
259	ㅲ	445D	AABD	RS500080
260	ㅳ	445E	AABE	RZ500080
261	ㅴ	445F	AABF	RT100080
262	ㅵ	4460	AAC0	RD100080
263	ㅶ	4461	AAC1	RT200080
264	ㅷ	4462	AAC2	RD200080
265	ㅸ	4463	AAC3	RT310080
266	ㅹ	4464	AAC4	RT300080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
267	づ	4465	AAC5	RD300080
268	て	4466	AAC6	RT400080
269	で	4467	AAC7	RD400080
270	と	4468	AAC8	RT500080
271	ど	4469	AAC9	RD500080
272	な	446A	AACA	RN100080
273	に	446B	AACB	RN200080
274	ぬ	446C	AACC	RN300080
275	ね	446D	AACD	RN400080
276	の	446E	AACE	RN500080
277	は	446F	AACF	RH100080
278	ば	4470	AAD0	RB100080
279	ぱ	4471	AAD1	RP100080
280	ひ	4472	AAD2	RH200080
281	び	4473	AAD3	RB200080
282	ぴ	4474	AAD4	RP200080
283	ふ	4475	AAD5	RH300080
284	ぶ	4476	AAD6	RB300080
285	ぷ	4477	AAD7	RP300080
286	へ	4478	AAD8	RH400080
287	べ	4479	AAD9	RB400080
288	ぺ	447A	AADA	RP400080
289	ほ	447B	AADB	RH500080
290	ぽ	447C	AADC	RB500080
291	ぽ	447D	AADD	RP500080
292	ま	447E	AADE	RM100080
293	み	447F	AADF	RM200080
294	む	4480	AAE0	RM300080

Line Number	Graphic	Host Code	PC Code	GCGID
295	め	4481	AAE1	RM400080
296	も	4482	AAE2	RM500080
297	や	4483	AAE3	RY110080
298	ゃ	4484	AAE4	RY100080
299	ゆ	4485	AAE5	RY310080
300	ゅ	4486	AAE6	RY300080
301	よ	4487	AAE7	RY510080
302	ょ	4488	AAE8	RY500080
303	ら	4489	AAE9	RR100080
304	り	448A	AAEA	RR200080
305	る	448B	AAEB	RR300080
306	れ	448C	AAEC	RR400080
307	ろ	448D	AAED	RR500080
308	わ	448E	AAEE	RW110080
309	わ	448F	AAEF	RW100080
310	ゐ	4490	AAF0	RW200080
311	ゑ	4491	AAF1	RW400080
312	を	4492	AAF2	RW500080
313	ん	4493	AAF3	RN000080
314	ァ	4541	ABA1	JA010080
315	ア	4542	ABA2	JA000080
316	ィ	4543	ABA3	Ji010080
317	イ	4544	ABA4	Ji000080
318	ゥ	4545	ABA5	JU010080
319	ウ	4546	ABA6	JU000080
320	ェ	4547	ABA7	JE010080
321	エ	4548	ABA8	JE000080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 8 (Page 7 of 18). Non-Hangeul/Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
322	オ	4549	ABA9	JO010080
323	オ	454A	ABAA	JO000080
324	カ	454B	ABAB	JK100080
325	ガ	454C	ABAC	JG100080
326	キ	454D	ABAD	JK200080
327	ギ	454E	ABAE	JG200080
328	ク	454F	ABAF	JK300080
329	グ	4550	ABB0	JG300080
330	ケ	4551	ABB1	JK400080
331	ゲ	4552	ABB2	JG400080
332	コ	4553	ABB3	JK500080
333	ゴ	4554	ABB4	JG500080
334	サ	4555	ABB5	JS100080
335	ザ	4556	ABB6	JZ100080
336	シ	4557	ABB7	JS200080
337	ジ	4558	ABB8	JZ200080
338	ス	4559	ABB9	JS300080
339	ズ	455A	ABBA	JZ300080
340	セ	455B	ABBB	JS400080
341	ゼ	455C	ABBC	JZ400080
342	ソ	455D	ABBD	JS500080
343	ゾ	455E	ABBE	JZ500080
344	タ	455F	ABBF	JT100080
345	ダ	4560	ABC0	JD100080
346	チ	4561	ABC1	JT200080
347	ヂ	4562	ABC2	JD200080

Table 8 (Page 7 of 18). Non-Hangeul/Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
348	ッ	4563	ABC3	JT310080
349	ツ	4564	ABC4	JT300080
350	ヅ	4565	ABC5	JD300080
351	テ	4566	ABC6	JT400080
352	デ	4567	ABC7	JD400080
353	ト	4568	ABC8	JT500080
354	ド	4569	ABC9	JD500080
355	ナ	456A	ABCA	JN100080
356	ニ	456B	ABCB	JN200080
357	ヌ	456C	ABCC	JN300080
358	ネ	456D	ABCD	JN400080
359	ノ	456E	ABCE	JN500080
360	ハ	456F	ABCF	JH100080
361	バ	4570	ABD0	JB100080
362	パ	4571	ABD1	JP100080
363	ヒ	4572	ABD2	JH200080
364	ピ	4573	ABD3	JB200080
365	ピ	4574	ABD4	JP200080
366	フ	4575	ABD5	JH300080
367	ブ	4576	ABD6	JB300080
368	ブ	4577	ABD7	JP300080
369	ヘ	4578	ABD8	JH400080
370	ベ	4579	ABD9	JB400080
371	ペ	457A	ABDA	JP400080
372	ホ	457B	ABDB	JH500080
373	ボ	457C	ABDC	JB500080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
374	ポ	457D	ABDD	JP500080
375	マ	457E	ABDE	JM100080
376	ミ	457F	ABDF	JM200080
377	ム	4580	ABE0	JM300080
378	メ	4581	ABE1	JM400080
379	モ	4582	ABE2	JM500080
380	ヤ	4583	ABE3	JY110080
381	ャ	4584	ABE4	JY100080
382	ユ	4585	ABE5	JY310080
383	ユ	4586	ABE6	JY300080
384	ヨ	4587	ABE7	JY510080
385	ヨ	4588	ABE8	JY500080
386	ラ	4589	ABE9	JR100080
387	リ	458A	ABEA	JR200080
388	ル	458B	ABEB	JR300080
389	レ	458C	ABEC	JR400080
390	ロ	458D	ABED	JR500080
391	ワ	458E	ABEE	JW110080
392	ワ	458F	ABEF	JW100080
393	キ	4590	ABF0	JW200080
394	キ	4591	ABF1	JW400080
395	ク	4592	ABF2	JW500080
396	ン	4593	ABF3	JN000080
397	ヴ	4594	ABF4	JV000080
398	カ	4595	ABF5	JK110080
399	ケ	4596	ABF6	JK410080

Line Number	Graphic	Host Code	PC Code	GCGID
400	i	4641	A5A1	NR010080
401	ii	4642	A5A2	NR020080
402	iii	4643	A5A3	NR030080
403	iv	4644	A5A4	NR040080
404	v	4645	A5A5	NR050080
405	vi	4646	A5A6	NR060080
406	vii	4647	A5A7	NR070080
407	viii	4648	A5A8	NR080080
408	ix	4649	A5A9	NR090080
409	x	464A	A5AA	NR100080
410	I	4650	A5B0	NR110080
411	II	4651	A5B1	NR120080
412	III	4652	A5B2	NR130080
413	IV	4653	A5B3	NR140080
414	V	4654	A5B4	NR150080
415	VI	4655	A5B5	NR160080
416	VII	4656	A5B6	NR170080
417	VIII	4657	A5B7	NR180080
418	IX	4658	A5B8	NR190080
419	X	4659	A5B9	NR200080
420	A	4661	A5C1	GA020080
421	B	4662	A5C2	GB020080
422	Γ	4663	A5C3	GG020080
423	Δ	4664	A5C4	GD020080
424	E	4665	A5C5	GE020080
425	Z	4666	A5C6	GZ020080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
426	H	4667	A5C7	GE320080
427	Θ	4668	A5C8	GT620080
428	I	4669	A5C9	GI020080
429	K	466A	A5CA	GK020080
430	Λ	466B	A5CB	GL020080
431	M	466C	A5CC	GM020080
432	N	466D	A5CD	GN020080
433	Ξ	466E	A5CE	GX020080
434	O	466F	A5CF	GO020080
435	Π	4670	A5D0	GP020080
436	P	4671	A5D1	GR020080
437	Σ	4672	A5D2	GS020080
438	T	4673	A5D3	GT020080
439	Υ	4674	A5D4	GU020080
440	Φ	4675	A5D5	GF020080
441	X	4676	A5D6	GH020080
442	Ψ	4677	A5D7	GP620080
443	Ω	4678	A5D8	GO320080
444	α	4681	A5E1	GA010080
445	β	4682	A5E2	GB010080
446	γ	4683	A5E3	GG010080
447	δ	4684	A5E4	GD010080
448	ε	4685	A5E5	GE010080
449	ξ	4686	A5E6	GZ010080
450	η	4687	A5E7	GE310080
451	θ	4688	A5E8	GT610082

Line Number	Graphic	Host Code	PC Code	GCGID
452	ι	4689	A5E9	GI010080
453	κ	468A	A5EA	GK010080
454	λ	468B	A5EB	GL010080
455	μ	468C	A5EC	GM010080
456	ν	468D	A5ED	GN010080
457	ξ	468E	A5EE	GX010080
458	ο	468F	A5EF	GO010080
459	π	4690	A5F0	GP010080
460	ρ	4691	A5F1	GR010080
461	σ	4692	A5F2	GS010080
462	τ	4693	A5F3	GT010080
463	υ	4694	A5F4	GU010080
464	φ	4695	A5F5	GF010080
465	χ	4696	A5F6	GH010080
466	ψ	4697	A5F7	GP610080
467	ω	4698	A5F8	GO310080
468	—	4741	A6A1	SF100080
469		4742	A6A2	SF110080
470	┌	4743	A6A3	SF010080
471	└	4744	A6A4	SF030080
472	┐	4745	A6A5	SF040080
473	└	4746	A6A6	SF020080
474	┌	4747	A6A7	SF080080
475	└	4748	A6A8	SF060080
476	┌	4749	A6A9	SF090080
477	└	474A	A6AA	SF070080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
478	+	474B	A6AB	SF050080
479	—	474C	A6AC	SF100082
480		474D	A6AD	SF110082
481	┌	474E	A6AE	SF010082
482	└	474F	A6AF	SF030082
483	┐	4750	A6B0	SF040082
484	└	4751	A6B1	SF020082
485	┌	4752	A6B2	SF080082
486	┐	4753	A6B3	SF060082
487	└	4754	A6B4	SF090082
488	┌	4755	A6B5	SF070082
489	+	4756	A6B6	SF050082
490	┌	4757	A6B7	SF080083
491	┐	4758	A6B8	SF060083
492	└	4759	A6B9	SF090083
493	┌	475A	A6BA	SF070083
494	+	475B	A6BB	SF050083
495	┌	475C	A6BC	SF080084
496	┐	475D	A6BD	SF060084
497	└	475E	A6BE	SF090084
498	┌	475F	A6BF	SF070084
499	+	4760	A6C0	SF050084
500	└	4761	A6C1	F1290080
501	┐	4762	A6C2	F12A0080
502	┐	4763	A6C3	F12B0080
503	┐	4764	A6C4	F12C0080

Line Number	Graphic	Host Code	PC Code	GCGID
504	└	4765	A6C5	F12D0080
505	└	4766	A6C6	F12E0080
506	┐	4767	A6C7	F12F0080
507	┐	4768	A6C8	F12G0080
508	┌	4769	A6C9	F12H0080
509	┌	476A	A6CA	F12I0080
510	┌	476B	A6CB	F12J0080
511	┌	476C	A6CC	F12K0080
512	└	476D	A6CD	F12L0080
513	└	476E	A6CE	F12M0080
514	└	476F	A6CF	F12N0080
515	└	4770	A6D0	F12O0080
516	┐	4771	A6D1	F12P0080
517	┐	4772	A6D2	F12Q0080
518	┐	4773	A6D3	F12R0080
519	┐	4774	A6D4	F12S0080
520	┌	4775	A6D5	F12T0080
521	┌	4776	A6D6	F12U0080
522	┌	4777	A6D7	F12V0080
523	┌	4778	A6D8	F12W0080
524	+	4779	A6D9	F12X0080
525	+	477A	A6DA	F12Y0080
526	+	477B	A6DB	F12Z0080
527	+	477C	A6DC	F1300080
528	+	477D	A6DD	F1310080
529	+	477E	A6DE	F1320080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
530	+	477F	A6DF	F1330080
531	+	4780	A6E0	F1340080
532	+	4781	A6E1	F1350080
533	+	4782	A6E2	F1360080
534	+	4783	A6E3	F1370080
535	+	4784	A6E4	F1380080
536	μQ	4841	A7A1	F16P0080
537	kQ	4842	A7A5	F16Q0080
538	mí	4843	A7A7	F16R0080
539	cií	4844	A7A8	F16S0080
540	mí	4845	A7A9	F16T0080
541	kií	4846	A7AA	F16U0080
542	fií	4847	A7AB	F16V0080
543	nií	4848	A7AC	F16W0080
544	μni	4849	A7AD	F16X0080
545	mí	484A	A7B1	F16Y0080
546	cií	484B	A7B2	F16Z0080
547	mí	484C	A7B3	SS840080
548	kií	484D	A7B4	F1710080
549	ha	484E	A7B5	F1720080
550	μδ	484F	A7B6	F1730080
551	kt	4850	A7B9	F1740080
552	caí	4851	A7BA	F1750080
553	kaí	4852	A7BB	F1760080
554	dB	4853	A7BC	F1770080
555	μs	4854	A7BD	F1780080

Line Number	Graphic	Host Code	PC Code	GCGID
556	μs	4855	A7BE	F1790080
557	ps	4856	A7BF	F17A0080
558	rs	4857	A7C0	F17B0080
559	μs	4858	A7C1	F17C0080
560	ms	4859	A7C2	F17D0080
561	pV	485A	A7C3	F17E0080
562	riV	485B	A7C4	F17F0080
563	μV	485C	A7C5	F17G0080
564	mV	485D	A7C6	F17H0080
565	kV	485E	A7C7	F17I0080
566	MV	485F	A7C8	F17J0080
567	PA	4860	A7C9	F17K0080
568	riA	4861	A7CA	F17L0080
569	μA	4862	A7CB	F17M0080
570	mA	4863	A7CC	F17N0080
571	kA	4864	A7CD	F17O0080
572	pW	4865	A7CE	F17P0080
573	riW	4866	A7CF	F17Q0080
574	μW	4867	A7D0	F17R0080
575	mW	4868	A7D1	F17S0080
576	kW	4869	A7D2	F17T0080
577	MW	486A	A7D3	F17U0080
578	Hz	486B	A7D4	F17V0080
579	KHz	486C	A7D5	F17W0080
580	MHz	486D	A7D6	F17X0080
581	GHz	486E	A7D7	F17Y0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
582	Th	486F	A7D8	F17Z0080
583	Ω	4870	A7D9	SM180080
584	kQ	4871	A7DA	F1810080
585	MQ	4872	A7DB	F1820080
586	pF	4873	A7DC	F1830080
587	rF	4874	A7DD	F1840080
588	MF	4875	A7DE	F1850080
589	mol	4876	A7DF	F1860080
590	od	4877	A7E0	F1870080
591	rad	4878	A7E1	F1880080
592	꺆	4879	A7E2	F1890080
593	꺇	487A	A7E3	F18A0080
594	sr	487B	A7E4	F18B0080
595	Pa	487C	A7E5	F18C0080
596	kPa	487D	A7E6	F18D0080
597	MPa	487E	A7E7	F18E0080
598	GPa	487F	A7E8	F18F0080
599	Wb	4880	A7E9	F18G0080
600	lm	4881	A7EA	F18H0080
601	lX	4882	A7EB	F18I0080
602	Bq	4883	A7EC	F18J0080
603	Gy	4884	A7ED	F18K0080
604	Sv	4885	A7EE	F18L0080
605	꺈	4886	A7EF	F18M0080
606	cc	4941	A1F0	SA470080
607	∴	4942	A1F1	SS540080

Line Number	Graphic	Host Code	PC Code	GCGID
608	∫	4943	A1F2	SA510080
609	∫	4944	A1F3	SA840080
610	€	4945	A1F4	SA670080
611	∃	4946	A1F5	SA310080
612	⊆	4947	A1F6	SA240080
613	⊇	4948	A1F7	SA270080
614	⊂	4949	A1F8	SA400080
615	⊃	494A	A1F9	SA410080
616	∪	494B	A1FA	SA390080
617	∩	494C	A1FB	SA380080
618	∧	494D	A1FC	SA330080
619	∨	494E	A1FD	SA320080
620	⇒	494F	A2A1	SM420080
621	⇔	4950	A2A2	SM410080
622	∇	4951	A2A3	SA210080
623	∋	4952	A2A4	SA230080
624	'	4953	A2A5	SD110080
625	~	4954	A2A6	SD190080
626	∩	4955	A2A7	SD210080
627	∪	4956	A2A8	SD230080
628	"	4957	A2A9	SD250080
629	°	4958	A2AA	SD270080
630	•	4959	A2AB	SD290080
631	∫	495A	A2AC	SD410080
632	∫	495B	A2AD	SD430080
633	∫	495C	A2AE	SP030080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 8 (Page 13 of 18). Non-Hangeul/Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
634	ㄷ	495D	A2AF	SP160080
635	ㄹ	495E	A2B0	F1CU0080
636	ㅅ	495F	A2B1	SA720080
637	ㅈ	4960	A2B2	SS400080
638	ㅊ	4961	A2B3	SA810080
639	ㅋ	4962	A2B4	SC010080
640	ㆁ	4963	A2B5	SM850080
641	‰	4964	A2B6	SM560080
642	◁	4965	A2B7	F1D10080
643	◀	4966	A2B8	F1D20080
644	▷	4967	A2B9	F1D30080
645	▶	4968	A2BA	SM600081
646	♠	4969	A2BB	F1D50080
647	♣	496A	A2BC	SS050080
648	♥	496B	A2BD	F1D70080
649	♦	496C	A2BE	SS020080
650	♣	496D	A2BF	F1D90080
651	♣	496E	A2C0	SS040080
652	⊙	496F	A2C1	F1DB0080
653	◇	4970	A2C2	F1DC0080
654	▣	4971	A2C3	F1DD0080
655	◐	4972	A2C4	F1DE0080
656	◑	4973	A2C5	F1DF0080
657	▤	4974	A2C6	F1DG0080
658	▥	4975	A2C7	F1DH0080
659	▧	4976	A2C8	F1DI0080

Table 8 (Page 13 of 18). Non-Hangeul/Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
660	▨	4977	A2C9	F1DJ0080
661	▩	4978	A2CA	F1DK0080
662	▪	4979	A2CB	F1DL0080
663	▫	497A	A2CC	F1DM0080
664	♩	497B	A2CD	F1DN0080
665	♪	497C	A2CE	F1DO0080
666	♫	497D	A2CF	F1DP0080
667	♬	497E	A2D0	F1DQ0080
668	♭	497F	A2D1	F1DR0080
669	♮	4980	A2D2	SM250080
670	♯	4981	A2D3	F1DT0080
671	♮	4982	A2D4	F1DU0080
672	↕	4983	A2D5	SM760080
673	↗	4984	A2D6	SM950080
674	↘	4985	A2D7	F1DX0080
675	↖	4986	A2D8	F1DY0080
676	↙	4987	A2D9	SM990080
677	♭	4988	A2DA	SM890080
678	♩	4989	A2DB	F1E10080
679	♪	498A	A2DC	SM930080
680	♫	498B	A2DD	SM910080
681	♬	498C	A2DE	F1E40080
682	♭	498D	A2DF	F1E50080
683	No.	498E	A2E0	F1E60080
684	Co.	498F	A2E1	F1E70080
685	TM	4990	A2E2	SM540080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 8 (Page 14 of 18). Non-Hangeul/Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
686	am	4991	A2E3	F1E90080
687	pm	4992	A2E4	F1EA0080
688	TEL	4993	A2E5	SS710080
689	"	4994		F1EC0080
690	€	4995	A2E6	SC200080
691	®	4996	A2E7	SM530080
692	А	4A41	ACA1	KA020080
693	Б	4A42	ACA2	KB020080
694	В	4A43	ACA3	KV020080
695	Г	4A44	ACA4	KG020080
696	Д	4A45	ACA5	KD020080
697	Е	4A46	ACA6	KE020080
698	Ё	4A47	ACA7	KE180080
699	Ж	4A48	ACA8	KZ220080
700	З	4A49	ACA9	KZ020080
701	И	4A4A	ACAA	KI020080
702	Й	4A4B	ACAB	KJ120080
703	К	4A4C	ACAC	KK020080
704	Л	4A4D	ACAD	KL020080
705	М	4A4E	ACAE	KM020080
706	Н	4A4F	ACAF	KN020080
707	О	4A50	ACB0	KO020080
708	П	4A51	ACB1	KP020080
709	Р	4A52	ACB2	KR020080
710	С	4A53	ACB3	KS020080
711	Т	4A54	ACB4	KT020080

Table 8 (Page 14 of 18). Non-Hangeul/Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
712	У	4A55	ACB5	KU020080
713	Ф	4A56	ACB6	KF020080
714	Х	4A57	ACB7	KH020080
715	Ц	4A58	ACB8	KC020080
716	Ч	4A59	ACB9	KC220080
717	Ш	4A5A	ACBA	KS220080
718	Щ	4A5B	ACBB	KS160080
719	Ъ	4A5C	ACBC	KU220080
720	Ы	4A5D	ACBD	KY020080
721	Ь	4A5E	ACBE	KX120080
722	Э	4A5F	ACBF	KE140080
723	Ю	4A60	ACC0	KU160080
724	Я	4A61	ACC1	KA160080
725	а	4A62	ACD1	KA010080
726	б	4A63	ACD2	KB010080
727	в	4A64	ACD3	KV010080
728	г	4A65	ACD4	KG010080
729	д	4A66	ACD5	KD010080
730	е	4A67	ACD6	KE010080
731	ё	4A68	ACD7	KE170080
732	ж	4A69	ACD8	KZ210080
733	з	4A6A	ACD9	KZ010080
734	и	4A6B	ACDA	KI010080
735	й	4A6C	ACDB	KJ110080
736	к	4A6D	ACDC	KK010080
737	л	4A6E	ACDD	KL010080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 8 (Page 15 of 18). Non-Hangeul/Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
738	ㅁ	4A6F	ACDE	KM010080
739	ㅂ	4A70	ACDF	KN010080
740	ㅇ	4A71	ACE0	KO010080
741	ㅍ	4A72	ACE1	KP010080
742	ㅑ	4A73	ACE2	KR010080
743	ㅓ	4A74	ACE3	KS010080
744	ㅕ	4A75	ACE4	KT010080
745	ㅗ	4A76	ACE5	KU010080
746	ㅛ	4A77	ACE6	KF010080
747	ㅜ	4A78	ACE7	KH010080
748	ㅠ	4A79	ACE8	KC010080
749	ㅡ	4A7A	ACE9	KC210080
750	ㅝ	4A7B	ACEA	KS210080
751	ㅞ	4A7C	ACEB	KS150080
752	ㅟ	4A7D	ACEC	KU210080
753	ㅠ	4A7E	ACED	KY010080
754	ㅠ	4A7F	ACEE	KX110080
755	ㅡ	4A80	ACEF	KE130080
756	ㅢ	4A81	ACF0	KU150080
757	ㅣ	4A82	ACF1	KA150080
758	ㅤ	4B41	A8A1	LA520080
759	ㅥ	4B42	A8A2	LD620080
760	ㅦ	4B43	A8A3	SM210080
761	ㅧ	4B44	A8A4	LH620080
762	ㅨ	4B46	A8A6	LI520080
763	ㅩ	4B48	A8A8	LL640080

Table 8 (Page 15 of 18). Non-Hangeul/Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
764	ㅪ	4B49	A8A9	LL620080
765	ㅫ	4B4A	A8AA	LO620080
766	ㅬ	4B4B	A8AB	LO520080
767	ㅭ	4B4C	A8AC	SM200080
768	ㅮ	4B4D	A8AD	LT640080
769	ㅯ	4B4E	A8AE	LT620080
770	ㅰ	4B4F	A8AF	LN620080
771	ㅱ	4B51	A8B1	F1N50080
772	ㅲ	4B52	A8B2	F1N60080
773	ㅳ	4B53	A8B3	F1N70080
774	ㅴ	4B54	A8B4	F1N80080
775	ㅵ	4B55	A8B5	F1N90080
776	ㅶ	4B56	A8B6	F1NA0080
777	ㅷ	4B57	A8B7	F1NB0080
778	ㅸ	4B58	A8B8	F1NC0080
779	ㅹ	4B59	A8B9	F1ND0080
780	ㅺ	4B5A	A8BA	F1NE0080
781	ㅻ	4B5B	A8BB	F1NF0080
782	ㅼ	4B5C	A8BC	F1NG0080
783	ㅽ	4B5D	A8BD	F1NH0080
784	ㅾ	4B5E	A8BE	F1NI0080
785	ㅿ	4B5F	A8BF	F1NJ0080
786	ㅿ	4B60	A8C0	F1NK0080
787	ㅿ	4B61	A8C1	F1NL0080
788	ㅿ	4B62	A8C2	F1NM0080
789	ㅿ	4B63	A8C3	F1NN0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
790	Ⓐ	4B64	A8C4	F1NO0080
791	Ⓑ	4B65	A8C5	F1NP0080
792	Ⓒ	4B66	A8C6	F1NQ0080
793	Ⓓ	4B67	A8C7	F1NR0080
794	Ⓔ	4B68	A8C8	F1NS0080
795	Ⓕ	4B69	A8C9	F1NT0080
796	Ⓖ	4B6A	A8CA	F1NU0080
797	Ⓗ	4B6B	A8CB	F1NV0080
798	Ⓘ	4B6C	A8CC	F1NW0080
799	ⓐ	4B6D	A8CD	F1NX0080
800	ⓑ	4B6E	A8CE	F1NY0080
801	ⓒ	4B6F	A8CF	F1NZ0080
802	ⓓ	4B70	A8D0	F1O00080
803	ⓔ	4B71	A8D1	F1O10080
804	ⓕ	4B72	A8D2	F1O20080
805	ⓖ	4B73	A8D3	F1O30080
806	ⓗ	4B74	A8D4	F1O40080
807	ⓘ	4B75	A8D5	F1O50080
808	ⓙ	4B76	A8D6	F1O60080
809	ⓚ	4B77	A8D7	F1O70080
810	ⓛ	4B78	A8D8	F1O80080
811	ⓜ	4B79	A8D9	F1O90080
812	ⓝ	4B7A	A8DA	F1OA0080
813	ⓞ	4B7B	A8DB	F1OB0080
814	ⓟ	4B7C	A8DC	F1OC0080
815	ⓠ	4B7D	A8DD	F1OD0080

Line Number	Graphic	Host Code	PC Code	GCGID
816	Ⓘ	4B7E	A8DE	F1OE0080
817	Ⓢ	4B7F	A8DF	F1OF0080
818	Ⓣ	4B80	A8E0	F1OG0080
819	Ⓤ	4B81	A8E1	F1OH0080
820	Ⓥ	4B82	A8E2	F1OI0080
821	Ⓦ	4B83	A8E3	F1OJ0080
822	Ⓧ	4B84	A8E4	F1OK0080
823	Ⓨ	4B85	A8E5	F1OL0080
824	Ⓩ	4B86	A8E6	F1OM0080
825	①	4B87	A8E7	NO010080
826	②	4B88	A8E8	NO020080
827	③	4B89	A8E9	NO030080
828	④	4B8A	A8EA	NO040080
829	⑤	4B8B	A8EB	NO050080
830	⑥	4B8C	A8EC	NO060080
831	⑦	4B8D	A8ED	NO070080
832	⑧	4B8E	A8EE	NO080080
833	⑨	4B8F	A8EF	NO090080
834	⑩	4B90	A8F0	NO100080
835	⑪	4B91	A8F1	F1OX0080
836	⑫	4B92	A8F2	F1OY0080
837	⑬	4B93	A8F3	F1OZ0080
838	⑭	4B94	A8F4	F1P00080
839	⑮	4B95	A8F5	F1P10080
840	1/2	4B96	A8F6	NF010080
841	1/3	4B97	A8F7	F1P30080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
842	2/3	4B98	A8F8	F1P40080
843	1/4	4B99	A8F9	NF040080
844	3/4	4B9A	A8FA	NF050080
845	1/8	4B9B	A8FB	NF180080
846	3/8	4B9C	A8FC	NF190080
847	5/8	4B9D	A8FD	NF200080
848	7/8	4B9E	A8FE	NF210080
849	∞	4BA0	A9A1	LA510080
850	đ	4BA1	A9A2	LD610080
851	ø	4BA2	A9A3	LD630080
852	ħ	4BA3	A9A4	LH610080
853	ı	4BA4	A9A5	LI610080
854	ij	4BA5	A9A6	LI510080
855	κ	4BA6	A9A7	F1PI0080
856	ı·	4BA7	A9A8	LL630080
857	ı	4BA8	A9A9	LL610080
858	ø	4BA9	A9AA	LO610080
859	œ	4BAA	A9AB	LO510080
860	ß	4BAB	A9AC	LS610080
861	Đ	4BAC	A9AD	LT630080
862	т	4BAD	A9AE	LT610080
863	ı	4BAE	A9AF	LN610080
864	n	4BAF	A9B0	F1PR0080
865	(ㄱ)	4BB0	A9B1	F1PS0080
866	(ㄴ)	4BB1	A9B2	F1PT0080
867	(ㄷ)	4BB2	A9B3	F1PU0080

Line Number	Graphic	Host Code	PC Code	GCGID
868	(ㅁ)	4BB3	A9B4	F1PV0080
869	(ㅂ)	4BB4	A9B5	F1PW0080
870	(ㅅ)	4BB5	A9B6	F1PX0080
871	(ㅇ)	4BB6	A9B7	F1PY0080
872	(ㅈ)	4BB7	A9B8	F1PZ0080
873	(ㅊ)	4BB8	A9B9	F1Q00080
874	(ㅋ)	4BB9	A9BA	F1Q10080
875	(ㆁ)	4BBA	A9BB	F1Q20080
876	(ㅌ)	4BBB	A9BC	F1Q30080
877	(ㅍ)	4BBC	A9BD	F1Q40080
878	(ㅎ)	4BBD	A9BE	F1Q50080
879	(가)	4BBE	A9BF	F1Q60080
880	(나)	4BBF	A9C0	F1Q70080
881	(다)	4BC0	A9C1	F1Q80080
882	(라)	4BC1	A9C2	F1Q90080
883	(마)	4BC2	A9C3	F1QA0080
884	(바)	4BC3	A9C4	F1QB0080
885	(사)	4BC4	A9C5	F1QC0080
886	(와)	4BC5	A9C6	F1QD0080
887	(자)	4BC6	A9C7	F1QE0080
888	(차)	4BC7	A9C8	F1QF0080
889	(카)	4BC8	A9C9	F1QG0080
890	(타)	4BC9	A9CA	F1QH0080
891	(파)	4BCA	A9CB	F1QI0080
892	(하)	4BCB	A9CC	F1QJ0080
893	(과)	4BCC	A9CD	F1QK0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
894	(b)	4BCD	A9CE	F1QL0080
895	(c)	4BCE	A9CF	F1QM0080
896	(d)	4BCF	A9D0	F1QN0080
897	(e)	4BD0	A9D1	F1QO0080
898	(f)	4BD1	A9D2	F1QP0080
899	(g)	4BD2	A9D3	F1QQ0080
900	(h)	4BD3	A9D4	F1QR0080
901	(i)	4BD4	A9D5	F1QS0080
902	(j)	4BD5	A9D6	F1QT0080
903	(k)	4BD6	A9D7	F1QU0080
904	(l)	4BD7	A9D8	F1QV0080
905	(m)	4BD8	A9D9	F1QW0080
906	(n)	4BD9	A9DA	F1QX0080
907	(o)	4BDA	A9DB	F1QY0080
908	(p)	4BDB	A9DC	F1QZ0080
909	(q)	4BDC	A9DD	F1R00080
910	(r)	4BDD	A9DE	F1R10080
911	(s)	4BDE	A9DF	F1R20080
912	(t)	4BDF	A9E0	F1R30080
913	(u)	4BE0	A9E1	F1R40080
914	(v)	4BE1	A9E2	F1R50080
915	(w)	4BE2	A9E3	F1R60080
916	(x)	4BE3	A9E4	F1R70080
917	(y)	4BE4	A9E5	F1R80080
918	(z)	4BE5	A9E6	F1R90080
919	(1)	4BE6	A9E7	NO010081

Line Number	Graphic	Host Code	PC Code	GCGID
920	(2)	4BE7	A9E8	NO020081
921	(3)	4BE8	A9E9	NO030081
922	(4)	4BE9	A9EA	NO040081
923	(5)	4BEA	A9EB	NO050081
924	(6)	4BEB	A9EC	NO060081
925	(7)	4BEC	A9ED	NO070081
926	(8)	4BED	A9EE	NO080081
927	(9)	4BEE	A9EF	NO090081
928	(10)	4BEF	A9F0	NO100081
929	(11)	4BF0	A9F1	F1RK0080
930	(12)	4BF1	A9F2	F1RL0080
931	(13)	4BF2	A9F3	F1RM0080
932	(14)	4BF3	A9F4	F1RN0080
933	(15)	4BF4	A9F5	F1RO0080
934	¹	4BF5	A9F6	ND011080
935	²	4BF6	A9F7	ND021080
936	³	4BF7	A9F8	ND031080
937	⁴	4BF8	A9F9	ND041080
938	ⁿ	4BF9	A9FA	LN011080
939	₁	4BFA	A9FB	ND012080
940	₂	4BFB	A9FC	ND022080
941	₃	4BFC	A9FD	ND032080
942	₄	4bfd	A9FE	ND042080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

8.2.2 Hangeul Jamo

Table 9 (Page 1 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1	ㄱ	4C41		U0001100*
2	ㄴ	4C42		U0001101*
3	ㄷ	4C43		U0001102*
4	ㄹ	4C44		U0001103*
5	ㅁ	4C45		U0001104*
6	ㅂ	4C46		U0001105*
7	ㅅ	4C47		U0001106*
8	ㅈ	4C48		U0001107*
9	ㅊ	4C49		U0001108*
10	ㅋ	4C4A		U0001109*
11	ㆁ	4C4B		U000110A*
12	ㅇ	4C4C		U000110B*
13	ㅅ	4C4D		U000110C*
14	ㅆ	4C4E		U000110D*
15	ㅉ	4C4F		U000110E*
16	ㅋ	4C50		U000110F*
17	ㅌ	4C51		U0001110*
18	ㅍ	4C52		U0001111*
19	ㅎ	4C53		U0001112*
20	ㄴ	4C54		U0001113*
21	ㄷ	4C55		U0001114*
22	ㄹ	4C56		U0001115*
23	ㅁ	4C57		U0001116*
24	ㅂ	4C58		U0001117*

Table 9 (Page 1 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
25	ㄷ	4C59		U0001118*
26	ㄹ	4C5A		U0001119*
27	ㅁ	4C5B		U000111A*
28	ㅂ	4C5C		U000111B*
29	ㅅ	4C5D		U000111C*
30	ㅆ	4C5E		U000111D*
31	ㅈ	4C5F		U000111E*
32	ㅊ	4C60		U000111F*
33	ㅋ	4C61		U0001120*
34	ㆁ	4C62		U0001121*
35	ㅅ	4C63		U0001122*
36	ㅆ	4C64		U0001123*
37	ㅉ	4C65		U0001124*
38	ㅋ	4C66		U0001125*
39	ㅌ	4C67		U0001126*
40	ㅍ	4C68		U0001127*
41	ㅎ	4C69		U0001128*
42	ㅌ	4C6A		U0001129*
43	ㅍ	4C6B		U000112A*
44	ㅇ	4C6C		U000112B*
45	ㅁ	4C6D		U000112C*
46	ㅂ	4C6E		U000112D*
47	ㅅ	4C6F		U000112E*
48	ㅆ	4C70		U000112F*
49	ㅈ	4C71		U0001130*
50	ㅊ	4C72		U0001131*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 9 (Page 2 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
51	ㅅㅅ	4C73		U0001132*
52	ㅅㅅ	4C74		U0001133*
53	ㅅㅅ	4C75		U0001134*
54	ㅅㅇ	4C76		U0001135*
55	ㅅㅅ	4C77		U0001136*
56	ㅅㅅ	4C78		U0001137*
57	ㅅㅅ	4C79		U0001138*
58	ㅅㅅ	4C7A		U0001139*
59	ㅅㅅ	4C7B		U000113A*
60	ㅅㅅ	4C7C		U000113B*
61	ㅅㅅ	4C7D		U000113C*
62	ㅅㅅ	4C7E		U000113D*
63	ㅅㅅ	4C7F		U000113E*
64	ㅅㅅ	4C80		U000113F*
65	ㅅㅅ	4C81		U0001140*
66	ㅇㅅ	4C82		U0001141*
67	ㅇㅅ	4C83		U0001142*
68	ㅇㅅ	4C84		U0001143*
69	ㅇㅅ	4C85		U0001144*
70	ㅇㅅ	4C86		U0001145*
71	ㅇㅅ	4C87		U0001146*
72	ㅇㅇ	4C88		U0001147*
73	ㅇㅅ	4C89		U0001148*
74	ㅇㅅ	4C8A		U0001149*
75	ㅇㅅ	4C8B		U000114A*
76	ㅇㅅ	4C8C		U000114B*

Table 9 (Page 2 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
77	ㅇ	4C8D		U000114C*
78	ㅅㅇ	4C8E		U000114D*
79	ㅅ	4C8F		U000114E*
80	ㅅ	4C90		U000114F*
81	ㅅ	4C91		U0001150*
82	ㅅ	4C92		U0001151*
83	ㅅ	4C93		U0001152*
84	ㅅ	4C94		U0001153*
85	ㅅ	4C95		U0001154*
86	ㅅ	4C96		U0001155*
87	ㅅ	4C97		U0001156*
88	ㅅ	4C98		U0001157*
89	ㅅ	4C99		U0001158*
90	ㅅ	4C9A		U0001159*
91		4D41		U000115F*
92		4D42		U0001160*
93	ㅅ	4D43		U0001161*
94	ㅅ	4D44		U0001162*
95	ㅅ	4D45		U0001163*
96	ㅅ	4D46		U0001164*
97	ㅅ	4D47		U0001165*
98	ㅅ	4D48		U0001166*
99	ㅅ	4D49		U0001167*
100	ㅅ	4D4A		U0001168*
101	ㅅ	4D4B		U0001169*
102	ㅅ	4D4C		U000116A*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 9 (Page 3 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
103	내	4D4D		U000116B*
104	녀	4D4E		U000116C*
105	너	4D4F		U000116D*
106	나	4D50		U000116E*
107	러	4D51		U000116F*
108	레	4D52		U0001170*
109	러	4D53		U0001171*
110	라	4D54		U0001172*
111	나	4D55		U0001173*
112	너	4D56		U0001174*
113	나	4D57		U0001175*
114	나	4D58		U0001176*
115	너	4D59		U0001177*
116	나	4D5A		U0001178*
117	너	4D5B		U0001179*
118	너	4D5C		U000117A*
119	너	4D5D		U000117B*
120	너	4D5E		U000117C*
121	너	4D5F		U000117D*
122	너	4D60		U000117E*
123	너	4D61		U000117F*
124	네	4D62		U0001180*
125	네	4D63		U0001181*
126	네	4D64		U0001182*
127	너	4D65		U0001183*
128	나	4D66		U0001184*

Table 9 (Page 3 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
129	내	4D67		U0001185*
130	녀	4D68		U0001186*
131	너	4D69		U0001187*
132	나	4D6A		U0001188*
133	러	4D6B		U0001189*
134	레	4D6C		U000118A*
135	러	4D6D		U000118B*
136	레	4D6E		U000118C*
137	루	4D6F		U000118D*
138	라	4D70		U000118E*
139	러	4D71		U000118F*
140	레	4D72		U0001190*
141	러	4D73		U0001191*
142	레	4D74		U0001192*
143	루	4D75		U0001193*
144	라	4D76		U0001194*
145	루	4D77		U0001195*
146	루	4D78		U0001196*
147	루	4D79		U0001197*
148	라	4D7A		U0001198*
149	라	4D7B		U0001199*
150	라	4D7C		U000119A*
151	라	4D7D		U000119B*
152	라	4D7E		U000119C*
153	!	4D7F		U000119D*
154	,	4D80		U000119E*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 9 (Page 4 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
155	ㄱ	4D81		U000119F*
156	ㅋ	4D82		U00011A0*
157	ㆁ	4D83		U00011A1*
158	ㄴ	4D84		U00011A2*
159	ㄷ	4E41		U00011A8*
160	ㄸ	4E42		U00011A9*
161	ㄹ	4E43		U00011AA*
162	ㄺ	4E44		U00011AB*
163	ㄻ	4E45		U00011AC*
164	ㄼ	4E46		U00011AD*
165	ㄽ	4E47		U00011AE*
166	ㄾ	4E48		U00011AF*
167	ㄿ	4E49		U00011B0*
168	ㅀ	4E4A		U00011B1*
169	ㅁ	4E4B		U00011B2*
170	ㅂ	4E4C		U00011B3*
171	ㅃ	4E4D		U00011B4*
172	ㅄ	4E4E		U00011B5*
173	ㅅ	4E4F		U00011B6*
174	ㅇ	4E50		U00011B7*
175	ㅈ	4E51		U00011B8*
176	ㅊ	4E52		U00011B9*
177	ㅋ	4E53		U00011BA*
178	ㆁ	4E54		U00011BB*
179	ㄴ	4E55		U00011BC*
180	ㄷ	4E56		U00011BD*

Table 9 (Page 4 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
181	ㅌ	4E57		U00011BE*
182	ㅍ	4E58		U00011BF*
183	ㅍ	4E59		U00011C0*
184	ㅊ	4E5A		U00011C1*
185	ㅋ	4E5B		U00011C2*
186	ㅌ	4E5C		U00011C3*
187	ㅍ	4E5D		U00011C4*
188	ㅊ	4E5E		U00011C5*
189	ㅌ	4E5F		U00011C6*
190	ㅍ	4E60		U00011C7*
191	ㅊ	4E61		U00011C8*
192	ㅌ	4E62		U00011C9*
193	ㅍ	4E63		U00011CA*
194	ㅊ	4E64		U00011CB*
195	ㅋ	4E65		U00011CC*
196	ㆁ	4E66		U00011CD*
197	ㄴ	4E67		U00011CE*
198	ㄷ	4E68		U00011CF*
199	ㄸ	4E69		U00011D0*
200	ㄹ	4E6A		U00011D1*
201	ㄺ	4E6B		U00011D2*
202	ㄻ	4E6C		U00011D3*
203	ㄼ	4E6D		U00011D4*
204	ㄽ	4E6E		U00011D5*
205	ㄾ	4E6F		U00011D6*
206	ㄿ	4E70		U00011D7*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 9 (Page 5 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
207	ㄷᄇ	4E71		U00011D8*
208	ㄷᄈ	4E72		U00011D9*
209	ㄷᄉ	4E73		U00011DA*
210	ㄷᄊ	4E74		U00011DB*
211	ㄷᄋ	4E75		U00011DC*
212	ㄷᄌ	4E76		U00011DD*
213	ㄷᄍ	4E77		U00011DE*
214	ㄷᄎ	4E78		U00011DF*
215	ㄷᄏ	4E79		U00011E0*
216	ㄷᄐ	4E7A		U00011E1*
217	ㄷᄑ	4E7B		U00011E2*
218	ㄷᄒ	4E7C		U00011E3*
219	ㄷᄓ	4E7D		U00011E4*
220	ㄷᄔ	4E7E		U00011E5*
221	ㄷᄕ	4E7F		U00011E6*
222	ㄷᄌ	4E80		U00011E7*
223	ㄷᄍ	4E81		U00011E8*
224	ㄷᄎ	4E82		U00011E9*
225	ㄷᄏ	4E83		U00011EA*
226	ㄷᄐ	4E84		U00011EB*
227	ㄷᄑ	4E85		U00011EC*
228	ㄷᄒ	4E86		U00011ED*
229	ㄷᄓ	4E87		U00011EE*
230	ㄷᄔ	4E88		U00011EF*
231	ㄷᄕ	4E89		U00011F0*
232	ㄷᄌ	4E8A		U00011F1*

Table 9 (Page 5 of 5). Hangeul Jamo Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
233	ᄇᄇ	4E8B		U00011F2*
234	ᄇᄈ	4E8C		U00011F3*
235	ᄇᄉ	4E8D		U00011F4*
236	ᄇᄊ	4E8E		U00011F5*
237	ᄇᄋ	4E8F		U00011F6*
238	ᄇᄌ	4E90		U00011F7*
239	ᄇᄍ	4E91		U00011F8*
240	ᄇᄎ	4E92		U00011F9*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

8.3 Hanja Set

Line Number	Graphic	Host Code	PC Code	GCGID
1	伽	5041	CAA1	F2DD0080
2	佳	5042	CAA2	F2DE0080
3	假	5043	CAA3	F2DF0080
4	價	5044	CAA4	F2DG0080
5	加	5045	CAA5	F2DH0080
6	可	5046	CAA6	F2DI0080
7	呵	5047	CAA7	F2DJ0080
8	哥	5048	CAA8	F2DK0080
9	嘉	5049	CAA9	F2DL0080
10	嫁	504A	CAAA	F2DM0080
11	家	504B	CAAB	F2DN0080
12	暇	504C	CAAC	F2DO0080
13	柯	504D	CAAF	F2DP0080
14	架	504E	CAAD	F2DQ0080
15	歌	504F	CAB0	F2DR0080
16	稼	5050	CAB3	F2DS0080
17	苛	5051	CAB4	F2DT0080
18	茄	5052	CAB5	F2DU0080
19	街	5053	CAB6	F2DV0080
20	袈	5054	CAB7	F2DW0080
21	詞	5055	CAB8	F2DX0080
22	賈	5056	CAB9	F2DY0080
23	跏	5057	CABA	F2DZ0080
24	軻	5058	CABB	F2E00080
25	迦	5059	CABC	F2E10080

Line Number	Graphic	Host Code	PC Code	GCGID
26	駕	505A	CABD	F2E20080
27	刻	505B	CABE	F2E30080
28	却	505C	CABF	F2E40080
29	各	505D	CAC0	F2E50080
30	喀	505E		F2E60080
31	恪	505F	CAC1	F2E70080
32	攔	5060		F2E80080
33	殼	5061	CAC3	F2E90080
34	瑀	5062	CAC4	F2EA0080
35	脚	5063	CAC5	F2EB0080
36	覺	5064	CAC6	F2EC0080
37	角	5065	CAC7	F2ED0080
38	閣	5066	CAC8	F2EE0080
39	刊	5067	CACA	F2EF0080
40	壘	5068	CACB	F2EG0080
41	奸	5069	CACC	F2EH0080
42	姦	506A	CACD	F2EI0080
43	干	506B	CACE	F2EJ0080
44	幹	506C	CACF	F2EK0080
45	懇	506D	CAD0	F2EL0080
46	揀	506E	CAD1	F2EM0080
47	杆	506F	CAD2	F2EN0080
48	澗	5070	CAD5	F2EO0080
49	癩	5071	CAD6	F2EP0080
50	看	5072	CAD7	F2EQ0080
51	稈	5073	CAD9	F2ER0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
52	竿	5074	CADA	F2ES0080
53	簡	5075	CADB	F2ET0080
54	良	5076	CADD	F2EU0080
55	艱	5077	CADE	F2EV0080
56	肝	5078	CADC	F2EW0080
57	諫	5079	CADF	F2EX0080
58	間	507A	CAE0	F2EY0080
59	芰	507B	CAE1	F2EZ0080
60	喝	507C	CAE2	F2F00080
61	曷	507D	CAE3	F2F10080
62	渴	507E	CAE4	F2F20080
63	碣	507F	CAE5	F2F30080
64	竭	5080	CAE6	F2F40080
65	褐	5081	CAE8	F2F50080
66	羯	5082		F2F60080
67	葛	5083	CAE7	F2F70080
68	鞞	5084	CAEA	F2F80080
69	勘	5085	CAEB	F2F90080
70	坎	5086	CAEC	F2FA0080
71	堪	5087	CAED	F2FB0080
72	嵌	5088	CAEE	F2FC0080
73	感	5089	CAEF	F2FD0080
74	憾	508A	CAF0	F2FE0080
75	敢	508B	CAF2	F2FF0080
76	柑	508C	CAF3	F2FG0080
77	橄	508D	CAF4	F2FH0080

Line Number	Graphic	Host Code	PC Code	GCGID
78	減	508E	CAF5	F2FI0080
79	甘	508F	CAF6	F2FJ0080
80	疖	5090	CAF7	F2FK0080
81	監	5091	CAF8	F2FL0080
82	紺	5092	CAFA	F2FM0080
83	酣	5093		F2FN0080
84	鑑	5094	CAFC	F2FO0080
85	龕	5095	CAFE	F2FP0080
86	匣	5096	CBA1	F2FQ0080
87	岬	5097	CBA2	F2FR0080
88	甲	5098	CBA3	F2FS0080
89	胛	5099	CBA4	F2FT0080
90	鉀	509A	CBA5	F2FU0080
91	閘	509B	CBA6	F2FV0080
92	岡	509C	CBAA	F2FW0080
93	剛	509D	CBA7	F2FX0080
94	姜	509E	CBA9	F2FY0080
95	崗	509F	CBAB	F2FZ0080
96	康	50A0	CBAC	F2G00080
97	強	50A1	CBAD	F2G10080
98	疆	50A2	CBAE	F2G20080
99	慷	50A3	CBAF	F2G30080
100	江	50A4	CBB0	F2G40080
101	疆	50A5	CBB2	F2G50080
102	綱	50A6	CBB5	F2G60080
103	襴	50A7	CBBA	F2G70080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 3 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
104	糠	50A8	CBB3	F2G80080
105	腔	50A9	CBB7	F2G90080
106	薑	50AA	CBB9	F2GA0080
107	講	50AB	CBBB	F2GB0080
108	鋼	50AC	CBBC	F2GC0080
109	降	50AD	CBBD	F2GD0080
110	介	50AE	CBBF	F2GE0080
111	价	50AF	CBC0	F2GF0080
112	個	50B0	CBC1	F2GG0080
113	凱	50B1	CBC2	F2GH0080
114	愷	50B2	CBC4	F2GI0080
115	愷	50B3	CBC5	F2GJ0080
116	慨	50B4	CBC6	F2GK0080
117	改	50B5	CBC7	F2GL0080
118	概	50B6	CBC8	F2GM0080
119	漑	50B7	CBC9	F2GN0080
120	疥	50B8	CBCA	F2GO0080
121	皆	50B9	CBCB	F2GP0080
122	盖	50BA	CBCC	F2GQ0080
123	箇	50BB	CBCD	F2GR0080
124	芥	50BC	CBCE	F2GS0080
125	蓋	50BD	CBCF	F2GT0080
126	開	50BE	CBD2	F2GU0080
127	客	50BF	CBD4	F2GV0080
128	坑	50C0	CBD5	F2GW0080
129	更	50C1	CBD6	F2GX0080

Table 10 (Page 3 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
130	粳	50C2	CBD7	F2GY0080
131	羹	50C3	CBD8	F2GZ0080
132	醴	50C4	CBD9	F2H00080
133	去	50C5	CBDB	F2H10080
134	居	50C6	CBDC	F2H20080
135	巨	50C7	CBDD	F2H30080
136	拒	50C8	CBDE	F2H40080
137	据	50C9	CBDF	F2H50080
138	據	50CA	CBE0	F2H60080
139	渠	50CB	CBE2	F2H70080
140	炬	50CC	CBE3	F2H80080
141	舉	50CD	CBE1	F2H90080
142	距	50CE	CBE5	F2HA0080
143	遽	50CF	CBE8	F2HB0080
144	車	50D0	CBE7	F2HC0080
145	醴	50D1		F2HD0080
146	鋸	50D2	CBEA	F2HE0080
147	乾	50D3	CBEB	F2HF0080
148	件	50D4	CBEC	F2HG0080
149	健	50D5	CBED	F2HH0080
150	巾	50D6	CBEE	F2HI0080
151	建	50D7	CBEF	F2HJ0080
152	愆	50D8	CBF0	F2HK0080
153	虔	50D9	CBF3	F2HL0080
154	蹇	50DA	CBF4	F2HM0080
155	鍵	50DB	CBF5	F2HN0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 4 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
156	騫	50DC	CBF6	F2HO0080
157	乞	50DD	CBF7	F2HP0080
158	傑	50DE	CBF8	F2HQ0080
159	杰	50DF	CBF9	F2HR0080
160	儉	50E0	CBFB	F2HS0080
161	劍	50E1	CBFC	F2HT0080
162	檢	50E2	CBFE	F2HU0080
163	臉	50E3	CCA1	F2HV0080
164	黔	50E4	CCA3	F2HW0080
165	劫	50E5	CCA4	F2HX0080
166	怯	50E6	CCA5	F2HY0080
167	偈	50E7	CCA7	F2HZ0080
168	憩	50E8	CCA8	F2I00080
169	揭	50E9	CCA9	F2I10080
170	擊	50EA	CCAA	F2I20080
171	格	50EB	CCAB	F2I30080
172	檄	50EC	CCAC	F2I40080
173	激	50ED	CCAD	F2I50080
174	覲	50EE	CCAF	F2I60080
175	隔	50EF	CCB0	F2I70080
176	骼	50F0		F2I80080
177	堅	50F1	CCB1	F2I90080
178	肩	50F2	CCB7	F2IA0080
179	牽	50F3	CCB2	F2IB0080
180	犬	50F4	CCB3	F2IC0080
181	甄	50F5	CCB4	F2ID0080

Table 10 (Page 4 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
182	絹	50F6	CCB5	F2IE0080
183	繭	50F7	CCB6	F2IF0080
184	見	50F8	CCB8	F2IG0080
185	謹	50F9	CCB9	F2IH0080
186	遣	50FA	CCBA	F2II0080
187	鶻	50FB	CCBB	F2IJ0080
188	潔	50FC	CCBE	F2IK0080
189	決	50FD	CCBD	F2IL0080
190	結	50FE	CCBF	F2IM0080
191	缺	5141	CCC0	F2IP0080
192	訣	5142	CCC1	F2IQ0080
193	兼	5143	CCC2	F2IR0080
194	慊	5144	CCC3	F2IS0080
195	箝	5145	CCC4	F2IT0080
196	兼	5146		F2IU0080
197	謙	5147	CCC5	F2IV0080
198	鎌	5148	CCC7	F2IW0080
199	京	5149	CCC8	F2IX0080
200	傾	514A	CCCB	F2IY0080
201	勁	514B	CCCD	F2IZ0080
202	勅	514C	CCCE	F2J00080
203	卿	514D	CCCF	F2J10080
204	哽	514E		F2J20080
205	境	514F	CCD1	F2J30080
206	庚	5150	CCD2	F2J40080
207	徑	5151	CCD3	F2J50080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 5 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
208	慶	5152	CCD4	F2J60080
209	暎	5153	CCD9	F2J70080
210	肩	5154		F2J80080
211	擎	5155	CCD6	F2J90080
212	敬	5156	CCD7	F2JA0080
213	景	5157	CCD8	F2JB0080
214	更	5158	CCDA	F2JC0080
215	梗	5159	CCDB	F2JD0080
216	檠	515A		F2JE0080
217	涇	515B	CCDC	F2JF0080
218	炅	515C	CCDD	F2JG0080
219	頰	515D		F2JH0080
220	璟	515E	CCDF	F2JI0080
221	瓊	515F	CCE1	F2JJ0080
222	畊	5160		F2JK0080
223	瘳	5161	CCE2	F2JL0080
224	硬	5162	CCE3	F2JM0080
225	磬	5163	CCE4	F2JN0080
226	竟	5164	CCE5	F2JO0080
227	競	5165	CCE6	F2JP0080
228	綱	5166	CCE7	F2JQ0080
229	經	5167	CCE8	F2JR0080
230	耕	5168	CCE9	F2JS0080
231	耿	5169	CCEA	F2JT0080
232	脛	516A	CCEB	F2JU0080
233	莖	516B	CCEC	F2JV0080

Table 10 (Page 5 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
234	警	516C	CCED	F2JW0080
235	輕	516D	CCEE	F2JX0080
236	逕	516E	CCEF	F2JY0080
237	鏡	516F	CCF0	F2JZ0080
238	頃	5170	CCF1	F2K00080
239	頸	5171	CCF2	F2K10080
240	驚	5172	CCF3	F2K20080
241	鯨	5173	CCF4	F2K30080
242	係	5174	CCF5	F2K40080
243	啓	5175	CCF6	F2K50080
244	契	5176	CCF8	F2K60080
245	季	5177	CCF9	F2K70080
246	屆	5178	CCFA	F2K80080
247	悻	5179	CCFB	F2K90080
248	戒	517A	CCFC	F2KA0080
249	桂	517B	CCFD	F2KB0080
250	械	517C	CCFE	F2KC0080
251	溪	517D	CDA2	F2KD0080
252	界	517E	CDA3	F2KE0080
253	癸	517F	CDA4	F2KF0080
254	磧	5180	CDA5	F2KG0080
255	稷	5181		F2KH0080
256	稽	5182	CDA6	F2KI0080
257	系	5183	CDA7	F2KJ0080
258	繫	5184	CDA8	F2KK0080
259	繼	5185	CDA9	F2KL0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
260	計	5186	CDA A	F2KM0080
261	誠	5187	CDAB	F2KN0080
262	階	5188	CDAD	F2KO0080
263	谿	5189	CDAC	F2KP0080
264	雞	518A		F2KQ0080
265	鷄	518B	CDAE	F2KR0080
266	叩	518C	CDB0	F2KS0080
267	古	518D	CDAF	F2KT0080
268	告	518E	CDB1	F2KU0080
269	呱	518F	CDB2	F2KV0080
270	固	5190	CDB3	F2KW0080
271	姑	5191	CDB4	F2KX0080
272	孤	5192	CDB5	F2KY0080
273	庫	5193	CDB7	F2KZ0080
274	拷	5194	CDB8	F2L00080
275	攷	5195	CDB9	F2L10080
276	故	5196	CDBA	F2L20080
277	敲	5197	CDBB	F2L30080
278	枯	5198	CDBD	F2L40080
279	杲	5199		F2L50080
280	沽	519A	CDBF	F2L60080
281	痼	519B	CDC0	F2L70080
282	皐	519C	CDC1	F2L80080
283	蠱	519D	CDCC	F2L90080
284	替	519E		F2LA0080
285	稿	519F	CDC3	F2LB0080

Line Number	Graphic	Host Code	PC Code	GCGID
286	嶽	51A0	CDC2	F2LC0080
287	考	51A1	CDC5	F2LD0080
288	股	51A2	CDC6	F2LE0080
289	膏	51A3	CDC7	F2LF0080
290	苦	51A4	CDC8	F2LG0080
291	藁	51A5	CDCB	F2LH0080
292	袴	51A6	CDCD	F2LI0080
293	詁	51A7		F2LJ0080
294	誥	51A8	CDCE	F2LK0080
295	賈	51A9	CDCF	F2LL0080
296	辜	51AA	CDD0	F2LM0080
297	錮	51AB	CDD1	F2LN0080
298	雇	51AC	CDD2	F2LO0080
299	顧	51AD	CDD3	F2LP0080
300	高	51AE	CDD4	F2LQ0080
301	鼓	51AF	CDD5	F2LR0080
302	哭	51B0	CDD6	F2LS0080
303	斛	51B1	CDD7	F2LT0080
304	曲	51B2	CDD8	F2LU0080
305	楛	51B3	CDD9	F2LV0080
306	穀	51B4	CDDA	F2LW0080
307	谷	51B5	CDDB	F2LX0080
308	鵠	51B6	CDDC	F2LY0080
309	困	51B7	CDDD	F2LZ0080
310	坤	51B8	CDDE	F2M00080
311	崑	51B9	CDDF	F2M10080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
312	昆	51BA	CDE0	F2M20080
313	梱	51BB	CDE1	F2M30080
314	棍	51BC	CDE2	F2M40080
315	滾	51BD	CDE3	F2M50080
316	袞	51BE	CDE5	F2M60080
317	汨	51BF	CDE7	F2M70080
318	滑	51C0	CDE8	F2M80080
319	骨	51C1	CDE9	F2M90080
320	供	51C2	CDEA	F2MA0080
321	公	51C3	CDEB	F2MB0080
322	共	51C4	CDEC	F2MC0080
323	功	51C5	CDED	F2MD0080
324	孔	51C6	CDEE	F2ME0080
325	工	51C7	CDEF	F2MF0080
326	貢	51C8	CDF8	F2MG0080
327	恭	51C9	CDF1	F2MH0080
328	恐	51CA	CDF0	F2MI0080
329	拱	51CB	CDF2	F2MJ0080
330	控	51CC	CDF3	F2MK0080
331	攻	51CD	CDF4	F2ML0080
332	栱	51CE		F2MM0080
333	檟	51CF		F2MN0080
334	空	51D0	CDF6	F2MO0080
335	筮	51D1		F2MP0080
336	寡	51D2	CDFB	F2MQ0080
337	戈	51D3	CDFC	F2MR0080

Line Number	Graphic	Host Code	PC Code	GCGID
338	果	51D4	CDFD	F2MS0080
339	瓜	51D5	CDFE	F2MT0080
340	科	51D6	CEA1	F2MU0080
341	菓	51D7	CEA2	F2MV0080
342	蝌	51D8		F2MW0080
343	誇	51D9	CEA3	F2MX0080
344	課	51DA	CEA4	F2MY0080
345	過	51DB	CEA6	F2MZ0080
346	顆	51DC	CEA8	F2N00080
347	廓	51DD	CEA9	F2N10080
348	槲	51DE	CEAA	F2N20080
349	藿	51DF	CEAB	F2N30080
350	郭	51E0	CEAC	F2N40080
351	霍	51E1		F2N50080
352	串	51E2	CEAD	F2N60080
353	冠	51E3	CEAE	F2N70080
354	官	51E4	CEAF	F2N80080
355	寬	51E5	CEB0	F2N90080
356	慣	51E6	CEB1	F2NA0080
357	棺	51E7	CEB2	F2NB0080
358	瓘	51E8	CEB6	F2NC0080
359	款	51E9	CEB3	F2ND0080
360	灌	51EA	CEB4	F2NE0080
361	盥	51EB		F2NF0080
362	管	51EC	CEB7	F2NG0080
363	罐	51ED	CEB8	F2NH0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
364	菅	51EE	CEB9	F2NI0080
365	觀	51EF	CEBA	F2NJ0080
366	貫	51F0	CEBB	F2NK0080
367	關	51F1	CEBC	F2NL0080
368	館	51F2	CEBD	F2NM0080
369	鶴	51F3		F2NN0080
370	刮	51F4	CEBE	F2NO0080
371	忽	51F5	CEBF	F2NP0080
372	括	51F6	CEC0	F2NQ0080
373	适	51F7	CEC1	F2NR0080
374	光	51F8	CEC3	F2NS0080
375	匡	51F9	CEC4	F2NT0080
376	壙	51FA	CEC5	F2NU0080
377	廣	51FB	CEC6	F2NV0080
378	曠	51FC	CEC7	F2NW0080
379	洸	51FD	CEC8	F2NX0080
380	狂	51FE	CECA	F2NY0080
381	琫	5241	CECB	F2O10080
382	筐	5242	CECC	F2O20080
383	胱	5243	CECD	F2O30080
384	鑛	5244	CECE	F2O40080
385	卦	5245	CECF	F2O50080
386	掛	5246	CED0	F2O60080
387	罍	5247	CED1	F2O70080
388	乖	5248	CED2	F2O80080
389	傀	5249	CED3	F2O90080

Line Number	Graphic	Host Code	PC Code	GCGID
390	塊	524A	CED4	F2OA0080
391	壞	524B	CED5	F2OB0080
392	怪	524C	CED6	F2OC0080
393	愧	524D	CED7	F2OD0080
394	拐	524E	CED8	F2OE0080
395	槐	524F	CED9	F2OF0080
396	魁	5250	CEDA	F2OG0080
397	宏	5251	CEDB	F2OH0080
398	紘	5252	CEDC	F2OI0080
399	肱	5253	CEDD	F2OJ0080
400	轟	5254	CEDE	F2OK0080
401	交	5255	CEDF	F2OL0080
402	僑	5256	CEE0	F2OM0080
403	咬	5257	CEE1	F2ON0080
404	喬	5258	CEE2	F2OO0080
405	嬌	5259	CEE3	F2OP0080
406	嶠	525A	CEE4	F2OQ0080
407	巧	525B	CEE5	F2OR0080
408	教	525C	CEE7	F2OS0080
409	攪	525D	CEE6	F2OT0080
410	校	525E	CEE8	F2OU0080
411	橋	525F	CEE9	F2OV0080
412	狡	5260	CEEA	F2OW0080
413	皎	5261	CEEB	F2OX0080
414	矯	5262	CEEC	F2OY0080
415	絞	5263	CEED	F2OZ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
416	翹	5264	CEEE	F2P00080
417	膠	5265	CEEF	F2P10080
418	蕎	5266	CEF0	F2P20080
419	蛟	5267	CEF1	F2P30080
420	較	5268	CEF2	F2P40080
421	輻	5269	CEF3	F2P50080
422	郊	526A	CEF4	F2P60080
423	餃	526B		F2P70080
424	餃	526C	CEF5	F2P80080
425	驕	526D	CEF6	F2P90080
426	鮫	526E	CEF7	F2PA0080
427	丘	526F	CEF8	F2PB0080
428	久	5270	CEF9	F2PC0080
429	九	5271	CEFA	F2PD0080
430	仇	5272	CEFB	F2PE0080
431	侑	5273		F2PF0080
432	俱	5274	CEFC	F2PG0080
433	樞	5275		F2PH0080
434	具	5276	CEFD	F2PI0080
435	勾	5277	CEFE	F2PJ0080
436	區	5278	CFA1	F2PK0080
437	口	5279	CFA2	F2PL0080
438	句	527A	CFA3	F2PM0080
439	咎	527B	CFA4	F2PN0080
440	嘔	527C	CFA5	F2PO0080
441	垢	527D	CFA7	F2PP0080

Line Number	Graphic	Host Code	PC Code	GCGID
442	媾	527E		F2PQ0080
443	嫗	527F		F2PR0080
444	寇	5280	CFA8	F2PS0080
445	嶇	5281	CFA9	F2PT0080
446	廐	5282	CFAA	F2PU0080
447	懼	5283	CFAB	F2PV0080
448	拘	5284	CFAC	F2PW0080
449	救	5285	CFAD	F2PX0080
450	晷	5286		F2PY0080
451	枸	5287	CFAE	F2PZ0080
452	樞	5288	CFAF	F2Q00080
453	構	5289	CFB0	F2Q10080
454	歐	528A	CFB1	F2Q20080
455	毆	528B	CFB2	F2Q30080
456	毬	528C	CFB3	F2Q40080
457	求	528D	CFB4	F2Q50080
458	溝	528E	CFB5	F2Q60080
459	灸	528F	CFB6	F2Q70080
460	狗	5290	CFB7	F2Q80080
461	玖	5291	CFB8	F2Q90080
462	球	5292	CFB9	F2QA0080
463	甌	5293		F2QB0080
464	瞿	5294	CFBA	F2QC0080
465	矩	5295	CFBB	F2QD0080
466	究	5296	CFBC	F2QE0080
467	絀	5297	CFBD	F2QF0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
468	購	5298	CFC5	F2QG0080
469	白	5299	CFBF	F2QH0080
470	舅	529A	CFC0	F2QI0080
471	舊	529B	CFC1	F2QJ0080
472	苟	529C	CFC2	F2QK0080
473	衢	529D	CFC3	F2QL0080
474	靚	529E		F2QM0080
475	謳	529F	CFC4	F2QN0080
476	軀	52A0	CFC6	F2QO0080
477	逯	52A1	CFC7	F2QP0080
478	邱	52A2	CFC8	F2QQ0080
479	鉤	52A3	CFC9	F2QR0080
480	颯	52A4		F2QS0080
481	駒	52A5	CFCB	F2QT0080
482	驅	52A6	CFCC	F2QU0080
483	鳩	52A7	CFCD	F2QV0080
484	鷗	52A8	CFCE	F2QW0080
485	龜	52A9	CFCF	F2QX0080
486	國	52AA	CFD0	F2QY0080
487	局	52AB	CFD1	F2QZ0080
488	掬	52AC		F2R00080
489	菊	52AD	CFD2	F2R10080
490	鞠	52AE	CFD3	F2R20080
491	麴	52AF	CFD5	F2R30080
492	窘	52B0	CFD7	F2R40080
493	群	52B1	CFD8	F2R50080

Line Number	Graphic	Host Code	PC Code	GCGID
494	軍	52B2	CFDA	F2R60080
495	君	52B3	CFD6	F2R70080
496	郡	52B4	CFDB	F2R80080
497	堀	52B5	CFDC	F2R90080
498	屈	52B6	CFDD	F2RA0080
499	掘	52B7	CFDE	F2RB0080
500	窟	52B8	CFDF	F2RC0080
501	宮	52B9	CFE0	F2RD0080
502	弓	52BA	CFE1	F2RE0080
503	穹	52BB	CFE2	F2RF0080
504	窮	52BC	CFE3	F2RG0080
505	躬	52BD	CFE5	F2RH0080
506	倦	52BE	CFE6	F2RI0080
507	券	52BF	CFE7	F2RJ0080
508	勸	52C0	CFE8	F2RK0080
509	卷	52C1	CFE9	F2RL0080
510	圈	52C2	CFEA	F2RM0080
511	拳	52C3	CFEB	F2RN0080
512	權	52C4	CFED	F2RO0080
513	眷	52C5	CFEF	F2RP0080
514	厥	52C6	CFF0	F2RQ0080
515	蹶	52C7	CFF3	F2RR0080
516	闕	52C8	CFF4	F2RS0080
517	机	52C9	CFF5	F2RT0080
518	櫃	52CA	CFF6	F2RU0080
519	潰	52CB	CFF7	F2RV0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
520	詭	52CC	CFF8	F2RW0080
521	跪	52CD		F2RX0080
522	軌	52CE	CFF9	F2RY0080
523	饋	52CF	CFFA	F2RZ0080
524	歸	52D0	CFFD	F2S00080
525	貴	52D1	CFFE	F2S10080
526	鬼	52D2	D0A1	F2S20080
527	龜	52D3	D0A2	F2S30080
528	叫	52D4	D0A3	F2S40080
529	圭	52D5	D0A4	F2S50080
530	奎	52D6	D0A5	F2S60080
531	揆	52D7	D0A6	F2S70080
532	珪	52D8	D0A8	F2S80080
533	硅	52D9	D0A9	F2S90080
534	窺	52DA	D0AA	F2SA0080
535	葵	52DB	D0AD	F2SB0080
536	糾	52DC	D0AC	F2SC0080
537	規	52DD	D0AE	F2SD0080
538	赳	52DE	D0AF	F2SE0080
539	逵	52DF	D0B0	F2SF0080
540	閏	52E0	D0B1	F2SG0080
541	均	52E1	D0B3	F2SH0080
542	筠	52E2	D0B5	F2SI0080
543	菌	52E3	D0B6	F2SJ0080
544	鈞	52E4	D0B7	F2SK0080
545	龜	52E5	D0B8	F2SL0080

Line Number	Graphic	Host Code	PC Code	GCGID
546	橘	52E6	D0B9	F2SM0080
547	克	52E7	D0BA	F2SN0080
548	剋	52E8	D0BB	F2SO0080
549	劇	52E9	D0BC	F2SP0080
550	戟	52EA	D0BD	F2SQ0080
551	極	52EB	D0BF	F2SR0080
552	棘	52EC	D0BE	F2SS0080
553	隙	52ED	D0C0	F2ST0080
554	僅	52EE	D0C1	F2SU0080
555	勤	52EF	D0C3	F2SV0080
556	香	52F0		F2SW0080
557	勲	52F1	D0C4	F2SX0080
558	斤	52F2	D0C5	F2SY0080
559	根	52F3	D0C6	F2SZ0080
560	槿	52F4	D0C7	F2T00080
561	滢	52F5		F2T10080
562	瑾	52F6	D0C8	F2T20080
563	筋	52F7	D0C9	F2T30080
564	芹	52F8	D0CA	F2T40080
565	董	52F9	D0CB	F2T50080
566	覲	52FA	D0CC	F2T60080
567	謹	52FB	D0CD	F2T70080
568	近	52FC	D0CE	F2T80080
569	饉	52FD	D0CF	F2T90080
570	契	52FE	D0D0	F2TA0080
571	今	5341	D0D1	F2TD0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
572	擒	5342	D0D3	F2TE0080
573	擒	5343	D0D5	F2TF0080
574	琴	5344	D0D6	F2TG0080
575	禁	5345	D0D7	F2TH0080
576	禽	5346	D0D8	F2TI0080
577	衿	5347	D0DB	F2TJ0080
578	衾	5348	D0DA	F2TK0080
579	襟	5349	D0DC	F2TL0080
580	金	534A	D0DD	F2TM0080
581	錦	534B	D0DE	F2TN0080
582	及	534C	D0E0	F2TO0080
583	岌	534D		F2TP0080
584	急	534E	D0E1	F2TQ0080
585	扱	534F	D0E2	F2TR0080
586	汲	5350	D0E3	F2TS0080
587	笈	5351		F2TT0080
588	級	5352	D0E4	F2TU0080
589	給	5353	D0E5	F2TV0080
590	亘	5354	D0E6	F2TW0080
591	兢	5355	D0E7	F2TX0080
592	矜	5356	D0E8	F2TY0080
593	肯	5357	D0E9	F2TZ0080
594	企	5358	D0EA	F2U00080
595	伎	5359	D0EB	F2U10080
596	其	535A	D0EC	F2U20080
597	冀	535B	D0ED	F2U30080

Line Number	Graphic	Host Code	PC Code	GCGID
598	嗜	535C	D0EE	F2U40080
599	器	535D	D0EF	F2U50080
600	圻	535E	D0F0	F2U60080
601	基	535F	D0F1	F2U70080
602	夔	5360	D0F3	F2U80080
603	奇	5361	D0F4	F2U90080
604	妓	5362	D0F5	F2UA0080
605	寄	5363	D0F6	F2UB0080
606	岐	5364	D0F7	F2UC0080
607	豈	5365	D1C2	F2UD0080
608	崎	5366	D0F8	F2UE0080
609	幾	5367	D0FA	F2UF0080
610	己	5368	D0F9	F2UG0080
611	忌	5369	D0FB	F2UH0080
612	技	536A	D0FC	F2UI0080
613	旗	536B	D0FD	F2UJ0080
614	既	536C	D0FE	F2UK0080
615	期	536D	D1A2	F2UL0080
616	杞	536E	D1A3	F2UM0080
617	棋	536F	D1A4	F2UN0080
618	棄	5370	D1A5	F2UO0080
619	機	5371	D1A6	F2UP0080
620	欺	5372	D1A7	F2UQ0080
621	氣	5373	D1A8	F2UR0080
622	汽	5374	D1A9	F2US0080
623	沂	5375	D1AA	F2UT0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
624	淇	5376	D1AB	F2UU0080
625	琦	5377	D1AD	F2UV0080
626	琪	5378	D1AE	F2UW0080
627	璣	5379	D1B0	F2UX0080
628	畸	537A	D1B1	F2UY0080
629	畿	537B	D1B2	F2UZ0080
630	碁	537C	D1B3	F2V00080
631	磯	537D	D1B4	F2V10080
632	祇	537E	D1B6	F2V20080
633	祈	537F	D1B7	F2V30080
634	祺	5380	D1B8	F2V40080
635	箕	5381	D1B9	F2V50080
636	紀	5382	D1BA	F2V60080
637	綺	5383	D1BB	F2V70080
638	霸	5384		F2V80080
639	耆	5385	D1BD	F2V90080
640	機	5386	D1BE	F2VA0080
641	肌	5387	D1BF	F2VB0080
642	菴	5388	D1A1	F2VC0080
643	記	5389	D1C0	F2VD0080
644	譏	538A	D1C1	F2VE0080
645	起	538B	D1C3	F2VF0080
646	錡	538C	D1C4	F2VG0080
647	飢	538D	D1C6	F2VH0080
648	饑	538E	D1C7	F2VI0080
649	騎	538F	D1C8	F2VJ0080

Line Number	Graphic	Host Code	PC Code	GCGID
650	騏	5390	D1C9	F2VK0080
651	驥	5391	D1CA	F2VL0080
652	鯨	5392		F2VM0080
653	麒	5393	D1CB	F2VN0080
654	緊	5394	D1CC	F2VO0080
655	佶	5395	D1CD	F2VP0080
656	吉	5396	D1CE	F2VQ0080
657	拮	5397	D1CF	F2VR0080
658	桔	5398	D1D0	F2VS0080
659	金	5399	D1D1	F2VT0080
660	忒	539A		F2VU0080
661	喫	539B	D1D2	F2VV0080
662	儼	539C	D1D3	F2VW0080
663	懦	539D	D1D7	F2VX0080
664	拏	539E	D1D9	F2VY0080
665	拿	539F	D1DA	F2VZ0080
666	糯	53A0		F2W00080
667	那	53A1	D1E1	F2W10080
668	諾	53A2	D1E7	F2W20080
669	暖	53A3	D1EC	F2W30080
670	煖	53A4	D1EE	F2W40080
671	難	53A5	D1F1	F2W50080
672	捺	53A6	D1F4	F2W60080
673	捏	53A7	D1F3	F2W70080
674	南	53A8	D1F5	F2W80080
675	喃	53A9		F2W90080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
676	男	53AA	D1FB	F2WA0080
677	納	53AB	D2A1	F2WB0080
678	囊	53AC	D2A5	F2WC0080
679	娘	53AD	D2A6	F2WD0080
680	曩	53AE		F2WE0080
681	乃	53AF	D2AC	F2WF0080
682	內	53B0	D2AE	F2WG0080
683	奈	53B1	D2AF	F2WH0080
684	柰	53B2	D2B0	F2WI0080
685	耐	53B3	D2B1	F2WJ0080
686	迺	53B4		F2WK0080
687	女	53B5	D2B3	F2WL0080
688	年	53B6	D2B4	F2WM0080
689	季	53B7	D2B6	F2WN0080
690	念	53B8	D2B7	F2WO0080
691	恬	53B9	D2B8	F2WP0080
692	拈	53BA	D2B9	F2WQ0080
693	捻	53BB	D2BA	F2WR0080
694	佞	53BC		F2WS0080
695	寧	53BD	D2BB	F2WT0080
696	孿	53BE		F2WU0080
697	努	53BF	D2BD	F2WV0080
698	奴	53C0	D2BF	F2WW0080
699	孥	53C1		F2WX0080
700	弩	53C2	D2C0	F2WY0080
701	怒	53C3	D2C1	F2WZ0080

Line Number	Graphic	Host Code	PC Code	GCGID
702	璫	53C4	D2C5	F2X00080
703	濃	53C5	D2D8	F2X10080
704	膿	53C6	D2DB	F2X20080
705	農	53C7	D2DC	F2X30080
706	惱	53C8	D2DD	F2X40080
707	腦	53C9	D2E0	F2X50080
708	尿	53CA	D2E3	F2X60080
709	鬧	53CB		F2X70080
710	嫩	53CC	D2EC	F2X80080
711	訥	53CD	D2ED	F2X90080
712	紐	53CE	D2EF	F2XA0080
713	能	53CF	D2F6	F2XB0080
714	尼	53D0	D2F9	F2XC0080
715	泥	53D1	D2FA	F2XD0080
716	匿	53D2	D2FB	F2XE0080
717	溺	53D3	D2FC	F2XF0080
718	多	53D4	D2FD	F2XG0080
719	茶	53D5	D2FE	F2XH0080
720	丹	53D6	D3A1	F2XI0080
721	但	53D7	D3A3	F2XJ0080
722	單	53D8	D3A4	F2XK0080
723	團	53D9	D3A5	F2XL0080
724	壇	53DA	D3A6	F2XM0080
725	斷	53DB	D3A8	F2XN0080
726	旦	53DC	D3A9	F2XO0080
727	檀	53DD	D3AA	F2XP0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
728	段	53DE	D3AB	F2XQ0080
729	湍	53DF	D3AC	F2XR0080
730	短	53E0	D3AD	F2XS0080
731	端	53E1	D3AE	F2XT0080
732	簞	53E2	D3AF	F2XU0080
733	緞	53E3	D3B0	F2XV0080
734	蛋	53E4	D3B1	F2XW0080
735	袒	53E5	D3B2	F2XX0080
736	鄲	53E6	D3B3	F2XY0080
737	鍛	53E7	D3B4	F2XZ0080
738	軛	53E8		F2Y00080
739	怛	53E9		F2Y10080
740	撻	53EA	D3B5	F2Y20080
741	獺	53EB	D3B7	F2Y30080
742	疸	53EC	D3B8	F2Y40080
743	達	53ED	D3B9	F2Y50080
744	闌	53EE		F2Y60080
745	韃	53EF		F2Y70080
746	啖	53F0	D3BA	F2Y80080
747	擔	53F1	D3BD	F2Y90080
748	曇	53F2	D3BE	F2YA0080
749	淡	53F3	D3BF	F2YB0080
750	潭	53F4	D3C1	F2YC0080
751	澹	53F5	D3C2	F2YD0080
752	痰	53F6	D3C3	F2YE0080
753	聃	53F7	D3C4	F2YF0080

Line Number	Graphic	Host Code	PC Code	GCGID
754	膽	53F8	D3C5	F2YG0080
755	覃	53F9	D3C7	F2YH0080
756	談	53FA	D3C8	F2YI0080
757	譚	53FB	D3C9	F2YJ0080
758	沓	53FC	D3CB	F2YK0080
759	答	53FD	D3CD	F2YL0080
760	踏	53FE	D3CE	F2YM0080
761	逕	5441	D3CF	F2YP0080
762	党	5442		F2YQ0080
763	堂	5443	D3D1	F2YR0080
764	塘	5444	D3D2	F2YS0080
765	幢	5445	D3D3	F2YT0080
766	唐	5446	D3D0	F2YU0080
767	撞	5447	D3D5	F2YV0080
768	棠	5448	D3D6	F2YW0080
769	當	5449	D3D7	F2YX0080
770	糖	544A	D3D8	F2YY0080
771	螳	544B		F2YZ0080
772	黨	544C	D3DA	F2Z00080
773	代	544D	D3DB	F2Z10080
774	岱	544E	D3DC	F2Z20080
775	大	544F	D3DE	F2Z30080
776	對	5450	D3DF	F2Z40080
777	岱	5451	D3E0	F2Z50080
778	帶	5452	D3E1	F2Z60080
779	待	5453	D3E2	F2Z70080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 16 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
780	戴	5454	D3E3	F2Z80080
781	擡	5455	D3E4	F2Z90080
782	玳	5456	D3E5	F2ZA0080
783	碓	5457		F2ZB0080
784	臺	5458	D3E6	F2ZC0080
785	袋	5459	D3E7	F2ZD0080
786	貸	545A	D3E8	F2ZE0080
787	隊	545B	D3E9	F2ZF0080
788	黛	545C	D3EA	F2ZG0080
789	宅	545D	D3EB	F2ZH0080
790	德	545E	D3EC	F2ZI0080
791	悳	545F	D3ED	F2ZJ0080
792	倒	5460	D3EE	F2ZK0080
793	刀	5461	D3EF	F2ZL0080
794	到	5462	D3F0	F2ZM0080
795	圖	5463	D3F1	F2ZN0080
796	堵	5464	D3F2	F2ZO0080
797	塗	5465	D3F3	F2ZP0080
798	導	5466	D3F4	F2ZQ0080
799	屠	5467	D3F5	F2ZR0080
800	島	5468	D3F6	F2ZS0080
801	度	5469	D3F8	F2ZT0080
802	徒	546A	D3F9	F2ZU0080
803	悼	546B	D3FA	F2ZV0080
804	挑	546C	D3FB	F2ZW0080
805	搗	546D	D3FD	F2ZX0080

Table 10 (Page 16 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
806	桃	546E	D3FE	F2ZY0080
807	棹	546F	D4A1	F2ZZ0080
808	淘	5470	D4A3	F3000080
809	渡	5471	D4A4	F3010080
810	滔	5472	D4A5	F3020080
811	濤	5473	D4A6	F3030080
812	煮	5474	D4A7	F3040080
813	盜	5475	D4A8	F3050080
814	睹	5476	D4A9	F3060080
815	禱	5477	D4AA	F3070080
816	稻	5478	D4AB	F3080080
817	萄	5479	D4AC	F3090080
818	菟	547A		F30A0080
819	賭	547B	D4AE	F30B0080
820	跳	547C	D4AF	F30C0080
821	蹈	547D	D4B0	F30D0080
822	逃	547E	D4B1	F30E0080
823	途	547F	D4B2	F30F0080
824	道	5480	D4B3	F30G0080
825	都	5481	D4B4	F30H0080
826	鍍	5482	D4B5	F30I0080
827	陶	5483	D4B6	F30J0080
828	韜	5484	D4B7	F30K0080
829	毒	5485	D4B8	F30L0080
830	瀆	5486	D4B9	F30M0080
831	牘	5487	D4BA	F30N0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 17 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
832	犢	5488	D4BB	F30O0080
833	獨	5489	D4BC	F30P0080
834	督	548A	D4BD	F30Q0080
835	禿	548B	D4BE	F30R0080
836	篤	548C	D4BF	F30S0080
837	轟	548D	D4C0	F30T0080
838	讀	548E	D4C1	F30U0080
839	墩	548F	D4C2	F30V0080
840	惇	5490	D4C3	F30W0080
841	敦	5491	D4C4	F30X0080
842	墩	5492	D4C6	F30Y0080
843	沌	5493	D4C7	F30Z0080
844	燉	5494	D4C9	F3100080
845	豚	5495	D4CA	F3110080
846	頓	5496	D4CB	F3120080
847	咄	5497		F3130080
848	互	5498	D4CC	F3140080
849	突	5499	D4CD	F3150080
850	仝	549A	D4CE	F3160080
851	冬	549B	D4CF	F3170080
852	凍	549C	D4D0	F3180080
853	動	549D	D4D1	F3190080
854	同	549E	D4D2	F31A0080
855	垌	549F		F31B0080
856	懂	54A0	D4D3	F31C0080
857	東	54A1	D4D4	F31D0080

Table 10 (Page 17 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
858	桐	54A2	D4D5	F31E0080
859	棟	54A3	D4D6	F31F0080
860	洞	54A4	D4D7	F31G0080
861	潼	54A5	D4D8	F31H0080
862	童	54A6	D4DB	F31I0080
863	疼	54A7	D4D9	F31J0080
864	瞳	54A8	D4DA	F31K0080
865	董	54A9	D4DD	F31L0080
866	胴	54AA	D4DC	F31M0080
867	銅	54AB	D4DE	F31N0080
868	兜	54AC	D4DF	F31O0080
869	斗	54AD	D4E0	F31P0080
870	杜	54AE	D4E1	F31Q0080
871	料	54AF	D4E2	F31R0080
872	痘	54B0	D4E3	F31S0080
873	竇	54B1	D4E4	F31T0080
874	荳	54B2	D4E5	F31U0080
875	肚	54B3		F31V0080
876	蚪	54B4		F31W0080
877	讀	54B5	D4E6	F31X0080
878	豆	54B6	D4E7	F31Y0080
879	頭	54B7	D4E9	F31Z0080
880	屯	54B8	D4EA	F3200080
881	臀	54B9	D4EB	F3210080
882	遁	54BA	D4ED	F3220080
883	遯	54BB	D4EE	F3230080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
884	鈍	54BC	D4EF	F3240080
885	得	54BD	D4F0	F3250080
886	橙	54BE	D4F2	F3260080
887	滕	54BF		F3270080
888	灯	54C0		F3280080
889	燈	54C1	D4F3	F3290080
890	登	54C2	D4F4	F32A0080
891	等	54C3	D4F5	F32B0080
892	藤	54C4	D4F6	F32C0080
893	騰	54C5	D4F7	F32D0080
894	鄧	54C6	D4F8	F32E0080
895	鐙	54C7		F32F0080
896	騰	54C8	D4F9	F32G0080
897	喇	54C9	D4FA	F32H0080
898	懶	54CA	D4FB	F32I0080
899	癩	54CB	D4FD	F32J0080
900	羅	54CC	D4FE	F32K0080
901	蘿	54CD	D5A1	F32L0080
902	螺	54CE	D5A2	F32M0080
903	裸	54CF	D5A3	F32N0080
904	邏	54D0	D5A4	F32O0080
905	樂	54D1	D5A5	F32P0080
906	洛	54D2	D5A6	F32Q0080
907	烙	54D3	D5A7	F32R0080
908	犖	54D4		F32S0080
909	珞	54D5	D5A8	F32T0080

Line Number	Graphic	Host Code	PC Code	GCGID
910	絡	54D6	D5A9	F32U0080
911	落	54D7	D5AA	F32V0080
912	酪	54D8	D5AC	F32W0080
913	駱	54D9	D5AD	F32X0080
914	亂	54DA	D5AF	F32Y0080
915	卵	54DB	D5B0	F32Z0080
916	欄	54DC		F3300080
917	欄	54DD	D5B1	F3310080
918	欒	54DE	D5B2	F3320080
919	瀾	54DF	D5B3	F3330080
920	爛	54E0	D5B4	F3340080
921	蘭	54E1	D5B5	F3350080
922	鸞	54E2	D5B6	F3360080
923	刺	54E3	D5B7	F3370080
924	埒	54E4		F3380080
925	辣	54E5	D5B8	F3390080
926	嵐	54E6	D5B9	F33A0080
927	孛	54E7	D5BA	F33B0080
928	攬	54E8	D5BB	F33C0080
929	欖	54E9	D5BC	F33D0080
930	濫	54EA	D5BD	F33E0080
931	籃	54EB	D5BE	F33F0080
932	纜	54EC	D5BF	F33G0080
933	藍	54ED	D5C0	F33H0080
934	檻	54EE	D5C1	F33I0080
935	覽	54EF	D5C2	F33J0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
936	拉	54F0	D5C3	F33K0080
937	臘	54F1	D5C4	F33L0080
938	蠟	54F2	D5C5	F33M0080
939	廊	54F3	D5C6	F33N0080
940	朗	54F4	D5C7	F33O0080
941	榔	54F5		F33P0080
942	浪	54F6	D5C8	F33Q0080
943	狼	54F7	D5C9	F33R0080
944	琅	54F8	D5CA	F33S0080
945	瑯	54F9	D5CB	F33T0080
946	螂	54FA	D5CC	F33U0080
947	郎	54FB	D5CD	F33V0080
948	來	54FC	D5CE	F33W0080
949	萊	54FD	D5D1	F33X0080
950	冷	54FE	D5D2	F33Y0080
951	掠	5541	D5D3	F3410080
952	略	5542	D5D4	F3420080
953	亮	5543	D5D5	F3430080
954	兩	5544	D5D7	F3440080
955	倆	5545	D5D6	F3450080
956	涼	5546	D5D8	F3460080
957	梁	5547	D5D9	F3470080
958	涼	5548		F3480080
959	樑	5549	D5DA	F3490080
960	糧	554A	D5DB	F34A0080
961	梁	554B	D5DC	F34B0080

Line Number	Graphic	Host Code	PC Code	GCGID
962	糧	554C	D5DD	F34C0080
963	良	554D	D5DE	F34D0080
964	諒	554E	D5DF	F34E0080
965	輛	554F	D5E0	F34F0080
966	量	5550	D5E1	F34G0080
967	魎	5551		F34H0080
968	侶	5552	D5E2	F34I0080
969	勵	5553	D5E4	F34J0080
970	呂	5554	D5E5	F34K0080
971	廬	5555	D5E6	F34L0080
972	戾	5556	D5E8	F34M0080
973	旅	5557	D5E9	F34N0080
974	欄	5558	D5EA	F34O0080
975	濾	5559	D5EB	F34P0080
976	癘	555A		F34Q0080
977	礪	555B	D5EC	F34R0080
978	簪	555C		F34S0080
979	藜	555D	D5ED	F34T0080
980	慮	555E	D5E7	F34U0080
981	蠣	555F	D5EE	F34V0080
982	蠡	5560		F34W0080
983	鑢	5561		F34X0080
984	閭	5562	D5EF	F34Y0080
985	驢	5563	D5F0	F34Z0080
986	驢	5564	D5F1	F3500080
987	麗	5565	D5F2	F3510080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
988	黎	5566	D5F3	F3520080
989	力	5567	D5F4	F3530080
990	歷	5568	D5F6	F3540080
991	曆	5569	D5F5	F3550080
992	櫟	556A		F3560080
993	瀝	556B	D5F7	F3570080
994	礫	556C	D5F8	F3580080
995	轆	556D	D5F9	F3590080
996	麗	556E	D5FA	F35A0080
997	憐	556F	D5FB	F35B0080
998	戀	5570	D5FC	F35C0080
999	摯	5571	D5FD	F35D0080
1000	漣	5572	D5FE	F35E0080
1001	煉	5573	D6A1	F35F0080
1002	練	5574	D6A3	F35G0080
1003	聯	5575	D6A4	F35H0080
1004	蓮	5576	D6A5	F35I0080
1005	輦	5577	D6A6	F35J0080
1006	連	5578	D6A7	F35K0080
1007	鍊	5579	D6A8	F35L0080
1008	冽	557A	D6A9	F35M0080
1009	劣	557B	D6AB	F35N0080
1010	列	557C	D6AA	F35O0080
1011	洌	557D	D6AC	F35P0080
1012	烈	557E	D6AD	F35Q0080
1013	裂	557F	D6AE	F35R0080

Line Number	Graphic	Host Code	PC Code	GCGID
1014	廉	5580	D6AF	F35S0080
1015	斂	5581	D6B0	F35T0080
1016	殮	5582	D6B1	F35U0080
1017	濂	5583	D6B2	F35V0080
1018	簾	5584	D6B3	F35W0080
1019	獵	5585	D6B4	F35X0080
1020	蠶	5586		F35Y0080
1021	令	5587	D6B5	F35Z0080
1022	伶	5588	D6B6	F3600080
1023	囿	5589	D6B7	F3610080
1024	嶺	558A	D6BA	F3620080
1025	伶	558B	D6BB	F3630080
1026	聆	558C		F3640080
1027	泠	558D		F3650080
1028	玲	558E	D6BC	F3660080
1029	羚	558F	D6BE	F3670080
1030	翎	5590	D6BF	F3680080
1031	苓	5591		F3690080
1032	蛉	5592		F36A0080
1033	逞	5593	D6C1	F36B0080
1034	零	5594	D6C3	F36C0080
1035	靈	5595	D6C4	F36D0080
1036	鈴	5596	D6C2	F36E0080
1037	領	5597	D6C5	F36F0080
1038	齡	5598	D6C6	F36G0080
1039	例	5599	D6C7	F36H0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 21 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1040	禮	559A	D6C9	F36I0080
1041	醴	559B	D6CA	F36J0080
1042	隸	559C	D6CB	F36K0080
1043	勞	559D	D6CC	F36L0080
1044	撈	559E	D6CE	F36M0080
1045	櫓	559F	D6D0	F36N0080
1046	潦	55A0		F36O0080
1047	爐	55A1	D6D3	F36P0080
1048	瀘	55A2	D6D2	F36Q0080
1049	盧	55A3	D6D4	F36R0080
1050	老	55A4	D6D5	F36S0080
1051	臚	55A5		F36T0080
1052	蘆	55A6	D6D6	F36U0080
1053	虜	55A7	D6D7	F36V0080
1054	路	55A8	D6D8	F36W0080
1055	輅	55A9	D6D9	F36X0080
1056	轆	55AA		F36Y0080
1057	露	55AB	D6DA	F36Z0080
1058	魯	55AC	D6DB	F3700080
1059	鷺	55AD	D6DC	F3710080
1060	鹵	55AE	D6DD	F3720080
1061	漉	55AF		F3730080
1062	碌	55B0	D6DE	F3740080
1063	祿	55B1		F3750080
1064	綠	55B2	D6E0	F3760080
1065	轆	55B3		F3770080

Table 10 (Page 21 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1066	錄	55B4	D6E2	F3780080
1067	麓	55B5	D6E4	F3790080
1068	鹿	55B6	D6E3	F37A0080
1069	論	55B7	D6E5	F37B0080
1070	壘	55B8	D6E6	F37C0080
1071	弄	55B9	D6E7	F37D0080
1072	隴	55BA	D6E8	F37E0080
1073	瀧	55BB	D6E9	F37F0080
1074	瓏	55BC	D6EA	F37G0080
1075	籠	55BD	D6EB	F37H0080
1076	聾	55BE	D6EC	F37I0080
1077	儻	55BF	D6ED	F37J0080
1078	牢	55C0	D6EF	F37K0080
1079	磊	55C1	D6F0	F37L0080
1080	籟	55C2		F37M0080
1081	蓄	55C3		F37N0080
1082	誅	55C4		F37O0080
1083	賴	55C5	D6F3	F37P0080
1084	賂	55C6	D6F1	F37Q0080
1085	雷	55C7	D6F4	F37R0080
1086	了	55C8	D6F5	F37S0080
1087	僚	55C9	D6F6	F37T0080
1088	寥	55CA		F37U0080
1089	寮	55CB	D6F7	F37V0080
1090	廖	55CC	D6F8	F37W0080
1091	療	55CD	D6FA	F37X0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 22 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1092	療	55CE	D6FB	F37Y0080
1093	瞭	55CF	D6FC	F37Z0080
1094	料	55D0	D6F9	F3800080
1095	聊	55D1	D6FD	F3810080
1096	蓼	55D2	D6FE	F3820080
1097	遼	55D3	D7A1	F3830080
1098	龍	55D4	D7A3	F3840080
1099	儂	55D5		F3850080
1100	壘	55D6	D7A4	F3860080
1101	屢	55D7	D7A6	F3870080
1102	樓	55D8	D7A7	F3880080
1103	淚	55D9	D7A8	F3890080
1104	漏	55DA	D7A9	F38A0080
1105	累	55DB	D7AB	F38B0080
1106	縷	55DC	D7AC	F38C0080
1107	樓	55DD	D7AE	F38D0080
1108	陋	55DE	D7B0	F38E0080
1109	饋	55DF		F38F0080
1110	劉	55E0	D7B1	F38G0080
1111	柳	55E1	D7B3	F38H0080
1112	榴	55E2	D7B4	F38I0080
1113	流	55E3	D7B5	F38J0080
1114	溜	55E4	D7B6	F38K0080
1115	琉	55E5	D7B8	F38L0080
1116	溜	55E6	D7B9	F38M0080
1117	留	55E7	D7BA	F38N0080

Table 10 (Page 22 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1118	瘤	55E8	D7BB	F38O0080
1119	硫	55E9	D7BC	F38P0080
1120	謬	55EA	D7BD	F38Q0080
1121	類	55EB	D7BE	F38R0080
1122	六	55EC	D7BF	F38S0080
1123	戮	55ED	D7C0	F38T0080
1124	陸	55EE	D7C1	F38U0080
1125	倫	55EF	D7C3	F38V0080
1126	崙	55F0	D7C4	F38W0080
1127	淪	55F1	D7C5	F38X0080
1128	綸	55F2	D7C6	F38Y0080
1129	輪	55F3	D7C7	F38Z0080
1130	律	55F4	D7C8	F3900080
1131	慄	55F5	D7C9	F3910080
1132	栗	55F6	D7CA	F3920080
1133	率	55F7	D7CB	F3930080
1134	窿	55F8		F3940080
1135	隆	55F9	D7CC	F3950080
1136	肋	55FA	D7CE	F3960080
1137	勒	55FB	D7CD	F3970080
1138	凜	55FC		F3980080
1139	廩	55FD		F3990080
1140	凌	55FE	D7D0	F39A0080
1141	楞	5641	D7D1	F39D0080
1142	稜	5642	D7D2	F39E0080
1143	綾	5643	D7D3	F39F0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1144	菱	5644	D7D4	F39G0080
1145	陵	5645	D7D5	F39H0080
1146	俚	5646	D7D6	F39I0080
1147	利	5647	D7D7	F39J0080
1148	厘	5648	D7D8	F39K0080
1149	吏	5649	D7D9	F39L0080
1150	履	564A	D7DB	F39M0080
1151	悞	564B	D7DC	F39N0080
1152	提	564C		F39O0080
1153	李	564D	D7DD	F39P0080
1154	梨	564E	D7DE	F39Q0080
1155	漓	564F		F39R0080
1156	犁	5650	D7E0	F39S0080
1157	狸	5651	D7E1	F39T0080
1158	理	5652	D7E2	F39U0080
1159	璃	5653	D7E3	F39V0080
1160	痢	5654	D7E5	F39W0080
1161	离	5655		F39X0080
1162	罹	5656	D7E7	F39Y0080
1163	籬	5657	D7E6	F39Z0080
1164	螭	5658		F3A00080
1165	裏	5659	D7EA	F3A10080
1166	里	565A	D7EC	F3A20080
1167	釐	565B	D7ED	F3A30080
1168	離	565C	D7EE	F3A40080
1169	魮	565D		F3A50080

Line Number	Graphic	Host Code	PC Code	GCGID
1170	鯉	565E	D7EF	F3A60080
1171	吝	565F	D7F0	F3A70080
1172	隣	5660	D7F2	F3A80080
1173	隣	5661	D7F3	F3A90080
1174	蘭	5662	D7F4	F3AA0080
1175	躑	5663	D7F5	F3AB0080
1176	隣	5664	D7F6	F3AC0080
1177	隣	5665	D7F7	F3AD0080
1178	隣	5666	D7F8	F3AE0080
1179	林	5667	D7F9	F3AF0080
1180	淋	5668	D7FA	F3AG0080
1181	琳	5669	D7FB	F3AH0080
1182	痲	566A		F3AI0080
1183	臨	566B	D7FC	F3AJ0080
1184	霖	566C	D7FD	F3AK0080
1185	岄	566D		F3AL0080
1186	礪	566E	D7FE	F3AM0080
1187	立	566F	D8A1	F3AN0080
1188	笠	5670	D8A2	F3AO0080
1189	粒	5671	D8A3	F3AP0080
1190	媽	5672		F3AQ0080
1191	摩	5673	D8A4	F3AR0080
1192	瑪	5674	D8A5	F3AS0080
1193	痲	5675	D8A6	F3AT0080
1194	磨	5676	D8A8	F3AU0080
1195	蓼	5677		F3AV0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1196	馬	5678	D8A9	F3AW0080
1197	魔	5679	D8AA	F3AX0080
1198	麻	567A	D8AB	F3AY0080
1199	寞	567B	D8AC	F3AZ0080
1200	幕	567C	D8AD	F3B00080
1201	漠	567D	D8AE	F3B10080
1202	膜	567E	D8AF	F3B20080
1203	莫	567F	D8B0	F3B30080
1204	媿	5680	D8B4	F3B40080
1205	巒	5681	D8B5	F3B50080
1206	彎	5682	D8B6	F3B60080
1207	慢	5683	D8B7	F3B70080
1208	挽	5684	D8B8	F3B80080
1209	晚	5685	D8B9	F3B90080
1210	曼	5686	D8BA	F3BA0080
1211	滿	5687	D8BB	F3BB0080
1212	漫	5688	D8BC	F3BC0080
1213	灣	5689	D8BD	F3BD0080
1214	瞞	568A	D8BE	F3BE0080
1215	萬	568B	D8BF	F3BF0080
1216	蔓	568C	D8C0	F3BG0080
1217	蠻	568D	D8C1	F3BH0080
1218	謾	568E		F3BI0080
1219	輓	568F	D8C2	F3BJ0080
1220	鎧	5690		F3BK0080
1221	饅	5691	D8C3	F3BL0080

Line Number	Graphic	Host Code	PC Code	GCGID
1222	鬘	5692		F3BM0080
1223	鰻	5693	D8C4	F3BN0080
1224	抹	5694	D8C6	F3BO0080
1225	末	5695	D8C7	F3BP0080
1226	沫	5696	D8C8	F3BQ0080
1227	襪	5697	D8CA	F3BR0080
1228	靺	5698	D8CB	F3BS0080
1229	亡	5699	D8CC	F3BT0080
1230	妄	569A	D8CD	F3BU0080
1231	忘	569B	D8CE	F3BV0080
1232	忙	569C	D8CF	F3BW0080
1233	望	569D	D8D0	F3BX0080
1234	網	569E	D8D1	F3BY0080
1235	罔	569F	D8D2	F3BZ0080
1236	芒	56A0	D8D3	F3C00080
1237	茫	56A1	D8D4	F3C10080
1238	莽	56A2	D8D5	F3C20080
1239	邛	56A3	D8D7	F3C30080
1240	魴	56A4		F3C40080
1241	埋	56A5	D8D8	F3C50080
1242	妹	56A6	D8D9	F3C60080
1243	媒	56A7	D8DA	F3C70080
1244	寐	56A8	D8DB	F3C80080
1245	昧	56A9	D8DC	F3C90080
1246	枚	56AA	D8DD	F3CA0080
1247	梅	56AB	D8DE	F3CB0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1248	每	56AC	D8DF	F3CC0080
1249	煤	56AD	D8E0	F3CD0080
1250	昧	56AE		F3CE0080
1251	罵	56AF	D8E1	F3CF0080
1252	莓	56B0		F3CG0080
1253	買	56B1	D8E2	F3CH0080
1254	賣	56B2	D8E3	F3CI0080
1255	邁	56B3	D8E4	F3CJ0080
1256	魅	56B4	D8E5	F3CK0080
1257	脈	56B5	D8E6	F3CL0080
1258	脉	56B6		F3CM0080
1259	貊	56B7	D8E7	F3CN0080
1260	陌	56B8	D8E8	F3CO0080
1261	驀	56B9	D8E9	F3CP0080
1262	麥	56BA	D8EA	F3CQ0080
1263	孟	56BB	D8EB	F3CR0080
1264	氓	56BC	D8EC	F3CS0080
1265	猛	56BD	D8ED	F3CT0080
1266	盟	56BE	D8EF	F3CU0080
1267	盲	56BF	D8EE	F3CV0080
1268	萌	56C0	D8F0	F3CW0080
1269	募	56C1	D8F1	F3CX0080
1270	覓	56C2	D8F2	F3CY0080
1271	俛	56C3		F3CZ0080
1272	免	56C4	D8F3	F3D00080
1273	勉	56C5	D8F5	F3D10080

Line Number	Graphic	Host Code	PC Code	GCGID
1274	冕	56C6	D8F4	F3D20080
1275	棉	56C7	D8F6	F3D30080
1276	眇	56C8	D8F8	F3D40080
1277	眠	56C9	D8F9	F3D50080
1278	綿	56CA	D8FA	F3D60080
1279	緬	56CB	D8FB	F3D70080
1280	面	56CC	D8FC	F3D80080
1281	麵	56CD	D8FD	F3D90080
1282	滅	56CE	D8FE	F3DA0080
1283	蔑	56CF	D9A1	F3DB0080
1284	命	56D0	D9A4	F3DC0080
1285	冥	56D1	D9A2	F3DD0080
1286	名	56D2	D9A3	F3DE0080
1287	鳴	56D3	D9B0	F3DF0080
1288	明	56D4	D9A5	F3DG0080
1289	暝	56D5	D9A6	F3DH0080
1290	溟	56D6	D9A8	F3DI0080
1291	皿	56D7	D9A9	F3DJ0080
1292	茗	56D8	D9AB	F3DK0080
1293	螟	56D9	D9AD	F3DL0080
1294	酩	56DA	D9AE	F3DM0080
1295	銘	56DB	D9AF	F3DN0080
1296	袂	56DC	D9B1	F3DO0080
1297	侮	56DD	D9B2	F3DP0080
1298	募	56DE	D9B4	F3DQ0080
1299	帽	56DF	D9B6	F3DR0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1300	姆	56E0	D9B5	F3DS0080
1301	慕	56E1	D9B7	F3DT0080
1302	摸	56E2	D9B8	F3DU0080
1303	暮	56E3	D9BA	F3DV0080
1304	冒	56E4	D9B3	F3DW0080
1305	某	56E5	D9BB	F3DX0080
1306	模	56E6	D9BC	F3DY0080
1307	母	56E7	D9BD	F3DZ0080
1308	毛	56E8	D9BE	F3E00080
1309	牟	56E9	D9BF	F3E10080
1310	牡	56EA	D9C0	F3E20080
1311	眸	56EB	D9C2	F3E30080
1312	矛	56EC	D9C3	F3E40080
1313	耄	56ED		F3E50080
1314	耗	56EE	D9C4	F3E60080
1315	茅	56EF	D9C6	F3E70080
1316	謀	56F0	D9C7	F3E80080
1317	謨	56F1	D9C8	F3E90080
1318	貌	56F2	D9C9	F3EA0080
1319	鉞	56F3		F3EB0080
1320	木	56F4	D9CA	F3EC0080
1321	沐	56F5	D9CB	F3ED0080
1322	牧	56F6	D9CC	F3EE0080
1323	目	56F7	D9CD	F3EF0080
1324	睦	56F8	D9CE	F3EG0080
1325	穆	56F9	D9CF	F3EH0080

Line Number	Graphic	Host Code	PC Code	GCGID
1326	歿	56FA	D9D1	F3EI0080
1327	沒	56FB	D9D2	F3EJ0080
1328	夢	56FC	D9D3	F3EK0080
1329	朦	56FD	D9D4	F3EL0080
1330	濛	56FE		F3EM0080
1331	矇	5741		F3EP0080
1332	蒙	5742	D9D5	F3EQ0080
1333	卯	5743	D9D6	F3ER0080
1334	墓	5744	D9D7	F3ES0080
1335	妙	5745	D9D8	F3ET0080
1336	廟	5746	D9D9	F3EU0080
1337	描	5747	D9DA	F3EV0080
1338	昴	5748	D9DB	F3EW0080
1339	杳	5749	D9DC	F3EX0080
1340	渺	574A	D9DD	F3EY0080
1341	猫	574B	D9DE	F3EZ0080
1342	苗	574C	D9E0	F3F00080
1343	錨	574D	D9E1	F3F10080
1344	務	574E	D9E2	F3F20080
1345	巫	574F	D9E3	F3F30080
1346	懋	5750	D9E5	F3F40080
1347	戊	5751	D9E6	F3F50080
1348	拇	5752	D9E7	F3F60080
1349	撫	5753	D9E8	F3F70080
1350	无	5754	D9E9	F3F80080
1351	武	5755	D9EB	F3F90080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1352	母	5756	D9EC	F3FA0080
1353	無	5757	D9ED	F3FB0080
1354	畝	5758	D9EF	F3FC0080
1355	繆	5759	D9F0	F3FD0080
1356	舞	575A	D9F1	F3FE0080
1357	茂	575B	D9F2	F3FF0080
1358	蕪	575C	D9F3	F3FG0080
1359	誣	575D	D9F4	F3FH0080
1360	貿	575E	D9F5	F3FI0080
1361	霧	575F	D9F6	F3FJ0080
1362	鷓	5760	D9F7	F3FK0080
1363	墨	5761	D9F8	F3FL0080
1364	默	5762	D9F9	F3FM0080
1365	芻	5763	D9FB	F3FN0080
1366	吻	5764	D9FC	F3FO0080
1367	文	5765	D9FE	F3FP0080
1368	汶	5766	DAA1	F3FQ0080
1369	紋	5767	DAA3	F3FR0080
1370	紊	5768	DAA2	F3FS0080
1371	蚊	5769	DAA5	F3FT0080
1372	門	576A	DAA6	F3FU0080
1373	問	576B	D9FD	F3FV0080
1374	聞	576C	DAA4	F3FW0080
1375	勿	576D	DAA8	F3FX0080
1376	物	576E	DAAA	F3FY0080
1377	味	576F	DAAB	F3FZ0080

Line Number	Graphic	Host Code	PC Code	GCGID
1378	媚	5770	DAAC	F3G00080
1379	尾	5771	DAAD	F3G10080
1380	媚	5772	DAAE	F3G20080
1381	靡	5773	DABC	F3G30080
1382	彌	5774	DAAF	F3G40080
1383	微	5775	DAB0	F3G50080
1384	未	5776	DAB1	F3G60080
1385	漾	5777	DAB4	F3G70080
1386	瀾	5778		F3G80080
1387	眉	5779	DAB6	F3G90080
1388	米	577A	DAB7	F3GA0080
1389	糜	577B		F3GB0080
1390	美	577C	DAB8	F3GC0080
1391	薇	577D	DAB9	F3GD0080
1392	謎	577E	DABA	F3GE0080
1393	迷	577F	DABB	F3GF0080
1394	悶	5780	DABF	F3GG0080
1395	愍	5781	DAC0	F3GH0080
1396	憫	5782	DAC1	F3GI0080
1397	敏	5783	DAC2	F3GJ0080
1398	旻	5784	DAC4	F3GK0080
1399	旻	5785	DAC3	F3GL0080
1400	民	5786	DAC5	F3GM0080
1401	泯	5787	DAC6	F3GN0080
1402	玟	5788	DAC7	F3GO0080
1403	珉	5789	DAC8	F3GP0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 28 of 33). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1404	閔	578A	DACA	F3GQ0080
1405	閔	578B		F3GR0080
1406	密	578C	DACB	F3GS0080
1407	蜜	578D	DACC	F3GT0080
1408	謚	578E	DACD	F3GU0080
1409	婆	578F		F3GV0080
1410	剝	5790	DACE	F3GW0080
1411	博	5791	DACF	F3GX0080
1412	拍	5792	DAD0	F3GY0080
1413	搏	5793	DAD1	F3GZ0080
1414	撲	5794	DAD2	F3H00080
1415	朴	5795	DAD3	F3H10080
1416	樸	5796	DAD4	F3H20080
1417	樸	5797		F3H30080
1418	泊	5798	DAD5	F3H40080
1419	搏	5799		F3H50080
1420	珀	579A	DAD6	F3H60080
1421	璞	579B	DAD7	F3H70080
1422	箔	579C	DAD8	F3H80080
1423	縛	579D	DADA	F3H90080
1424	粕	579E	DAD9	F3HA0080
1425	搏	579F	DADB	F3HB0080
1426	舶	57A0	DADC	F3HC0080
1427	薄	57A1	DADD	F3HD0080
1428	迫	57A2	DADE	F3HE0080
1429	雹	57A3	DADF	F3HF0080

Table 10 (Page 28 of 33). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1430	駁	57A4	DAE0	F3HG0080
1431	伴	57A5	DAE1	F3HH0080
1432	半	57A6	DAE2	F3HI0080
1433	反	57A7	DAE3	F3HJ0080
1434	叛	57A8	DAE4	F3HK0080
1435	拌	57A9	DAE5	F3HL0080
1436	搬	57AA	DAE6	F3HM0080
1437	攀	57AB	DAE7	F3HN0080
1438	斑	57AC	DAE8	F3HO0080
1439	槃	57AD	DAE9	F3HP0080
1440	潘	57AE	DAEB	F3HQ0080
1441	泮	57AF	DAEA	F3HR0080
1442	班	57B0	DAEC	F3HS0080
1443	畔	57B1	DAED	F3HT0080
1444	盤	57B2	DAEF	F3HU0080
1445	磻	57B3	DAF2	F3HV0080
1446	攀	57B4	DAF3	F3HW0080
1447	絆	57B5	DAF4	F3HX0080
1448	胖	57B6		F3HY0080
1449	蟠	57B7	DAF6	F3HZ0080
1450	般	57B8	DAF5	F3I00080
1451	返	57B9	DAF7	F3I10080
1452	頒	57BA	DAF8	F3I20080
1453	飯	57BB	DAF9	F3I30080
1454	勃	57BC	DAFA	F3I40080
1455	拔	57BD	DAFB	F3I50080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1456	潑	57BE	DAFE	F3I60080
1457	撥	57BF	DAFC	F3I70080
1458	發	57C0	DBA1	F3I80080
1459	跋	57C1	DBA2	F3I90080
1460	釅	57C2	DBA3	F3IA0080
1461	鉢	57C3	DBA4	F3IB0080
1462	髮	57C4	DBA5	F3IC0080
1463	魃	57C5	DBA6	F3ID0080
1464	倣	57C6	DBA7	F3IE0080
1465	傍	57C7	DBA8	F3IF0080
1466	坊	57C8	DBA9	F3IG0080
1467	妨	57C9	DBAA	F3IH0080
1468	尫	57CA	DBAB	F3II0080
1469	幫	57CB	DBAC	F3IJ0080
1470	彷彿	57CC	DBAD	F3IK0080
1471	房	57CD	DBAE	F3IL0080
1472	放	57CE	DBAF	F3IM0080
1473	方	57CF	DBB0	F3IN0080
1474	旁	57D0	DBB1	F3IO0080
1475	昉	57D1	DBB2	F3IP0080
1476	榜	57D2	DBB4	F3IQ0080
1477	紡	57D3	DBB7	F3IR0080
1478	肪	57D4	DBB8	F3IS0080
1479	勝	57D5	DBB9	F3IT0080
1480	舫	57D6	DBBA	F3IU0080
1481	芳	57D7	DBBB	F3IV0080

Line Number	Graphic	Host Code	PC Code	GCGID
1482	莠	57D8	DBBC	F3IW0080
1483	蚌	57D9	DBBD	F3IX0080
1484	訪	57DA	DBBE	F3IY0080
1485	誘	57DB	DBBF	F3IZ0080
1486	邦	57DC	DBC0	F3J00080
1487	防	57DD	DBC1	F3J10080
1488	髣	57DE		F3J20080
1489	魴	57DF		F3J30080
1490	龐	57E0	DBC2	F3J40080
1491	俳	57E1	DBC4	F3J50080
1492	倍	57E2	DBC3	F3J60080
1493	北	57E3	DBC5	F3J70080
1494	培	57E4	DBC6	F3J80080
1495	徘	57E5	DBC7	F3J90080
1496	拜	57E6	DBC8	F3JA0080
1497	排	57E7	DBC9	F3JB0080
1498	杯	57E8	DBCA	F3JC0080
1499	湃	57E9	DBCB	F3JD0080
1500	盃	57EA	DBCD	F3JE0080
1501	胚	57EB	DBCF	F3JF0080
1502	背	57EC	DBCE	F3JG0080
1503	裴	57ED	DBD1	F3JH0080
1504	裴	57EE	DBD0	F3JI0080
1505	褸	57EF	DBD2	F3JJ0080
1506	賠	57F0	DBD3	F3JK0080
1507	輩	57F1	DBD4	F3JL0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 10 (Page 30 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1508	配	57F2	DBD5	F3JM0080
1509	陪	57F3	DBD6	F3JN0080
1510	伯	57F4	DBD7	F3JO0080
1511	佰	57F5	DBD8	F3JP0080
1512	帛	57F6	DBD9	F3JQ0080
1513	柏	57F7	DBDA	F3JR0080
1514	栢	57F8	DBDB	F3JS0080
1515	白	57F9	DBDC	F3JT0080
1516	百	57FA	DBDD	F3JU0080
1517	魄	57FB	DBDE	F3JV0080
1518	樊	57FC	DBE0	F3JW0080
1519	潘	57FD		F3JX0080
1520	煩	57FE	DBE1	F3JY0080
1521	番	5841	DBE3	F3K10080
1522	磻	5842	DBE4	F3K20080
1523	繁	5843	DBE5	F3K30080
1524	翻	5844		F3K40080
1525	蕃	5845	DBE6	F3K50080
1526	藩	5846	DBE7	F3K60080
1527	馱	5847	DBE8	F3K70080
1528	伐	5848	DBE9	F3K80080
1529	筏	5849	DBEA	F3K90080
1530	罰	584A	DBEB	F3KA0080
1531	閥	584B	DBEC	F3KB0080
1532	凡	584C	DBED	F3KC0080
1533	帆	584D	DBEE	F3KD0080

Table 10 (Page 30 of 33). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1534	梵	584E	DBEF	F3KE0080
1535	汜	584F	DBF0	F3KF0080
1536	汎	5850	DBF1	F3KG0080
1537	泛	5851	DBF2	F3KH0080
1538	犯	5852	DBF3	F3KI0080
1539	範	5853	DBF4	F3KJ0080
1540	范	5854	DBF5	F3KK0080
1541	法	5855	DBF6	F3KL0080
1542	珞	5856	DBF7	F3KM0080
1543	僻	5857	DBF8	F3KN0080
1544	劈	5858	DBF9	F3KO0080
1545	壁	5859	DBFA	F3KP0080
1546	擘	585A	DBFB	F3KQ0080
1547	璧	585B	DBFD	F3KR0080
1548	癖	585C	DBFE	F3KS0080
1549	碧	585D	DCA1	F3KT0080
1550	辟	585E		F3KU0080
1551	闢	585F	DCA3	F3KV0080
1552	霹	5860	DCA4	F3KW0080
1553	便	5861	DCA5	F3KX0080
1554	卞	5862	DCA6	F3KY0080
1555	弁	5863	DCA7	F3KZ0080
1556	汴	5864		F3L00080
1557	辦	5865		F3L10080
1558	變	5866	DCA8	F3L20080
1559	辨	5867	DCA9	F3L30080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1560	辯	5868	DCAA	F3L40080
1561	遍	5869		F3L50080
1562	邊	586A	DCAB	F3L60080
1563	駢	586B		F3L70080
1564	別	586C	DCAC	F3L80080
1565	譬	586D		F3L90080
1566	譬	586E	DCAD	F3LA0080
1567	鰲	586F	DCAE	F3LB0080
1568	鼈	5870	DCAF	F3LC0080
1569	丙	5871	DCB0	F3LD0080
1570	併	5872	DCB1	F3LE0080
1571	兵	5873	DCB2	F3LF0080
1572	屏	5874	DCB3	F3LG0080
1573	并	5875	DCB4	F3LH0080
1574	晒	5876	DCB5	F3LI0080
1575	昃	5877	DCB6	F3LJ0080
1576	柄	5878	DCB7	F3LK0080
1577	炳	5879	DCB9	F3LL0080
1578	瓶	587A	DCBA	F3LM0080
1579	病	587B	DCBB	F3LN0080
1580	並	587C	DCBD	F3LO0080
1581	秉	587D	DCBC	F3LP0080
1582	駢	587E	DCBE	F3LQ0080
1583	迸	587F		F3LR0080
1584	餅	5880	DCBF	F3LS0080
1585	保	5881	DCC1	F3LT0080

Line Number	Graphic	Host Code	PC Code	GCGID
1586	堡	5882	DCC2	F3LU0080
1587	報	5883	DCC3	F3LV0080
1588	寶	5884	DCC4	F3LW0080
1589	普	5885	DCC5	F3LX0080
1590	步	5886	DCC6	F3LY0080
1591	淥	5887	DCC8	F3LZ0080
1592	洑	5888	DCC7	F3M00080
1593	潛	5889	DCC9	F3M10080
1594	甫	588A	DCCB	F3M20080
1595	補	588B	DCCD	F3M30080
1596	裸	588C	DCCE	F3M40080
1597	譜	588D	DCCF	F3M50080
1598	輔	588E	DCD0	F3M60080
1599	鵠	588F		F3M70080
1600	黼	5890		F3M80080
1601	伏	5891	DCD1	F3M90080
1602	僕	5892	DCD2	F3MA0080
1603	匍	5893	DCD3	F3MB0080
1604	卜	5894	DCD4	F3MC0080
1605	宓	5895	DCD5	F3MD0080
1606	復	5896	DCD6	F3ME0080
1607	福	5897	DCD8	F3MF0080
1608	服	5898	DCD7	F3MG0080
1609	腹	5899	DCD9	F3MH0080
1610	茯	589A	DCDA	F3MI0080
1611	蔔	589B	DCDB	F3MJ0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1612	覆	589C	DCDD	F3MK0080
1613	蝠	589D		F3ML0080
1614	複	589E	DCDC	F3MM0080
1615	輻	589F	DCDF	F3MN0080
1616	馥	58A0	DCE0	F3MO0080
1617	馥	58A1	DCE1	F3MP0080
1618	本	58A2	DCE2	F3MQ0080
1619	芟	58A3	DCE3	F3MR0080
1620	丰	58A4		F3MS0080
1621	棒	58A5	DCE4	F3MT0080
1622	奉	58A6	DCE5	F3MU0080
1623	封	58A7	DCE6	F3MV0080
1624	峰	58A8	DCE8	F3MW0080
1625	峯	58A9	DCE7	F3MX0080
1626	捧	58AA	DCE9	F3MY0080
1627	率	58AB	DCED	F3MZ0080
1628	棒	58AC	DCEA	F3N00080
1629	烽	58AD	DCEB	F3N10080
1630	縫	58AE	DCEE	F3N20080
1631	葑	58AF		F3N30080
1632	蓬	58B0	DCEF	F3N40080
1633	蜂	58B1	DCF0	F3N50080
1634	逢	58B2	DCF1	F3N60080
1635	鋒	58B3	DCF2	F3N70080
1636	鳳	58B4	DCF3	F3N80080
1637	仆	58B5		F3N90080

Line Number	Graphic	Host Code	PC Code	GCGID
1638	付	58B6	DCF5	F3NA0080
1639	傅	58B7	DCF7	F3NB0080
1640	剖	58B8	DCF8	F3NC0080
1641	副	58B9	DCF9	F3ND0080
1642	否	58BA	DCFA	F3NE0080
1643	埠	58BB	DCFC	F3NF0080
1644	夫	58BC	DCFD	F3NG0080
1645	婦	58BD	DCFE	F3NH0080
1646	孵	58BE	DDA2	F3NI0080
1647	富	58BF	DDA3	F3NJ0080
1648	府	58C0	DDA4	F3NK0080
1649	復	58C1	DDA5	F3NL0080
1650	扶	58C2	DDA6	F3NM0080
1651	敷	58C3	DDA7	F3NN0080
1652	斧	58C4	DDA8	F3NO0080
1653	浮	58C5	DDA9	F3NP0080
1654	溥	58C6	DDAA	F3NQ0080
1655	父	58C7	DDAB	F3NR0080
1656	簿	58C8	DDAD	F3NS0080
1657	缶	58C9	DDAE	F3NT0080
1658	符	58CA	DDAC	F3NU0080
1659	罟	58CB		F3NV0080
1660	腑	58CC	DDB0	F3NW0080
1661	腐	58CD	DDAF	F3NX0080
1662	膚	58CE	DDB1	F3NY0080
1663	芙	58CF	DDB3	F3NZ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1664	苻	58D0		F3O00080
1665	蜚	58D1		F3O10080
1666	訃	58D2	DDB5	F3O20080
1667	負	58D3	DDB6	F3O30080
1668	賦	58D4	DDB7	F3O40080
1669	贖	58D5	DDB8	F3O50080
1670	赴	58D6	DDB9	F3O60080
1671	趺	58D7	DDBA	F3O70080
1672	部	58D8	DDBB	F3O80080
1673	釜	58D9	DDBC	F3O90080
1674	阜	58DA	DDBD	F3OA0080
1675	附	58DB	DDBE	F3OB0080
1676	頰	58DC		F3OC0080
1677	駙	58DD	DDBF	F3OD0080
1678	鮒	58DE		F3OE0080
1679	鳧	58DF	DDC0	F3OF0080
1680	北	58E0	DDC1	F3OG0080
1681	分	58E1	DDC2	F3OH0080
1682	噴	58E2	DDC4	F3OI0080
1683	吟	58E3		F3OJ0080
1684	墳	58E4	DDC5	F3OK0080
1685	奔	58E5	DDC6	F3OL0080
1686	奮	58E6	DDC7	F3OM0080
1687	忿	58E7	DDC8	F3ON0080
1688	憤	58E8	DDC9	F3OO0080
1689	扮	58E9	DDCA	F3OP0080

Line Number	Graphic	Host Code	PC Code	GCGID
1690	汾	58EA	DDCC	F3OQ0080
1691	焚	58EB	DDCD	F3OR0080
1692	盆	58EC	DDCE	F3OS0080
1693	粉	58ED	DDCF	F3OT0080
1694	羹	58EE	DDD0	F3OU0080
1695	紛	58EF	DDD1	F3OV0080
1696	芬	58F0	DDD2	F3OW0080
1697	蕒	58F1		F3OX0080
1698	雰	58F2	DDD4	F3OY0080
1699	不	58F3	DDD5	F3OZ0080
1700	佛	58F4	DDD6	F3P00080
1701	市	58F5		F3P10080
1702	弗	58F6	DDD7	F3P20080
1703	拂	58F7	DDD9	F3P30080
1704	髯	58F8		F3P40080
1705	黻	58F9		F3P50080
1706	崩	58FA	DDDA	F3P60080
1707	朋	58FB	DDDB	F3P70080
1708	棚	58FC	DDDC	F3P80080
1709	礪	58FD	DDDD	F3P90080
1710	繡	58FE	DDDE	F3PA0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1711	鵬	5941	DDDF	F3PD0080
1712	丕	5942	DDE0	F3PE0080
1713	備	5943	DDE1	F3PF0080
1714	匕	5944	DDE2	F3PG0080
1715	匪	5945	DDE3	F3PH0080
1716	卑	5946	DDE4	F3PI0080
1717	妃	5947	DDE5	F3PJ0080
1718	妣	5948		F3PK0080
1719	婢	5949	DDE6	F3PL0080
1720	庇	594A	DDE7	F3PM0080
1721	悲	594B	DDE8	F3PN0080
1722	憊	594C	DDE9	F3PO0080
1723	扉	594D	DDEA	F3PP0080
1724	批	594E	DDEB	F3PQ0080
1725	斐	594F	DDEC	F3PR0080
1726	沙	5950		F3PS0080
1727	榧	5951	DDEE	F3PT0080
1728	泚	5952		F3PU0080
1729	泌	5953	DDF4	F3PV0080
1730	沸	5954	DDF3	F3PW0080
1731	比	5955	DDEF	F3PX0080
1732	毘	5956	DDF2	F3PY0080
1733	毳	5957	DDF5	F3PZ0080
1734	痺	5958	DDF6	F3Q00080
1735	脾	5959		F3Q10080
1736	砒	595A	DDF7	F3Q20080

Line Number	Graphic	Host Code	PC Code	GCGID
1737	碑	595B	DDF8	F3Q30080
1738	秘	595C	DDFA	F3Q40080
1739	篋	595D		F3Q50080
1740	緋	595E	DDFC	F3Q60080
1741	翡	595F	DDFD	F3Q70080
1742	肥	5960	DDFE	F3Q80080
1743	腓	5961		F3Q90080
1744	脾	5962	DEA1	F3QA0080
1745	臂	5963	DEA2	F3QB0080
1746	菲	5964	DEA3	F3QC0080
1747	蜚	5965	DEA4	F3QD0080
1748	裨	5966	DEA5	F3QE0080
1749	誹	5967	DEA6	F3QF0080
1750	譬	5968	DEA7	F3QG0080
1751	費	5969	DEA8	F3QH0080
1752	轡	596A		F3QI0080
1753	鄙	596B	DEA9	F3QJ0080
1754	非	596C	DEAA	F3QK0080
1755	飛	596D	DEAB	F3QL0080
1756	髀	596E		F3QM0080
1757	鼻	596F	DEAC	F3QN0080
1758	嬪	5970	DEAE	F3QO0080
1759	賓	5971	DEB9	F3QP0080
1760	彬	5972	DEAF	F3QQ0080
1761	擯	5973		F3QR0080
1762	斌	5974	DEB0	F3QS0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 11 (Page 2 of 37). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1763	檣	5975	DEB1	F3QT0080
1764	殯	5976	DEB2	F3QU0080
1765	濱	5977	DEB4	F3QV0080
1766	瀨	5978	DEB5	F3QW0080
1767	牝	5979	DEB6	F3QX0080
1768	蘋	597A		F3QY0080
1769	貧	597B	DEB8	F3QZ0080
1770	贊	597C		F3R00080
1771	頻	597D	DEBA	F3R10080
1772	墾	597E		F3R20080
1773	鬢	597F		F3R30080
1774	憑	5980	DEBB	F3R40080
1775	水	5981	DEBC	F3R50080
1776	聘	5982	DEBD	F3R60080
1777	聘	5983	DEBE	F3R70080
1778	乍	5984	DEBF	F3R80080
1779	事	5985	DEC0	F3R90080
1780	些	5986	DEC1	F3RA0080
1781	仕	5987	DEC2	F3RB0080
1782	似	5988	DEC4	F3RC0080
1783	伺	5989	DEC3	F3RD0080
1784	舍	598A	DEEC	F3RE0080
1785	使	598B	DEC5	F3RF0080
1786	僂	598C	DEC7	F3RG0080
1787	史	598D	DEC8	F3RH0080
1788	司	598E	DEC9	F3RI0080

Table 11 (Page 2 of 37). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1789	四	598F	DECC	F3RJ0080
1790	唆	5990	DECA	F3RK0080
1791	嗣	5991	DECB	F3RL0080
1792	士	5992	DECD	F3RM0080
1793	奢	5993	DECE	F3RN0080
1794	姒	5994		F3RO0080
1795	娑	5995	DECF	F3RP0080
1796	寫	5996	DED0	F3RQ0080
1797	寺	5997	DED1	F3RR0080
1798	巳	5998	DED3	F3RS0080
1799	師	5999	DED4	F3RT0080
1800	麝	599A		F3RU0080
1801	徙	599B	DED5	F3RV0080
1802	思	599C	DED6	F3RW0080
1803	捨	599D	DED7	F3RX0080
1804	赦	599E	DEF5	F3RY0080
1805	斯	599F	DED9	F3RZ0080
1806	斜	59A0	DED8	F3S00080
1807	查	59A1	DEDB	F3S10080
1808	梭	59A2	DEDC	F3S20080
1809	楂	59A3		F3S30080
1810	槎	59A4		F3S40080
1811	沙	59A5	DEDE	F3S50080
1812	泗	59A6	DEDF	F3S60080
1813	渣	59A7	DEE0	F3S70080
1814	瀉	59A8	DEE1	F3S80080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1815	邪	59A9	DEF7	F3S90080
1816	獅	59AA	DEE2	F3SA0080
1817	祀	59AB	DEE5	F3SB0080
1818	社	59AC	DEE4	F3SC0080
1819	祠	59AD	DEE6	F3SD0080
1820	死	59AE	DEDD	F3SE0080
1821	砂	59AF	DEE3	F3SF0080
1822	私	59B0	DEE7	F3SG0080
1823	筍	59B1		F3SH0080
1824	篩	59B2	DEE8	F3SI0080
1825	蓑	59B3	DEEE	F3SJ0080
1826	紗	59B4	DEE9	F3SK0080
1827	絲	59B5	DEEA	F3SL0080
1828	莎	59B6	DEED	F3SM0080
1829	蛇	59B7	DEEF	F3SN0080
1830	裘	59B8	DEF0	F3SO0080
1831	詐	59B9	DEF1	F3SP0080
1832	詞	59BA	DEF2	F3SQ0080
1833	謝	59BB	DEF3	F3SR0080
1834	賜	59BC	DEF4	F3SS0080
1835	射	59BD	DED2	F3ST0080
1836	辭	59BE	DEF6	F3SU0080
1837	肆	59BF	DEEB	F3SV0080
1838	飼	59C0	DEF8	F3SW0080
1839	駟	59C1	DEF9	F3SX0080
1840	削	59C2	DEFB	F3SY0080

Line Number	Graphic	Host Code	PC Code	GCGID
1841	數	59C3	DEFC	F3SZ0080
1842	槩	59C4		F3T00080
1843	朔	59C5	DEFD	F3T10080
1844	索	59C6	DEFE	F3T20080
1845	鑠	59C7		F3T30080
1846	傘	59C8	DFA1	F3T40080
1847	刪	59C9	DFA2	F3T50080
1848	山	59CA	DFA3	F3T60080
1849	散	59CB	DFA4	F3T70080
1850	汕	59CC	DFA5	F3T80080
1851	珊	59CD	DFA6	F3T90080
1852	產	59CE	DFA7	F3TA0080
1853	疝	59CF	DFA8	F3TB0080
1854	算	59D0	DFA9	F3TC0080
1855	蒜	59D1	DFAA	F3TD0080
1856	酸	59D2	DFAB	F3TE0080
1857	撒	59D3	DFAE	F3TF0080
1858	殺	59D4	DFAF	F3TG0080
1859	娑	59D5	DFAD	F3TH0080
1860	薩	59D6	DFB1	F3TI0080
1861	三	59D7	DFB2	F3TJ0080
1862	參	59D8	DFB3	F3TK0080
1863	杉	59D9	DFB4	F3TL0080
1864	森	59DA	DFB5	F3TM0080
1865	滲	59DB	DFB6	F3TN0080
1866	衫	59DC	DFB9	F3TO0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1867	芟	59DD	DFB7	F3TP0080
1868	蔘	59DE	DFB8	F3TQ0080
1869	畝	59DF		F3TR0080
1870	插	59E0	DFBA	F3TS0080
1871	澁	59E1	DFBB	F3TT0080
1872	颯	59E2	DFBD	F3TU0080
1873	鍤	59E3		F3TV0080
1874	霎	59E4		F3TW0080
1875	上	59E5	DFBE	F3TX0080
1876	傷	59E6	DFBF	F3TY0080
1877	像	59E7	DFC0	F3TZ0080
1878	償	59E8	DFC1	F3U00080
1879	商	59E9	DFC2	F3U10080
1880	喪	59EA	DFC3	F3U20080
1881	嘗	59EB	DFC4	F3U30080
1882	爽	59EC	DFD0	F3U40080
1883	孀	59ED	DFC5	F3U50080
1884	尙	59EE	DFC6	F3U60080
1885	床	59EF	DFC9	F3U70080
1886	庠	59F0	DFCA	F3U80080
1887	廂	59F1	DFCB	F3U90080
1888	常	59F2	DFC8	F3UA0080
1889	想	59F3	DFCC	F3UB0080
1890	相	59F4	DFD3	F3UC0080
1891	桑	59F5	DFCD	F3UD0080
1892	橡	59F6	DFCE	F3UE0080

Line Number	Graphic	Host Code	PC Code	GCGID
1893	瘍	59F7		F3UF0080
1894	湘	59F8	DFCF	F3UG0080
1895	狀	59F9	DFD2	F3UH0080
1896	牀	59FA	DFD1	F3UI0080
1897	祥	59FB	DFD4	F3UJ0080
1898	箱	59FC	DFD5	F3UK0080
1899	翔	59FD	DFD6	F3UL0080
1900	裳	59FE	DFD7	F3UM0080
1901	觴	5A41	DFD8	F3UP0080
1902	象	5A42	DFDA	F3UQ0080
1903	賞	5A43	DFDB	F3UR0080
1904	詳	5A44	DFD9	F3US0080
1905	霜	5A45	DFDC	F3UT0080
1906	塞	5A46	DFDD	F3UU0080
1907	璽	5A47	DFDE	F3UV0080
1908	賽	5A48	DFDF	F3UW0080
1909	鯢	5A49		F3UX0080
1910	塞	5A4A	DFE1	F3UY0080
1911	穢	5A4B	DFE2	F3UZ0080
1912	索	5A4C	DFE3	F3V00080
1913	色	5A4D	DFE4	F3V10080
1914	牲	5A4E	DFE5	F3V20080
1915	生	5A4F	DFE6	F3V30080
1916	甥	5A50	DFE7	F3V40080
1917	省	5A51	DFE8	F3V50080
1918	笙	5A52	DFE9	F3V60080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1919	噬	5A53		F3V70080
1920	埴	5A54	DFEB	F3V80080
1921	墅	5A55	DFEA	F3V90080
1922	婿	5A56		F3VA0080
1923	犀	5A57	DFF9	F3VB0080
1924	嶼	5A58	DFEC	F3VC0080
1925	序	5A59	DFED	F3VD0080
1926	庶	5A5A	DFEE	F3VE0080
1927	徐	5A5B	DFEF	F3VF0080
1928	恕	5A5C	DFF0	F3VG0080
1929	抒	5A5D	DFF1	F3VH0080
1930	敘	5A5E	DFF3	F3VI0080
1931	暑	5A5F	DFF4	F3VJ0080
1932	曙	5A60	DFF5	F3VK0080
1933	書	5A61	DFF6	F3VL0080
1934	栖	5A62	DFF7	F3VM0080
1935	棲	5A63	DFF8	F3VN0080
1936	瑞	5A64	DFFA	F3VO0080
1937	絮	5A65	DFFC	F3VP0080
1938	緒	5A66	DFFD	F3VQ0080
1939	署	5A67	DFFE	F3VR0080
1940	胥	5A68	E0A1	F3VS0080
1941	舒	5A69	E0A2	F3VT0080
1942	薯	5A6A	E0A3	F3VU0080
1943	西	5A6B	E0A4	F3VV0080
1944	誓	5A6C	E0A5	F3VW0080

Line Number	Graphic	Host Code	PC Code	GCGID
1945	鋤	5A6D	E0A7	F3VX0080
1946	逝	5A6E	E0A6	F3VY0080
1947	黍	5A6F	E0A8	F3VZ0080
1948	齟	5A70		F3W00080
1949	鼠	5A71	E0A9	F3W10080
1950	夕	5A72	E0AA	F3W20080
1951	爽	5A73	E0AB	F3W30080
1952	射	5A74		F3W40080
1953	席	5A75	E0AC	F3W50080
1954	惜	5A76	E0AD	F3W60080
1955	昔	5A77	E0AE	F3W70080
1956	皙	5A78	E0AF	F3W80080
1957	析	5A79	E0B0	F3W90080
1958	汐	5A7A	E0B1	F3WA0080
1959	浙	5A7B	E0B2	F3WB0080
1960	瀉	5A7C	E0B3	F3WC0080
1961	石	5A7D	E0B4	F3WD0080
1962	碩	5A7E	E0B5	F3WE0080
1963	蓆	5A7F	E0B6	F3WF0080
1964	釋	5A80	E0B7	F3WG0080
1965	錫	5A81	E0B8	F3WH0080
1966	先	5A82	E0BB	F3WI0080
1967	仙	5A83	E0B9	F3WJ0080
1968	僂	5A84	E0BA	F3WK0080
1969	單	5A85		F3WL0080
1970	善	5A86	E0BC	F3WM0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1971	宣	5A87	E0BE	F3WN0080
1972	勹	5A88		F3WO0080
1973	愴	5A89		F3WP0080
1974	扇	5A8A	E0BF	F3WQ0080
1975	旋	5A8B	E0C1	F3WR0080
1976	洗	5A8C		F3WS0080
1977	煽	5A8D	E0C3	F3WT0080
1978	燹	5A8E		F3WU0080
1979	禪	5A8F	E0C9	F3WV0080
1980	瑄	5A90	E0C5	F3WW0080
1981	璇	5A91	E0C6	F3WX0080
1982	璿	5A92	E0C7	F3WY0080
1983	癩	5A93	E0C8	F3WZ0080
1984	線	5A94	E0CA	F3X00080
1985	繕	5A95	E0CB	F3X10080
1986	羨	5A96	E0CC	F3X20080
1987	腺	5A97	E0CD	F3X30080
1988	膳	5A98	E0CE	F3X40080
1989	船	5A99	E0CF	F3X50080
1990	薜	5A9A	E0D0	F3X60080
1991	蟬	5A9B	E0D1	F3X70080
1992	詵	5A9C	E0D2	F3X80080
1993	跣	5A9D	E0D3	F3X90080
1994	選	5A9E	E0D4	F3XA0080
1995	銑	5A9F	E0D5	F3XB0080
1996	霰	5AA0		F3XC0080

Line Number	Graphic	Host Code	PC Code	GCGID
1997	鮮	5AA1	E0D8	F3XD0080
1998	楔	5AA2		F3XE0080
1999	尙	5AA3	E0D9	F3XF0080
2000	舌	5AA4	E0DF	F3XG0080
2001	契	5AA5		F3XH0080
2002	屑	5AA6	E0DA	F3XI0080
2003	挈	5AA7		F3XJ0080
2004	楔	5AA8	E0DB	F3XK0080
2005	洩	5AA9	E0DD	F3XL0080
2006	滌	5AAA	E0DE	F3XM0080
2007	薛	5AAB	E0E0	F3XN0080
2008	設	5AAC	E0E2	F3XO0080
2009	說	5AAD	E0E3	F3XP0080
2010	雪	5AAE	E0E4	F3XQ0080
2011	殲	5AAF	E0E8	F3XR0080
2012	織	5AB0	E0E9	F3XS0080
2013	蟾	5AB1	E0EA	F3XT0080
2014	瞻	5AB2	E0EB	F3XU0080
2015	遲	5AB3	E0E7	F3XV0080
2016	閃	5AB4	E0EC	F3XW0080
2017	燮	5AB5	E0F0	F3XX0080
2018	攝	5AB6	E0EE	F3XY0080
2019	涉	5AB7	E0EF	F3XZ0080
2020	葉	5AB8	E0F1	F3Y00080
2021	城	5AB9	E0F2	F3Y10080
2022	姓	5ABA	E0F3	F3Y20080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2023	性	5ABB	E0F5	F3Y30080
2024	惺	5ABC	E0F6	F3Y40080
2025	成	5ABD	E0F7	F3Y50080
2026	星	5ABE	E0F8	F3Y60080
2027	晟	5ABF	E0F9	F3Y70080
2028	猩	5AC0	E0FA	F3Y80080
2029	盛	5AC1	E0FC	F3Y90080
2030	省	5AC2	E0FD	F3YA0080
2031	箴	5AC3	E0FE	F3YB0080
2032	聖	5AC4	E1A1	F3YC0080
2033	聲	5AC5	E1A2	F3YD0080
2034	腥	5AC6	E1A3	F3YE0080
2035	誠	5AC7	E1A4	F3YF0080
2036	醒	5AC8	E1A5	F3YG0080
2037	世	5AC9	E1A6	F3YH0080
2038	勢	5ACA	E1A7	F3YI0080
2039	歲	5ACB	E1A8	F3YJ0080
2040	洗	5ACC	E1A9	F3YK0080
2041	稅	5ACD	E1AA	F3YL0080
2042	箠	5ACE	E1AB	F3YM0080
2043	細	5ACF	E1AC	F3YN0080
2044	說	5AD0	E1AD	F3YO0080
2045	貫	5AD1	E1AE	F3YP0080
2046	召	5AD2	E1AF	F3YQ0080
2047	嘯	5AD3	E1B0	F3YR0080
2048	塑	5AD4	E1B1	F3YS0080

Line Number	Graphic	Host Code	PC Code	GCGID
2049	小	5AD5	E1B3	F3YT0080
2050	少	5AD6	E1B4	F3YU0080
2051	宵	5AD7	E1B2	F3YV0080
2052	巢	5AD8	E1B5	F3YW0080
2053	掃	5AD9	E1B7	F3YX0080
2054	搔	5ADA	E1B8	F3YY0080
2055	所	5ADB	E1B6	F3YZ0080
2056	昭	5ADC	E1B9	F3Z00080
2057	梳	5ADD	E1BA	F3Z10080
2058	沼	5ADE	E1BB	F3Z20080
2059	消	5ADF	E1BC	F3Z30080
2060	溯	5AE0	E1BD	F3Z40080
2061	瀟	5AE1	E1BE	F3Z50080
2062	炤	5AE2	E1BF	F3Z60080
2063	燒	5AE3	E1C0	F3Z70080
2064	甦	5AE4	E1C1	F3Z80080
2065	疎	5AE5	E1C3	F3Z90080
2066	疏	5AE6	E1C2	F3ZA0080
2067	笑	5AE7	E1C5	F3ZB0080
2068	簫	5AE8	E1C7	F3ZC0080
2069	素	5AE9	E1C8	F3ZD0080
2070	紹	5AEA	E1C9	F3ZE0080
2071	艘	5AEB		F3ZF0080
2072	蔬	5AEC	E1CA	F3ZG0080
2073	蕭	5AED	E1CB	F3ZH0080
2074	蘇	5AEE	E1CC	F3ZI0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 11 (Page 8 of 37). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2075	訴	5AEF	E1CD	F3ZJ0080
2076	迨	5AF0	E1CE	F3ZK0080
2077	遡	5AF1	E1CF	F3ZL0080
2078	邵	5AF2	E1D0	F3ZM0080
2079	銷	5AF3	E1D1	F3ZN0080
2080	霄	5AF4		F3ZO0080
2081	韶	5AF5	E1D2	F3ZP0080
2082	騷	5AF6	E1D3	F3ZQ0080
2083	俗	5AF7	E1D4	F3ZR0080
2084	屬	5AF8	E1D5	F3ZS0080
2085	束	5AF9	E1D6	F3ZT0080
2086	粟	5AFA	E1D8	F3ZU0080
2087	續	5AFB	E1D9	F3ZV0080
2088	速	5AFC	E1DC	F3ZW0080
2089	孫	5AFD	E1DD	F3ZX0080
2090	損	5AFE	E1DF	F3ZY0080
2091	遜	5B41	E1E1	F4010080
2092	率	5B42	E1E3	F4020080
2093	蟀	5B43		F4030080
2094	宋	5B44	E1E4	F4040080
2095	松	5B45	E1E6	F4050080
2096	訟	5B46	E1E8	F4060080
2097	誦	5B47	E1E9	F4070080
2098	送	5B48	E1EA	F4080080
2099	頌	5B49	E1EB	F4090080
2100	刷	5B4A	E1EC	F40A0080

Table 11 (Page 8 of 37). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2101	殺	5B4B	E1ED	F40B0080
2102	灑	5B4C	E1EE	F40C0080
2103	瑣	5B4D		F40D0080
2104	碎	5B4E	E1EF	F40E0080
2105	鎖	5B4F	E1F0	F40F0080
2106	衰	5B50	E1F1	F40G0080
2107	釧	5B51	E1F2	F40H0080
2108	修	5B52	E1F3	F40I0080
2109	受	5B53	E1F4	F40J0080
2110	叟	5B54		F40K0080
2111	囚	5B55	E1F6	F40L0080
2112	嗽	5B56	E1F5	F40M0080
2113	垂	5B57	E1F7	F40N0080
2114	壽	5B58	E1F8	F40O0080
2115	嫂	5B59	E1F9	F40P0080
2116	守	5B5A	E1FA	F40Q0080
2117	宿	5B5B		F40R0080
2118	岫	5B5C	E1FB	F40S0080
2119	帥	5B5D	E1FD	F40T0080
2120	戍	5B5E	E2A1	F40U0080
2121	愁	5B5F	E1FE	F40V0080
2122	手	5B60	E2A2	F40W0080
2123	授	5B61	E2A3	F40X0080
2124	搜	5B62	E2A4	F40Y0080
2125	收	5B63	E2A5	F40Z0080
2126	數	5B64	E2A6	F4100080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2127	晬	5B65		F4110080
2128	樹	5B66	E2A7	F4120080
2129	殊	5B67	E2A8	F4130080
2130	燧	5B68	E2AC	F4140080
2131	水	5B69	E2A9	F4150080
2132	洙	5B6A	E2AA	F4160080
2133	洩	5B6B		F4170080
2134	漱	5B6C	E2AB	F4180080
2135	狩	5B6D	E2AD	F4190080
2136	獸	5B6E	E2AE	F41A0080
2137	崇	5B6F		F41B0080
2138	瘦	5B70	E2B1	F41C0080
2139	睡	5B71	E2B2	F41D0080
2140	睢	5B72		F41E0080
2141	秀	5B73	E2B3	F41F0080
2142	穗	5B74	E2B4	F41G0080
2143	豎	5B75	E2B5	F41H0080
2144	粹	5B76	E2B6	F41I0080
2145	綏	5B77	E2B7	F41J0080
2146	綬	5B78	E2B8	F41K0080
2147	繡	5B79	E2B9	F41L0080
2148	羞	5B7A	E2BA	F41M0080
2149	脩	5B7B	E2BB	F41N0080
2150	茱	5B7C	E2BC	F41O0080
2151	菟	5B7D	E2BD	F41P0080
2152	蓀	5B7E	E2BE	F41Q0080

Line Number	Graphic	Host Code	PC Code	GCGID
2153	藪	5B7F	E2BF	F41R0080
2154	袖	5B80	E2C0	F41S0080
2155	誰	5B81	E2C1	F41T0080
2156	輸	5B82	E2C3	F41U0080
2157	遂	5B83	E2C4	F41V0080
2158	邃	5B84	E2C5	F41W0080
2159	酬	5B85	E2C6	F41X0080
2160	銖	5B86	E2C7	F41Y0080
2161	銹	5B87	E2C8	F41Z0080
2162	隋	5B88	E2C9	F4200080
2163	隨	5B89	E2CB	F4210080
2164	雖	5B8A	E2CC	F4220080
2165	需	5B8B	E2CD	F4230080
2166	須	5B8C	E2CE	F4240080
2167	首	5B8D	E2CF	F4250080
2168	髓	5B8E	E2D0	F4260080
2169	鬚	5B8F	E2D1	F4270080
2170	叔	5B90	E2D2	F4280080
2171	塾	5B91	E2D3	F4290080
2172	夙	5B92	E2D4	F42A0080
2173	孰	5B93	E2D5	F42B0080
2174	宿	5B94	E2D6	F42C0080
2175	淑	5B95	E2D7	F42D0080
2176	熟	5B96	E2D9	F42E0080
2177	肅	5B97	E2DC	F42F0080
2178	菽	5B98	E2DD	F42G0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2179	循	5B99	E2E0	F42H0080
2180	恂	5B9A	E2E1	F42I0080
2181	旬	5B9B	E2E2	F42J0080
2182	楯	5B9C	E2E4	F42K0080
2183	殉	5B9D	E2E6	F42L0080
2184	洵	5B9E	E2E7	F42M0080
2185	淳	5B9F	E2E8	F42N0080
2186	珣	5BA0	E2E9	F42O0080
2187	盾	5BA1	E2EA	F42P0080
2188	瞬	5BA2	E2EB	F42Q0080
2189	筍	5BA3	E2EC	F42R0080
2190	純	5BA4	E2ED	F42S0080
2191	脣	5BA5	E2EE	F42T0080
2192	舜	5BA6	E2EF	F42U0080
2193	荀	5BA7	E2F0	F42V0080
2194	詢	5BA8	E2F3	F42W0080
2195	巡	5BA9	E2DE	F42X0080
2196	醇	5BAA	E2F5	F42Y0080
2197	鎔	5BAB	E2F6	F42Z0080
2198	順	5BAC	E2F7	F4300080
2199	馴	5BAD	E2F8	F4310080
2200	鶉	5BAE		F4320080
2201	戍	5BAF	E2F9	F4330080
2202	術	5BB0	E2FA	F4340080
2203	述	5BB1	E2FB	F4350080
2204	崇	5BB2	E2FD	F4360080

Line Number	Graphic	Host Code	PC Code	GCGID
2205	崧	5BB3	E2FE	F4370080
2206	嵩	5BB4	E3A1	F4380080
2207	瑟	5BB5	E3A2	F4390080
2208	膝	5BB6	E3A3	F43A0080
2209	虱	5BB7		F43B0080
2210	蝨	5BB8	E3A4	F43C0080
2211	拾	5BB9	E3A6	F43D0080
2212	濕	5BBA	E3A5	F43E0080
2213	習	5BBB	E3A7	F43F0080
2214	褶	5BBC	E3A8	F43G0080
2215	襲	5BBD	E3A9	F43H0080
2216	丞	5BBE	E3AA	F43I0080
2217	乘	5BBF	E3AB	F43J0080
2218	僧	5BC0	E3AC	F43K0080
2219	升	5BC1	E3AE	F43L0080
2220	承	5BC2	E3AF	F43M0080
2221	昇	5BC3	E3B0	F43N0080
2222	勝	5BC4	E3AD	F43O0080
2223	繩	5BC5	E3B1	F43P0080
2224	蠅	5BC6	E3B2	F43Q0080
2225	陞	5BC7	E3B3	F43R0080
2226	侍	5BC8	E3B4	F43S0080
2227	匙	5BC9	E3B5	F43T0080
2228	雷	5BCA		F43U0080
2229	嘶	5BCB	E3B6	F43V0080
2230	始	5BCC	E3B7	F43W0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2231	媿	5BCD	E3B8	F43X0080
2232	寺	5BCE		F43Y0080
2233	尸	5BCF	E3B9	F43Z0080
2234	屍	5BD0	E3BB	F4400080
2235	市	5BD1	E3BC	F4410080
2236	弑	5BD2	E3BD	F4420080
2237	恃	5BD3	E3BE	F4430080
2238	施	5BD4	E3BF	F4440080
2239	是	5BD5	E3C0	F4450080
2240	時	5BD6	E3C1	F4460080
2241	柿	5BD7	E3C2	F4470080
2242	柴	5BD8	E3C3	F4480080
2243	猜	5BD9	E3C4	F4490080
2244	矢	5BDA	E3C5	F44A0080
2245	示	5BDB	E3C6	F44B0080
2246	視	5BDC	E3CA	F44C0080
2247	總	5BDD		F44D0080
2248	翅	5BDE	E3C7	F44E0080
2249	蒔	5BDF	E3C8	F44F0080
2250	蓍	5BE0	E3C9	F44G0080
2251	詩	5BE1	E3CC	F44H0080
2252	試	5BE2	E3CB	F44I0080
2253	諡	5BE3	E3CD	F44J0080
2254	豺	5BE4	E3CF	F44K0080
2255	埴	5BE5	E3D0	F44L0080
2256	寔	5BE6	E3D1	F44M0080

Line Number	Graphic	Host Code	PC Code	GCGID
2257	式	5BE7	E3D2	F44N0080
2258	息	5BE8	E3D3	F44O0080
2259	拭	5BE9	E3D4	F44P0080
2260	植	5BEA	E3D5	F44Q0080
2261	殖	5BEB	E3D6	F44R0080
2262	湜	5BEC	E3D7	F44S0080
2263	熄	5BED	E3D8	F44T0080
2264	識	5BEE	E3DB	F44U0080
2265	軾	5BEF	E3DC	F44V0080
2266	食	5BF0	E3DD	F44W0080
2267	飾	5BF1	E3DE	F44X0080
2268	伸	5BF2	E3DF	F44Y0080
2269	信	5BF3	E3E1	F44Z0080
2270	呻	5BF4	E3E2	F4500080
2271	娠	5BF5	E3E3	F4510080
2272	宸	5BF6	E3E4	F4520080
2273	愼	5BF7	E3E5	F4530080
2274	新	5BF8	E3E6	F4540080
2275	晨	5BF9	E3E7	F4550080
2276	燼	5BFA	E3E8	F4560080
2277	申	5BFB	E3E9	F4570080
2278	矧	5BFC		F4580080
2279	神	5BFD	E3EA	F4590080
2280	紳	5BFE	E3EB	F45A0080
2281	腎	5C41	E3EC	F45D0080
2282	臣	5C42	E3ED	F45E0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2283	莘	5C43	E3EE	F45F0080
2284	薪	5C44	E3EF	F45G0080
2285	蜃	5C45	E3F1	F45H0080
2286	訊	5C46	E3F2	F45I0080
2287	身	5C47	E3F3	F45J0080
2288	辛	5C48	E3F4	F45K0080
2289	辰	5C49	E3F5	F45L0080
2290	迅	5C4A	E3F6	F45M0080
2291	失	5C4B	E3F7	F45N0080
2292	室	5C4C	E3F8	F45O0080
2293	實	5C4D	E3F9	F45P0080
2294	悉	5C4E	E3FA	F45Q0080
2295	瑟	5C4F		F45R0080
2296	審	5C50	E3FB	F45S0080
2297	尋	5C51	E3FC	F45T0080
2298	心	5C52	E3FD	F45U0080
2299	沈	5C53	E4A1	F45V0080
2300	沁	5C54	E3FE	F45W0080
2301	深	5C55	E4A2	F45X0080
2302	藩	5C56	E4A3	F45Y0080
2303	甚	5C57	E4A4	F45Z0080
2304	芯	5C58	E4A5	F4600080
2305	什	5C59	E4A7	F4610080
2306	十	5C5A	E4A8	F4620080
2307	拾	5C5B	E4A9	F4630080
2308	雙	5C5C	E4AA	F4640080

Line Number	Graphic	Host Code	PC Code	GCGID
2309	氏	5C5D	E4AB	F4650080
2310	亞	5C5E	E4AC	F4660080
2311	俄	5C5F	E4AD	F4670080
2312	兒	5C60	E4AE	F4680080
2313	娥	5C61	E4B0	F4690080
2314	峨	5C62	E4B1	F46A0080
2315	我	5C63	E4B2	F46B0080
2316	牙	5C64	E4B3	F46C0080
2317	芽	5C65	E4B4	F46D0080
2318	蛾	5C66	E4B6	F46E0080
2319	衙	5C67	E4B7	F46F0080
2320	訝	5C68	E4B8	F46G0080
2321	阿	5C69	E4B9	F46H0080
2322	雅	5C6A	E4BA	F46I0080
2323	餓	5C6B	E4BB	F46J0080
2324	鴉	5C6C	E4BC	F46K0080
2325	鵝	5C6D	E4BD	F46L0080
2326	堊	5C6E	E4BE	F46M0080
2327	岳	5C6F	E4BF	F46N0080
2328	嶽	5C70	E4C0	F46O0080
2329	愕	5C71	E4C3	F46P0080
2330	惡	5C72	E4C2	F46Q0080
2331	握	5C73	E4C4	F46R0080
2332	樂	5C74	E4C5	F46S0080
2333	渥	5C75	E4C6	F46T0080
2334	萼	5C76		F46U0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2335	顎	5C77	E4C9	F46V0080
2336	齷	5C78	E4CB	F46W0080
2337	安	5C79	E4CC	F46X0080
2338	岸	5C7A	E4CD	F46Y0080
2339	按	5C7B	E4CE	F46Z0080
2340	晏	5C7C	E4CF	F4700080
2341	案	5C7D	E4D0	F4710080
2342	眼	5C7E	E4D1	F4720080
2343	雁	5C7F	E4D2	F4730080
2344	贗	5C80		F4740080
2345	鞍	5C81	E4D3	F4750080
2346	顏	5C82	E4D4	F4760080
2347	鴈	5C83		F4770080
2348	憂	5C84		F4780080
2349	幹	5C85	E4D6	F4790080
2350	謁	5C86	E4D7	F47A0080
2351	軋	5C87	E4D8	F47B0080
2352	遏	5C88		F47C0080
2353	闕	5C89	E4D9	F47D0080
2354	岳	5C8A		F47E0080
2355	巖	5C8B	E4DC	F47F0080
2356	庵	5C8C	E4DD	F47G0080
2357	暗	5C8D	E4DE	F47H0080
2358	癌	5C8E	E4DF	F47I0080
2359	菴	5C8F	E4E0	F47J0080
2360	諳	5C90		F47K0080

Line Number	Graphic	Host Code	PC Code	GCGID
2361	閻	5C91	E4E1	F47L0080
2362	黯	5C92		F47M0080
2363	壓	5C93	E4E2	F47N0080
2364	押	5C94	E4E3	F47O0080
2365	狎	5C95	E4E4	F47P0080
2366	鴨	5C96	E4E5	F47Q0080
2367	仰	5C97	E4E6	F47R0080
2368	央	5C98	E4E7	F47S0080
2369	快	5C99	E4E8	F47T0080
2370	昂	5C9A	E4E9	F47U0080
2371	殃	5C9B	E4EA	F47V0080
2372	秧	5C9C	E4EB	F47W0080
2373	鞅	5C9D		F47X0080
2374	鴛	5C9E	E4EC	F47Y0080
2375	厓	5C9F	E4ED	F47Z0080
2376	埃	5CA0	E4EF	F4800080
2377	崖	5CA1	E4F0	F4810080
2378	愛	5CA2	E4F1	F4820080
2379	欸	5CA3		F4830080
2380	涯	5CA4	E4F3	F4840080
2381	皚	5CA5		F4850080
2382	曖	5CA6	E4F2	F4860080
2383	碍	5CA7	E4F4	F4870080
2384	礙	5CA8		F4880080
2385	艾	5CA9	E4F5	F4890080
2386	哀	5CAA	E4EE	F48A0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2387	隘	5CAB	E4F6	F48B0080
2388	靄	5CAC	E4F7	F48C0080
2389	靄	5CAD		F48D0080
2390	厄	5CAE	E4F8	F48E0080
2391	掖	5CAF	E4FA	F48F0080
2392	液	5CB0	E4FB	F48G0080
2393	腋	5CB1	E4FD	F48H0080
2394	阨	5CB2		F48I0080
2395	額	5CB3	E4FE	F48J0080
2396	櫻	5CB4	E5A1	F48K0080
2397	罍	5CB5	E5A2	F48L0080
2398	鶯	5CB6	E5A3	F48M0080
2399	鸚	5CB7	E5A4	F48N0080
2400	也	5CB8	E5A5	F48O0080
2401	椰	5CB9	E5A6	F48P0080
2402	冶	5CBA	E5A7	F48Q0080
2403	夜	5CBB	E5A8	F48R0080
2404	射	5CBC		F48S0080
2405	挪	5CBD	E5AA	F48T0080
2406	椰	5CBE	E5AB	F48U0080
2407	爺	5CBF	E5AC	F48V0080
2408	耶	5CC0	E5AD	F48W0080
2409	若	5CC1	E5AE	F48X0080
2410	惹	5CC2	E5A9	F48Y0080
2411	野	5CC3	E5AF	F48Z0080
2412	弱	5CC4	E5B0	F4900080

Line Number	Graphic	Host Code	PC Code	GCGID
2413	籊	5CC5		F4910080
2414	籊	5CC6		F4920080
2415	約	5CC7	E5B3	F4930080
2416	若	5CC8	E5B4	F4940080
2417	葯	5CC9	E5B5	F4950080
2418	藥	5CCA	E5B7	F4960080
2419	躍	5CCB	E5B8	F4970080
2420	佯	5CCC	E5BA	F4980080
2421	壤	5CCD	E5BD	F4990080
2422	孃	5CCE	E5BE	F49A0080
2423	恙	5CCF	E5BF	F49B0080
2424	揚	5CD0	E5C0	F49C0080
2425	攘	5CD1	E5C1	F49D0080
2426	馭	5CD2	E5C2	F49E0080
2427	暘	5CD3	E5C3	F49F0080
2428	楊	5CD4	E5C5	F49G0080
2429	樣	5CD5	E5C6	F49H0080
2430	洋	5CD6	E5C7	F49I0080
2431	漾	5CD7	E5C8	F49J0080
2432	煬	5CD8	E5C9	F49K0080
2433	穰	5CD9	E5CD	F49L0080
2434	痒	5CDA	E5CA	F49M0080
2435	瘍	5CDB	E5CB	F49N0080
2436	羊	5CDC	E5CF	F49O0080
2437	胖	5CDD		F49P0080
2438	襄	5CDE	E5D1	F49Q0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2439	讓	5CDF	E5D3	F49R0080
2440	釀	5CE0	E5D4	F49S0080
2441	陽	5CE1	E5D5	F49T0080
2442	養	5CE2	E5D7	F49U0080
2443	圀	5CE3	E5D8	F49V0080
2444	御	5CE4	E5D9	F49W0080
2445	敵	5CE5		F49X0080
2446	於	5CE6	E5DA	F49Y0080
2447	漁	5CE7	E5DB	F49Z0080
2448	禦	5CE8	E5DD	F4A00080
2449	語	5CE9	E5DE	F4A10080
2450	馭	5CEA	E5DF	F4A20080
2451	魚	5CEB	E5E0	F4A30080
2452	鯿	5CEC	E5E1	F4A40080
2453	億	5CED	E5E2	F4A50080
2454	憶	5CEE	E5E3	F4A60080
2455	抑	5CEF	E5E4	F4A70080
2456	憶	5CF0	E5E5	F4A80080
2457	臆	5CF1	E5E6	F4A90080
2458	偃	5CF2	E5E7	F4AA0080
2459	堰	5CF3	E5E8	F4AB0080
2460	彥	5CF4	E5E9	F4AC0080
2461	焉	5CF5	E5EA	F4AD0080
2462	言	5CF6	E5EB	F4AE0080
2463	諺	5CF7	E5EC	F4AF0080
2464	孽	5CF8	E5ED	F4AG0080

Line Number	Graphic	Host Code	PC Code	GCGID
2465	儼	5CF9	E5F0	F4AH0080
2466	嚴	5CFA	E5F1	F4AI0080
2467	奄	5CFB	E5F2	F4AJ0080
2468	掩	5CFC	E5F3	F4AK0080
2469	淹	5CFD	E5F4	F4AL0080
2470	嶮	5CFE	E5F5	F4AM0080
2471	業	5D41	E5F6	F4AP0080
2472	恚	5D42		F4AQ0080
2473	予	5D43	E5F8	F4AR0080
2474	余	5D44	E5F9	F4AS0080
2475	如	5D45	E5FD	F4AT0080
2476	歟	5D46	E6A2	F4AU0080
2477	汝	5D47	E6A3	F4AV0080
2478	與	5D48	E6A8	F4AW0080
2479	餘	5D49	E6AE	F4AX0080
2480	亦	5D4A	E6B2	F4AY0080
2481	域	5D4B	E6B4	F4AZ0080
2482	射	5D4C		F4B00080
2483	役	5D4D	E6B5	F4B10080
2484	易	5D4E	E6B6	F4B20080
2485	疫	5D4F	E6B9	F4B30080
2486	繹	5D50	E6BA	F4B40080
2487	譯	5D51	E6BB	F4B50080
2488	逆	5D52	E6BD	F4B60080
2489	驛	5D53	E6BE	F4B70080
2490	噉	5D54	E6BF	F4B80080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2491	堦	5D55	E6C0	F4B90080
2492	妍	5D56	E6C1	F4BA0080
2493	娟	5D57	E6C2	F4BB0080
2494	宴	5D58	E6C3	F4BC0080
2495	延	5D59	E6C5	F4BD0080
2496	捐	5D5A	E6C8	F4BE0080
2497	撚	5D5B	E6CA	F4BF0080
2498	椽	5D5C	E6CB	F4BG0080
2499	沿	5D5D	E6CD	F4BH0080
2500	涓	5D5E	E6CF	F4BI0080
2501	涎	5D5F	E6CE	F4BJ0080
2502	淵	5D60	E6D0	F4BK0080
2503	演	5D61	E6D1	F4BL0080
2504	烟	5D62	E6D3	F4BM0080
2505	然	5D63	E6D4	F4BN0080
2506	煙	5D64	E6D5	F4BO0080
2507	燃	5D65	E6D7	F4BP0080
2508	燕	5D66	E6D8	F4BQ0080
2509	研	5D67	E6DA	F4BR0080
2510	硯	5D68	E6DB	F4BS0080
2511	筵	5D69	E6DD	F4BT0080
2512	緣	5D6A	E6DE	F4BU0080
2513	羨	5D6B		F4BV0080
2514	膳	5D6C		F4BW0080
2515	蠕	5D6D		F4BX0080
2516	衍	5D6E	E6E2	F4BY0080

Line Number	Graphic	Host Code	PC Code	GCGID
2517	讌	5D6F		F4BZ0080
2518	軟	5D70	E6E3	F4C00080
2519	鉛	5D71	E6E7	F4C10080
2520	鳶	5D72	E6E9	F4C20080
2521	咽	5D73	E6EC	F4C30080
2522	悅	5D74	E6ED	F4C40080
2523	涅	5D75	E6EE	F4C50080
2524	熱	5D76	E6F0	F4C60080
2525	說	5D77	E6F2	F4C70080
2526	閱	5D78	E6F3	F4C80080
2527	厭	5D79	E6F4	F4C90080
2528	塩	5D7A		F4CA0080
2529	染	5D7B	E6F8	F4CB0080
2530	炎	5D7C	E6FA	F4CC0080
2531	焰	5D7D	E6FB	F4CD0080
2532	鹽	5D7E	E7A4	F4CE0080
2533	蔞	5D7F	E6FE	F4CF0080
2534	艷	5D80	E6FD	F4CG0080
2535	閨	5D81	E7A2	F4CH0080
2536	鑿	5D82		F4CI0080
2537	髻	5D83	E7A3	F4CJ0080
2538	曄	5D84	E7A5	F4CK0080
2539	燁	5D85	E7A7	F4CL0080
2540	葉	5D86	E7A8	F4CM0080
2541	瑩	5D87	E7AB	F4CN0080
2542	嬰	5D88		F4CO0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2543	影	5D89	E7AF	F4CP0080
2544	映	5D8A	E7B1	F4CQ0080
2545	暎	5D8B	E7B2	F4CR0080
2546	楹	5D8C	E7B3	F4CS0080
2547	榮	5D8D	E7B4	F4CT0080
2548	永	5D8E	E7B5	F4CU0080
2549	泳	5D8F	E7B6	F4CV0080
2550	穎	5D90	E7B8	F4CW0080
2551	瀛	5D91	E7BA	F4CX0080
2552	營	5D92	E7BD	F4CY0080
2553	瑛	5D93	E7C0	F4CZ0080
2554	瑩	5D94	E7C1	F4D00080
2555	瓔	5D95	E7C2	F4D10080
2556	盈	5D96	E7C3	F4D20080
2557	纓	5D97	E7C5	F4D30080
2558	英	5D98	E7C8	F4D40080
2559	詠	5D99	E7C9	F4D50080
2560	迎	5D9A	E7CA	F4D60080
2561	倪	5D9B	E7D2	F4D70080
2562	刈	5D9C	E7D4	F4D80080
2563	叡	5D9D	E7D5	F4D90080
2564	曳	5D9E	E7D6	F4DA0080
2565	滅	5D9F	E7D8	F4DB0080
2566	狻	5DA0	E7D9	F4DC0080
2567	睨	5DA1		F4DD0080
2568	睿	5DA2	E7DA	F4DE0080

Line Number	Graphic	Host Code	PC Code	GCGID
2569	翳	5DA3		F4DF0080
2570	芮	5DA4	E7DC	F4DG0080
2571	葦	5DA5		F4DH0080
2572	藝	5DA6	E7DD	F4DI0080
2573	藥	5DA7	E7DE	F4DJ0080
2574	裔	5DA8	E7E0	F4DK0080
2575	詣	5DA9	E7E1	F4DL0080
2576	譽	5DAA	E7E2	F4DM0080
2577	豫	5DAB	E7E3	F4DN0080
2578	銳	5DAC	E7E5	F4DO0080
2579	寬	5DAD	E7E7	F4DP0080
2580	預	5DAE	E7E8	F4DQ0080
2581	五	5DAF	E7E9	F4DR0080
2582	伍	5DB0	E7EA	F4DS0080
2583	傲	5DB1	E7EC	F4DT0080
2584	午	5DB2	E7ED	F4DU0080
2585	吳	5DB3	E7EF	F4DV0080
2586	鳴	5DB4	E7F0	F4DW0080
2587	塿	5DB5	E7F2	F4DX0080
2588	奧	5DB6	E7F3	F4DY0080
2589	娛	5DB7	E7F4	F4DZ0080
2590	寤	5DB8	E7F5	F4E00080
2591	悟	5DB9	E7F6	F4E10080
2592	惡	5DBA	E7F7	F4E20080
2593	昨	5DBB	E7FA	F4E30080
2594	晤	5DBC	E7FB	F4E40080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2595	梧	5DBD	E7FC	F4E50080
2596	汚	5DBE	E7FD	F4E60080
2597	烏	5DBF	E8A1	F4E70080
2598	癸	5DC0	E8A3	F4E80080
2599	蜈	5DC1	E8A5	F4E90080
2600	誤	5DC2	E8A6	F4EA0080
2601	遨	5DC3		F4EB0080
2602	吾	5DC4	E7EE	F4EC0080
2603	屋	5DC5	E8A9	F4ED0080
2604	沃	5DC6	E8AA	F4EE0080
2605	獄	5DC7	E8AB	F4EF0080
2606	玉	5DC8	E8AC	F4EG0080
2607	鉦	5DC9	E8AD	F4EH0080
2608	媪	5DCA		F4EI0080
2609	溫	5DCB	E8AE	F4EJ0080
2610	璫	5DCC	E8AF	F4EK0080
2611	瘡	5DCD	E8B0	F4EL0080
2612	穩	5DCE	E8B1	F4EM0080
2613	藎	5DCF		F4EN0080
2614	蘊	5DD0	E8B3	F4EO0080
2615	鯁	5DD1		F4EP0080
2616	兀	5DD2	E8B4	F4EQ0080
2617	壅	5DD3	E8B5	F4ER0080
2618	瓮	5DD4	E8B7	F4ES0080
2619	癰	5DD5	E8B9	F4ET0080
2620	擁	5DD6	E8B6	F4EU0080

Line Number	Graphic	Host Code	PC Code	GCGID
2621	甕	5DD7	E8B8	F4EV0080
2622	翁	5DD8	E8BA	F4EW0080
2623	邕	5DD9	E8BB	F4EX0080
2624	雍	5DDA	E8BC	F4EY0080
2625	渦	5ddb	E8BE	F4EZ0080
2626	瓦	5DDC	E8BF	F4F00080
2627	窩	5DDD	E8C0	F4F10080
2628	蛙	5DDE	E8C3	F4F20080
2629	蝸	5DDF	E8C4	F4F30080
2630	訛	5DE0	E8C5	F4F40080
2631	臥	5DE1	E8C2	F4F50080
2632	婉	5DE2	E8C6	F4F60080
2633	完	5DE3	E8C7	F4F70080
2634	宛	5DE4	E8C8	F4F80080
2635	浣	5DE5	E8CB	F4F90080
2636	玩	5DE6	E8CC	F4FA0080
2637	琬	5DE7	E8CE	F4FB0080
2638	碗	5DE8	E8CF	F4FC0080
2639	緩	5DE9	E8D0	F4FD0080
2640	翫	5DEA	E8D1	F4FE0080
2641	腕	5DEB	E8D3	F4FF0080
2642	莞	5DEC	E8D4	F4FG0080
2643	腕	5DED	E8D5	F4FH0080
2644	阮	5DEE	E8D6	F4FI0080
2645	頑	5DEF	E8D7	F4FJ0080
2646	臼	5DF0	E8D8	F4FK0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2647	往	5DF1	E8D9	F4FL0080
2648	旺	5DF2	E8DA	F4FM0080
2649	枉	5DF3	E8DB	F4FN0080
2650	汪	5DF4	E8DC	F4FO0080
2651	王	5DF5	E8DD	F4FP0080
2652	倭	5DF6	E8DE	F4FQ0080
2653	歪	5DF7	E8E0	F4FR0080
2654	矮	5DF8	E8E1	F4FS0080
2655	外	5DF9	E8E2	F4FT0080
2656	巍	5DFA	E8E4	F4FU0080
2657	猥	5DFB	E8E5	F4FV0080
2658	畏	5DFC	E8E6	F4FW0080
2659	僥	5DFD	E8E9	F4FX0080
2660	凹	5DFE	E8EA	F4FY0080
2661	堯	5E41	E8EB	F4G10080
2662	夭	5E42	E8EC	F4G20080
2663	妖	5E43	E8ED	F4G30080
2664	姚	5E44	E8EE	F4G40080
2665	嶢	5E45	E8F2	F4G50080
2666	拗	5E46	E8F3	F4G60080
2667	搖	5E47	E8F4	F4G70080
2668	擾	5E48	E8F6	F4G80080
2669	曜	5E49	E8F8	F4G90080
2670	腰	5E4A	E9A6	F4GA0080
2671	樂	5E4B	E8F9	F4GB0080
2672	橈	5E4C	E8FA	F4GC0080

Line Number	Graphic	Host Code	PC Code	GCGID
2673	瑤	5E4D	E8FD	F4GD0080
2674	竊	5E4E	E9A1	F4GE0080
2675	窯	5E4F	E9A2	F4GF0080
2676	繇	5E50	E9A3	F4GG0080
2677	繞	5E51	E9A4	F4GH0080
2678	耀	5E52	E9A5	F4GI0080
2679	堯	5E53		F4GJ0080
2680	嶢	5E54	E9A8	F4GK0080
2681	要	5E55	E9A9	F4GL0080
2682	謠	5E56	E9AA	F4GM0080
2683	遙	5E57	E9AB	F4GN0080
2684	邀	5E58	E9AD	F4GO0080
2685	饒	5E59	E9AE	F4GP0080
2686	辱	5E5A	E9B4	F4GQ0080
2687	慾	5E5B	E9AF	F4GR0080
2688	欲	5E5C	E9B0	F4GS0080
2689	浴	5E5D	E9B1	F4GT0080
2690	褥	5E5E	E9B3	F4GU0080
2691	傭	5E5F	E9B6	F4GV0080
2692	勇	5E60	E9B8	F4GW0080
2693	容	5E61	E9BB	F4GX0080
2694	庸	5E62	E9BC	F4GY0080
2695	冗	5E63	E9B7	F4GZ0080
2696	榕	5E64	E9BE	F4H00080
2697	湧	5E65	E9C0	F4H10080
2698	溶	5E66	E9C1	F4H20080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2699	熔	5E67	E9C2	F4H30080
2700	瑤	5E68	E9C3	F4H40080
2701	用	5E69	E9C4	F4H50080
2702	聳	5E6A	E9C6	F4H60080
2703	春	5E6B		F4H70080
2704	茸	5E6C	E9C7	F4H80080
2705	蓉	5E6D	E9C8	F4H90080
2706	蛹	5E6E		F4HA0080
2707	踊	5E6F	E9C9	F4HB0080
2708	鎔	5E70	E9CA	F4HC0080
2709	鏞	5E71	E9CB	F4HD0080
2710	佑	5E72	E9CE	F4HE0080
2711	偶	5E73	E9CF	F4HF0080
2712	優	5E74	E9D0	F4HG0080
2713	又	5E75	E9D1	F4HH0080
2714	友	5E76	E9D2	F4HI0080
2715	右	5E77	E9D3	F4HJ0080
2716	吁	5E78		F4HK0080
2717	宇	5E79	E9D4	F4HL0080
2718	寓	5E7A	E9D5	F4HM0080
2719	尢	5E7B	E9D6	F4HN0080
2720	于	5E7C	E9CD	F4HO0080
2721	愚	5E7D	E9D7	F4HP0080
2722	憂	5E7E	E9D8	F4HQ0080
2723	牛	5E7F	E9DA	F4HR0080
2724	盂	5E80	E9DD	F4HS0080

Line Number	Graphic	Host Code	PC Code	GCGID
2725	祐	5E81	E9DE	F4HT0080
2726	禡	5E82	E9DF	F4HU0080
2727	禹	5E83	E9E0	F4HV0080
2728	羽	5E84	E9E2	F4HW0080
2729	芋	5E85	E9E3	F4HX0080
2730	虞	5E86	E9E5	F4HY0080
2731	迂	5E87	E9E6	F4HZ0080
2732	遇	5E88	E9E7	F4I00080
2733	郵	5E89	E9E8	F4I10080
2734	隅	5E8A	E9EA	F4I20080
2735	雨	5E8B	E9EB	F4I30080
2736	雩	5E8C	E9EC	F4I40080
2737	旭	5E8D	E9EF	F4I50080
2738	昱	5E8E	E9F0	F4I60080
2739	煜	5E8F	E9F2	F4I70080
2740	穢	5E90	E9F3	F4I80080
2741	郁	5E91	E9F4	F4I90080
2742	頊	5E92	E9F5	F4IA0080
2743	云	5E93	E9F6	F4IB0080
2744	暈	5E94	E9F7	F4IC0080
2745	殞	5E95	E9F9	F4ID0080
2746	耘	5E96	E9FC	F4IE0080
2747	芸	5E97	E9FD	F4IF0080
2748	運	5E98	EAA1	F4IG0080
2749	隕	5E99	EAA2	F4IH0080
2750	雲	5E9A	EAA3	F4II0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2751	韻	5E9B	EAA4	F4IJ0080
2752	熨	5E9C		F4IK0080
2753	蔚	5E9D	EAA5	F4IL0080
2754	鬱	5E9E	EAA6	F4IM0080
2755	熊	5E9F	EAA8	F4IN0080
2756	雄	5EA0	EAA9	F4IO0080
2757	元	5EA1	EAAA	F4IP0080
2758	原	5EA2	EAA8	F4IQ0080
2759	員	5EA3	EAA8	F4IR0080
2760	園	5EA4	EAAE	F4IS0080
2761	圓	5EA5	EAAD	F4IT0080
2762	爰	5EA6	EABA	F4IU0080
2763	垣	5EA7	EAAF	F4IV0080
2764	媛	5EA8	EAB0	F4IW0080
2765	冤	5EA9	EAB2	F4IX0080
2766	怨	5EAA	EAB3	F4IY0080
2767	愿	5EAB	EAB4	F4IZ0080
2768	援	5EAC	EAB5	F4J00080
2769	源	5EAD	EAB9	F4J10080
2770	猿	5EAE	EABB	F4J20080
2771	瑗	5EAF	EABC	F4J30080
2772	苑	5EB0	EABD	F4J40080
2773	蜿	5EB1		F4J50080
2774	袁	5EB2	EABE	F4J60080
2775	轅	5EB3	EABF	F4J70080
2776	遠	5EB4	EAC0	F4J80080

Line Number	Graphic	Host Code	PC Code	GCGID
2777	院	5EB5	EAC2	F4J90080
2778	願	5EB6	EAC3	F4JA0080
2779	鴛	5EB7	EAC4	F4JB0080
2780	月	5EB8	EAC5	F4JC0080
2781	越	5EB9	EAC6	F4JD0080
2782	鉞	5EBA	EAC7	F4JE0080
2783	位	5EBB	EAC8	F4JF0080
2784	偉	5EBC	EAC9	F4JG0080
2785	僞	5EBD	EACA	F4JH0080
2786	危	5EBE	EACB	F4JI0080
2787	圍	5EBF	EACC	F4JJ0080
2788	委	5EC0	EACD	F4JK0080
2789	尉	5EC1	EACF	F4JL0080
2790	幃	5EC2		F4JM0080
2791	慰	5EC3	EAD0	F4JN0080
2792	威	5EC4	EACE	F4JO0080
2793	渭	5EC5	EAD2	F4JP0080
2794	爲	5EC6	EAD3	F4JQ0080
2795	瑋	5EC7	EAD4	F4JR0080
2796	緯	5EC8	EAD5	F4JS0080
2797	胃	5EC9	EAD6	F4JT0080
2798	萎	5ECA	EAD7	F4JU0080
2799	葦	5ECB	EAD8	F4JV0080
2800	蝟	5ECC	EADA	F4JW0080
2801	衛	5ECD	EADB	F4JX0080
2802	衛	5ECE		F4JY0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2803	謂	5ECF	EADD	F4JZ0080
2804	違	5ED0	EADE	F4K00080
2805	韋	5ED1	EADF	F4K10080
2806	魏	5ED2	EAE0	F4K20080
2807	乳	5ED3	EAE1	F4K30080
2808	攸	5ED4	EAF2	F4K40080
2809	侑	5ED5	EAE2	F4K50080
2810	儒	5ED6	EAE3	F4K60080
2811	兪	5ED7	EAE4	F4K70080
2812	幼	5ED8	EAEA	F4K80080
2813	唯	5ED9	EAE6	F4K90080
2814	喻	5EDA	EAE7	F4KA0080
2815	囿	5EDB		F4KB0080
2816	孺	5EDC	EAE8	F4KC0080
2817	宥	5EDD	EAE9	F4KD0080
2818	帷	5EDE		F4KE0080
2819	幽	5EDF	EAEB	F4KF0080
2820	庾	5EE0	EAEC	F4KG0080
2821	悠	5EE1	EAED	F4KH0080
2822	惟	5EE2	EAEE	F4KI0080
2823	愉	5EE3	EAF0	F4KJ0080
2824	愈	5EE4	EAEF	F4KK0080
2825	揄	5EE5	EAF1	F4KL0080
2826	有	5EE6	EAF3	F4KM0080
2827	柔	5EE7	EAF5	F4KN0080
2828	柚	5EE8	EAF6	F4KO0080

Line Number	Graphic	Host Code	PC Code	GCGID
2829	榆	5EE9	EAF8	F4KP0080
2830	油	5EEA	EAF8	F4KQ0080
2831	游	5EEB	EAFD	F4KR0080
2832	濡	5EEC	EBA1	F4KS0080
2833	猶	5EED	EBA2	F4KT0080
2834	瑜	5EEE	EBA5	F4KU0080
2835	由	5EEF	EBA6	F4KV0080
2836	癒	5EF0	EBA8	F4KW0080
2837	維	5EF1	EBAB	F4KX0080
2838	與	5EF2	EBAC	F4KY0080
2839	奠	5EF3	EBAD	F4KZ0080
2840	蕤	5EF4		F4L00080
2841	裕	5EF5	EBAE	F4L10080
2842	誘	5EF6	EBAF	F4L20080
2843	諛	5EF7	EBB0	F4L30080
2844	諭	5EF8	EBB1	F4L40080
2845	蹂	5EF9	EBB3	F4L50080
2846	踰	5EFA	EBB2	F4L60080
2847	遊	5EFB	EBB4	F4L70080
2848	逾	5EFC	EBB5	F4L80080
2849	遺	5EFD	EBB6	F4L90080
2850	酉	5EFE	EBB7	F4LA0080
2851	釉	5F41	EBB8	F4LD0080
2852	鋤	5F42	EBB9	F4LE0080
2853	黝	5F43		F4LF0080
2854	毓	5F44	EBBE	F4LG0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 11 (Page 23 of 37). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2855	肉	5F45	EBBF	F4LH0080
2856	育	5F46	EBC0	F4LI0080
2857	鬻	5F47		F4LJ0080
2858	允	5F48	EBC3	F4LK0080
2859	奩	5F49	EBC4	F4LL0080
2860	尹	5F4A	EBC5	F4LM0080
2861	潤	5F4B	EBC8	F4LN0080
2862	玢	5F4C	EBC9	F4LO0080
2863	胤	5F4D	EBCA	F4LP0080
2864	閏	5F4E	EBCE	F4LQ0080
2865	聿	5F4F	EBD3	F4LR0080
2866	戎	5F50	EBD4	F4LS0080
2867	絨	5F51	EBD6	F4LT0080
2868	融	5F52	EBD7	F4LU0080
2869	垠	5F53	EBD9	F4LV0080
2870	恩	5F54	EBDA	F4LW0080
2871	慇	5F55	EBDB	F4LX0080
2872	檣	5F56		F4LY0080
2873	殷	5F57	EBDC	F4LZ0080
2874	琅	5F58		F4M00080
2875	銀	5F59	EBDE	F4M10080
2876	閭	5F5A	EBDD	F4M20080
2877	隱	5F5B	EBDF	F4M30080
2878	齷	5F5C		F4M40080
2879	乙	5F5D	EBE0	F4M50080
2880	吟	5F5E	EBE1	F4M60080

Table 11 (Page 23 of 37). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2881	淫	5F5F	EBE2	F4M70080
2882	蔭	5F60	EBE3	F4M80080
2883	陰	5F61	EBE4	F4M90080
2884	飲	5F62	EBE6	F4MA0080
2885	音	5F63	EBE5	F4MB0080
2886	挹	5F64		F4MC0080
2887	捐	5F65	EBE7	F4MD0080
2888	泣	5F66	EBE8	F4ME0080
2889	邑	5F67	EBE9	F4MF0080
2890	凝	5F68	EBEA	F4MG0080
2891	應	5F69	EBEB	F4MH0080
2892	膺	5F6A	EBEC	F4MI0080
2893	鷹	5F6B	EBED	F4MJ0080
2894	依	5F6C	EBEE	F4MK0080
2895	倚	5F6D	EBEF	F4ML0080
2896	儀	5F6E	EBF0	F4MM0080
2897	疑	5F6F	EBF7	F4MN0080
2898	矣	5F70	EBF8	F4MO0080
2899	宜	5F71	EBF1	F4MP0080
2900	意	5F72	EBF2	F4MQ0080
2901	懿	5F73	EBF3	F4MR0080
2902	擬	5F74	EBF4	F4MS0080
2903	毅	5F75	EBF6	F4MT0080
2904	義	5F76	EBF9	F4MU0080
2905	蟻	5F77	EBFA	F4MV0080
2906	蟻	5F78	EBFC	F4MW0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2907	衣	5F79	EBFD	F4MX0080
2908	誼	5F7A	EBFE	F4MY0080
2909	議	5F7B	ECA1	F4MZ0080
2910	醫	5F7C	ECA2	F4N00080
2911	二	5F7D	ECA3	F4N10080
2912	以	5F7E	ECA4	F4N20080
2913	伊	5F7F	ECA5	F4N30080
2914	夷	5F80	ECA8	F4N40080
2915	姨	5F81	ECA9	F4N50080
2916	已	5F82	ECAB	F4N60080
2917	貳	5F83	ECC3	F4N70080
2918	弛	5F84	ECAC	F4N80080
2919	彝	5F85	ECAD	F4N90080
2920	怡	5F86	ECAE	F4NA0080
2921	易	5F87	ECAF	F4NB0080
2922	楫	5F88		F4NC0080
2923	爾	5F89	ECB3	F4ND0080
2924	珥	5F8A	ECB4	F4NE0080
2925	異	5F8B	ECB6	F4NF0080
2926	瘕	5F8C	ECB7	F4NG0080
2927	移	5F8D	ECB9	F4NH0080
2928	而	5F8E	ECBB	F4NI0080
2929	耳	5F8F	ECBC	F4NJ0080
2930	萸	5F90	ECBF	F4NK0080
2931	飴	5F91	ECC7	F4NL0080
2932	餌	5F92	ECC8	F4NM0080

Line Number	Graphic	Host Code	PC Code	GCGID
2933	頤	5F93		F4NN0080
2934	漢	5F94	ECCB	F4NO0080
2935	翼	5F95	ECCF	F4NP0080
2936	益	5F96	ECCC	F4NQ0080
2937	翊	5F97	ECCD	F4NR0080
2938	翌	5F98	ECCE	F4NS0080
2939	人	5F99	ECD1	F4NT0080
2940	仁	5F9A	ECD2	F4NU0080
2941	仞	5F9B		F4NV0080
2942	刃	5F9C	ECD3	F4NW0080
2943	印	5F9D	ECD4	F4NX0080
2944	咽	5F9E	ECD6	F4NY0080
2945	因	5F9F	ECD7	F4NZ0080
2946	姻	5FA0	ECD8	F4O00080
2947	寅	5FA1	ECD9	F4O10080
2948	引	5FA2	ECDA	F4O20080
2949	忍	5FA3	ECDB	F4O30080
2950	湮	5FA4	ECDC	F4O40080
2951	認	5FA5	ECE3	F4O50080
2952	靱	5FA6	ECE5	F4O60080
2953	鞞	5FA7	ECE6	F4O70080
2954	一	5FA8	ECE9	F4O80080
2955	侷	5FA9	ECEB	F4O90080
2956	壹	5FAA	ECEC	F4OA0080
2957	日	5FAB	ECED	F4OB0080
2958	溢	5FAC	ECEE	F4OC0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2959	逸	5FAD	ECEF	F4OD0080
2960	鎰	5FAE	ECF0	F4OE0080
2961	駟	5FAF	ECF1	F4OF0080
2962	任	5FB0	ECF2	F4OG0080
2963	壬	5FB1	ECF3	F4OH0080
2964	妊	5FB2	ECF4	F4OI0080
2965	姪	5FB3	ECF5	F4OJ0080
2966	稔	5FB4	ECF9	F4OK0080
2967	荏	5FB5	ECFB	F4OL0080
2968	賃	5FB6	ECFC	F4OM0080
2969	人	5FB7	ECFD	F4ON0080
2970	仍	5FB8	EDA4	F4OO0080
2971	孕	5FB9	EDA6	F4OP0080
2972	剩	5FBA	EDA5	F4OQ0080
2973	仔	5FBB	EDA8	F4OR0080
2974	刺	5FBC	EDA9	F4OS0080
2975	咨	5FBD	EDAA	F4OT0080
2976	姊	5FBE	EDAB	F4OU0080
2977	姿	5FBF	EDAC	F4OV0080
2978	子	5FC0	EDAD	F4OW0080
2979	孜	5FC1	EDAF	F4OX0080
2980	字	5FC2	EDAE	F4OY0080
2981	恣	5FC3	EDB0	F4OZ0080
2982	慈	5FC4	EDB1	F4P00080
2983	滋	5FC5	EDB2	F4P10080
2984	炙	5FC6	EDB3	F4P20080

Line Number	Graphic	Host Code	PC Code	GCGID
2985	煮	5FC7	EDB4	F4P30080
2986	茲	5FC8	EDB5	F4P40080
2987	瓷	5FC9	EDB6	F4P50080
2988	疵	5FCA	EDB7	F4P60080
2989	皆	5FCB		F4P70080
2990	磁	5FCC	EDB8	F4P80080
2991	粦	5FCD		F4P90080
2992	紫	5FCE	EDB9	F4PA0080
2993	者	5FCF	EDBA	F4PB0080
2994	籽	5FD0		F4PC0080
2995	自	5FD1	EDBB	F4PD0080
2996	蔗	5FD2	EDBD	F4PE0080
2997	藉	5FD3	EDBE	F4PF0080
2998	紫	5FD4		F4PG0080
2999	諮	5FD5	EDBF	F4PH0080
3000	資	5FD6	EDC0	F4PI0080
3001	赭	5FD7		F4PJ0080
3002	雌	5FD8	EDC1	F4PK0080
3003	作	5FD9	EDC2	F4PL0080
3004	勺	5FDA	EDC3	F4PM0080
3005	嚼	5FDB	EDC4	F4PN0080
3006	斫	5FDC	EDC5	F4PO0080
3007	昨	5FDD	EDC6	F4PP0080
3008	柞	5FDE		F4PQ0080
3009	灼	5FDF	EDC7	F4PR0080
3010	炸	5FE0	EDC8	F4PS0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3011	爵	5FE1	EDC9	F4PT0080
3012	綽	5FE2	EDCA	F4PU0080
3013	芍	5FE3	EDCB	F4PV0080
3014	酌	5FE4	EDCC	F4PW0080
3015	雀	5FE5	EDCD	F4PX0080
3016	鵲	5FE6	EDCE	F4PY0080
3017	棧	5FE7	EDD0	F4PZ0080
3018	殘	5FE8	EDD1	F4Q00080
3019	潺	5FE9	EDD2	F4Q10080
3020	盞	5FEA	EDD3	F4Q20080
3021	岑	5FEB	EDD4	F4Q30080
3022	暫	5FEC	EDD5	F4Q40080
3023	潛	5FED	EDD6	F4Q50080
3024	潛	5FEE		F4Q60080
3025	箴	5FEF	EDD7	F4Q70080
3026	簪	5FF0	EDD8	F4Q80080
3027	蚕	5FF1		F4Q90080
3028	蠶	5FF2	EDD9	F4QA0080
3029	雜	5FF3	EDDA	F4QB0080
3030	丈	5FF4	EDDB	F4QC0080
3031	仗	5FF5	EDDC	F4QD0080
3032	匠	5FF6	EDDD	F4QE0080
3033	場	5FF7	EDDE	F4QF0080
3034	墻	5FF8	EDDF	F4QG0080
3035	獎	5FF9	EDE1	F4QH0080
3036	嶂	5FFA		F4QI0080

Line Number	Graphic	Host Code	PC Code	GCGID
3037	帳	5FFB	EDE3	F4QJ0080
3038	庄	5FFC	EDE4	F4QK0080
3039	張	5FFD	EDE5	F4QL0080
3040	掌	5FFE	EDE6	F4QM0080
3041	曄	6041	EDE7	F4QP0080
3042	杖	6042	EDE8	F4QQ0080
3043	樟	6043	EDE9	F4QR0080
3044	檣	6044	EDEA	F4QS0080
3045	穢	6045	EDEB	F4QT0080
3046	漿	6046	EDEC	F4QU0080
3047	壯	6047	EDE0	F4QV0080
3048	將	6048	EDE2	F4QW0080
3049	牆	6049	EDED	F4QX0080
3050	狀	604A	EDEE	F4QY0080
3051	獐	604B	EDEF	F4QZ0080
3052	璋	604C	EDF0	F4R00080
3053	瘡	604D		F4R10080
3054	章	604E	EDF1	F4R20080
3055	粧	604F	EDF2	F4R30080
3056	腸	6050	EDF3	F4R40080
3057	臟	6051	EDF4	F4R50080
3058	莊	6052	EDF6	F4R60080
3059	葬	6053	EDF7	F4R70080
3060	蔣	6054	EDF8	F4R80080
3061	蓄	6055	EDF9	F4R90080
3062	藏	6056	EDFA	F4RA0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 11 (Page 27 of 37). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3063	裝	6057		F4RB0080
3064	裝	6058	EDFB	F4RC0080
3065	贓	6059	EDFC	F4RD0080
3066	醬	605A	EDFD	F4RE0080
3067	長	605B	EDFE	F4RF0080
3068	障	605C	EEA1	F4RG0080
3069	再	605D	EEA2	F4RH0080
3070	哉	605E	EEA3	F4RI0080
3071	在	605F	EEA4	F4RJ0080
3072	宰	6060	EEA5	F4RK0080
3073	才	6061	EEA6	F4RL0080
3074	材	6062	EEA7	F4RM0080
3075	裁	6063	EEA8	F4RN0080
3076	梓	6064	EEA9	F4RO0080
3077	滓	6065	EEAB	F4RP0080
3078	災	6066	EEAC	F4RQ0080
3079	纒	6067		F4RR0080
3080	裁	6068	EEAE	F4RS0080
3081	財	6069	EEAF	F4RT0080
3082	載	606A	EEB0	F4RU0080
3083	齋	606B	EEB1	F4RV0080
3084	齋	606C	EEB2	F4RW0080
3085	爭	606D	EEB3	F4RX0080
3086	箏	606E	EEB4	F4RY0080
3087	諍	606F	EEB5	F4RZ0080
3088	錚	6070	EEB6	F4S00080

Table 11 (Page 27 of 37). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3089	低	6071	EEB8	F4S10080
3090	佇	6072	EEB7	F4S20080
3091	儲	6073	EEB9	F4S30080
3092	咀	6074	EEBA	F4S40080
3093	姐	6075	EEBB	F4S50080
3094	底	6076	EEBC	F4S60080
3095	抵	6077	EEBD	F4S70080
3096	杵	6078	EEBE	F4S80080
3097	柢	6079		F4S90080
3098	楮	607A	EEBF	F4SA0080
3099	樗	607B	EEC0	F4SB0080
3100	沮	607C	EEC1	F4SC0080
3101	渚	607D	EEC2	F4SD0080
3102	狙	607E	EEC3	F4SE0080
3103	猪	607F	EEC4	F4SF0080
3104	疽	6080	EEC5	F4SG0080
3105	箸	6081	EEC6	F4SH0080
3106	苧	6082	EEC8	F4SI0080
3107	著	6083	EECA	F4SJ0080
3108	譖	6084	EECB	F4SK0080
3109	蛆	6085		F4SL0080
3110	詛	6086	EECC	F4SM0080
3111	豬	6087		F4SN0080
3112	貯	6088	EECD	F4SO0080
3113	躐	6089	EECE	F4SP0080
3114	這	608A	EECF	F4SQ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3115	邸	608B	EED0	F4SR0080
3116	勳	608C	EED3	F4SS0080
3117	嫡	608D	EED5	F4ST0080
3118	寂	608E	EED6	F4SU0080
3119	摘	608F	EED7	F4SV0080
3120	敵	6090	EED8	F4SW0080
3121	滴	6091	EED9	F4SX0080
3122	狄	6092	EEDA	F4SY0080
3123	的	6093	EEDC	F4SZ0080
3124	積	6094	EEDD	F4T00080
3125	笛	6095	EEDE	F4T10080
3126	籍	6096	EEDF	F4T20080
3127	糴	6097		F4T30080
3128	績	6098	EEE0	F4T40080
3129	荻	6099	EEE2	F4T50080
3130	謫	609A	EEE3	F4T60080
3131	賊	609B	EEE4	F4T70080
3132	赤	609C	EEE5	F4T80080
3133	跡	609D	EEE6	F4T90080
3134	蹟	609E	EEE7	F4TA0080
3135	迪	609F	EEE8	F4TB0080
3136	迹	60A0	EEE9	F4TC0080
3137	適	60A1	EEEE	F4TD0080
3138	傳	60A2	EEEE	F4TE0080
3139	全	60A3	EEEF	F4TF0080
3140	典	60A4	EEF0	F4TG0080

Line Number	Graphic	Host Code	PC Code	GCGID
3141	前	60A5	EEF1	F4TH0080
3142	剪	60A6	EEF2	F4TI0080
3143	囁	60A7		F4TJ0080
3144	填	60A8	EEF3	F4TK0080
3145	奠	60A9	EEF5	F4TL0080
3146	專	60AA	EEF6	F4TM0080
3147	展	60AB	EEF7	F4TN0080
3148	巔	60AC		F4TO0080
3149	廬	60AD	EEF8	F4TP0080
3150	悛	60AE	EEF9	F4TQ0080
3151	戰	60AF	EEFA	F4TR0080
3152	栓	60B0	EEFB	F4TS0080
3153	殿	60B1	EEFC	F4TT0080
3154	氈	60B2	EEFD	F4TU0080
3155	澱	60B3	EEFE	F4TV0080
3156	煎	60B4	EFA1	F4TW0080
3157	田	60B5	EFA3	F4TX0080
3158	甸	60B6	EFA4	F4TY0080
3159	癩	60B7	EFA6	F4TZ0080
3160	磚	60B8		F4U00080
3161	箋	60B9	EFA8	F4U10080
3162	箭	60BA	EFA9	F4U20080
3163	篆	60BB	EFAA	F4U30080
3164	纏	60BC	EFAB	F4U40080
3165	翦	60BD		F4U50080
3166	詮	60BE	EFAc	F4U60080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3167	輓	60BF	EFAD	F4U70080
3168	轉	60C0	EFAE	F4U80080
3169	鈿	60C1	EFAF	F4U90080
3170	銓	60C2	EFB0	F4UA0080
3171	錢	60C3	EFB1	F4UB0080
3172	電	60C4	EFB3	F4UC0080
3173	顛	60C5	EFB4	F4UD0080
3174	顛	60C6	EFB5	F4UE0080
3175	餞	60C7	EFB6	F4UF0080
3176	切	60C8	EFB7	F4UG0080
3177	截	60C9	EFB8	F4UH0080
3178	折	60CA	EFB9	F4UI0080
3179	浙	60CB	EFBA	F4UJ0080
3180	窃	60CC		F4UK0080
3181	竊	60CD	EFBC	F4UL0080
3182	節	60CE	EFBD	F4UM0080
3183	絕	60CF	EFBE	F4UN0080
3184	占	60D0	EFBF	F4UO0080
3185	帖	60D1	EFC0	F4UP0080
3186	店	60D2	EFC1	F4UQ0080
3187	漸	60D3	EFC2	F4UR0080
3188	点	60D4	EFC3	F4US0080
3189	點	60D5	EFC7	F4UT0080
3190	粘	60D6	EFC4	F4UU0080
3191	霑	60D7	EFC5	F4UV0080
3192	接	60D8	EFC8	F4UW0080

Line Number	Graphic	Host Code	PC Code	GCGID
3193	摺	60D9	EFC9	F4UX0080
3194	接	60DA		F4UY0080
3195	蝶	60DB	EFCA	F4UZ0080
3196	丁	60DC	EFCB	F4V00080
3197	井	60DD	EFCC	F4V10080
3198	亭	60DE	EFCD	F4V20080
3199	停	60DF	EFCE	F4V30080
3200	偵	60E0	EFCF	F4V40080
3201	呈	60E1	EFD0	F4V50080
3202	妊	60E2	EFD1	F4V60080
3203	幘	60E3	EFD3	F4V70080
3204	廷	60E4	EFD5	F4V80080
3205	征	60E5	EFD6	F4V90080
3206	定	60E6	EFD2	F4VA0080
3207	庭	60E7	EFD4	F4VB0080
3208	情	60E8	EFD7	F4VC0080
3209	挺	60E9	EFD8	F4VD0080
3210	政	60EA	EFD9	F4VE0080
3211	整	60EB	EFDA	F4VF0080
3212	旌	60EC	EFDB	F4VG0080
3213	晶	60ED	EFDC	F4VH0080
3214	晷	60EE	EFDD	F4VI0080
3215	挺	60EF		F4VJ0080
3216	楨	60F0	EFDF	F4VK0080
3217	正	60F1	EFE1	F4VL0080
3218	汀	60F2	EFE2	F4VM0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3219	淨	60F3	EFE4	F4VN0080
3220	淳	60F4	EFE5	F4VO0080
3221	町	60F5	EFE6	F4VP0080
3222	睛	60F6	EFE7	F4VQ0080
3223	碇	60F7	EFE8	F4VR0080
3224	禎	60F8	EFE9	F4VS0080
3225	程	60F9	EFEA	F4VT0080
3226	穽	60FA	EFF0	F4VU0080
3227	靖	60FB	EFF1	F4VV0080
3228	精	60FC	EFF2	F4VW0080
3229	艇	60FD	EFF3	F4VX0080
3230	訂	60FE	EFF4	F4VY0080
3231	諄	6141	EFF5	F4W10080
3232	貞	6142	EFF6	F4W20080
3233	鄭	6143	EFF7	F4W30080
3234	酌	6144	EFF8	F4W40080
3235	釘	6145	EFF9	F4W50080
3236	鉦	6146	EFFA	F4W60080
3237	錠	6147	EFFC	F4W70080
3238	霆	6148	EFFD	F4W80080
3239	靜	6149	F0A1	F4W90080
3240	頂	614A	F0A2	F4WA0080
3241	鼎	614B	F0A3	F4WB0080
3242	制	614C	F0A4	F4WC0080
3243	劑	614D	F0A5	F4WD0080
3244	啼	614E	F0A6	F4WE0080

Line Number	Graphic	Host Code	PC Code	GCGID
3245	堤	614F	F0A7	F4WF0080
3246	帝	6150	F0A8	F4WG0080
3247	弟	6151	F0A9	F4WH0080
3248	悌	6152	F0AA	F4WI0080
3249	提	6153	F0AB	F4WJ0080
3250	哲	6154		F4WK0080
3251	梯	6155	F0AC	F4WL0080
3252	濟	6156	F0AD	F4WM0080
3253	堤	6157		F4WN0080
3254	臍	6158	F0B0	F4WO0080
3255	祭	6159	F0AE	F4WP0080
3256	第	615A	F0AF	F4WQ0080
3257	薺	615B	F0B1	F4WR0080
3258	製	615C	F0B2	F4WS0080
3259	諸	615D	F0B3	F4WT0080
3260	踀	615E		F4WU0080
3261	蹄	615F	F0B4	F4WV0080
3262	醜	6160	F0B5	F4WW0080
3263	除	6161	F0B6	F4WX0080
3264	際	6162	F0B7	F4WY0080
3265	霽	6163	F0B8	F4WZ0080
3266	題	6164	F0B9	F4X00080
3267	齊	6165	F0BA	F4X10080
3268	俎	6166	F0BB	F4X20080
3269	凋	6167	F0BD	F4X30080
3270	兆	6168	F0BC	F4X40080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 11 (Page 31 of 37). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3271	助	6169	F0BE	F4X50080
3272	吊	616A		F4X60080
3273	嘲	616B	F0BF	F4X70080
3274	噪	616C		F4X80080
3275	弔	616D	F0C0	F4X90080
3276	彫	616E	F0C1	F4XA0080
3277	措	616F	F0C2	F4XB0080
3278	操	6170	F0C3	F4XC0080
3279	早	6171	F0C4	F4XD0080
3280	晁	6172	F0C5	F4XE0080
3281	曹	6173	F0C6	F4XF0080
3282	曹	6174	F0C7	F4XG0080
3283	朝	6175	F0C8	F4XH0080
3284	條	6176	F0C9	F4XI0080
3285	棗	6177	F0CA	F4XJ0080
3286	槽	6178	F0CB	F4XK0080
3287	漕	6179	F0CC	F4XL0080
3288	潮	617A	F0CD	F4XM0080
3289	照	617B	F0CE	F4XN0080
3290	燥	617C	F0CF	F4XO0080
3291	爪	617D	F0D0	F4XP0080
3292	阜	617E		F4XQ0080
3293	眺	617F	F0D2	F4XR0080
3294	祖	6180	F0D3	F4XS0080
3295	祚	6181	F0D4	F4XT0080
3296	租	6182	F0D5	F4XU0080

Table 11 (Page 31 of 37). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3297	稠	6183	F0D6	F4XV0080
3298	窳	6184	F0D7	F4XW0080
3299	竈	6185		F4XX0080
3300	筮	6186		F4XY0080
3301	粗	6187	F0D8	F4XZ0080
3302	糟	6188	F0D9	F4Y00080
3303	糴	6189		F4Y10080
3304	組	618A	F0DA	F4Y20080
3305	條	618B		F4Y30080
3306	繰	618C	F0DB	F4Y40080
3307	肇	618D	F0DC	F4Y50080
3308	藻	618E	F0DD	F4Y60080
3309	蚤	618F	F0DE	F4Y70080
3310	詔	6190	F0DF	F4Y80080
3311	調	6191	F0E0	F4Y90080
3312	趙	6192	F0E1	F4YA0080
3313	躁	6193	F0E2	F4YB0080
3314	造	6194	F0E3	F4YC0080
3315	遭	6195	F0E4	F4YD0080
3316	釣	6196	F0E5	F4YE0080
3317	阻	6197	F0E6	F4YF0080
3318	鯛	6198		F4YG0080
3319	鳥	6199	F0E8	F4YH0080
3320	族	619A	F0E9	F4YI0080
3321	簇	619B	F0EA	F4YJ0080
3322	足	619C	F0EB	F4YK0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3323	鏃	619D	F0EC	F4YL0080
3324	存	619E	F0ED	F4YM0080
3325	尊	619F	F0EE	F4YN0080
3326	卒	61A0	F0EF	F4YO0080
3327	拙	61A1	F0F0	F4YP0080
3328	猝	61A2	F0F1	F4YQ0080
3329	倅	61A3	F0F2	F4YR0080
3330	宗	61A4	F0F3	F4YS0080
3331	從	61A5	F0F4	F4YT0080
3332	慇	61A6	F0F6	F4YU0080
3333	棕	61A7	F0F7	F4YV0080
3334	樅	61A8		F4YW0080
3335	淙	61A9	F0F8	F4YX0080
3336	琮	61AA	F0F9	F4YY0080
3337	種	61AB	F0FA	F4YZ0080
3338	終	61AC	F0FB	F4Z00080
3339	綜	61AD	F0FC	F4Z10080
3340	縱	61AE	F0FD	F4Z20080
3341	腫	61AF	F0FE	F4Z30080
3342	踵	61B0	F1A2	F4Z40080
3343	蹤	61B1		F4Z50080
3344	鍾	61B2	F1A3	F4Z60080
3345	鐘	61B3	F1A4	F4Z70080
3346	佐	61B4	F1A5	F4Z80080
3347	坐	61B5	F1A6	F4Z90080
3348	左	61B6	F1A7	F4ZA0080

Line Number	Graphic	Host Code	PC Code	GCGID
3349	座	61B7	F1A8	F4ZB0080
3350	挫	61B8	F1A9	F4ZC0080
3351	罪	61B9	F1AA	F4ZD0080
3352	主	61BA	F1AB	F4ZE0080
3353	住	61BB	F1AC	F4ZF0080
3354	侏	61BC	F1AD	F4ZG0080
3355	做	61BD	F1AE	F4ZH0080
3356	廚	61BE	F1B7	F4ZI0080
3357	呪	61BF	F1B1	F4ZJ0080
3358	周	61C0	F1B2	F4ZK0080
3359	嗾	61C1	F1B3	F4ZL0080
3360	奏	61C2	F1B4	F4ZM0080
3361	宙	61C3	F1B5	F4ZN0080
3362	州	61C4	F1B6	F4ZO0080
3363	晝	61C5	F1B8	F4ZP0080
3364	朱	61C6	F1B9	F4ZQ0080
3365	柱	61C7	F1BA	F4ZR0080
3366	株	61C8	F1BB	F4ZS0080
3367	炷	61C9	F1C0	F4ZT0080
3368	注	61CA	F1BC	F4ZU0080
3369	洲	61CB	F1BD	F4ZV0080
3370	酒	61CC	F1D0	F4ZW0080
3371	珠	61CD	F1C1	F4ZX0080
3372	疇	61CE	F1C2	F4ZY0080
3373	簇	61CF		F4ZZ0080
3374	籌	61D0	F1C3	F5000080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3375	紂	61D1	F1C4	F5010080
3376	紬	61D2	F1C5	F5020080
3377	綱	61D3	F1C6	F5030080
3378	肘	61D4		F5040080
3379	冑	61D5	F1B0	F5050080
3380	舟	61D6	F1C7	F5060080
3381	蛛	61D7	F1C8	F5070080
3382	註	61D8	F1C9	F5080080
3383	誅	61D9	F1CA	F5090080
3384	走	61DA	F1CB	F50A0080
3385	躡	61DB	F1CC	F50B0080
3386	轉	61DC	F1CD	F50C0080
3387	耐	61DD	F1CF	F50D0080
3388	週	61DE	F1CE	F50E0080
3389	鑄	61DF	F1D1	F50F0080
3390	駐	61E0	F1D2	F50G0080
3391	竹	61E1	F1D3	F50H0080
3392	粥	61E2	F1D4	F50I0080
3393	俊	61E3	F1D5	F50J0080
3394	僞	61E4	F1D6	F50K0080
3395	准	61E5	F1D7	F50L0080
3396	竣	61E6	F1D8	F50M0080
3397	峻	61E7	F1DA	F50N0080
3398	竣	61E8	F1DB	F50O0080
3399	樽	61E9	F1DC	F50P0080
3400	浚	61EA	F1DD	F50Q0080

Line Number	Graphic	Host Code	PC Code	GCGID
3401	準	61EB	F1DE	F50R0080
3402	濬	61EC	F1DF	F50S0080
3403	竣	61ED	F1E1	F50T0080
3404	竣	61EE	F1E2	F50U0080
3405	蠢	61EF	F1E3	F50V0080
3406	逡	61F0	F1E4	F50W0080
3407	逡	61F1	F1E5	F50X0080
3408	隼	61F2		F50Y0080
3409	駿	61F3	F1E7	F50Z0080
3410	茁	61F4	F1E8	F5100080
3411	中	61F5	F1E9	F5110080
3412	仲	61F6	F1EA	F5120080
3413	衆	61F7	F1EB	F5130080
3414	重	61F8	F1EC	F5140080
3415	則	61F9		F5150080
3416	卽	61FA	F1ED	F5160080
3417	櫛	61FB	F1EE	F5170080
3418	楫	61FC	F1EF	F5180080
3419	汁	61FD	F1F0	F5190080
3420	萑	61FE	F1F1	F51A0080
3421	增	6241	F1F2	F51D0080
3422	憎	6242	F1F3	F51E0080
3423	拯	6243	F1F5	F51F0080
3424	烝	6244	F1F6	F51G0080
3425	曾	6245	F1F4	F51H0080
3426	甌	6246	F1F7	F51I0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3427	症	6247	F1F8	F51J0080
3428	蒸	6248	F1FA	F51K0080
3429	証	6249		F51L0080
3430	證	624A	F1FB	F51M0080
3431	贈	624B	F1FC	F51N0080
3432	之	624C	F1FD	F51O0080
3433	只	624D	F1FE	F51P0080
3434	咫	624E	F2A1	F51Q0080
3435	地	624F	F2A2	F51R0080
3436	址	6250	F2A3	F51S0080
3437	志	6251	F2A4	F51T0080
3438	持	6252	F2A5	F51U0080
3439	指	6253	F2A6	F51V0080
3440	摯	6254	F2A7	F51W0080
3441	支	6255	F2A8	F51X0080
3442	旨	6256	F2A9	F51Y0080
3443	智	6257	F2AA	F51Z0080
3444	枝	6258	F2AB	F5200080
3445	枳	6259	F2AC	F5210080
3446	止	625A	F2AD	F5220080
3447	池	625B	F2AE	F5230080
3448	漬	625C	F2B0	F5240080
3449	痣	625D		F5250080
3450	知	625E	F2B1	F5260080
3451	砥	625F	F2B2	F5270080
3452	祗	6260	F2B4	F5280080

Line Number	Graphic	Host Code	PC Code	GCGID
3453	社	6261	F2B3	F5290080
3454	紙	6262	F2B5	F52A0080
3455	肢	6263	F2B6	F52B0080
3456	脂	6264	F2B7	F52C0080
3457	至	6265	F2B8	F52D0080
3458	芝	6266	F2B9	F52E0080
3459	蚰	6267	F2BB	F52F0080
3460	誌	6268	F2BC	F52G0080
3461	識	6269	F2BD	F52H0080
3462	贄	626A	F2BE	F52I0080
3463	趾	626B	F2BF	F52J0080
3464	遲	626C	F2C0	F52K0080
3465	直	626D	F2C1	F52L0080
3466	植	626E	F2C2	F52M0080
3467	稷	626F	F2C3	F52N0080
3468	織	6270	F2C4	F52O0080
3469	職	6271	F2C5	F52P0080
3470	辰	6272	F2E3	F52Q0080
3471	嗔	6273	F2C7	F52R0080
3472	塵	6274	F2C8	F52S0080
3473	振	6275	F2C9	F52T0080
3474	晉	6276	F2CB	F52U0080
3475	榛	6277	F2CE	F52V0080
3476	津	6278	F2D0	F52W0080
3477	溱	6279	F2D1	F52X0080
3478	珍	627A	F2D2	F52Y0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3479	璫	627B	F2D3	F52Z0080
3480	璫	627C	F2D4	F5300080
3481	疹	627D	F2D6	F5310080
3482	盡	627E	F2D7	F5320080
3483	眞	627F	F2D8	F5330080
3484	瞋	6280	F2D9	F5340080
3485	秦	6281	F2DA	F5350080
3486	縉	6282	F2DB	F5360080
3487	診	6283	F2E0	F5370080
3488	賑	6284	F2E1	F5380080
3489	軫	6285	F2E2	F5390080
3490	進	6286	F2E4	F53A0080
3491	鎮	6287	F2E5	F53B0080
3492	陣	6288	F2E6	F53C0080
3493	陳	6289	F2E7	F53D0080
3494	震	628A	F2E8	F53E0080
3495	叱	628B	F2EA	F53F0080
3496	窒	628C	F2F2	F53G0080
3497	姪	628D	F2EB	F53H0080
3498	嫉	628E	F2EC	F53I0080
3499	帙	628F	F2ED	F53J0080
3500	榘	6290	F2EE	F53K0080
3501	疾	6291	F2F0	F53L0080
3502	秩	6292	F2F1	F53M0080
3503	臙	6293	F2F3	F53N0080
3504	蛭	6294	F2F4	F53O0080

Line Number	Graphic	Host Code	PC Code	GCGID
3505	質	6295	F2F5	F53P0080
3506	跌	6296	F2F6	F53Q0080
3507	迭	6297	F2F7	F53R0080
3508	斟	6298	F2F8	F53S0080
3509	朕	6299	F2F9	F53T0080
3510	執	629A	F2FB	F53U0080
3511	集	629B	F3A2	F53V0080
3512	緝	629C	F2FD	F53W0080
3513	輯	629D	F2FE	F53X0080
3514	徵	629E	F3A3	F53Y0080
3515	懲	629F	F3A4	F53Z0080
3516	澄	62A0	F3A5	F5400080
3517	且	62A1	F3A6	F5410080
3518	借	62A2	F3A8	F5420080
3519	筍	62A3	F3B0	F5430080
3520	叉	62A4	F3A9	F5440080
3521	嗟	62A5	F3AA	F5450080
3522	差	62A6	F3AC	F5460080
3523	嗟	62A7	F3AB	F5470080
3524	次	62A8	F3AD	F5480080
3525	此	62A9	F3AE	F5490080
3526	磋	62AA	F3AF	F54A0080
3527	茶	62AB	F3B1	F54B0080
3528	蹉	62AC	F3B2	F54C0080
3529	遮	62AD	F3B4	F54D0080
3530	車	62AE	F3B3	F54E0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3531	捉	62AF	F3B5	F54F0080
3532	搾	62B0	F3B6	F54G0080
3533	着	62B1	F3B7	F54H0080
3534	窄	62B2	F3B8	F54I0080
3535	錯	62B3	F3B9	F54J0080
3536	鑿	62B4	F3BA	F54K0080
3537	齷	62B5	F3BB	F54L0080
3538	撰	62B6	F3BC	F54M0080
3539	濼	62B7	F3BD	F54N0080
3540	燦	62B8	F3BE	F54O0080
3541	璨	62B9	F3BF	F54P0080
3542	瓚	62BA	F3C0	F54Q0080
3543	竄	62BB	F3C1	F54R0080
3544	纂	62BC	F3C3	F54S0080
3545	粲	62BD	F3C4	F54T0080
3546	纘	62BE	F3C5	F54U0080
3547	讚	62BF	F3C6	F54V0080
3548	贊	62C0	F3C7	F54W0080
3549	鑽	62C1	F3C8	F54X0080
3550	滄	62C2		F54Y0080
3551	餐	62C3	F3C9	F54Z0080
3552	饌	62C4	F3CA	F5500080
3553	刹	62C5	F3CB	F5510080
3554	察	62C6	F3CC	F5520080
3555	擦	62C7	F3CD	F5530080
3556	札	62C8	F3CE	F5540080

Line Number	Graphic	Host Code	PC Code	GCGID
3557	僭	62C9	F3D0	F5550080
3558	參	62CA	F3D1	F5560080
3559	塹	62CB	F3D2	F5570080
3560	慘	62CC	F3D3	F5580080
3561	慙	62CD	F3D4	F5590080
3562	慚	62CE		F55A0080
3563	饑	62CF	F3D5	F55B0080
3564	斬	62D0	F3D6	F55C0080
3565	站	62D1	F3D7	F55D0080
3566	讒	62D2	F3D8	F55E0080
3567	倡	62D3	F3DB	F55F0080
3568	倉	62D4	F3DA	F55G0080
3569	剏	62D5		F55H0080
3570	創	62D6	F3DC	F55I0080
3571	唱	62D7	F3DD	F55J0080
3572	娼	62D8	F3DE	F55K0080
3573	廠	62D9	F3DF	F55L0080
3574	彰	62DA	F3E0	F55M0080
3575	悵	62DB		F55N0080
3576	敞	62DC	F3E2	F55O0080
3577	昌	62DD	F3E3	F55P0080
3578	昶	62DE	F3E4	F55Q0080
3579	暢	62DF	F3E5	F55R0080
3580	槍	62E0	F3E6	F55S0080
3581	肇	62E1		F55T0080
3582	滄	62E2	F3E7	F55U0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 11 (Page 37 of 37). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3583	漲	62E3	F3E8	F55V0080
3584	瘡	62E4	F3EA	F55W0080
3585	窓	62E5	F3EB	F55X0080
3586	脹	62E6	F3EC	F55Y0080
3587	艙	62E7	F3ED	F55Z0080
3588	莖	62E8	F3EE	F5600080
3589	蒼	62E9	F3EF	F5610080
3590	債	62EA	F3F0	F5620080
3591	塚	62EB	F3F1	F5630080
3592	彩	62EC	F3F4	F5640080
3593	採	62ED	F3F5	F5650080
3594	砦	62EE	F3F6	F5660080
3595	綵	62EF	F3F7	F5670080
3596	菜	62F0	F3F8	F5680080
3597	蔡	62F1	F3F9	F5690080
3598	采	62F2	F3FA	F56A0080
3599	釵	62F3	F3FB	F56B0080
3600	册	62F4	F3FC	F56C0080
3601	柵	62F5	F3FD	F56D0080
3602	策	62F6	F3FE	F56E0080
3603	簣	62F7		F56F0080
3604	責	62F8	F4A1	F56G0080
3605	淒	62F9	F4A2	F56H0080
3606	妻	62FA	F4A3	F56I0080
3607	悽	62FB	F4A4	F56J0080
3608	處	62FC	F4A5	F56K0080

Table 11 (Page 37 of 37). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3609	刺	62FD	F4A7	F56L0080
3610	剔	62FE	F4A8	F56M0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3611	尺	6341	F4A9	F56P0080
3612	憾	6342	F4AA	F56Q0080
3613	戚	6343	F4AB	F56R0080
3614	拓	6344	F4AC	F56S0080
3615	擲	6345	F4AD	F56T0080
3616	斥	6346	F4AE	F56U0080
3617	滌	6347	F4AF	F56V0080
3618	瘠	6348	F4B0	F56W0080
3619	脊	6349	F4B1	F56X0080
3620	蜴	634A		F56Y0080
3621	躑	634B		F56Z0080
3622	陟	634C	F4B3	F5700080
3623	隻	634D	F4B4	F5710080
3624	仟	634E	F4B5	F5720080
3625	千	634F	F4B6	F5730080
3626	喘	6350	F4B7	F5740080
3627	天	6351	F4B8	F5750080
3628	川	6352	F4B9	F5760080
3629	擅	6353	F4BA	F5770080
3630	泉	6354	F4BB	F5780080
3631	淺	6355	F4BC	F5790080
3632	濺	6356		F57A0080
3633	穿	6357	F4BE	F57B0080
3634	舛	6358	F4BF	F57C0080
3635	薦	6359	F4C0	F57D0080
3636	賤	635A	F4C1	F57E0080

Line Number	Graphic	Host Code	PC Code	GCGID
3637	踐	635B	F4C2	F57F0080
3638	遷	635C	F4C3	F57G0080
3639	釧	635D	F4C4	F57H0080
3640	闡	635E	F4C5	F57I0080
3641	阡	635F	F4C6	F57J0080
3642	韃	6360	F4C7	F57K0080
3643	凸	6361	F4C8	F57L0080
3644	徹	6362	F4CB	F57M0080
3645	哲	6363	F4C9	F57N0080
3646	喆	6364	F4CA	F57O0080
3647	撤	6365	F4CC	F57P0080
3648	澈	6366	F4CD	F57Q0080
3649	綴	6367	F4CE	F57R0080
3650	轍	6368	F4D0	F57S0080
3651	鐵	6369	F4D1	F57T0080
3652	兪	636A	F4D2	F57U0080
3653	尖	636B	F4D3	F57V0080
3654	沾	636C	F4D4	F57W0080
3655	添	636D	F4D5	F57X0080
3656	甜	636E	F4D6	F57Y0080
3657	瞻	636F	F4D7	F57Z0080
3658	簷	6370		F5800080
3659	籤	6371	F4D9	F5810080
3660	諂	6372	F4DB	F5820080
3661	妾	6373	F4DD	F5830080
3662	帖	6374	F4DE	F5840080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3663	捷	6375	F4DF	F5850080
3664	牒	6376	F4E0	F5860080
3665	疊	6377	F4E1	F5870080
3666	睫	6378	F4E2	F5880080
3667	諜	6379	F4E3	F5890080
3668	貼	637A	F4E4	F58A0080
3669	輒	637B	F4E5	F58B0080
3670	廳	637C	F4E6	F58C0080
3671	晴	637D	F4E7	F58D0080
3672	清	637E	F4E8	F58E0080
3673	聽	637F	F4E9	F58F0080
3674	菁	6380	F4EA	F58G0080
3675	蜻	6381		F58H0080
3676	請	6382	F4EB	F58I0080
3677	青	6383	F4EC	F58J0080
3678	鯖	6384	F4ED	F58K0080
3679	切	6385	F4EE	F58L0080
3680	剝	6386	F4EF	F58M0080
3681	替	6387	F4F0	F58N0080
3682	涕	6388	F4F1	F58O0080
3683	滯	6389	F4F2	F58P0080
3684	砌	638A		F58Q0080
3685	締	638B	F4F3	F58R0080
3686	諦	638C	F4F4	F58S0080
3687	逮	638D	F4F5	F58T0080
3688	遞	638E	F4F6	F58U0080

Line Number	Graphic	Host Code	PC Code	GCGID
3689	黷	638F		F58V0080
3690	體	6390	F4F7	F58W0080
3691	初	6391	F4F8	F58X0080
3692	哨	6392	F4FA	F58Y0080
3693	峭	6393		F58Z0080
3694	樵	6394	F4FB	F5900080
3695	抄	6395	F4FC	F5910080
3696	招	6396	F4FD	F5920080
3697	梢	6397	F4FE	F5930080
3698	椒	6398	F5A1	F5940080
3699	楚	6399	F5A2	F5950080
3700	樵	639A	F5A3	F5960080
3701	炒	639B	F5A4	F5970080
3702	焦	639C	F5A5	F5980080
3703	硝	639D	F5A6	F5990080
3704	礁	639E	F5A7	F59A0080
3705	礎	639F	F5A8	F59B0080
3706	秒	63A0	F5A9	F59C0080
3707	稍	63A1	F5AA	F59D0080
3708	綃	63A2		F59E0080
3709	肖	63A3	F5AB	F59F0080
3710	草	63A4	F5AE	F59G0080
3711	蕉	63A5	F5AF	F59H0080
3712	貂	63A6	F5B0	F59I0080
3713	超	63A7	F5B1	F59J0080
3714	酢	63A8	F5B2	F59K0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3715	醋	63A9	F5B3	F59L0080
3716	醮	63AA	F5B4	F59M0080
3717	鈔	63AB		F59N0080
3718	鞞	63AC		F59O0080
3719	促	63AD	F5B5	F59P0080
3720	囑	63AE	F5B6	F59Q0080
3721	數	63AF		F59R0080
3722	燭	63B0	F5B7	F59S0080
3723	蠱	63B1	F5B8	F59T0080
3724	蜀	63B2	F5B9	F59U0080
3725	觸	63B3	F5BA	F59V0080
3726	躅	63B4		F59W0080
3727	鬪	63B5		F59X0080
3728	寸	63B6	F5BB	F59Y0080
3729	付	63B7	F5BC	F59Z0080
3730	村	63B8	F5BD	F5A00080
3731	叢	63B9	F5BF	F5A10080
3732	塚	63BA	F5C0	F5A20080
3733	寵	63BB	F5C1	F5A30080
3734	忽	63BC		F5A40080
3735	摠	63BD	F5C4	F5A50080
3736	總	63BE	F5C5	F5A60080
3737	聰	63BF	F5C6	F5A70080
3738	葱	63C0		F5A80080
3739	銃	63C1	F5C8	F5A90080
3740	撮	63C2	F5C9	F5AA0080

Line Number	Graphic	Host Code	PC Code	GCGID
3741	催	63C3	F5CA	F5AB0080
3742	崔	63C4	F5CB	F5AC0080
3743	摧	63C5		F5AD0080
3744	最	63C6	F5CC	F5AE0080
3745	墜	63C7	F5CD	F5AF0080
3746	抽	63C8	F5CE	F5AG0080
3747	推	63C9	F5CF	F5AH0080
3748	椎	63CA	F5D0	F5AI0080
3749	楸	63CB	F5D1	F5AJ0080
3750	槌	63CC		F5AK0080
3751	樞	63CD	F5D2	F5AL0080
3752	湫	63CE	F5D3	F5AM0080
3753	整	63CF		F5AN0080
3754	皺	63D0	F5D4	F5AO0080
3755	秋	63D1	F5D5	F5AP0080
3756	箒	63D2		F5AQ0080
3757	芻	63D3	F5D6	F5AR0080
3758	萩	63D4	F5D7	F5AS0080
3759	趨	63D5	F5D9	F5AT0080
3760	追	63D6	F5DA	F5AU0080
3761	鄒	63D7	F5DB	F5AV0080
3762	酋	63D8	F5DC	F5AW0080
3763	醜	63D9	F5DD	F5AX0080
3764	錘	63DA	F5DF	F5AY0080
3765	錐	63DB	F5DE	F5AZ0080
3766	離	63DC	F5E1	F5B00080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3767	鞦	63DD		F5B10080
3768	鞦	63DE	F5E3	F5B20080
3769	龠	63DF		F5B30080
3770	麤	63E0		F5B40080
3771	丑	63E1	F5E4	F5B50080
3772	扭	63E2		F5B60080
3773	祝	63E3	F5E6	F5B70080
3774	畜	63E4	F5E5	F5B80080
3775	竺	63E5	F5E7	F5B90080
3776	筑	63E6	F5E8	F5BA0080
3777	築	63E7	F5E9	F5BB0080
3778	縮	63E8	F5EA	F5BC0080
3779	舳	63E9		F5BD0080
3780	蓄	63EA	F5EB	F5BE0080
3781	蹴	63EB	F5ED	F5BF0080
3782	軸	63EC	F5EE	F5BG0080
3783	逐	63ED	F5EF	F5BH0080
3784	春	63EE	F5F0	F5BI0080
3785	椿	63EF	F5F1	F5BJ0080
3786	出	63F0	F5F3	F5BK0080
3787	黜	63F1	F5F5	F5BL0080
3788	充	63F2	F5F6	F5BM0080
3789	冲	63F3		F5BN0080
3790	忠	63F4	F5F7	F5BO0080
3791	冲	63F5	F5F8	F5BP0080
3792	蟲	63F6	F5F9	F5BQ0080

Line Number	Graphic	Host Code	PC Code	GCGID
3793	衝	63F7	F5FA	F5BR0080
3794	衷	63F8	F5FB	F5BS0080
3795	悴	63F9	F5FC	F5BT0080
3796	臍	63FA	F5FD	F5BU0080
3797	萃	63FB	F5FE	F5BV0080
3798	取	63FC	F6A2	F5BW0080
3799	吹	63FD	F6A3	F5BX0080
3800	嘴	63FE	F6A4	F5BY0080
3801	娶	6441	F6A5	F5C10080
3802	就	6442	F6A6	F5C20080
3803	橈	6443		F5C30080
3804	炊	6444	F6A7	F5C40080
3805	翠	6445	F6A8	F5C50080
3806	聚	6446	F6A9	F5C60080
3807	脆	6447	F6AA	F5C70080
3808	臭	6448	F6AB	F5C80080
3809	贅	6449		F5C90080
3810	趣	644A	F6AC	F5CA0080
3811	醉	644B	F6AD	F5CB0080
3812	驟	644C	F6AE	F5CC0080
3813	鶩	644D	F6AF	F5CD0080
3814	仄	644E	F6B1	F5CE0080
3815	側	644F	F6B0	F5CF0080
3816	惻	6450	F6B3	F5CG0080
3817	測	6451	F6B4	F5CH0080
3818	層	6452	F6B5	F5CI0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 5 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3819	侈	6453	F6B6	F5CJ0080
3820	值	6454	F6B7	F5CK0080
3821	嗤	6455	F6B8	F5CL0080
3822	峙	6456	F6B9	F5CM0080
3823	卮	6457		F5CN0080
3824	幟	6458	F6BA	F5CO0080
3825	徵	6459		F5CP0080
3826	梔	645A	F6BC	F5CQ0080
3827	治	645B	F6BD	F5CR0080
3828	淄	645C	F6BE	F5CS0080
3829	熾	645D	F6BF	F5CT0080
3830	痔	645E	F6C0	F5CU0080
3831	痴	645F	F6C1	F5CV0080
3832	癡	6460	F6C2	F5CW0080
3833	雉	6461	F6CB	F5CX0080
3834	稚	6462	F6C3	F5CY0080
3835	緇	6463	F6C5	F5CZ0080
3836	緞	6464	F6C6	F5D00080
3837	置	6465	F6C7	F5D10080
3838	恥	6466	F6BB	F5D20080
3839	致	6467	F6C8	F5D30080
3840	輜	6468	F6CA	F5D40080
3841	馳	6469	F6CC	F5D50080
3842	鷄	646A		F5D60080
3843	齒	646B	F6CD	F5D70080
3844	則	646C	F6CE	F5D80080

Table 12 (Page 5 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3845	勅	646D	F6CF	F5D90080
3846	飭	646E	F6D0	F5DA0080
3847	親	646F	F6D1	F5DB0080
3848	七	6470	F6D2	F5DC0080
3849	柒	6471	F6D3	F5DD0080
3850	漆	6472	F6D4	F5DE0080
3851	侵	6473	F6D5	F5DF0080
3852	寢	6474	F6D6	F5DG0080
3853	忱	6475		F5DH0080
3854	枕	6476	F6D7	F5DI0080
3855	沈	6477	F6D8	F5DJ0080
3856	浸	6478	F6D9	F5DK0080
3857	砧	6479	F6DB	F5DL0080
3858	針	647A	F6DC	F5DM0080
3859	鍼	647B	F6DD	F5DN0080
3860	蟄	647C	F6DE	F5DO0080
3861	秤	647D	F6DF	F5DP0080
3862	稱	647E	F6E0	F5DQ0080
3863	快	647F	F6E1	F5DR0080
3864	他	6480	F6E2	F5DS0080
3865	睡	6481	F6E4	F5DT0080
3866	墮	6482	F6E5	F5DU0080
3867	妥	6483	F6E6	F5DV0080
3868	惰	6484	F6E7	F5DW0080
3869	打	6485	F6E8	F5DX0080
3870	朶	6486	F6EA	F5DY0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3871	橈	6487	F6EB	F5DZ0080
3872	舵	6488	F6EC	F5E00080
3873	陀	6489	F6ED	F5E10080
3874	駝	648A	F6EF	F5E20080
3875	倬	648B	F6F0	F5E30080
3876	卓	648C	F6F1	F5E40080
3877	啄	648D	F6F2	F5E50080
3878	度	648E	F6F4	F5E60080
3879	托	648F	F6F5	F5E70080
3880	拆	6490		F5E80080
3881	拓	6491	F6F6	F5E90080
3882	擢	6492	F6F7	F5EA0080
3883	柝	6493	F6F9	F5EB0080
3884	橐	6494		F5EC0080
3885	濁	6495	F6FA	F5ED0080
3886	濯	6496	F6FB	F5EE0080
3887	琢	6497	F6FC	F5EF0080
3888	託	6498	F6FE	F5EG0080
3889	鐸	6499	F7A1	F5EH0080
3890	吞	649A	F7A2	F5EI0080
3891	嘆	649B	F7A3	F5EJ0080
3892	坦	649C	F7A4	F5EK0080
3893	彈	649D	F7A5	F5EL0080
3894	憚	649E	F7A6	F5EM0080
3895	歎	649F	F7A7	F5EN0080
3896	灘	64A0	F7A8	F5EO0080

Line Number	Graphic	Host Code	PC Code	GCGID
3897	炭	64A1	F7A9	F5EP0080
3898	綻	64A2	F7AA	F5EQ0080
3899	誕	64A3	F7AB	F5ER0080
3900	奪	64A4	F7AC	F5ES0080
3901	脫	64A5	F7AD	F5ET0080
3902	探	64A6	F7AE	F5EU0080
3903	耽	64A7	F7B0	F5EV0080
3904	貪	64A8	F7B1	F5EW0080
3905	塔	64A9	F7B2	F5EX0080
3906	搭	64AA	F7B3	F5EY0080
3907	榻	64AB	F7B4	F5EZ0080
3908	宕	64AC	F7B5	F5F00080
3909	帑	64AD	F7B6	F5F10080
3910	湯	64AE	F7B7	F5F20080
3911	蕩	64AF	F7B9	F5F30080
3912	兌	64B0	F7BA	F5F40080
3913	台	64B1	F7BB	F5F50080
3914	太	64B2	F7BC	F5F60080
3915	怠	64B3	F7BD	F5F70080
3916	態	64B4	F7BE	F5F80080
3917	殆	64B5	F7BF	F5F90080
3918	汰	64B6	F7C0	F5FA0080
3919	泰	64B7	F7C1	F5FB0080
3920	筭	64B8	F7C2	F5FC0080
3921	胎	64B9	F7C3	F5FD0080
3922	苔	64BA	F7C4	F5FE0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 7 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3923	跲	64BB	F7C5	F5FF0080
3924	郃	64BC	F7C6	F5FG0080
3925	颯	64BD	F7C7	F5FH0080
3926	馱	64BE		F5FI0080
3927	宅	64BF	F7C8	F5FJ0080
3928	擇	64C0	F7C9	F5FK0080
3929	澤	64C1	F7CA	F5FL0080
3930	幘	64C2		F5FM0080
3931	撐	64C3	F7CB	F5FN0080
3932	攄	64C4	F7CC	F5FO0080
3933	兔	64C5	F7CD	F5FP0080
3934	吐	64C6	F7CE	F5FQ0080
3935	土	64C7	F7CF	F5FR0080
3936	討	64C8	F7D0	F5FS0080
3937	働	64C9	F7D1	F5FT0080
3938	桶	64CA	F7D2	F5FU0080
3939	洞	64CB	F7D3	F5FV0080
3940	痛	64CC	F7D4	F5FW0080
3941	筒	64CD	F7D5	F5FX0080
3942	統	64CE	F7D6	F5FY0080
3943	通	64CF	F7D7	F5FZ0080
3944	堆	64D0	F7D8	F5G00080
3945	腿	64D1	F7DA	F5G10080
3946	褪	64D2	F7DB	F5G20080
3947	退	64D3	F7DC	F5G30080
3948	頰	64D4	F7DD	F5G40080

Table 12 (Page 7 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3949	偷	64D5	F7DE	F5G50080
3950	套	64D6	F7DF	F5G60080
3951	妬	64D7	F7E0	F5G70080
3952	投	64D8	F7E1	F5G80080
3953	透	64D9	F7E2	F5G90080
3954	鬪	64DA	F7E3	F5GA0080
3955	慝	64DB	F7E4	F5GB0080
3956	特	64DC	F7E5	F5GC0080
3957	婆	64DD	F7E8	F5GD0080
3958	坡	64DE	F7E7	F5GE0080
3959	巴	64DF	F7E9	F5GF0080
3960	把	64E0	F7EA	F5GG0080
3961	播	64E1	F7EB	F5GH0080
3962	杷	64E2	F7ED	F5GI0080
3963	波	64E3	F7EE	F5GJ0080
3964	派	64E4	F7EF	F5GK0080
3965	爬	64E5	F7F0	F5GL0080
3966	琶	64E6	F7F1	F5GM0080
3967	破	64E7	F7F2	F5GN0080
3968	罷	64E8	F7F3	F5GO0080
3969	芭	64E9	F7F4	F5GP0080
3970	跛	64EA	F7F5	F5GQ0080
3971	頗	64EB	F7F6	F5GR0080
3972	坂	64EC	F7F8	F5GS0080
3973	判	64ED	F7F7	F5GT0080
3974	板	64EE	F7F9	F5GU0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3975	版	64EF	F7FA	F5GV0080
3976	販	64F0	F7FC	F5GW0080
3977	辦	64F1	F7FD	F5GX0080
3978	瓣	64F2	F7FB	F5GY0080
3979	阪	64F3	F8A1	F5GZ0080
3980	八	64F4	F8A2	F5H00080
3981	叭	64F5	F8A3	F5H10080
3982	捌	64F6	F8A4	F5H20080
3983	佩	64F7	F8A5	F5H30080
3984	唄	64F8	F8A6	F5H40080
3985	悖	64F9	F8A7	F5H50080
3986	沛	64FA	F8A9	F5H60080
3987	涓	64FB	F8AA	F5H70080
3988	牌	64FC	F8AB	F5H80080
3989	狽	64FD	F8AC	F5H90080
3990	稗	64FE	F8AD	F5HA0080
3991	貝	6541	F8AF	F5HD0080
3992	敗	6542	F8A8	F5HE0080
3993	霸	6543	F8AE	F5HF0080
3994	彭	6544	F8B0	F5HG0080
3995	澎	6545	F8B1	F5HH0080
3996	烹	6546	F8B2	F5HI0080
3997	膨	6547	F8B3	F5HJ0080
3998	復	6548	F8B4	F5HK0080
3999	便	6549	F8B5	F5HL0080
4000	偏	654A	F8B6	F5HM0080

Line Number	Graphic	Host Code	PC Code	GCGID
4001	扁	654B	F8B7	F5HN0080
4002	片	654C	F8B8	F5HO0080
4003	篇	654D	F8B9	F5HP0080
4004	編	654E	F8BA	F5HQ0080
4005	翩	654F	F8BB	F5HR0080
4006	蝙	6550		F5HS0080
4007	遍	6551	F8BC	F5HT0080
4008	鞭	6552	F8BD	F5HU0080
4009	眨	6553	F8BF	F5HV0080
4010	坪	6554	F8C0	F5HW0080
4011	平	6555	F8C1	F5HX0080
4012	萍	6556	F8C3	F5HY0080
4013	評	6557	F8C4	F5HZ0080
4014	吠	6558	F8C5	F5I00080
4015	嬖	6559	F8C6	F5I10080
4016	幣	655A	F8C7	F5I20080
4017	廢	655B	F8C8	F5I30080
4018	弊	655C	F8C9	F5I40080
4019	斃	655D	F8CA	F5I50080
4020	肺	655E	F8CB	F5I60080
4021	蔽	655F	F8CC	F5I70080
4022	閉	6560	F8CD	F5I80080
4023	陞	6561	F8CE	F5I90080
4024	佈	6562	F8CF	F5IA0080
4025	包	6563	F8D0	F5IB0080
4026	匍	6564	F8D1	F5IC0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 9 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4027	匏	6565	F8D2	F5ID0080
4028	咆	6566	F8D3	F5IE0080
4029	哺	6567	F8D4	F5IF0080
4030	圃	6568	F8D5	F5IG0080
4031	庖	6569		F5IH0080
4032	布	656A	F8D6	F5II0080
4033	怖	656B	F8D7	F5IJ0080
4034	抱	656C	F8D9	F5IK0080
4035	抛	656D	F8D8	F5IL0080
4036	捕	656E	F8DA	F5IM0080
4037	泡	656F	F8DC	F5IN0080
4038	浦	6570	F8DD	F5IO0080
4039	炮	6571		F5IP0080
4040	庖	6572	F8DE	F5IQ0080
4041	砲	6573	F8DF	F5IR0080
4042	胞	6574	F8E0	F5IS0080
4043	脯	6575	F8E1	F5IT0080
4044	鋪	6576		F5IU0080
4045	葡	6577	F8E3	F5IV0080
4046	蒲	6578	F8E4	F5IW0080
4047	袍	6579	F8E5	F5IX0080
4048	褒	657A	F8E6	F5IY0080
4049	匏	657B		F5IZ0080
4050	鋪	657C	F8E8	F5J00080
4051	鞞	657D		F5J10080
4052	飽	657E	F8E9	F5J20080

Table 12 (Page 9 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4053	鮑	657F	F8EA	F5J30080
4054	幅	6580	F8EB	F5J40080
4055	暴	6581	F8EC	F5J50080
4056	瀑	6582	F8EE	F5J60080
4057	爆	6583	F8EF	F5J70080
4058	倭	6584	F8F1	F5J80080
4059	剽	6585	F8F2	F5J90080
4060	彪	6586	F8F3	F5JA0080
4061	慄	6587	F8F4	F5JB0080
4062	杓	6588	F8F5	F5JC0080
4063	標	6589	F8F6	F5JD0080
4064	漂	658A	F8F7	F5JE0080
4065	瓢	658B	F8F8	F5JF0080
4066	票	658C	F8F9	F5JG0080
4067	表	658D	F8FA	F5JH0080
4068	豹	658E	F8FB	F5JI0080
4069	飄	658F	F8FD	F5JJ0080
4070	分	6590		F5JK0080
4071	品	6591	F9A1	F5JL0080
4072	稟	6592	F9A2	F5JM0080
4073	馮	6593	F9A7	F5JN0080
4074	楓	6594	F9A3	F5JO0080
4075	諷	6595	F9A4	F5JP0080
4076	豐	6596	F9A5	F5JQ0080
4077	風	6597	F9A6	F5JR0080
4078	彼	6598	F9A8	F5JS0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4079	披	6599	F9A9	F5JT0080
4080	疲	659A	F9AA	F5JU0080
4081	皮	659B	F9AB	F5JV0080
4082	萑	659C		F5JW0080
4083	被	659D	F9AC	F5JX0080
4084	避	659E	F9AD	F5JY0080
4085	匹	659F	F9AF	F5JZ0080
4086	弼	65A0	F9B0	F5K00080
4087	必	65A1	F9B1	F5K10080
4088	泌	65A2	F9B2	F5K20080
4089	畢	65A3	F9B4	F5K30080
4090	疋	65A4	F9B5	F5K40080
4091	筆	65A5	F9B6	F5K50080
4092	躡	65A6		F5K60080
4093	乏	65A7	F9B9	F5K70080
4094	逼	65A8	F9BA	F5K80080
4095	下	65A9	F9BB	F5K90080
4096	何	65AA	F9BC	F5KA0080
4097	夏	65AB	F9BE	F5KB0080
4098	廈	65AC	F9BF	F5KC0080
4099	昷	65AD	F9C0	F5KD0080
4100	河	65AE	F9C1	F5KE0080
4101	瑕	65AF	F9C2	F5KF0080
4102	蝦	65B0	F9C4	F5KG0080
4103	荷	65B1	F9C3	F5KH0080
4104	賀	65B2	F9C5	F5KI0080

Line Number	Graphic	Host Code	PC Code	GCGID
4105	遐	65B3	F9C6	F5KJ0080
4106	霞	65B4	F9C7	F5KK0080
4107	鰕	65B5	F9C8	F5KL0080
4108	壑	65B6	F9C9	F5KM0080
4109	學	65B7	F9CA	F5KN0080
4110	瘡	65B8		F5KO0080
4111	虐	65B9	F9CB	F5KP0080
4112	諺	65BA	F9CC	F5KQ0080
4113	鶴	65BB	F9CD	F5KR0080
4114	寒	65BC	F9CE	F5KS0080
4115	恨	65BD	F9CF	F5KT0080
4116	悍	65BE	F9D0	F5KU0080
4117	旱	65BF	F9D1	F5KV0080
4118	汗	65C0	F9D2	F5KW0080
4119	漢	65C1	F9D3	F5KX0080
4120	澣	65C2	F9D4	F5KY0080
4121	罕	65C3	F9D6	F5KZ0080
4122	翰	65C4	F9D7	F5L00080
4123	邯	65C5		F5L10080
4124	閒	65C6	F9D9	F5L20080
4125	閑	65C7	F9D8	F5L30080
4126	限	65C8	F9DA	F5L40080
4127	韓	65C9	F9DB	F5L50080
4128	鵬	65CA		F5L60080
4129	割	65CB	F9DC	F5L70080
4130	轄	65CC	F9DD	F5L80080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4131	函	65CD	F9DE	F5L90080
4132	含	65CE	F9DF	F5LA0080
4133	咸	65CF	F9E0	F5LB0080
4134	啣	65D0	F9E1	F5LC0080
4135	喊	65D1	F9E2	F5LD0080
4136	檻	65D2	F9E3	F5LE0080
4137	涵	65D3	F9E4	F5LF0080
4138	緘	65D4	F9E5	F5LG0080
4139	艦	65D5	F9E6	F5LH0080
4140	陷	65D6	F9E8	F5LI0080
4141	合	65D7	F9EA	F5LJ0080
4142	哈	65D8	F9EB	F5LK0080
4143	盒	65D9	F9EC	F5LL0080
4144	蛤	65DA	F9ED	F5LM0080
4145	閤	65DB	F9EE	F5LN0080
4146	陝	65DC	F9F0	F5LO0080
4147	亢	65DD	F9F1	F5LP0080
4148	仇	65DE	F9F2	F5LQ0080
4149	姪	65DF	F9F3	F5LR0080
4150	巷	65E0	F9F5	F5LS0080
4151	恒	65E1	F9F6	F5LT0080
4152	抗	65E2	F9F7	F5LU0080
4153	杭	65E3	F9F8	F5LV0080
4154	桁	65E4	F9F9	F5LW0080
4155	沆	65E5	F9FA	F5LX0080
4156	港	65E6	F9FB	F5LY0080

Line Number	Graphic	Host Code	PC Code	GCGID
4157	炕	65E7		F5LZ0080
4158	缸	65E8	F9FC	F5M00080
4159	肛	65E9	F9FD	F5M10080
4160	航	65EA	F9FE	F5M20080
4161	降	65EB	FAA2	F5M30080
4162	項	65EC	FAA3	F5M40080
4163	亥	65ED	FAA4	F5M50080
4164	偕	65EE	FAA5	F5M60080
4165	咳	65EF	FAA6	F5M70080
4166	奚	65F0	FAA8	F5M80080
4167	垓	65F1	FAA7	F5M90080
4168	孩	65F2	FAA9	F5MA0080
4169	害	65F3	FAAA	F5MB0080
4170	廨	65F4		F5MC0080
4171	懈	65F5	FAAB	F5MD0080
4172	楷	65F6	FAAC	F5ME0080
4173	海	65F7	FAAD	F5MF0080
4174	蟹	65F8	FAAF	F5MG0080
4175	解	65F9	FAB0	F5MH0080
4176	該	65FA	FAB1	F5MI0080
4177	諧	65FB	FAB2	F5MJ0080
4178	邂	65FC	FAB3	F5MK0080
4179	駭	65FD	FAB4	F5ML0080
4180	骸	65FE	FAB5	F5MM0080
4181	劾	6641	FAB6	F5MP0080
4182	核	6642	FAB7	F5MQ0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 12 of 32). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4183	倖	6643	FAB8	F5MR0080
4184	幸	6644	FAB9	F5MS0080
4185	杏	6645	FABA	F5MT0080
4186	行	6646	FABC	F5MU0080
4187	享	6647	FABD	F5MV0080
4188	向	6648	FABE	F5MW0080
4189	嚮	6649	FABF	F5MX0080
4190	鄉	664A	FAC1	F5MY0080
4191	珣	664B	FAC0	F5MZ0080
4192	響	664C	FAC2	F5N00080
4193	餉	664D	FAC3	F5N10080
4194	饗	664E	FAC4	F5N20080
4195	香	664F	FAC5	F5N30080
4196	噓	6650	FAC6	F5N40080
4197	墟	6651	FAC7	F5N50080
4198	虛	6652	FAC8	F5N60080
4199	許	6653	FAC9	F5N70080
4200	憲	6654	FACA	F5N80080
4201	軒	6655	FACD	F5N90080
4202	獻	6656	FACC	F5NA0080
4203	歇	6657	FACE	F5NB0080
4204	險	6658	FACF	F5NC0080
4205	驗	6659	FAD0	F5ND0080
4206	奕	665A	FAD1	F5NE0080
4207	懾	665B	FAD2	F5NF0080
4208	赫	665C	FAD3	F5NG0080

Table 12 (Page 12 of 32). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4209	革	665D	FAD4	F5NH0080
4210	峴	665E	FAD6	F5NI0080
4211	弦	665F	FAD7	F5NJ0080
4212	懸	6660	FAD8	F5NK0080
4213	炫	6661	FADB	F5NL0080
4214	現	6662	FADE	F5NM0080
4215	玄	6663	FADC	F5NN0080
4216	眩	6664	FADF	F5NO0080
4217	絃	6665	FAE1	F5NP0080
4218	絢	6666	FAE2	F5NQ0080
4219	縣	6667	FAE3	F5NR0080
4220	舷	6668	FAE4	F5NS0080
4221	銜	6669	FAE5	F5NT0080
4222	見	666A	FAE6	F5NU0080
4223	賢	666B	FAE7	F5NV0080
4224	鉉	666C	FAE8	F5NW0080
4225	顯	666D	FAE9	F5NX0080
4226	子	666E	FAEA	F5NY0080
4227	穴	666F	FAEB	F5NZ0080
4228	血	6670	FAEC	F5O00080
4229	頁	6671	FAED	F5O10080
4230	嫌	6672	FAEE	F5O20080
4231	慊	6673		F5O30080
4232	俠	6674	FAEF	F5O40080
4233	協	6675	FAF0	F5O50080
4234	夾	6676	FAF1	F5O60080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4235	峽	6677	FAF2	F5O70080
4236	挾	6678	FAF3	F5O80080
4237	浹	6679	FAF4	F5O90080
4238	狹	667A	FAF5	F5OA0080
4239	篋	667B		F5OB0080
4240	脇	667C	FAF7	F5OC0080
4241	脅	667D	FAF6	F5OD0080
4242	莢	667E	FAF8	F5OE0080
4243	陝	667F		F5OF0080
4244	缺	6680	FAF9	F5OG0080
4245	頰	6681	FAFA	F5OH0080
4246	亨	6682	FAFB	F5OI0080
4247	刑	6683	FAFD	F5OJ0080
4248	型	6684	FAFE	F5OK0080
4249	形	6685	FBA1	F5OL0080
4250	兄	6686	FAFC	F5OM0080
4251	澄	6687	FBA4	F5ON0080
4252	炯	6688	FBA6	F5OO0080
4253	珩	6689	FBA8	F5OP0080
4254	荊	668A	FBAA	F5OQ0080
4255	螢	668B	FBAB	F5OR0080
4256	衡	668C	FBAC	F5OS0080
4257	邢	668D	FBAE	F5OT0080
4258	筌	668E	FBAF	F5OU0080
4259	馨	668F	FBB0	F5OV0080
4260	兮	6690	FBB1	F5OW0080

Line Number	Graphic	Host Code	PC Code	GCGID
4261	彗	6691	FBB2	F5OX0080
4262	惠	6692	FBB3	F5OY0080
4263	慧	6693	FBB4	F5OZ0080
4264	蕙	6694	FBB6	F5P00080
4265	醯	6695	FBB8	F5P10080
4266	鞋	6696	FBB9	F5P20080
4267	乎	6697	FBBA	F5P30080
4268	互	6698	FBBB	F5P40080
4269	豪	6699	FBDF	F5P50080
4270	呼	669A	FBBC	F5P60080
4271	壺	669B	FBBE	F5P70080
4272	壕	669C	FBBD	F5P80080
4273	好	669D	FBBF	F5P90080
4274	弧	669E	FBC1	F5PA0080
4275	昊	669F	FBC4	F5PB0080
4276	戶	66A0	FBC2	F5PC0080
4277	毫	66A1	FBC6	F5PD0080
4278	浩	66A2	FBC7	F5PE0080
4279	溟	66A3	FBC8	F5PF0080
4280	湖	66A4	FBC9	F5PG0080
4281	滌	66A5	FBCA	F5PH0080
4282	澹	66A6	FBCB	F5PI0080
4283	濩	66A7	FBCD	F5PJ0080
4284	濠	66A8	FBCC	F5PK0080
4285	灑	66A9	FBCE	F5PL0080
4286	狐	66AA	FBCF	F5PM0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4287	瑚	66AB	FBD1	F5PN0080
4288	瓠	66AC	FBD2	F5PO0080
4289	皓	66AD	FBD3	F5PP0080
4290	皞	66AE		F5PQ0080
4291	祐	66AF	FBD4	F5PR0080
4292	糊	66B0	FBD5	F5PS0080
4293	縞	66B1	FBD6	F5PT0080
4294	胡	66B2	FBD7	F5PU0080
4295	葫	66B3	FBD9	F5PV0080
4296	虎	66B4	FBDB	F5PW0080
4297	號	66B5	FBDC	F5PX0080
4298	蝴	66B6	FBDD	F5PY0080
4299	護	66B7	FBDE	F5PZ0080
4300	扈	66B8	FBC3	F5Q00080
4301	醐	66B9		F5Q10080
4302	鎬	66BA	FBE0	F5Q20080
4303	護	66BB	FBE1	F5Q30080
4304	顙	66BC	FBE2	F5Q40080
4305	惑	66BD	FBE3	F5Q50080
4306	或	66BE	FBE4	F5Q60080
4307	酷	66BF	FBE5	F5Q70080
4308	婚	66C0	FBE6	F5Q80080
4309	昏	66C1	FBE7	F5Q90080
4310	混	66C2	FBE8	F5QA0080
4311	渾	66C3	FBE9	F5QB0080
4312	瓊	66C4	FBEA	F5QC0080

Line Number	Graphic	Host Code	PC Code	GCGID
4313	魂	66C5	FBEB	F5QD0080
4314	忽	66C6	FBEC	F5QE0080
4315	惚	66C7	FBED	F5QF0080
4316	笏	66C8	FBEE	F5QG0080
4317	鶻	66C9		F5QH0080
4318	弘	66CA	FBF0	F5QI0080
4319	哄	66CB	FBF1	F5QJ0080
4320	汞	66CC	FBF1	F5QK0080
4321	泓	66CD	FBF2	F5QL0080
4322	洪	66CE	FBF3	F5QM0080
4323	鴻	66CF	FBF8	F5QN0080
4324	紅	66D0	FBF5	F5QO0080
4325	虹	66D1	FBF6	F5QP0080
4326	訶	66D2	FBF7	F5QQ0080
4327	化	66D3	FBF9	F5QR0080
4328	嬋	66D4	FBFB	F5QS0080
4329	樺	66D5	FBFC	F5QT0080
4330	火	66D6	FBFD	F5QU0080
4331	禍	66D7	FCA1	F5QV0080
4332	晝	66D8	FBFE	F5QW0080
4333	禾	66D9	FCA2	F5QX0080
4334	和	66DA	FBFA	F5QY0080
4335	花	66DB	FCA3	F5QZ0080
4336	華	66DC	FCA4	F5R00080
4337	話	66DD	FCA5	F5R10080
4338	靴	66DE	FCA8	F5R20080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4339	貨	66DF	FCA7	F5R30080
4340	廓	66E0	FCA9	F5R40080
4341	擴	66E1	FCAA	F5R50080
4342	攪	66E2	FCAB	F5R60080
4343	確	66E3	FCAC	F5R70080
4344	碯	66E4	FCAD	F5R80080
4345	穫	66E5	FCAE	F5R90080
4346	鑊	66E6		F5RA0080
4347	丸	66E7	FCAF	F5RB0080
4348	喚	66E8	FCB0	F5RC0080
4349	圓	66E9		F5RD0080
4350	宦	66EA	FCB2	F5RE0080
4351	幻	66EB	FCB3	F5RF0080
4352	患	66EC	FCB4	F5RG0080
4353	懽	66ED		F5RH0080
4354	換	66EE	FCB5	F5RI0080
4355	桓	66EF	FCB8	F5RJ0080
4356	歡	66F0	FCB6	F5RK0080
4357	渙	66F1	FCB9	F5RL0080
4358	煥	66F2	FCBA	F5RM0080
4359	環	66F3	FCBB	F5RN0080
4360	紈	66F4	FCBC	F5RO0080
4361	還	66F5	FCBD	F5RP0080
4362	驩	66F6	FCBE	F5RQ0080
4363	鰥	66F7	FCBF	F5RR0080
4364	鬢	66F8		F5RS0080

Line Number	Graphic	Host Code	PC Code	GCGID
4365	活	66F9	FCC0	F5RT0080
4366	滑	66FA	FCC1	F5RU0080
4367	猾	66FB	FCC2	F5RV0080
4368	豁	66FC	FCC3	F5RW0080
4369	闊	66FD	FCC4	F5RX0080
4370	鳳	66FE	FCC5	F5RY0080
4371	媼	6741		F5S10080
4372	徨	6742	FCC7	F5S20080
4373	恍	6743		F5S30080
4374	恍	6744	FCC8	F5S40080
4375	慌	6745	FCCB	F5S50080
4376	惶	6746	FCC9	F5S60080
4377	晃	6747	FCCC	F5S70080
4378	況	6748	FCCF	F5S80080
4379	滉	6749	FCD1	F5S90080
4380	煌	674A	FCD3	F5SA0080
4381	皇	674B	FCD5	F5SB0080
4382	篁	674C	FCD6	F5SC0080
4383	荒	674D	FCD8	F5SD0080
4384	蝗	674E	FCD9	F5SE0080
4385	遑	674F	FCDA	F5SF0080
4386	隍	6750	FCDB	F5SG0080
4387	黃	6751	FCDC	F5SH0080
4388	回	6752	FCDE	F5SI0080
4389	廻	6753	FCDF	F5SJ0080
4390	徊	6754	FCE0	F5SK0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4391	恢	6755	FCE1	F5SL0080
4392	悔	6756	FCE2	F5SM0080
4393	懷	6757	FCE3	F5SN0080
4394	晦	6758	FCE4	F5SO0080
4395	會	6759	FCE5	F5SP0080
4396	檜	675A	FCE6	F5SQ0080
4397	淮	675B	FCE7	F5SR0080
4398	滄	675C	FCE8	F5SS0080
4399	灰	675D	FCE9	F5ST0080
4400	獮	675E	FCEA	F5SU0080
4401	繪	675F	FCEB	F5SV0080
4402	膾	6760	FCEC	F5SW0080
4403	蛔	6761	FCEE	F5SX0080
4404	誨	6762	FCEF	F5SY0080
4405	賄	6763	FCF0	F5SZ0080
4406	劃	6764	FCF1	F5T00080
4407	獲	6765	FCF2	F5T10080
4408	橫	6766	FCF4	F5T20080
4409	哮	6767	FCF6	F5T30080
4410	噓	6768	FCF7	F5T40080
4411	囂	6769		F5T50080
4412	孝	676A	FCF8	F5T60080
4413	效	676B	FCF9	F5T70080
4414	曉	676C	FCFB	F5T80080
4415	梟	676D	FCFC	F5T90080
4416	爻	676E	FDA1	F5TA0080

Line Number	Graphic	Host Code	PC Code	GCGID
4417	肴	676F	FDA2	F5TB0080
4418	酵	6770	FDA3	F5TC0080
4419	侯	6771	FDA5	F5TD0080
4420	候	6772	FDA6	F5TE0080
4421	厚	6773	FDA7	F5TF0080
4422	后	6774	FDA8	F5TG0080
4423	吼	6775	FDA9	F5TH0080
4424	喉	6776	FDAA	F5TI0080
4425	嗅	6777	FDAB	F5TJ0080
4426	後	6778	FDAD	F5TK0080
4427	朽	6779	FDAE	F5TL0080
4428	猴	677A		F5TM0080
4429	逅	677B	FDB1	F5TN0080
4430	篋	677C		F5TO0080
4431	勳	677D	FDB3	F5TP0080
4432	墳	677E	FDB4	F5TQ0080
4433	燻	677F	FDB5	F5TR0080
4434	暈	6780	FDBB	F5TS0080
4435	焄	6781	FDB6	F5TT0080
4436	熏	6782	FDB7	F5TU0080
4437	燻	6783	FDB8	F5TV0080
4438	薰	6784	FDB9	F5TW0080
4439	訓	6785	FDBA	F5TX0080
4440	薨	6786	FDBC	F5TY0080
4441	喧	6787	FDBD	F5TZ0080
4442	萱	6788	FDC0	F5U00080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4443	卉	6789	FDC1	F5U10080
4444	喙	678A	FDC2	F5U20080
4445	毀	678B	FDC3	F5U30080
4446	彙	678C	FDC4	F5U40080
4447	徽	678D	FDC5	F5U50080
4448	揮	678E	FDC6	F5U60080
4449	暉	678F	FDC7	F5U70080
4450	輝	6790	FDC8	F5U80080
4451	諱	6791	FDC9	F5U90080
4452	輝	6792	FDCA	F5UA0080
4453	麾	6793	FDCB	F5UB0080
4454	休	6794	FDCC	F5UC0080
4455	携	6795	FDCD	F5UD0080
4456	杰	6796	FDCE	F5UE0080
4457	畦	6797	FDCF	F5UF0080
4458	虧	6798	FDD0	F5UG0080
4459	恤	6799	FDD1	F5UH0080
4460	譎	679A	FDD2	F5UI0080
4461	鷓	679B	FDD3	F5UJ0080
4462	凶	679C	FDD5	F5UK0080
4463	匈	679D	FDD6	F5UL0080
4464	兇	679E	FDD4	F5UM0080
4465	洵	679F	FDD7	F5UN0080
4466	胸	67A0	FDD8	F5UO0080
4467	黑	67A1	FDD9	F5UP0080
4468	忻	67A2		F5UQ0080

Line Number	Graphic	Host Code	PC Code	GCGID
4469	昕	67A3	FDDA	F5UR0080
4470	欣	67A4	FDDB	F5US0080
4471	痕	67A5	FDDD	F5UT0080
4472	吃	67A6	FDDE	F5UU0080
4473	屹	67A7	FDDF	F5UV0080
4474	紘	67A8	FDE0	F5UW0080
4475	迄	67A9		F5UX0080
4476	欠	67AA	FDE2	F5UY0080
4477	歆	67AB	FDE4	F5UZ0080
4478	欽	67AC	FDE3	F5V00080
4479	吸	67AD	FDE5	F5V10080
4480	恰	67AE	FDE6	F5V20080
4481	洽	67AF	FDE7	F5V30080
4482	興	67B0	FDE9	F5V40080
4483	僖	67B1	FDEA	F5V50080
4484	喜	67B2	FDEC	F5V60080
4485	噫	67B3	FDED	F5V70080
4486	姬	67B4	FDEF	F5V80080
4487	嬉	67B5	FDF0	F5V90080
4488	希	67B6	FDF1	F5VA0080
4489	曦	67B7	FDF6	F5VB0080
4490	愆	67B8	FDF2	F5VC0080
4491	戲	67B9	FDF4	F5VD0080
4492	犧	67BA	FDFA	F5VE0080
4493	熙	67BB	FDF7	F5VF0080
4494	灑	67BC	FDEB	F5VG0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 18 of 32). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4495	熹	67BD	FDF8	F5VH0080
4496	禧	67BE	FDFB	F5VI0080
4497	稀	67BF	FDFC	F5VJ0080
4498	羲	67C0	FDFD	F5VK0080
4499	詰	67C1	FDFE	F5VL0080
4500	頡	67C2		F5VM0080
4501	枷	6841	CAAE	F5XD0080
4502	珂	6842	CAB1	F5XE0080
4503	痂	6843	CAB2	F5XF0080
4504	愨	6844	CAC2	F5XG0080
4505	侃	6845	CAC9	F5XH0080
4506	柬	6846	CAD3	F5XI0080
4507	椁	6847	CAD4	F5XJ0080
4508	礪	6848	CAD8	F5XK0080
4509	蝮	6849	CAE9	F5XL0080
4510	戡	684A	CAF1	F5XM0080
4511	瞰	684B	CAF9	F5XN0080
4512	邯	684C	CAFB	F5XO0080
4513	鑿	684D	CAFD	F5XP0080
4514	垲	684E	CBA8	F5XQ0080
4515	晝	684F	CBB1	F5XR0080
4516	絳	6850	CBB4	F5XS0080
4517	羌	6851	CBB6	F5XT0080
4518	缸	6852	CBB8	F5XU0080
4519	鱗	6853	CBBE	F5XV0080
4520	塏	6854	CBC3	F5XW0080

Table 12 (Page 18 of 32). Hanja Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4521	豈	6855	CBD0	F5XX0080
4522	鎧	6856	CBD1	F5XY0080
4523	喀	6857	CBD3	F5XZ0080
4524	倨	6858	CBDA	F5Y00080
4525	祛	6859	CBE4	F5Y10080
4526	踞	685A	CBE6	F5Y20080
4527	鉅	685B	CBE9	F5Y30080
4528	捷	685C	CBF1	F5Y40080
4529	捷	685D	CBF2	F5Y50080
4530	桀	685E	CBFA	F5Y60080
4531	劒	685F	CBFD	F5Y70080
4532	鈐	6860	CCA2	F5Y80080
4533	逖	6861	CCA6	F5Y90080
4534	膈	6862	CCAE	F5YA0080
4535	抉	6863	CCBC	F5YB0080
4536	鉗	6864	CCC6	F5YC0080
4537	徑	6865	CCC9	F5YD0080
4538	倮	6866	CCCA	F5YE0080
4539	倮	6867	CCCC	F5YF0080
4540	垲	6868	CCD0	F5YG0080
4541	憬	6869	CCD5	F5YH0080
4542	罔	686A	CCDE	F5YI0080
4543	礫	686B	CCE0	F5YJ0080
4544	堺	686C	CCF7	F5YK0080
4545	蔡	686D	CDA1	F5YL0080
4546	尻	686E	CDB6	F5YM0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4547	嵩	686F	CDBC	F5YN0080
4548	稿	6870	CDBE	F5YO0080
4549	羔	6871	CDC4	F5YP0080
4550	苾	6872	CDC9	F5YQ0080
4551	菰	6873	CDCA	F5YR0080
4552	琨	6874	CDE4	F5YS0080
4553	鯤	6875	CDE6	F5YT0080
4554	珙	6876	CDF5	F5YU0080
4555	蚣	6877	CDF7	F5YV0080
4556	鞏	6878	CDF9	F5YW0080
4557	串	6879	CDFA	F5YX0080
4558	跨	687A	CEA5	F5YY0080
4559	鍋	687B	CEA7	F5YZ0080
4560	瑄	687C	CEB5	F5Z00080
4561	恍	687D	CEC2	F5Z10080
4562	眈	687E	CEC9	F5Z20080
4563	坵	687F	CFA6	F5Z30080
4564	考	6880	CFBE	F5Z40080
4565	錄	6881	CFCA	F5Z50080
4566	鞫	6882	CFD4	F5Z60080
4567	裙	6883	CFD9	F5Z70080
4568	芎	6884	CFE4	F5Z80080
4569	捲	6885	CFEC	F5Z90080
4570	漣	6886	CFEE	F5ZA0080
4571	獺	6887	CFF1	F5ZB0080
4572	麩	6888	CFF2	F5ZC0080

Line Number	Graphic	Host Code	PC Code	GCGID
4573	旬	6889	CFFB	F5ZD0080
4574	晷	688A	CFFC	F5ZE0080
4575	榧	688B	D0A7	F5ZF0080
4576	竅	688C	D0AB	F5ZG0080
4577	勻	688D	D0B2	F5ZH0080
4578	昀	688E	D0B4	F5ZI0080
4579	勗	688F	D0C2	F5ZJ0080
4580	矜	6890	D0D2	F5ZK0080
4581	吟	6891	D0D4	F5ZL0080
4582	芩	6892	D0D9	F5ZM0080
4583	倂	6893	D0DF	F5ZN0080
4584	埼	6894	D0F2	F5ZO0080
4585	玘	6895	D1AC	F5ZP0080
4586	璦	6896	D1AF	F5ZQ0080
4587	祁	6897	D1B5	F5ZR0080
4588	羈	6898	D1BC	F5ZS0080
4589	鎰	6899	D1C5	F5ZT0080
4590	喇	689A	D1D4	F5ZU0080
4591	奈	689B	D1D5	F5ZV0080
4592	娜	689C	D1D6	F5ZW0080
4593	懶	689D	D1D8	F5ZX0080
4594	癩	689E	D1DB	F5ZY0080
4595	羅	689F	D1DC	F5ZZ0080
4596	蘿	68A0	D1DD	F6000080
4597	螺	68A1	D1DE	F6010080
4598	裸	68A2	D1DF	F6020080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4599	邏	68A3	D1E0	F6030080
4600	樂	68A4	D1E2	F6040080
4601	洛	68A5	D1E3	F6050080
4602	烙	68A6	D1E4	F6060080
4603	珞	68A7	D1E5	F6070080
4604	落	68A8	D1E6	F6080080
4605	酪	68A9	D1E8	F6090080
4606	駱	68AA	D1E9	F60A0080
4607	亂	68AB	D1EA	F60B0080
4608	卵	68AC	D1EB	F60C0080
4609	欄	68AD	D1ED	F60D0080
4610	爛	68AE	D1EF	F60E0080
4611	蘭	68AF	D1F0	F60F0080
4612	鸞	68B0	D1F2	F60G0080
4613	嵐	68B1	D1F6	F60H0080
4614	杓	68B2	D1F7	F60I0080
4615	楠	68B3	D1F8	F60J0080
4616	滷	68B4	D1F9	F60K0080
4617	濫	68B5	D1FA	F60L0080
4618	藍	68B6	D1FC	F60M0080
4619	檻	68B7	D1FD	F60N0080
4620	拉	68B8	D1FE	F60O0080
4621	臘	68B9	D2A2	F60P0080
4622	蠟	68BA	D2A3	F60Q0080
4623	衲	68BB	D2A4	F60R0080
4624	廊	68BC	D2A7	F60S0080

Line Number	Graphic	Host Code	PC Code	GCGID
4625	朗	68BD	D2A8	F60T0080
4626	浪	68BE	D2A9	F60U0080
4627	狼	68BF	D2AA	F60V0080
4628	郎	68C0	D2AB	F60W0080
4629	來	68C1	D2AD	F60X0080
4630	冷	68C2	D2B2	F60Y0080
4631	撚	68C3	D2B5	F60Z0080
4632	寧	68C4	D2BC	F6100080
4633	勞	68C5	D2BE	F6110080
4634	擄	68C6	D2C2	F6120080
4635	櫓	68C7	D2C3	F6130080
4636	爐	68C8	D2C4	F6140080
4637	盧	68C9	D2C6	F6150080
4638	老	68CA	D2C7	F6160080
4639	蘆	68CB	D2C8	F6170080
4640	虜	68CC	D2C9	F6180080
4641	路	68CD	D2CA	F6190080
4642	露	68CE	D2CB	F61A0080
4643	鷲	68CF	D2CC	F61B0080
4644	魯	68D0	D2CD	F61C0080
4645	鷲	68D1	D2CE	F61D0080
4646	碌	68D2	D2CF	F61E0080
4647	祿	68D3	D2D0	F61F0080
4648	綠	68D4	D2D1	F61G0080
4649	菴	68D5	D2D2	F61H0080
4650	錄	68D6	D2D3	F61I0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4651	鹿	68D7	D2D4	F61J0080
4652	論	68D8	D2D5	F61K0080
4653	壘	68D9	D2D6	F61L0080
4654	弄	68DA	D2D7	F61M0080
4655	籠	68DB	D2D9	F61N0080
4656	聳	68DC	D2DA	F61O0080
4657	牢	68DD	D2DE	F61P0080
4658	磊	68DE	D2DF	F61Q0080
4659	賂	68DF	D2E1	F61R0080
4660	雷	68E0	D2E2	F61S0080
4661	壘	68E1	D2E4	F61T0080
4662	屢	68E2	D2E5	F61U0080
4663	樓	68E3	D2E6	F61V0080
4664	淚	68E4	D2E7	F61W0080
4665	漏	68E5	D2E8	F61X0080
4666	累	68E6	D2E9	F61Y0080
4667	縷	68E7	D2EA	F61Z0080
4668	陋	68E8	D2EB	F6200080
4669	杻	68E9	D2EE	F6210080
4670	勒	68EA	D2F0	F6220080
4671	肋	68EB	D2F1	F6230080
4672	凜	68EC	D2F2	F6240080
4673	凌	68ED	D2F3	F6250080
4674	稜	68EE	D2F4	F6260080
4675	綾	68EF	D2F5	F6270080
4676	菱	68F0	D2F7	F6280080

Line Number	Graphic	Host Code	PC Code	GCGID
4677	陵	68F1	D2F8	F6290080
4678	直	68F2	D3A2	F62A0080
4679	豕	68F3	D3A7	F62B0080
4680	澆	68F4	D3B6	F62C0080
4681	埴	68F5	D3BB	F62D0080
4682	愴	68F6	D3BC	F62E0080
4683	湛	68F7	D3C0	F62F0080
4684	蕞	68F8	D3C6	F62G0080
4685	鏌	68F9	D3CA	F62H0080
4686	奮	68FA	D3CC	F62I0080
4687	戇	68FB	D3D4	F62J0080
4688	螳	68FC	D3D9	F62K0080
4689	垠	68FD	D3DD	F62L0080
4690	嶋	68FE	D3F7	F62M0080
4691	掉	6941	D3FC	F62P0080
4692	權	6942	D4A2	F62Q0080
4693	覩	6943	D4AD	F62R0080
4694	吨	6944	D4C5	F62S0080
4695	焯	6945	D4C8	F62T0080
4696	逗	6946	D4E8	F62U0080
4697	茈	6947	D4EC	F62V0080
4698	嶝	6948	D4F1	F62W0080
4699	拏	6949	D4FC	F62X0080
4700	諾	694A	D5AB	F62Y0080
4701	丹	694B	D5AE	F62Z0080
4702	崮	694C	D5CF	F6300080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4703	徠	694D	D5D0	F6310080
4704	儷	694E	D5E3	F6320080
4705	璉	694F	D6A2	F6330080
4706	寧	6950	D6B8	F6340080
4707	岑	6951	D6B9	F6350080
4708	筇	6952	D6BD	F6360080
4709	聆	6953	D6C0	F6370080
4710	禮	6954	D6C8	F6380080
4711	怒	6955	D6CD	F6390080
4712	擄	6956	D6CF	F63A0080
4713	踳	6957	D6D1	F63B0080
4714	祿	6958	D6DF	F63C0080
4715	菘	6959	D6E1	F63D0080
4716	瀨	695A	D6EE	F63E0080
4717	賚	695B	D6F2	F63F0080
4718	鬧	695C	D7A2	F63G0080
4719	婁	695D	D7A5	F63H0080
4720	瘰	695E	D7AA	F63I0080
4721	萋	695F	D7AD	F63J0080
4722	鏤	6960	D7AF	F63K0080
4723	旒	6961	D7B2	F63L0080
4724	瀏	6962	D7B7	F63M0080
4725	侖	6963	D7C2	F63N0080
4726	凜	6964	D7CF	F63O0080
4727	唰	6965	D7DA	F63P0080
4728	湮	6966	D7DF	F63Q0080

Line Number	Graphic	Host Code	PC Code	GCGID
4729	異	6967	D7E4	F63R0080
4730	羸	6968	D7E8	F63S0080
4731	莉	6969	D7E9	F63T0080
4732	裡	696A	D7EB	F63U0080
4733	潏	696B	D7F1	F63V0080
4734	碼	696C	D8A7	F63W0080
4735	邈	696D	D8B1	F63X0080
4736	万	696E	D8B2	F63Y0080
4737	亓	696F	D8B3	F63Z0080
4738	忝	6970	D8C5	F6400080
4739	茱	6971	D8C9	F6410080
4740	輞	6972	D8D6	F6420080
4741	沔	6973	D8F7	F6430080
4742	桢	6974	D9A7	F6440080
4743	暝	6975	D9AA	F6450080
4744	莫	6976	D9AC	F6460080
4745	摹	6977	D9B9	F6470080
4746	瑁	6978	D9C1	F6480080
4747	茈	6979	D9C5	F6490080
4748	鶩	697A	D9D0	F64A0080
4749	妙	697B	D9DF	F64B0080
4750	懣	697C	D9E4	F64C0080
4751	楸	697D	D9EA	F64D0080
4752	珺	697E	D9EE	F64E0080
4753	們	697F	D9FA	F64F0080
4754	雯	6980	DAA7	F64G0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4755	沕	6981	DAA9	F64H0080
4756	梶	6982	DAB2	F64I0080
4757	楣	6983	DAB3	F64J0080
4758	湄	6984	DAB5	F64K0080
4759	徽	6985	DABD	F64L0080
4760	岷	6986	DABE	F64M0080
4761	緡	6987	DAC9	F64N0080
4762	癩	6988	DAEE	F64O0080
4763	盼	6989	DAF0	F64P0080
4764	磐	698A	DAF1	F64Q0080
4765	渤	698B	DAFD	F64R0080
4766	枋	698C	DBB3	F64S0080
4767	滂	698D	DBB5	F64T0080
4768	磅	698E	DBB6	F64U0080
4769	焙	698F	DBCC	F64V0080
4770	幡	6990	DBDF	F64W0080
4771	燔	6991	DBE2	F64X0080
4772	槩	6992	DBFC	F64Y0080
4773	藥	6993	DCA2	F64Z0080
4774	棟	6994	DCB8	F6500080
4775	駢	6995	DCC0	F6510080
4776	瑤	6996	DCCA	F6520080
4777	菩	6997	DCCC	F6530080
4778	輶	6998	DCDE	F6540080
4779	燧	6999	DCEC	F6550080
4780	不	699A	DCF4	F6560080

Line Number	Graphic	Host Code	PC Code	GCGID
4781	俯	699B	DCF6	F6570080
4782	咐	699C	DCFB	F6580080
4783	孚	699D	DDA1	F6590080
4784	棼	699E	DDB2	F65A0080
4785	葶	699F	DDB4	F65B0080
4786	吩	69A0	DDC3	F65C0080
4787	盼	69A1	DDCB	F65D0080
4788	賁	69A2	DDD3	F65E0080
4789	拂	69A3	DDD8	F65F0080
4790	枇	69A4	DDED	F65G0080
4791	毖	69A5	DDF0	F65H0080
4792	毗	69A6	DDF1	F65I0080
4793	秕	69A7	DDF9	F65J0080
4794	糝	69A8	DDFB	F65K0080
4795	噸	69A9	DEAD	F65L0080
4796	浜	69AA	DEB3	F65M0080
4797	玼	69AB	DEB7	F65N0080
4798	俟	69AC	DEC6	F65O0080
4799	栖	69AD	DEDA	F65P0080
4800	麪	69AE	DEFA	F65Q0080
4801	霰	69AF	DFAC	F65R0080
4802	煞	69B0	DFB0	F65S0080
4803	鋏	69B1	DFBC	F65T0080
4804	峠	69B2	DFC7	F65U0080
4805	嗇	69B3	DFE0	F65V0080
4806	摟	69B4	DFF2	F65W0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4807	筮	69B5	DFFB	F65X0080
4808	婢	69B6	E0BD	F65Y0080
4809	斂	69B7	E0C0	F65Z0080
4810	渲	69B8	E0C2	F6600080
4811	璇	69B9	E0C4	F6610080
4812	鐔	69BA	E0D6	F6620080
4813	饈	69BB	E0D7	F6630080
4814	泄	69BC	E0DC	F6640080
4815	褻	69BD	E0E1	F6650080
4816	齧	69BE	E0E5	F6660080
4817	剡	69BF	E0E6	F6670080
4818	陝	69C0	E0ED	F6680080
4819	宍	69C1	E0F4	F6690080
4820	城	69C2	E0FB	F66A0080
4821	瘞	69C3	E1C4	F66B0080
4822	篠	69C4	E1C6	F66C0080
4823	涑	69C5	E1D7	F66D0080
4824	謾	69C6	E1DA	F66E0080
4825	贖	69C7	E1DB	F66F0080
4826	巽	69C8	E1DE	F66G0080
4827	蓀	69C9	E1E0	F66H0080
4828	飡	69CA	E1E2	F66I0080
4829	悚	69CB	E1E5	F66J0080
4830	淞	69CC	E1E7	F66K0080
4831	崑	69CD	E1FC	F66L0080
4832	琇	69CE	E2AF	F66M0080

Line Number	Graphic	Host Code	PC Code	GCGID
4833	璩	69CF	E2B0	F66N0080
4834	讐	69D0	E2C2	F66O0080
4835	隕	69D1	E2CA	F66P0080
4836	瀟	69D2	E2D8	F66Q0080
4837	璦	69D3	E2DA	F66R0080
4838	璫	69D4	E2DB	F66S0080
4839	徇	69D5	E2DF	F66T0080
4840	枸	69D6	E2E3	F66U0080
4841	檣	69D7	E2E5	F66V0080
4842	蓐	69D8	E2F1	F66W0080
4843	薜	69D9	E2F2	F66X0080
4844	諄	69DA	E2F4	F66Y0080
4845	鈇	69DB	E2FC	F66Z0080
4846	屎	69DC	E3BA	F6700080
4847	豕	69DD	E3CE	F6710080
4848	簣	69DE	E3D9	F6720080
4849	蝕	69DF	E3DA	F6730080
4850	侏	69E0	E3E0	F6740080
4851	蓋	69E1	E3F0	F6750080
4852	諶	69E2	E4A6	F6760080
4853	啞	69E3	E4AF	F6770080
4854	莪	69E4	E4B5	F6780080
4855	幄	69E5	E4C1	F6790080
4856	鄂	69E6	E4C7	F67A0080
4857	鏢	69E7	E4C8	F67B0080
4858	鰐	69E8	E4CA	F67C0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4859	鯪	69E9	E4D5	F67D0080
4860	唵	69EA	E4DA	F67E0080
4861	岩	69EB	E4DB	F67F0080
4862	扼	69EC	E4F9	F67G0080
4863	縊	69ED	E4FC	F67H0080
4864	掠	69EE	E5B1	F67I0080
4865	略	69EF	E5B2	F67J0080
4866	蕪	69F0	E5B6	F67K0080
4867	亮	69F1	E5B9	F67L0080
4868	兩	69F2	E5BB	F67M0080
4869	涼	69F3	E5BC	F67N0080
4870	梁	69F4	E5C4	F67O0080
4871	禳	69F5	E5CC	F67P0080
4872	糧	69F6	E5CE	F67Q0080
4873	良	69F7	E5D0	F67R0080
4874	諒	69F8	E5D2	F67S0080
4875	量	69F9	E5D6	F67T0080
4876	瘵	69FA	E5DC	F67U0080
4877	藥	69FB	E5EE	F67V0080
4878	俺	69FC	E5EF	F67W0080
4879	卮	69FD	E5F7	F67X0080
4880	勵	69FE	E5FA	F67Y0080
4881	呂	6A41	E5FB	F6810080
4882	女	6A42	E5FC	F6820080
4883	廬	6A43	E5FE	F6830080
4884	旅	6A44	E6A1	F6840080

Line Number	Graphic	Host Code	PC Code	GCGID
4885	濾	6A45	E6A4	F6850080
4886	璵	6A46	E6A5	F6860080
4887	礪	6A47	E6A6	F6870080
4888	礪	6A48	E6A7	F6880080
4889	鯨	6A49	E6A9	F6890080
4890	茹	6A4A	E6AA	F68A0080
4891	輿	6A4B	E6AB	F68B0080
4892	舉	6A4C	E6AC	F68C0080
4893	閭	6A4D	E6AD	F68D0080
4894	驪	6A4E	E6AF	F68E0080
4895	麗	6A4F	E6B0	F68F0080
4896	黎	6A50	E6B1	F68G0080
4897	力	6A51	E6B3	F68H0080
4898	曆	6A52	E6B7	F68I0080
4899	歷	6A53	E6B8	F68J0080
4900	轢	6A54	E6BC	F68K0080
4901	年	6A55	E6C4	F68L0080
4902	憐	6A56	E6C6	F68M0080
4903	戀	6A57	E6C7	F68N0080
4904	挺	6A58	E6C9	F68O0080
4905	沅	6A59	E6CC	F68P0080
4906	漣	6A5A	E6D2	F68Q0080
4907	煉	6A5B	E6D6	F68R0080
4908	璉	6A5C	E6D9	F68S0080
4909	季	6A5D	E6DC	F68T0080
4910	練	6A5E	E6DF	F68U0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4911	繽	6A5F	E6E0	F68V0080
4912	聯	6A60	E6E1	F68W0080
4913	輦	6A61	E6E4	F68X0080
4914	蓮	6A62	E6E5	F68Y0080
4915	連	6A63	E6E6	F68Z0080
4916	鍊	6A64	E6E8	F6900080
4917	列	6A65	E6EA	F6910080
4918	劣	6A66	E6EB	F6920080
4919	烈	6A67	E6EF	F6930080
4920	裂	6A68	E6F1	F6940080
4921	廉	6A69	E6F5	F6950080
4922	念	6A6A	E6F6	F6960080
4923	捻	6A6B	E6F7	F6970080
4924	殮	6A6C	E6F9	F6980080
4925	琰	6A6D	E6FC	F6990080
4926	簾	6A6E	E7A1	F69A0080
4927	獵	6A6F	E7A6	F69B0080
4928	令	6A70	E7A9	F69C0080
4929	圀	6A71	E7AA	F69D0080
4930	寧	6A72	E7AC	F69E0080
4931	嶺	6A73	E7AD	F69F0080
4932	嶸	6A74	E7AE	F69G0080
4933	伶	6A75	E7B0	F69H0080
4934	漠	6A76	E7B7	F69I0080
4935	滌	6A77	E7B9	F69J0080
4936	灣	6A78	E7BB	F69K0080

Line Number	Graphic	Host Code	PC Code	GCGID
4937	煨	6A79	E7BC	F69L0080
4938	獐	6A7A	E7BE	F69M0080
4939	玲	6A7B	E7BF	F69N0080
4940	穎	6A7C	E7C4	F69O0080
4941	羚	6A7D	E7C6	F69P0080
4942	聆	6A7E	E7C7	F69Q0080
4943	鈴	6A7F	E7CB	F69R0080
4944	鎂	6A80	E7CC	F69S0080
4945	零	6A81	E7CD	F69T0080
4946	霽	6A82	E7CE	F69U0080
4947	靈	6A83	E7CF	F69V0080
4948	領	6A84	E7D0	F69W0080
4949	乂	6A85	E7D1	F69X0080
4950	例	6A86	E7D3	F69Y0080
4951	汨	6A87	E7D7	F69Z0080
4952	穢	6A88	E7DB	F6A00080
4953	禮	6A89	E7DF	F6A10080
4954	醴	6A8A	E7E4	F6A20080
4955	隸	6A8B	E7E6	F6A30080
4956	倍	6A8C	E7EB	F6A40080
4957	塢	6A8D	E7F1	F6A50080
4958	懊	6A8E	E7F8	F6A60080
4959	敖	6A8F	E7F9	F6A70080
4960	澳	6A90	E7FE	F6A80080
4961	熬	6A91	E8A2	F6A90080
4962	奠	6A92	E8A4	F6AA0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4963	鰲	6A93	E8A7	F6AB0080
4964	黿	6A94	E8A8	F6AC0080
4965	縕	6A95	E8B2	F6AD0080
4966	夔	6A96	E8BD	F6AE0080
4967	窪	6A97	E8C1	F6AF0080
4968	椀	6A98	E8C9	F6AG0080
4969	椀	6A99	E8CA	F6AH0080
4970	琬	6A9A	E8CD	F6AI0080
4971	腕	6A9B	E8D2	F6AJ0080
4972	娃	6A9C	E8DF	F6AK0080
4973	嵬	6A9D	E8E3	F6AL0080
4974	了	6A9E	E8E7	F6AM0080
4975	僚	6A9F	E8E8	F6AN0080
4976	寥	6AA0	E8EF	F6AO0080
4977	寮	6AA1	E8F0	F6AP0080
4978	尿	6AA2	E8F1	F6AQ0080
4979	撓	6AA3	E8F5	F6AR0080
4980	料	6AA4	E8F7	F6AS0080
4981	燎	6AA5	E8FB	F6AT0080
4982	耀	6AA6	E8FC	F6AU0080
4983	療	6AA7	E8FE	F6AV0080
4984	蓼	6AA8	E9A7	F6AW0080
4985	遼	6AA9	E9AC	F6AX0080
4986	縹	6AAA	E9B2	F6AY0080
4987	俑	6AAB	E9B5	F6AZ0080
4988	埇	6AAC	E9B9	F6B00080

Line Number	Graphic	Host Code	PC Code	GCGID
4989	壩	6AAD	E9BA	F6B10080
4990	瀝	6AAE	E9BD	F6B20080
4991	涌	6AAF	E9BF	F6B30080
4992	甬	6AB0	E9C5	F6B40080
4993	龍	6AB1	E9CC	F6B50080
4994	吁	6AB2	E9D9	F6B60080
4995	玗	6AB3	E9DB	F6B70080
4996	瑀	6AB4	E9DC	F6B80080
4997	紆	6AB5	E9E1	F6B90080
4998	藕	6AB6	E9E4	F6BA0080
4999	鈎	6AB7	E9E9	F6BB0080
5000	勛	6AB8	E9ED	F6BC0080
5001	噉	6AB9	E9EE	F6BD0080
5002	梢	6ABA	E9F1	F6BE0080
5003	檉	6ABB	E9F8	F6BF0080
5004	漚	6ABC	E9FA	F6BG0080
5005	煩	6ABD	E9FB	F6BH0080
5006	蕓	6ABE	E9FE	F6BI0080
5007	亏	6ABF	EAA7	F6BJ0080
5008	嫫	6AC0	EAB1	F6BK0080
5009	沅	6AC1	EAB6	F6BL0080
5010	洹	6AC2	EAB7	F6BM0080
5011	浚	6AC3	EAB8	F6BN0080
5012	阮	6AC4	EAC1	F6BO0080
5013	暉	6AC5	EAD1	F6BP0080
5014	蔦	6AC6	EAD9	F6BQ0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
5015	樟	6AC7	EADC	F6BR0080
5016	劉	6AC8	EAE5	F6BS0080
5017	柎	6AC9	EAF4	F6BT0080
5018	柳	6ACA	EAF7	F6BU0080
5019	檣	6ACB	EAF9	F6BV0080
5020	洧	6ACC	EAFB	F6BW0080
5021	流	6ACD	E AFC	F6BX0080
5022	溜	6ACE	EAFE	F6BY0080
5023	猷	6ACF	EBA3	F6BZ0080
5024	琉	6AD0	EBA4	F6C00080
5025	留	6AD1	EBA7	F6C10080
5026	硫	6AD2	EBA9	F6C20080
5027	紐	6AD3	EBA A	F6C30080
5028	類	6AD4	EBBA	F6C40080
5029	六	6AD5	EBBB	F6C50080
5030	埇	6AD6	EBBC	F6C60080
5031	戮	6AD7	EBBD	F6C70080
5032	陸	6AD8	EBC1	F6C80080
5033	倫	6AD9	EBC2	F6C90080
5034	崙	6ADA	EBC6	F6CA0080
5035	淪	6ADB	EBC7	F6CB0080
5036	贛	6ADC	EBCB	F6CC0080
5037	輪	6ADD	EBCC	F6CD0080
5038	鈞	6ADE	EBCD	F6CE0080
5039	律	6ADF	EBCF	F6CF0080
5040	慄	6AE0	EBD0	F6CG0080

Line Number	Graphic	Host Code	PC Code	GCGID
5041	栗	6AE1	EBD1	F6CH0080
5042	率	6AE2	EBD2	F6CI0080
5043	灑	6AE3	EBD5	F6CJ0080
5044	隆	6AE4	EBD8	F6CK0080
5045	椅	6AE5	EBF5	F6CL0080
5046	薏	6AE6	EBFB	F6CM0080
5047	利	6AE7	ECA6	F6CN0080
5048	吏	6AE8	ECA7	F6CO0080
5049	履	6AE9	ECAA	F6CP0080
5050	李	6AEA	ECB0	F6CQ0080
5051	梨	6AEB	ECB1	F6CR0080
5052	泥	6AEC	ECB2	F6CS0080
5053	理	6AED	ECB5	F6CT0080
5054	痢	6AEE	ECB8	F6CU0080
5055	罹	6AEF	ECBA	F6CV0080
5056	肆	6AF0	ECBD	F6CW0080
5057	苡	6AF1	ECBE	F6CX0080
5058	裏	6AF2	ECC0	F6CY0080
5059	裡	6AF3	ECC1	F6CZ0080
5060	貽	6AF4	ECC2	F6D00080
5061	邇	6AF5	ECC4	F6D10080
5062	里	6AF6	ECC5	F6D20080
5063	離	6AF7	ECC6	F6D30080
5064	匿	6AF8	ECC9	F6D40080
5065	溺	6AF9	ECCA	F6D50080
5066	諡	6AFA	ECD0	F6D60080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
5067	吝	6AFB	ECD5	F6D70080
5068	憐	6AFC	ECDD	F6D80080
5069	璘	6AFD	ECDE	F6D90080
5070	網	6AFE	ECDF	F6DA0080
5071	茵	6B41	ECE0	F6DD0080
5072	蔭	6B42	ECE1	F6DE0080
5073	蚓	6B43	ECE2	F6DF0080
5074	隣	6B44	ECE4	F6DG0080
5075	鱗	6B45	ECE7	F6DH0080
5076	麟	6B46	ECE8	F6DI0080
5077	佚	6B47	ECEA	F6DJ0080
5078	恁	6B48	ECF6	F6DK0080
5079	林	6B49	ECF7	F6DL0080
5080	淋	6B4A	ECF8	F6DM0080
5081	臨	6B4B	ECFA	F6DN0080
5082	廿	6B4C	ECFE	F6DO0080
5083	立	6B4D	EDA1	F6DP0080
5084	笠	6B4E	EDA2	F6DQ0080
5085	粒	6B4F	EDA3	F6DR0080
5086	仍	6B50	EDA7	F6DS0080
5087	茨	6B51	EDBC	F6DT0080
5088	孱	6B52	EDCF	F6DU0080
5089	臧	6B53	EDF5	F6DV0080
5090	澱	6B54	EEAA	F6DW0080
5091	緯	6B55	EEAD	F6DX0080
5092	紵	6B56	EEC7	F6DY0080

Line Number	Graphic	Host Code	PC Code	GCGID
5093	涓	6B57	EEC9	F6DZ0080
5094	睢	6B58	EED1	F6E00080
5095	齟	6B59	EED2	F6E10080
5096	吊	6B5A	EED4	F6E20080
5097	炙	6B5B	EEDB	F6E30080
5098	翟	6B5C	EEE1	F6E40080
5099	鎬	6B5D	EEEB	F6E50080
5100	佃	6B5E	EEEC	F6E60080
5101	佺	6B5F	EEED	F6E70080
5102	塽	6B60	EEF4	F6E80080
5103	璵	6B61	EFA2	F6E90080
5104	畑	6B62	EFA5	F6EA0080
5105	筌	6B63	EFA7	F6EB0080
5106	鐫	6B64	EFB2	F6EC0080
5107	癩	6B65	EFBB	F6ED0080
5108	鮎	6B66	EFC6	F6EE0080
5109	桎	6B67	EFDE	F6EF0080
5110	櫟	6B68	EFE0	F6EG0080
5111	淀	6B69	EFE3	F6EH0080
5112	瀆	6B6A	EFE6	F6EI0080
5113	澗	6B6B	EFE7	F6EJ0080
5114	炆	6B6C	EFE8	F6EK0080
5115	玎	6B6D	EFE9	F6EL0080
5116	斑	6B6E	EFEA	F6EM0080
5117	縊	6B6F	EFF2	F6EN0080
5118	鋌	6B70	EFFB	F6EO0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
5119	皃	6B71	F0D1	F6EP0080
5120	雕	6B72	F0E7	F6EQ0080
5121	惊	6B73	F0F5	F6ER0080
5122	踪	6B74	F1A1	F6ES0080
5123	姝	6B75	F1AF	F6ET0080
5124	湊	6B76	F1BE	F6EU0080
5125	澍	6B77	F1BF	F6EV0080
5126	窩	6B78	F1D9	F6EW0080
5127	竣	6B79	F1E0	F6EX0080
5128	雋	6B7A	F1E6	F6EY0080
5129	繪	6B7B	F1F9	F6EZ0080
5130	泚	6B7C	F2AF	F6F00080
5131	芷	6B7D	F2BA	F6F10080
5132	昏	6B7E	F2C6	F6F20080
5133	摺	6B7F	F2CA	F6F30080
5134	晋	6B80	F2CC	F6F40080
5135	振	6B81	F2CD	F6F50080
5136	殄	6B82	F2CF	F6F60080
5137	畛	6B83	F2D5	F6F70080
5138	纘	6B84	F2DC	F6F80080
5139	臻	6B85	F2DD	F6F90080
5140	陳	6B86	F2DE	F6FA0080
5141	衫	6B87	F2DF	F6FB0080
5142	侄	6B88	F2E9	F6FC0080
5143	瓊	6B89	F2EF	F6FD0080
5144	什	6B8A	F2FA	F6FE0080

Line Number	Graphic	Host Code	PC Code	GCGID
5145	灑	6B8B	F2FC	F6FF0080
5146	鏢	6B8C	F3A1	F6FG0080
5147	侘	6B8D	F3A7	F6FH0080
5148	纂	6B8E	F3C2	F6FI0080
5149	紮	6B8F	F3CF	F6FJ0080
5150	讖	6B90	F3D9	F6FK0080
5151	愴	6B91	F3E1	F6FL0080
5152	狷	6B92	F3E9	F6FM0080
5153	案	6B93	F3F2	F6FN0080
5154	寨	6B94	F3F3	F6FO0080
5155	倜	6B95	F4A6	F6FP0080
5156	蹠	6B96	F4B2	F6FQ0080
5157	玕	6B97	F4BD	F6FR0080
5158	輟	6B98	F4CF	F6FS0080
5159	簽	6B99	F4D8	F6FT0080
5160	詹	6B9A	F4DA	F6FU0080
5161	堞	6B9B	F4DC	F6FV0080
5162	剿	6B9C	F4F9	F6FW0080
5163	艸	6B9D	F5AC	F6FX0080
5164	苕	6B9E	F5AD	F6FY0080
5165	邨	6B9F	F5BE	F6FZ0080
5166	悃	6BA0	F5C2	F6G00080
5167	悃	6BA1	F5C3	F6G10080
5168	蔥	6BA2	F5C7	F6G20080
5169	諏	6BA3	F5D8	F6G30080
5170	鎚	6BA4	F5E0	F6G40080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 31 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5171	騶	6BA5	F5E2	F6G50080
5172	蹇	6BA6	F5EC	F6G60080
5173	璿	6BA7	F5F2	F6G70080
5174	朮	6BA8	F5F4	F6G80080
5175	贅	6BA9	F6A1	F6G90080
5176	廁	6BAA	F6B2	F6GA0080
5177	穉	6BAB	F6C4	F6GB0080
5178	蚩	6BAC	F6C9	F6GC0080
5179	琛	6BAD	F6DA	F6GD0080
5180	咤	6BAE	F6E3	F6GE0080
5181	掩	6BAF	F6E9	F6GF0080
5182	馱	6BB0	F6EE	F6GG0080
5183	坼	6BB1	F6F3	F6GH0080
5184	皦	6BB2	F6F8	F6GI0080
5185	瑯	6BB3	F6FD	F6GJ0080
5186	眈	6BB4	F7AF	F6GK0080
5187	糖	6BB5	F7B8	F6GL0080
5188	槌	6BB6	F7D9	F6GM0080
5189	闖	6BB7	F7E6	F6GN0080
5190	擺	6BB8	F7EC	F6GO0080
5191	鋌	6BB9	F7FE	F6GP0080
5192	騙	6BBA	F8BE	F6GQ0080
5193	枰	6BBB	F8C2	F6GR0080
5194	暴	6BBC	F8DB	F6GS0080
5195	苞	6BBD	F8E2	F6GT0080
5196	逋	6BBE	F8E7	F6GU0080

Table 12 (Page 31 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5197	曝	6BBF	F8ED	F6GV0080
5198	輻	6BC0	F8F0	F6GW0080
5199	臚	6BC1	F8FC	F6GX0080
5200	驃	6BC2	F8FE	F6GY0080
5201	陂	6BC3	F9AE	F6GZ0080
5202	秘	6BC4	F9B3	F6H00080
5203	苾	6BC5	F9B7	F6H10080
5204	秘	6BC6	F9B8	F6H20080
5205	厦	6BC7	F9BD	F6H30080
5206	瀚	6BC8	F9D5	F6H40080
5207	銜	6BC9	F9E7	F6H50080
5208	鹹	6BCA	F9E9	F6H60080
5209	闔	6BCB	F9EF	F6H70080
5210	嫵	6BCC	F9F4	F6H80080
5211	行	6BCD	FAA1	F6H90080
5212	濯	6BCE	FAAE	F6HA0080
5213	苻	6BCF	FABB	F6HB0080
5214	憶	6BD0	FACB	F6HC0080
5215	倪	6BD1	FAD5	F6HD0080
5216	睨	6BD2	FAE0	F6HE0080
5217	泫	6BD3	FADA	F6HF0080
5218	玆	6BD4	FADD	F6HG0080
5219	睨	6BD5	FAD9	F6HH0080
5220	洞	6BD6	FBA2	F6HI0080
5221	榮	6BD7	FBA3	F6HJ0080
5222	澄	6BD8	FBA5	F6HK0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 12 (Page 32 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5223	熒	6BD9	FBA7	F6HL0080
5224	瑩	6BDA	FBA9	F6HM0080
5225	迥	6BDB	FBAD	F6HN0080
5226	瞿	6BDC	FBB5	F6HO0080
5227	蹊	6BDD	FBB7	F6HP0080
5228	岫	6BDE	FBC0	F6HQ0080
5229	皓	6BDF	FBC5	F6HR0080
5230	琥	6BE0	FBD0	F6HS0080
5231	芦	6BE1	FBD8	F6HT0080
5232	蒿	6BE2	FBDA	F6HU0080
5233	烘	6BE3	FBF4	F6HV0080
5234	譁	6BE4	FCA6	F6HW0080
5235	奂	6BE5	FCB1	F6HX0080
5236	皖	6BE6	FCB7	F6HY0080
5237	幌	6BE7	FCC6	F6HZ0080
5238	愧	6BE8	FCCA	F6I00080
5239	眈	6BE9	FCCD	F6I10080
5240	梶	6BEA	FCCE	F6I20080
5241	湟	6BEB	FCD0	F6I30080
5242	潢	6BEC	FCD2	F6I40080
5243	璜	6BED	FCD4	F6I50080
5244	簧	6BEE	FCD7	F6I60080
5245	匯	6BEF	FCDD	F6I70080
5246	茴	6BF0	FCED	F6I80080
5247	弘	6BF1	FCF3	F6I90080
5248	鑛	6BF2	FCF5	F6IA0080

Table 12 (Page 32 of 32). Hanja Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5249	斃	6BF3	FCFA	F6IB0080
5250	滄	6BF4	FCFD	F6IC0080
5251	渚	6BF5	FCFE	F6ID0080
5252	驍	6BF6	FDA4	F6IE0080
5253	幘	6BF7	FDAC	F6IF0080
5254	煦	6BF8	FDAF	F6IG0080
5255	翊	6BF9	FDB0	F6IH0080
5256	勛	6BFA	FDB2	F6II0080
5257	暄	6BFB	FDBE	F6IJ0080
5258	煊	6BFC	FDBF	F6IK0080
5259	炘	6BFD	FDDC	F6IL0080
5260	訖	6BFE	FDE1	F6IM0080
5261	翕	6C41	FDE8	F6IP0080
5262	囍	6C42	FDEE	F6IQ0080
5263	愜	6C43	PDF3	F6IR0080
5264	晞	6C44	PDF5	F6IS0080
5265	燿	6C45	PDF9	F6IT0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

8.4 Hangeul Set

Table 13 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1	가	8861	B0A1	FAOX0080
2	각	8862	B0A2	FAOY0080
3	갇	8863	8141	FAOZ0080
4	갸	8864	8142	FAP00080*
5	간	8865	B0A3	FAP10080
6	갓	8866	8143	FAP20080*
7	간	8867	8144	FAP30080*
8	갈	8868	B0A4	FAP40080
9	갇	8869	B0A5	FAP50080
10	갸	886A	B0A6	FAP60080
11	갹	886B	B0A7	FAP70080
12	갺	886C	8145	FAP80080
13	갻	886D	8146	FAP90080*
14	갼	886E	8147	FAPA0080*
15	갽	886F	8148	FAPB0080*
16	갾	8870	8149	FAPC0080*
17	감	8871	B0A8	FAPD0080
18	갸	8873	B0A9	FAPF0080
19	갹	8874	B0AA	FAPG0080
20	갺	8875	B0AB	FAPH0080
21	갻	8876	B0AC	FAPI0080
22	갼	8877	B0AD	FAPJ0080
23	갽	8878	B0AE	FAPK0080
24	갾	8879	B0AF	FAPL0080
25	각	887A	814A	FAPM0080*

Table 13 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
26	갈	887B	B0B0	FAPN0080
27	갸	887C	B0B1	FAP00080
28	갹	887D	B0B2	FAPP0080
29	개	8881	B0B3	FAPT0080
30	객	8882	B0B4	FAPU0080
31	갸	8883	814B	FAPV0080*
32	갹	8884	814C	FAPW0080*
33	겐	8885	B0B5	FAPX0080
34	갸	8886	814D	FAPY0080*
35	갹	8887	814E	FAPZ0080*
36	겐	8888	814F	FAQ00080*
37	갸	8889	B0B6	FAQ10080
38	갹	888A	8150	FAQ20080*
39	갺	888B	8151	FAQ30080*
40	갻	888C	8152	FAQ40080*
41	갼	888D	8153	FAQ50080*
42	갽	888E	8154	FAQ60080*
43	갾	888F	8155	FAQ70080*
44	갸	8890	8156	FAQ80080*
45	갹	8891	B0B7	FAQ90080
46	갺	8893	B0B8	FAQB0080
47	갻	8894	8157	FAQC0080*
48	갼	8895	B0B9	FAQD0080
49	갽	8896	B0BA	FAQE0080
50	갾	8897	B0BB	FAQF0080
51	갸	8898	8158	FAQG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
52	꺄	8899	8159	FAQH0080*
53	꺅	889A	815A	FAQI0080*
54	꺆	889B	8161	FAQJ0080*
55	꺇	889C	8162	FAQK0080*
56	꺈	889D	8163	FAQL0080*
57	꺉	88A1	B0BC	FAQP0080
58	꺊	88A2	B0BD	FAQQ0080
59	꺋	88A3	8164	FAQR0080*
60	꺌	88A4	8165	FAQS0080*
61	꺍	88A5	B0BE	FAQT0080
62	꺎	88A6	8166	FAQU0080*
63	꺏	88A7	8167	FAQV0080*
64	꺐	88A8	8168	FAQW0080*
65	꺑	88A9	B0BF	FAQX0080
66	꺒	88AA	8169	FAQY0080*
67	꺓	88AB	816A	FAQZ0080*
68	꺔	88AC	816B	FAR00080*
69	꺕	88AD	816C	FAR10080*
70	꺖	88AE	816D	FAR20080*
71	꺗	88AF	816E	FAR30080*
72	꺘	88B0	816F	FAR40080*
73	꺙	88B1	8170	FAR50080*
74	꺚	88B3	8171	FAR70080*
75	꺛	88B4	8172	FAR80080*
76	꺜	88B5	B0C0	FAR90080
77	꺝	88B6	8173	FARA0080*

Table 13 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
78	꺞	88B7	B0C1	FARB0080
79	꺟	88B8	8174	FARC0080*
80	꺠	88B9	8175	FARD0080*
81	꺡	88BA	8176	FARE0080*
82	꺢	88BB	8177	FARF0080*
83	꺣	88BC	8178	FARG0080*
84	꺤	88BD	8179	FARH0080*
85	꺥	88C1	B0C2	FARL0080
86	꺦	88C2	817A	FARM0080*
87	꺧	88C3	8181	FARN0080*
88	꺨	88C4	8182	FARO0080*
89	꺩	88C5	B0C3	FARP0080
90	꺪	88C6	8183	FARQ0080*
91	꺫	88C7	8184	FARR0080*
92	꺬	88C8	8185	FARS0080*
93	꺭	88C9	B0C4	FART0080
94	꺮	88CA	8186	FARU0080*
95	꺯	88CB	8187	FARV0080*
96	꺰	88CC	8188	FARW0080*
97	꺱	88CD	8189	FARX0080*
98	꺲	88CE	818A	FARY0080*
99	꺳	88CF	818B	FARZ0080*
100	꺴	88D0	818C	FAS00080*
101	꺵	88D1	818D	FAS10080*
102	꺶	88D3	818E	FAS30080*
103	꺷	88D4	818F	FAS40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
104	갯	88D5	8190	FAS50080*
105	갬	88D6	8191	FAS60080*
106	갯	88D7	8192	FAS70080*
107	갯	88D8	8193	FAS80080*
108	갯	88D9	8194	FAS90080*
109	갯	88DA	8195	FASA0080*
110	갯	88DB	8196	FASB0080*
111	갯	88DC	8197	FASC0080*
112	갯	88DD	8198	FASD0080*
113	거	88E1	B0C5	FASH0080
114	격	88E2	B0C6	FASI0080
115	귀	88E3	8199	FASJ0080*
116	값	88E4	819A	FASK0080*
117	건	88E5	B0C7	FASL0080
118	값	88E6	819B	FASM0080*
119	값	88E7	819C	FASN0080*
120	값	88E8	B0C8	FASO0080
121	값	88E9	B0C9	FASP0080
122	값	88EA	819D	FASQ0080
123	값	88EB	B0CA	FASR0080
124	값	88EC	819E	FASS0080*
125	값	88ED	819F	FAST0080*
126	값	88EE	81A0	FASU0080*
127	값	88EF	81A1	FASV0080*
128	값	88F0	81A2	FASW0080*
129	검	88F1	B0CB	FASX0080

Table 13 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
130	값	88F3	B0CC	FASZ0080
131	값	88F4	81A3	FAT00080*
132	값	88F5	B0CD	FAT10080
133	값	88F6	B0CE	FAT20080
134	경	88F7	B0CF	FAT30080
135	값	88F8	B0D0	FAT40080
136	값	88F9	81A4	FAT50080
137	값	88FA	81A5	FAT60080*
138	값	88FB	B0D1	FAT70080
139	값	88FC	B0D2	FAT80080
140	경	88FD	B0D3	FAT90080
141	계	8941	B0D4	FATD0080
142	값	8942	81A6	FATE0080*
143	귀	8943	81A7	FATF0080*
144	값	8944	81A8	FATG0080*
145	건	8945	B0D5	FATH0080
146	값	8946	81A9	FATI0080*
147	값	8947	81AA	FATJ0080*
148	값	8948	81AB	FATK0080
149	값	8949	B0D6	FATL0080
150	값	894A	81AC	FATM0080*
151	값	894B	81AD	FATN0080*
152	값	894C	81AE	FATO0080*
153	값	894D	81AF	FATP0080*
154	값	894E	81B0	FATQ0080*
155	값	894F	81B1	FATR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
156	꺄	8950	81B2	FATS0080*
157	꺅	8951	B0D7	FATT0080
158	꺆	8953	B0D8	FATV0080
159	꺇	8954	81B3	FATW0080*
160	꺈	8955	B0D9	FATX0080
161	꺉	8956	B0DA	FATY0080
162	꺊	8957	B0DB	FATZ0080
163	꺋	8958	81B4	FAU00080*
164	꺌	8959	81B5	FAU10080*
165	꺍	895A	81B6	FAU20080*
166	꺎	895B	81B7	FAU30080*
167	꺏	895C	81B8	FAU40080*
168	꺐	895D	81B9	FAU50080*
169	꺑	8961	B0DC	FAU90080
170	꺒	8962	B0DD	FAUA0080
171	꺓	8963	B0DE	FAUB0080
172	꺔	8964	81BA	FAUC0080*
173	꺕	8965	B0DF	FAUD0080
174	꺖	8966	81BB	FAUE0080*
175	꺗	8967	81BC	FAUF0080*
176	꺘	8968	B0E0	FAUG0080
177	꺙	8969	B0E1	FAUH0080
178	꺚	896A	81BD	FAUI0080*
179	꺛	896B	81BE	FAUJ0080*
180	꺜	896C	81BF	FAUK0080*
181	꺝	896D	81C0	FAUL0080*

Table 13 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
182	꺞	896E	81C1	FAUM0080*
183	꺟	896F	81C2	FAUN0080*
184	꺠	8970	81C3	FAUO0080*
185	꺡	8971	B0E2	FAUP0080
186	꺢	8973	B0E3	FAUR0080
187	꺣	8974	81C4	FAUS0080*
188	꺤	8975	B0E4	FAUT0080
189	꺥	8976	B0E5	FAUU0080
190	꺦	8977	B0E6	FAUV0080
191	꺧	8978	81C5	FAUW0080*
192	꺨	8979	81C6	FAUX0080*
193	꺩	897A	81C7	FAUY0080*
194	꺪	897B	B0E7	FAUZ0080
195	꺫	897C	81C8	FAV00080*
196	꺬	897D	81C9	FAV10080*
197	꺭	8981	B0E8	FAV50080
198	꺮	8982	81CA	FAV60080*
199	꺯	8983	81CB	FAV70080*
200	꺰	8984	81CC	FAV80080*
201	꺱	8985	B0E9	FAV90080
202	꺲	8986	81CD	FAVA0080*
203	꺳	8987	81CE	FAVB0080*
204	꺴	8988	81CF	FAVC0080*
205	꺵	8989	B0EA	FAVD0080
206	꺶	898A	81D0	FAVE0080*
207	꺷	898B	81D1	FAVF0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
208	꺄	898C	81D2	FAVG0080*
209	꺅	898D	81D3	FAVH0080*
210	꺆	898E	81D4	FAVI0080*
211	꺇	898F	81D5	FAVJ0080*
212	꺈	8990	81D6	FAVK0080*
213	꺉	8991	81D7	FAVL0080*
214	꺊	8993	B0EB	FAVN0080
215	꺋	8994	81D8	FAVO0080*
216	꺌	8995	B0EC	FAVP0080
217	꺍	8996	81D9	FAVQ0080*
218	꺎	8997	81DA	FAVR0080*
219	꺏	8998	81DB	FAVS0080*
220	꺑	8999	81DC	FAVT0080*
221	꺒	899A	81DD	FAVU0080*
222	꺓	899B	81DE	FAVV0080*
223	꺔	899C	81DF	FAVW0080*
224	꺕	899D	81E0	FAVX0080*
225	꺖	89A1	B0ED	FAW10080
226	꺗	89A2	B0EE	FAW20080
227	꺘	89A3	81E1	FAW30080*
228	꺙	89A4	81E2	FAW40080*
229	꺚	89A5	B0EF	FAW50080
230	꺛	89A6	81E3	FAW60080*
231	꺜	89A7	81E4	FAW70080*
232	꺝	89A8	B0F0	FAW80080
233	꺞	89A9	B0F1	FAW90080

Table 13 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
234	꺟	89AA	81E5	FAWA0080
235	꺠	89AB	B0F2	FAWB0080
236	꺡	89AC	81E6	FAWC0080*
237	꺢	89AD	B0F3	FAWD0080
238	꺣	89AE	81E7	FAWE0080*
239	꺤	89AF	81E8	FAWF0080*
240	꺥	89B0	B0F4	FAWG0080
241	꺦	89B1	B0F5	FAWH0080
242	꺧	89B3	B0F6	FAWJ0080
243	꺨	89B4	81E9	FAWK0080*
244	꺩	89B5	B0F7	FAWL0080
245	꺪	89B6	81EA	FAWM0080*
246	꺫	89B7	B0F8	FAWN0080
247	꺬	89B8	B0F9	FAWO0080
248	꺭	89B9	81EB	FAWP0080*
249	꺮	89BA	81EC	FAWQ0080*
250	꺯	89BB	81ED	FAWR0080*
251	꺰	89BC	81EE	FAWS0080
252	꺱	89BD	81EF	FAWT0080*
253	꺲	89C1	B0FA	FAWX0080
254	꺳	89C2	B0FB	FAWY0080
255	꺴	89C3	81F0	FAWZ0080*
256	꺵	89C4	81F1	FAX00080*
257	꺶	89C5	B0FC	FAX10080
258	꺷	89C6	81F2	FAX20080*
259	꺸	89C7	81F3	FAX30080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 6 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
260	관	89C8	81F4	FAX40080*
261	괵	89C9	B0FD	FAX50080
262	괶	89CA	81F5	FAX60080*
263	괷	89CB	B0FE	FAX70080
264	괸	89CC	81F6	FAX80080*
265	괹	89CD	81F7	FAX90080*
266	괺	89CE	81F8	FAXA0080*
267	괻	89CF	81F9	FAXB0080*
268	괼	89D0	81FA	FAXC0080*
269	괽	89D1	B1A1	FAXD0080
270	괾	89D3	B1A2	FAXF0080
271	괿	89D4	81FB	FAXG0080*
272	괻	89D5	B1A3	FAXH0080
273	괽	89D6	81FC	FAXI0080*
274	괿	89D7	B1A4	FAXJ0080
275	괻	89D8	81FD	FAXK0080*
276	괽	89D9	81FE	FAXL0080*
277	괿	89DA	8241	FAXM0080*
278	괻	89DB	8242	FAXN0080*
279	괽	89DC	8243	FAXO0080*
280	괿	89DD	8244	FAXP0080*
281	괻	89E1	B1A5	FAXT0080
282	괽	89E2	8245	FAXU0080
283	괿	89E3	8246	FAXV0080*
284	괻	89E4	8247	FAXW0080*
285	괽	89E5	B1A6	FAXX0080

Table 13 (Page 6 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
286	괼	89E6	8248	FAXY0080*
287	괽	89E7	8249	FAXZ0080*
288	괿	89E8	824A	FAY00080*
289	괻	89E9	B1A7	FAY10080
290	괽	89EA	824B	FAY20080*
291	괿	89EB	824C	FAY30080*
292	괻	89EC	824D	FAY40080*
293	괽	89ED	824E	FAY50080*
294	괿	89EE	824F	FAY60080*
295	괻	89EF	8250	FAY70080*
296	괽	89F0	8251	FAY80080*
297	괿	89F1	8252	FAY90080
298	괻	89F3	B1A8	FAYB0080
299	괽	89F4	8253	FAYC0080*
300	괿	89F5	8254	FAYD0080
301	괻	89F6	B1A9	FAYE0080
302	괽	89F7	B1AA	FAYF0080
303	괿	89F8	8255	FAYG0080*
304	괻	89F9	8256	FAYH0080*
305	괽	89FA	8257	FAYI0080*
306	괿	89FB	8258	FAYJ0080*
307	괻	89FC	8259	FAYK0080*
308	괽	89FD	825A	FAYL0080*
309	괿	8A41	B1AB	FAYP0080
310	괻	8A42	B1AC	FAYQ0080
311	괽	8A43	8261	FAYR0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 7 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
312	꺄	8A44	8262	FAYS0080*
313	꺅	8A45	B1AD	FAYT0080
314	꺆	8A46	8263	FAYU0080*
315	꺇	8A47	8264	FAYV0080*
316	꺈	8A48	8265	FAYW0080*
317	꺉	8A49	B1AE	FAYX0080
318	꺊	8A4A	8266	FAYY0080*
319	꺋	8A4B	8267	FAYZ0080*
320	꺌	8A4C	8268	FAZ00080*
321	꺍	8A4D	8269	FAZ10080*
322	꺎	8A4E	826A	FAZ20080*
323	꺏	8A4F	826B	FAZ30080*
324	꺐	8A50	826C	FAZ40080*
325	꺑	8A51	B1AF	FAZ50080
326	꺒	8A53	B1B0	FAZ70080
327	꺓	8A54	826D	FAZ80080*
328	꺔	8A55	B1B1	FAZ90080
329	꺕	8A56	826E	FAZA0080*
330	꺖	8A57	B1B2	FAZB0080
331	꺗	8A58	826F	FAZC0080*
332	꺘	8A59	8270	FAZD0080*
333	꺙	8A5A	8271	FAZE0080*
334	꺚	8A5B	8272	FAZF0080*
335	꺛	8A5C	8273	FAZG0080*
336	꺜	8A5D	8274	FAZH0080*
337	꺝	8A61	B1B3	FAZL0080

Table 13 (Page 7 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
338	꺞	8A62	8275	FAZM0080*
339	꺟	8A63	8276	FAZN0080*
340	꺠	8A64	8277	FAZO0080*
341	꺡	8A65	B1B4	FAZP0080
342	꺢	8A66	8278	FAZQ0080*
343	꺣	8A67	8279	FAZR0080*
344	꺤	8A68	827A	FAZS0080*
345	꺥	8A69	B1B5	FAZT0080
346	꺦	8A6A	8281	FAZU0080*
347	꺧	8A6B	8282	FAZV0080*
348	꺨	8A6C	8283	FAZW0080*
349	꺩	8A6D	8284	FAZX0080*
350	꺪	8A6E	8285	FAZY0080*
351	꺫	8A6F	8286	FAZZ0080*
352	꺬	8A70	8287	FB000080*
353	꺭	8A71	8288	FB010080*
354	꺮	8A73	B1B6	FB030080
355	꺯	8A74	8289	FB040080*
356	꺰	8A75	B1B7	FB050080
357	꺱	8A76	828A	FB060080*
358	꺲	8A77	828B	FB070080*
359	꺳	8A78	828C	FB080080*
360	꺴	8A79	828D	FB090080*
361	꺵	8A7A	828E	FB0A0080*
362	꺶	8A7B	828F	FB0B0080*
363	꺷	8A7C	8290	FB0C0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
364	꽁	8A7D	8291	FB0D0080*
365	구	8A81	B1B8	FB0H0080
366	국	8A82	B1B9	FB0I0080
367	규	8A83	8292	FB0J0080*
368	꺠	8A84	8293	FB0K0080*
369	군	8A85	B1BA	FB0L0080
370	꺡	8A86	8294	FB0M0080*
371	꺢	8A87	8295	FB0N0080*
372	곤	8A88	B1BB	FB0O0080
373	굴	8A89	B1BC	FB0P0080
374	꺣	8A8A	B1BD	FB0Q0080
375	꺤	8A8B	B1BE	FB0R0080
376	꺥	8A8C	8296	FB0S0080*
377	꺦	8A8D	8297	FB0T0080*
378	꺧	8A8E	8298	FB0U0080*
379	꺨	8A8F	8299	FB0V0080*
380	꺩	8A90	B1BF	FB0W0080
381	꺪	8A91	B1C0	FB0X0080
382	꺫	8A93	B1C1	FB0Z0080
383	꺬	8A94	829A	FB100080*
384	꺭	8A95	B1C2	FB110080
385	꺮	8A96	829B	FB120080*
386	꺯	8A97	B1C3	FB130080
387	꺰	8A98	B1C4	FB140080
388	꺱	8A99	829C	FB150080*
389	꺲	8A9A	829D	FB160080*

Line Number	Graphic	Host Code	PC Code	GCGID
390	꺳	8A9B	829E	FB170080*
391	꺴	8A9C	829F	FB180080*
392	꺵	8A9D	82A0	FB190080*
393	꺶	8AA1	B1C5	FB1D0080
394	꺷	8AA2	B1C6	FB1E0080
395	꺸	8AA3	82A1	FB1F0080*
396	꺹	8AA4	82A2	FB1G0080*
397	꺺	8AA5	B1C7	FB1H0080
398	꺻	8AA6	82A3	FB1I0080*
399	꺼	8AA7	82A4	FB1J0080*
400	꺽	8AA8	82A5	FB1K0080*
401	꺾	8AA9	B1C8	FB1L0080
402	꺿	8AAA	82A6	FB1M0080*
403	꺾	8AAB	82A7	FB1N0080*
404	꺿	8AAC	82A8	FB1O0080*
405	꺾	8AAD	82A9	FB1P0080*
406	꺾	8AAE	82AA	FB1Q0080*
407	꺾	8AAF	82AB	FB1R0080*
408	꺾	8AB0	82AC	FB1S0080*
409	꺾	8AB1	82AD	FB1T0080*
410	꺾	8AB3	82AE	FB1V0080*
411	꺾	8AB4	82AF	FB1W0080*
412	꺾	8AB5	82B0	FB1X0080
413	꺾	8AB6	B1C9	FB1Y0080
414	꺾	8AB7	B1CA	FB1Z0080
415	꺾	8AB8	82B1	FB200080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
416	꺄	8AB9	82B2	FB210080*
417	꺅	8ABA	82B3	FB220080*
418	꺆	8ABB	82B4	FB230080*
419	꺇	8ABC	82B5	FB240080*
420	꺈	8ABD	82B6	FB250080*
421	꺉	8AC1	B1CB	FB290080
422	꺊	8AC2	82B7	FB2A0080*
423	꺋	8AC3	82B8	FB2B0080*
424	꺌	8AC4	82B9	FB2C0080*
425	꺍	8AC5	82BA	FB2D0080*
426	꺎	8AC6	82BB	FB2E0080*
427	꺏	8AC7	82BC	FB2F0080*
428	꺐	8AC8	82BD	FB2G0080*
429	꺑	8AC9	82BE	FB2H0080*
430	꺒	8ACA	82BF	FB2I0080*
431	꺓	8ACB	82C0	FB2J0080*
432	꺔	8ACC	82C1	FB2K0080*
433	꺕	8ACD	82C2	FB2L0080*
434	꺖	8ACE	82C3	FB2M0080*
435	꺗	8ACF	82C4	FB2N0080*
436	꺘	8AD0	82C5	FB2O0080*
437	꺙	8AD1	82C6	FB2P0080*
438	꺚	8AD3	82C7	FB2R0080*
439	꺛	8AD4	82C8	FB2S0080*
440	꺜	8AD5	B1CC	FB2T0080
441	꺝	8AD6	82C9	FB2U0080*

Table 13 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
442	꺞	8AD7	82CA	FB2V0080*
443	꺟	8AD8	82CB	FB2W0080*
444	꺠	8AD9	82CC	FB2X0080*
445	꺡	8ADA	82CD	FB2Y0080*
446	꺢	8ADB	82CE	FB2Z0080*
447	꺣	8ADC	82CF	FB300080*
448	꺤	8ADD	82D0	FB310080*
449	꺥	8AE1	B1CD	FB350080
450	꺦	8AE2	B1CE	FB360080
451	꺧	8AE3	82D1	FB370080*
452	꺨	8AE4	82D2	FB380080*
453	꺩	8AE5	B1CF	FB390080
454	꺪	8AE6	82D3	FB3A0080*
455	꺫	8AE7	82D4	FB3B0080*
456	꺬	8AE8	82D5	FB3C0080*
457	꺭	8AE9	B1D0	FB3D0080
458	꺮	8AEA	82D6	FB3E0080*
459	꺯	8AEB	82D7	FB3F0080*
460	꺰	8AEC	82D8	FB3G0080*
461	꺱	8AED	82D9	FB3H0080*
462	꺲	8AEE	82DA	FB3I0080*
463	꺳	8AEF	82DB	FB3J0080*
464	꺴	8AF0	82DC	FB3K0080*
465	꺵	8AF1	B1D1	FB3L0080
466	꺶	8AF3	B1D2	FB3N0080
467	꺷	8AF4	82DD	FB3O0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
468	ќ	8AF5	B1D3	FB3P0080
469	ќ	8AF6	82DE	FB3Q0080*
470	ќ	8AF7	82DF	FB3R0080
471	ќ	8AF8	82E0	FB3S0080*
472	ќ	8AF9	82E1	FB3T0080*
473	ќ	8AFA	82E2	FB3U0080*
474	ќ	8AFB	82E3	FB3V0080*
475	ќ	8AFC	82E4	FB3W0080*
476	ќ	8AFD	82E5	FB3X0080*
477	ќ	8B41	B1D4	FB410080
478	ќ	8B42	82E6	FB420080*
479	ќ	8B43	82E7	FB430080*
480	ќ	8B44	82E8	FB440080*
481	ќ	8B45	B1D5	FB450080
482	ќ	8B46	82E9	FB460080*
483	ќ	8B47	82EA	FB470080*
484	ќ	8B48	82EB	FB480080*
485	ќ	8B49	B1D6	FB490080
486	ќ	8B4A	82EC	FB4A0080*
487	ќ	8B4B	82ED	FB4B0080*
488	ќ	8B4C	82EE	FB4C0080*
489	ќ	8B4D	82EF	FB4D0080*
490	ќ	8B4E	82F0	FB4E0080*
491	ќ	8B4F	82F1	FB4F0080*
492	ќ	8B50	82F2	FB4G0080*
493	ќ	8B51	82F3	FB4H0080

Line Number	Graphic	Host Code	PC Code	GCGID
494	ќ	8B53	82F4	FB4J0080*
495	ќ	8B54	82F5	FB4K0080*
496	ќ	8B55	82F6	FB4L0080*
497	ќ	8B56	82F7	FB4M0080*
498	ќ	8B57	82F8	FB4N0080*
499	ќ	8B58	82F9	FB4O0080*
500	ќ	8B59	82FA	FB4P0080*
501	ќ	8B5A	82FB	FB4Q0080*
502	ќ	8B5B	82FC	FB4R0080*
503	ќ	8B5C	82FD	FB4S0080*
504	ќ	8B5D	82FE	FB4T0080*
505	ќ	8B61	B1D7	FB4X0080
506	ќ	8B62	B1D8	FB4Y0080
507	ќ	8B63	8341	FB4Z0080*
508	ќ	8B64	8342	FB500080*
509	ќ	8B65	B1D9	FB510080
510	ќ	8B66	8343	FB520080*
511	ќ	8B67	8344	FB530080*
512	ќ	8B68	B1DA	FB540080
513	ќ	8B69	B1DB	FB550080
514	ќ	8B6A	B1DC	FB560080
515	ќ	8B6B	8345	FB570080
516	ќ	8B6C	8346	FB580080*
517	ќ	8B6D	8347	FB590080*
518	ќ	8B6E	8348	FB5A0080*
519	ќ	8B6F	8349	FB5B0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 11 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
520	꺄	8B70	834A	FB5C0080*
521	꺅	8B71	B1DD	FB5D0080
522	꺆	8B73	B1DE	FB5F0080
523	꺇	8B74	834B	FB5G0080*
524	꺈	8B75	B1DF	FB5H0080
525	꺉	8B76	834C	FB5I0080*
526	꺊	8B77	B1E0	FB5J0080
527	꺋	8B78	834D	FB5K0080*
528	꺌	8B79	834E	FB5L0080
529	꺍	8B7A	834F	FB5M0080*
530	꺎	8B7B	8350	FB5N0080
531	꺏	8B7C	8351	FB5O0080*
532	꺐	8B7D	8352	FB5P0080*
533	꺑	8B81	B1E1	FB5T0080
534	꺒	8B82	8353	FB5U0080*
535	꺓	8B83	8354	FB5V0080*
536	꺔	8B84	8355	FB5W0080*
537	꺕	8B85	8356	FB5X0080*
538	꺖	8B86	8357	FB5Y0080*
539	꺗	8B87	8358	FB5Z0080*
540	꺘	8B88	8359	FB600080*
541	꺙	8B89	835A	FB610080*
542	꺚	8B8A	8361	FB620080*
543	꺛	8B8B	8362	FB630080*
544	꺜	8B8C	8363	FB640080*
545	꺝	8B8D	8364	FB650080*

Table 13 (Page 11 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
546	꺞	8B8E	8365	FB660080*
547	꺟	8B8F	8366	FB670080*
548	꺠	8B90	8367	FB680080*
549	꺡	8B91	8368	FB690080*
550	꺢	8B93	8369	FB6B0080*
551	꺣	8B94	836A	FB6C0080*
552	꺤	8B95	836B	FB6D0080
553	꺥	8B96	836C	FB6E0080*
554	꺦	8B97	836D	FB6F0080*
555	꺧	8B98	836E	FB6G0080*
556	꺨	8B99	836F	FB6H0080*
557	꺩	8B9A	8370	FB6I0080*
558	꺪	8B9B	8371	FB6J0080*
559	꺫	8B9C	8372	FB6K0080*
560	꺬	8B9D	8373	FB6L0080*
561	꺭	8BA1	B1E2	FB6P0080
562	꺮	8BA2	B1E3	FB6Q0080
563	꺯	8BA3	8374	FB6R0080*
564	꺰	8BA4	8375	FB6S0080*
565	꺱	8BA5	B1E4	FB6T0080
566	꺲	8BA6	8376	FB6U0080*
567	꺳	8BA7	8377	FB6V0080*
568	꺴	8BA8	B1E5	FB6W0080
569	꺵	8BA9	B1E6	FB6X0080
570	꺶	8BAA	8378	FB6Y0080*
571	꺷	8BAB	B1E7	FB6Z0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 12 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
572	꺄	8BAC	8379	FB700080*
573	꺅	8BAD	837A	FB710080
574	꺆	8BAE	8381	FB720080*
575	꺇	8BAF	8382	FB730080*
576	꺈	8BB0	8383	FB740080*
577	꺉	8BB1	B1E8	FB750080
578	꺊	8BB3	B1E9	FB770080
579	꺋	8BB4	8384	FB780080*
580	꺌	8BB5	B1EA	FB790080
581	꺍	8BB6	8385	FB7A0080
582	꺎	8BB7	B1EB	FB7B0080
583	꺏	8BB8	B1EC	FB7C0080
584	꺐	8BB9	8386	FB7D0080*
585	꺑	8BBA	8387	FB7E0080*
586	꺒	8BBB	8388	FB7F0080
587	꺓	8BBC	B1ED	FB7G0080
588	꺔	8BBD	8389	FB7H0080*
589	꺕	8C61	B1EE	FBA90080
590	꺖	8C62	B1EF	FBAA0080
591	꺗	8C63	B1F0	FBAB0080
592	꺘	8C64	838A	FBAC0080*
593	꺙	8C65	B1F1	FBAD0080
594	꺚	8C66	838B	FBAE0080*
595	꺛	8C67	838C	FBAF0080*
596	꺜	8C68	838D	FBAG0080*
597	꺝	8C69	B1F2	FBAH0080

Table 13 (Page 12 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
598	꺞	8C6A	838E	FBAI0080*
599	꺟	8C6B	B1F3	FBAJ0080
600	꺠	8C6C	838F	FBAK0080*
601	꺡	8C6D	8390	FBAL0080*
602	꺢	8C6E	8391	FBAM0080*
603	꺣	8C6F	8392	FBAN0080*
604	꺤	8C70	8393	FBAO0080*
605	꺥	8C71	B1F4	FBAP0080
606	꺦	8C73	B1F5	FBAR0080
607	꺧	8C74	8394	FBAS0080*
608	꺨	8C75	B1F6	FBAT0080
609	꺩	8C76	B1F7	FBAU0080
610	꺪	8C77	B1F8	FBAV0080
611	꺫	8C78	8395	FBAW0080
612	꺬	8C79	8396	FBAX0080*
613	꺭	8C7A	8397	FBAZ0080*
614	꺮	8C7B	B1F9	FBAZ0080
615	꺯	8C7C	8398	FBB00080*
616	꺰	8C7D	8399	FBB10080*
617	꺱	8C81	B1FA	FBB50080
618	꺲	8C82	B1FB	FBB60080
619	꺳	8C83	839A	FBB70080*
620	꺴	8C84	839B	FBB80080*
621	꺵	8C85	B1FC	FBB90080
622	꺶	8C86	839C	FBBA0080*
623	꺷	8C87	839D	FBBB0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
624	뀨	8C88	839E	FBBC0080*
625	뀨	8C89	B1FD	FBBD0080
626	뀨	8C8A	839F	FBBE0080*
627	뀨	8C8B	83A0	FBBF0080*
628	뀨	8C8C	83A1	FBBG0080*
629	뀨	8C8D	83A2	FBBH0080*
630	뀨	8C8E	83A3	FBBI0080*
631	뀨	8C8F	83A4	FBBJ0080*
632	뀨	8C90	83A5	FBBK0080*
633	뀨	8C91	B1FE	FBBL0080
634	뀨	8C93	B2A1	FBBN0080
635	뀨	8C94	83A6	FBBO0080*
636	뀨	8C95	B2A2	FBBP0080
637	뀨	8C96	B2A3	FBBQ0080
638	뀨	8C97	B2A4	FBBR0080
639	뀨	8C98	83A7	FBBS0080*
640	뀨	8C99	83A8	FBBT0080*
641	뀨	8C9A	83A9	FBBU0080*
642	뀨	8C9B	83AA	FBBV0080*
643	뀨	8C9C	83AB	FBBW0080*
644	뀨	8C9D	83AC	FBBX0080*
645	뀨	8CA1	B2A5	FBC10080
646	뀨	8CA2	B2A6	FBC20080
647	뀨	8CA3	83AD	FBC30080*
648	뀨	8CA4	83AE	FBC40080*
649	뀨	8CA5	83AF	FBC50080*

Table 13 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
650	뀨	8CA6	83B0	FBC60080*
651	뀨	8CA7	83B1	FBC70080*
652	뀨	8CA8	83B2	FBC80080*
653	뀨	8CA9	B2A7	FBC90080
654	뀨	8CAA	83B3	FBCA0080*
655	뀨	8CAB	83B4	FBCB0080*
656	뀨	8CAC	83B5	FBC0080*
657	뀨	8CAD	83B6	FBCD0080*
658	뀨	8CAE	83B7	FBCE0080*
659	뀨	8CAF	83B8	FBCF0080*
660	뀨	8CB0	83B9	FBCG0080*
661	뀨	8CB1	83BA	FBCH0080*
662	뀨	8CB3	83BB	FBCJ0080*
663	뀨	8CB4	83BC	FBCK0080*
664	뀨	8CB5	83BD	FBCL0080*
665	뀨	8CB6	83BE	FBCM0080*
666	뀨	8CB7	83BF	FBCN0080*
667	뀨	8CB8	83C0	FBCO0080*
668	뀨	8CB9	83C1	FBCP0080*
669	뀨	8CBA	83C2	FBCQ0080*
670	뀨	8CBB	83C3	FBCR0080*
671	뀨	8CBC	83C4	FBCS0080*
672	뀨	8CBD	83C5	FBCT0080*
673	뀨	8CC1	83C6	FBCX0080
674	뀨	8CC2	83C7	FBCY0080*
675	뀨	8CC3	83C8	FBCZ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
676	꺄	8CC4	83C9	FBD00080*
677	꺅	8CC5	83CA	FBD10080*
678	꺆	8CC6	83CB	FBD20080*
679	꺇	8CC7	83CC	FBD30080*
680	꺈	8CC8	83CD	FBD40080*
681	꺉	8CC9	83CE	FBD50080*
682	꺊	8CCA	83CF	FBD60080*
683	꺋	8CCB	83D0	FBD70080*
684	꺌	8CCC	83D1	FBD80080*
685	꺍	8CCD	83D2	FBD90080*
686	꺎	8CCE	83D3	FBDA0080*
687	꺏	8CCF	83D4	FBD0080*
688	꺑	8CD0	83D5	FBDC0080*
689	꺒	8CD1	83D6	FBDD0080*
690	꺓	8CD3	83D7	FBD0080*
691	꺔	8CD4	83D8	FBDG0080*
692	꺕	8CD5	83D9	FBDH0080*
693	꺖	8CD6	83DA	FBDI0080*
694	꺗	8CD7	83DB	FBDJ0080*
695	꺘	8CD8	83DC	FBDK0080*
696	꺙	8CD9	83DD	FBDL0080*
697	꺚	8CDA	83DE	FBDM0080*
698	꺛	8CDB	83DF	FBDN0080*
699	꺜	8CDC	83E0	FBD0080*
700	꺝	8CDD	83E1	FBDP0080*
701	꺞	8CE1	B2A8	FBDT0080

Table 13 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
702	꺟	8CE2	B2A9	FBDU0080
703	꺠	8CE3	B2AA	FBDV0080
704	꺡	8CE4	83E2	FBDW0080*
705	꺢	8CE5	B2AB	FBDX0080
706	꺣	8CE6	83E3	FBDY0080*
707	꺤	8CE7	83E4	FBDZ0080*
708	꺥	8CE8	83E5	FBE00080*
709	꺦	8CE9	B2AC	FBE10080
710	꺧	8CEA	83E6	FBE20080*
711	꺨	8CEB	83E7	FBE30080*
712	꺩	8CEC	83E8	FBE40080*
713	꺪	8CED	83E9	FBE50080*
714	꺫	8CEE	83EA	FBE60080*
715	꺬	8CEF	83EB	FBE70080*
716	꺭	8CF0	83EC	FBE80080*
717	꺮	8CF1	B2AD	FBE90080
718	꺯	8CF3	B2AE	FBE0080
719	꺰	8CF4	83ED	FBEC0080*
720	꺱	8CF5	B2AF	FBED0080
721	꺲	8CF6	B2B0	FBEE0080
722	꺳	8CF7	B2B1	FBEF0080
723	꺴	8CF8	83EE	FBEG0080*
724	꺵	8CF9	83EF	FBEH0080*
725	꺶	8CFA	83F0	FBEI0080*
726	꺷	8CFB	83F1	FBEJ0080*
727	꺸	8CFC	83F2	FBEK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
728	꺄	8CFD	83F3	FBEL0080*
729	꺅	8D41	B2B2	FBEP0080
730	꺆	8D42	B2B3	FBEQ0080
731	꺇	8D43	83F4	FBER0080*
732	꺈	8D44	83F5	FBES0080*
733	꺉	8D45	B2B4	FBET0080
734	꺊	8D46	83F6	FBEU0080*
735	꺋	8D47	83F7	FBEV0080*
736	꺌	8D48	83F8	FBEW0080*
737	꺍	8D49	83F9	FBEX0080*
738	꺎	8D4A	83FA	FBEY0080*
739	꺏	8D4B	83FB	FBEZ0080*
740	꺐	8D4C	83FC	FBF00080*
741	꺑	8D4D	83FD	FBF10080*
742	꺒	8D4E	83FE	FBF20080*
743	꺓	8D4F	8441	FBF30080*
744	꺔	8D50	8442	FBF40080*
745	꺕	8D51	B2B5	FBF50080
746	꺖	8D53	8443	FBF70080*
747	꺗	8D54	8444	FBF80080*
748	꺘	8D55	B2B6	FBF90080
749	꺙	8D56	8445	FBFA0080*
750	꺚	8D57	B2B7	FBFB0080
751	꺛	8D58	8446	FBFC0080*
752	꺜	8D59	8447	FBFD0080*
753	꺝	8D5A	8448	FBFE0080*

Line Number	Graphic	Host Code	PC Code	GCGID
754	꺞	8D5B	8449	FBFF0080*
755	꺟	8D5C	844A	FBFG0080*
756	꺠	8D5D	844B	FBFH0080*
757	꺡	8D61	B2B8	FBFL0080
758	꺢	8D62	844C	FBFM0080*
759	꺣	8D63	844D	FBFN0080*
760	꺤	8D64	844E	FBFO0080*
761	꺥	8D65	B2B9	FBFP0080
762	꺦	8D66	844F	FBFQ0080*
763	꺧	8D67	8450	FBFR0080*
764	꺨	8D68	8451	FBFS0080*
765	꺩	8D69	B2BA	FBFT0080
766	꺪	8D6A	8452	FBFU0080*
767	꺫	8D6B	8453	FBFV0080*
768	꺬	8D6C	8454	FBFW0080*
769	꺭	8D6D	8455	FBFX0080*
770	꺮	8D6E	8456	FBFY0080*
771	꺯	8D6F	8457	FBFZ0080*
772	꺰	8D70	8458	FBG00080*
773	꺱	8D71	8459	FBG10080
774	꺲	8D73	845A	FBG30080*
775	꺳	8D74	8461	FBG40080*
776	꺴	8D75	B2BB	FBG50080
777	꺵	8D76	B2BC	FBG60080
778	꺶	8D77	8462	FBG70080*
779	꺷	8D78	8463	FBG80080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 16 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
780	꺾	8D79	8464	FBG90080*
781	꺾	8D7A	8465	FBGA0080*
782	꺾	8D7B	B2BD	FBGB0080
783	꺾	8D7C	8466	FBGC0080*
784	꺾	8D7D	8467	FBGD0080*
785	꺾	8D81	B2BE	FBGH0080
786	꺾	8D82	8468	FBGI0080*
787	꺾	8D83	8469	FBGJ0080*
788	꺾	8D84	846A	FBGK0080*
789	꺾	8D85	846B	FBGL0080*
790	꺾	8D86	846C	FBGM0080*
791	꺾	8D87	846D	FBGN0080*
792	꺾	8D88	846E	FBGO0080*
793	꺾	8D89	846F	FBGP0080*
794	꺾	8D8A	8470	FBGQ0080*
795	꺾	8D8B	8471	FBGR0080*
796	꺾	8D8C	8472	FBGS0080*
797	꺾	8D8D	8473	FBGT0080*
798	꺾	8D8E	8474	FBGU0080*
799	꺾	8D8F	8475	FBGV0080*
800	꺾	8D90	8476	FBGW0080*
801	꺾	8D91	8477	FBGX0080*
802	꺾	8D93	8478	FBGZ0080*
803	꺾	8D94	8479	FBH00080*
804	꺾	8D95	847A	FBH10080*
805	꺾	8D96	8481	FBH20080*

Table 13 (Page 16 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
806	꺾	8D97	8482	FBH30080*
807	꺾	8D98	8483	FBH40080*
808	꺾	8D99	8484	FBH50080*
809	꺾	8D9A	8485	FBH60080*
810	꺾	8D9B	8486	FBH70080*
811	꺾	8D9C	8487	FBH80080*
812	꺾	8D9D	8488	FBH90080*
813	꺾	8DA1	B2BF	FBHD0080
814	꺾	8DA2	B2C0	FBHE0080
815	꺾	8DA3	8489	FBHF0080*
816	꺾	8DA4	848A	FBHG0080*
817	꺾	8DA5	B2C1	FBHH0080
818	꺾	8DA6	848B	FBHI0080*
819	꺾	8DA7	B2C2	FBHJ0080
820	꺾	8DA8	848C	FBHK0080
821	꺾	8DA9	B2C3	FBHL0080
822	꺾	8DAA	848D	FBHM0080*
823	꺾	8DAB	848E	FBHN0080*
824	꺾	8DAC	848F	FBHO0080*
825	꺾	8DAD	8490	FBHP0080*
826	꺾	8DAE	8491	FBHQ0080*
827	꺾	8DAF	8492	FBHR0080*
828	꺾	8DB0	8493	FBHS0080*
829	꺾	8DB1	B2C4	FBHT0080
830	꺾	8DB3	B2C5	FBHV0080
831	꺾	8DB4	8494	FBHW0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 17 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
832	꽃	8DB5	B2C6	FBHX0080
833	꽃	8DB6	8495	FBHY0080*
834	꽁	8DB7	B2C7	FBHZ0080
835	꽃	8DB8	B2C8	FBI00080
836	꽃	8DB9	B2C9	FBI10080
837	꽂	8DBA	8496	FBI20080*
838	꿀	8DBB	8497	FBI30080*
839	꿀	8DBC	8498	FBI40080*
840	꽁	8DBD	8499	FBI50080*
841	파	8DC1	B2CA	FBI90080
842	팍	8DC2	B2CB	FBIA0080
843	팍	8DC3	849A	FBIB0080*
844	팍	8DC4	849B	FBIC0080*
845	판	8DC5	849C	FBID0080
846	팍	8DC6	849D	FBIE0080*
847	팍	8DC7	849E	FBIF0080*
848	팍	8DC8	849F	FBIG0080*
849	팍	8DC9	B2CC	FBIH0080
850	팍	8DCA	84A0	FBII0080*
851	팍	8DCB	84A1	FBIJ0080*
852	팍	8DCC	84A2	FBIK0080*
853	팍	8DCD	84A3	FBIL0080*
854	팍	8DCE	84A4	FBIM0080*
855	팍	8DCF	84A5	FBIN0080*
856	팍	8DD0	84A6	FBIO0080*
857	팍	8DD1	84A7	FBIP0080

Table 13 (Page 17 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
858	꺄	8DD3	84A8	FBIR0080*
859	꺄	8DD4	84A9	FBIS0080*
860	꺄	8DD5	84AA	FBIT0080
861	꺄	8DD6	B2CD	FBIU0080
862	꺄	8DD7	B2CE	FBIV0080
863	꺄	8DD8	84AB	FBIW0080*
864	꺄	8DD9	84AC	FBIX0080*
865	꺄	8DDA	84AD	FBIY0080*
866	꺄	8ddb	84AE	FBIZ0080*
867	꺄	8DDC	84AF	FBJ00080*
868	꺄	8DDD	84B0	FBJ10080*
869	꺄	8DE1	B2CF	FBJ50080
870	꺄	8DE2	B2D0	FBJ60080
871	꺄	8DE3	84B1	FBJ70080*
872	꺄	8DE4	84B2	FBJ80080*
873	꺄	8DE5	84B3	FBJ90080
874	꺄	8DE6	84B4	FBJA0080*
875	꺄	8DE7	84B5	FBJB0080*
876	꺄	8DE8	84B6	FBJC0080*
877	꺄	8DE9	84B7	FBJD0080*
878	꺄	8DEA	84B8	FBJE0080*
879	꺄	8DEB	84B9	FBJF0080*
880	꺄	8DEC	84BA	FBJG0080*
881	꺄	8DED	84BB	FBJH0080*
882	꺄	8DEE	84BC	FBJI0080*
883	꺄	8DEF	84BD	FBJJ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
884	꺾	8DF0	84BE	FBJK0080*
885	꺾	8DF1	84BF	FBJL0080*
886	꺾	8DF3	84C0	FBJN0080*
887	꺾	8DF4	84C1	FBJO0080*
888	꺾	8DF5	84C2	FBJP0080*
889	꺾	8DF6	84C3	FBJQ0080*
890	꺾	8DF7	B2D1	FBJR0080
891	꺾	8DF8	84C4	FBJS0080*
892	꺾	8DF9	84C5	FBJT0080*
893	꺾	8DFA	84C6	FBJU0080*
894	꺾	8DFB	84C7	FBJV0080*
895	꺾	8DFC	84C8	FBJW0080*
896	꺾	8DFD	84C9	FBJX0080*
897	꺾	8E41	B2D2	FBK10080
898	꺾	8E42	84CA	FBK20080*
899	꺾	8E43	84CB	FBK30080*
900	꺾	8E44	84CC	FBK40080*
901	꺾	8E45	B2D3	FBK50080
902	꺾	8E46	84CD	FBK60080*
903	꺾	8E47	84CE	FBK70080*
904	꺾	8E48	84CF	FBK80080*
905	꺾	8E49	B2D4	FBK90080
906	꺾	8E4A	84D0	FBKA0080*
907	꺾	8E4B	84D1	FBKB0080*
908	꺾	8E4C	84D2	FBKC0080*
909	꺾	8E4D	84D3	FBKD0080*

Table 13 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
910	꺾	8E4E	84D4	FBKE0080*
911	꺾	8E4F	84D5	FBKF0080*
912	꺾	8E50	84D6	FBKG0080*
913	꺾	8E51	B2D5	FBKH0080
914	꺾	8E53	B2D6	FBKJ0080
915	꺾	8E54	84D7	FBKK0080*
916	꺾	8E55	84D8	FBKL0080
917	꺾	8E56	84D9	FBKM0080*
918	꺾	8E57	B2D7	FBKN0080
919	꺾	8E58	84DA	FBKO0080*
920	꺾	8E59	84DB	FBKP0080*
921	꺾	8E5A	84DC	FBKQ0080*
922	꺾	8E5B	84DD	FBKR0080*
923	꺾	8E5C	84DE	FBKS0080*
924	꺾	8E5D	84DF	FBKT0080*
925	꺾	8E61	B2D8	FBKX0080
926	꺾	8E62	84E0	FBKY0080*
927	꺾	8E63	84E1	FBKZ0080*
928	꺾	8E64	84E2	FBL00080*
929	꺾	8E65	84E3	FBL10080*
930	꺾	8E66	84E4	FBL20080*
931	꺾	8E67	84E5	FBL30080*
932	꺾	8E68	84E6	FBL40080*
933	꺾	8E69	84E7	FBL50080*
934	꺾	8E6A	84E8	FBL60080*
935	꺾	8E6B	84E9	FBL70080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 19 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
936	꺄	8E6C	84EA	FBL80080*
937	꺅	8E6D	84EB	FBL90080*
938	꺆	8E6E	84EC	FBLA0080*
939	꺇	8E6F	84ED	FBLB0080*
940	꺈	8E70	84EE	FBLC0080*
941	꺉	8E71	84EF	FBLD0080*
942	꺊	8E73	84F0	FBLF0080*
943	꺋	8E74	84F1	FBLG0080*
944	꺌	8E75	84F2	FBLH0080*
945	꺍	8E76	84F3	FBLI0080*
946	꺎	8E77	84F4	FBLJ0080*
947	꺏	8E78	84F5	FBLK0080
948	꺐	8E79	84F6	FBLL0080*
949	꺑	8E7A	84F7	FBLM0080*
950	꺒	8E7B	84F8	FBLN0080*
951	꺓	8E7C	84F9	FBL00080*
952	꺔	8E7D	84FA	FBLP0080*
953	꺕	8E81	B2D9	FBLT0080
954	꺖	8E82	B2DA	FBLU0080
955	꺗	8E83	84FB	FBLV0080*
956	꺘	8E84	84FC	FBLW0080*
957	꺙	8E85	B2DB	FBLX0080
958	꺚	8E86	84FD	FBLY0080*
959	꺛	8E87	84FE	FBLZ0080*
960	꺜	8E88	8541	FBM00080
961	꺝	8E89	B2DC	FBM10080

Table 13 (Page 19 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
962	꺞	8E8A	8542	FBM20080*
963	꺟	8E8B	8543	FBM30080*
964	꺠	8E8C	8544	FBM40080*
965	꺡	8E8D	8545	FBM50080*
966	꺢	8E8E	8546	FBM60080*
967	꺣	8E8F	8547	FBM70080*
968	꺤	8E90	B2DD	FBM80080
969	꺥	8E91	B2DE	FBM90080
970	꺦	8E93	B2DF	FBMB0080
971	꺧	8E94	8548	FBMC0080*
972	꺨	8E95	B2E0	FBMD0080
973	꺩	8E96	8549	FBME0080*
974	꺪	8E97	B2E1	FBMF0080
975	꺫	8E98	B2E2	FBMG0080
976	꺬	8E99	854A	FBMH0080*
977	꺭	8E9A	854B	FBMI0080*
978	꺮	8E9B	854C	FBMJ0080*
979	꺯	8E9C	854D	FBMK0080*
980	꺰	8E9D	854E	FBML0080*
981	꺱	8EA1	B2E3	FBMP0080
982	꺲	8EA2	854F	FBMQ0080*
983	꺳	8EA3	8550	FBMR0080*
984	꺴	8EA4	8551	FBMS0080*
985	꺵	8EA5	8552	FBMT0080
986	꺶	8EA6	8553	FBMU0080*
987	꺷	8EA7	8554	FBMV0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
988	꺄	8EA8	8555	FBMW0080*
989	꺅	8EA9	B2E4	FBMX0080
990	꺆	8EAA	8556	FBMY0080*
991	꺇	8EAB	8557	FBMZ0080*
992	꺈	8EAC	8558	FBN00080*
993	꺉	8EAD	8559	FBN10080*
994	꺊	8EAE	855A	FBN20080*
995	꺋	8EAF	8561	FBN30080*
996	꺌	8EB0	8562	FBN40080*
997	꺍	8EB1	8563	FBN50080*
998	꺎	8EB3	8564	FBN70080*
999	꺏	8EB4	8565	FBN80080*
1000	꺐	8EB5	8566	FBN90080
1001	꺑	8EB6	B2E5	FBNA0080
1002	꺒	8EB7	B2E6	FBNB0080
1003	꺓	8EB8	8567	FBNC0080*
1004	꺔	8EB9	8568	FBND0080*
1005	꺕	8EBA	8569	FBNE0080*
1006	꺖	8EBB	856A	FBNF0080*
1007	꺗	8EBC	856B	FBNG0080*
1008	꺘	8EBD	856C	FBNH0080*
1009	꺙	8EC1	B2E7	FBNL0080
1010	꺚	8EC2	B2E8	FBNM0080
1011	꺛	8EC3	856D	FBNN0080*
1012	꺜	8EC4	856E	FBNO0080*
1013	꺝	8EC5	B2E9	FBNP0080

Table 13 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1014	꺞	8EC6	856F	FBNQ0080*
1015	꺟	8EC7	8570	FBNR0080*
1016	꺠	8EC8	8571	FBNS0080*
1017	꺡	8EC9	B2EA	FBNT0080
1018	꺢	8ECA	8572	FBNU0080*
1019	꺣	8ECB	8573	FBNV0080*
1020	꺤	8ECC	8574	FBNW0080*
1021	꺥	8ECD	8575	FBNX0080*
1022	꺦	8ECE	8576	FBNY0080*
1023	꺧	8ECF	8577	FBNZ0080*
1024	꺨	8ED0	8578	FBO00080*
1025	꺩	8ED1	B2EB	FBO10080
1026	꺪	8ED3	B2EC	FBO30080
1027	꺫	8ED4	8579	FBO40080*
1028	꺬	8ED5	857A	FBO50080*
1029	꺭	8ED6	B2ED	FBO60080
1030	꺮	8ED7	8581	FBO70080*
1031	꺯	8ED8	8582	FBO80080*
1032	꺰	8ED9	8583	FBO90080*
1033	꺱	8EDA	8584	FBOA0080*
1034	꺲	8EDB	8585	FBOB0080*
1035	꺳	8EDC	8586	FBOC0080*
1036	꺴	8EDD	8587	FBOD0080*
1037	꺵	8EE1	B2EE	FBOH0080
1038	꺶	8EE2	8588	FBOI0080
1039	꺷	8EE3	8589	FBOJ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1040	꺾	8EE4	858A	FBOK0080*
1041	꺾	8EE5	B2EF	FBOL0080
1042	꺾	8EE6	858B	FBOM0080*
1043	꺾	8EE7	858C	FBON0080*
1044	꺾	8EE8	858D	FBOO0080*
1045	꺾	8EE9	B2F0	FBOP0080
1046	꺾	8EEA	858E	FBOQ0080*
1047	꺾	8EEB	858F	FBOR0080*
1048	꺾	8EEC	8590	FBOS0080*
1049	꺾	8EED	8591	FBOT0080*
1050	꺾	8EEE	8592	FBOU0080*
1051	꺾	8EEF	8593	FBOV0080*
1052	꺾	8EF0	8594	FBOW0080*
1053	꺾	8EF1	B2F1	FBOX0080
1054	꺾	8EF3	B2F2	FBOZ0080
1055	꺾	8EF4	8595	FBP00080*
1056	꺾	8EF5	8596	FBP10080*
1057	꺾	8EF6	8597	FBP20080*
1058	꺾	8EF7	8598	FBP30080
1059	꺾	8EF8	8599	FBP40080*
1060	꺾	8EF9	859A	FBP50080*
1061	꺾	8EFA	859B	FBP60080*
1062	꺾	8EFB	859C	FBP70080*
1063	꺾	8EFC	859D	FBP80080*
1064	꺾	8EFD	859E	FBP90080*
1065	꺾	8F41	B2F3	FBPD0080

Line Number	Graphic	Host Code	PC Code	GCGID
1066	꺾	8F42	859F	FBPE0080*
1067	꺾	8F43	85A0	FBPF0080*
1068	꺾	8F44	85A1	FBPG0080*
1069	꺾	8F45	85A2	FBPH0080*
1070	꺾	8F46	85A3	FBPI0080*
1071	꺾	8F47	85A4	FBPJ0080*
1072	꺾	8F48	85A5	FBPK0080*
1073	꺾	8F49	85A6	FBPL0080*
1074	꺾	8F4A	85A7	FBPM0080*
1075	꺾	8F4B	85A8	FBPN0080*
1076	꺾	8F4C	85A9	FBPO0080*
1077	꺾	8F4D	85AA	FBPP0080*
1078	꺾	8F4E	85AB	FBPQ0080*
1079	꺾	8F4F	85AC	FBPR0080*
1080	꺾	8F50	85AD	FBPS0080*
1081	꺾	8F51	85AE	FBPT0080*
1082	꺾	8F53	85AF	FBPV0080*
1083	꺾	8F54	85B0	FBPW0080*
1084	꺾	8F55	85B1	FBPX0080*
1085	꺾	8F56	85B2	FBPY0080*
1086	꺾	8F57	85B3	FBPZ0080*
1087	꺾	8F58	85B4	FBQ00080*
1088	꺾	8F59	85B5	FBQ10080*
1089	꺾	8F5A	85B6	FBQ20080*
1090	꺾	8F5B	85B7	FBQ30080*
1091	꺾	8F5C	85B8	FBQ40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 22 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1092	꺄	8F5D	85B9	FBQ50080*
1093	꺅	8F61	B2F4	FBQ90080
1094	꺆	8F62	B2F5	FBQA0080
1095	꺇	8F63	85BA	FBQB0080*
1096	꺈	8F64	85BB	FBQC0080*
1097	꺉	8F65	B2F6	FBQD0080
1098	꺊	8F66	85BC	FBQE0080*
1099	꺋	8F67	B2F7	FBQF0080
1100	꺌	8F68	85BD	FBQG0080*
1101	꺍	8F69	B2F8	FBQH0080
1102	꺎	8F6A	85BE	FBQI0080*
1103	꺏	8F6B	B2F9	FBQJ0080
1104	꺐	8F6C	85BF	FBQK0080*
1105	꺑	8F6D	85C0	FBQL0080*
1106	꺒	8F6E	85C1	FBQM0080*
1107	꺓	8F6F	85C2	FBQN0080*
1108	꺔	8F70	B2FA	FBQO0080
1109	꺕	8F71	B2FB	FBQP0080
1110	꺖	8F73	B2FC	FBQR0080
1111	꺗	8F74	85C3	FBQS0080*
1112	꺘	8F75	B2FD	FBQT0080
1113	꺙	8F76	85C4	FBQU0080*
1114	꺚	8F77	B2FE	FBQV0080
1115	꺛	8F78	85C5	FBQW0080*
1116	꺜	8F79	85C6	FBQX0080*
1117	꺝	8F7A	85C7	FBQY0080*

Table 13 (Page 22 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1118	꺞	8F7B	B3A1	FBQZ0080
1119	꺟	8F7C	85C8	FBR00080*
1120	꺠	8F7D	85C9	FBR10080*
1121	꺡	8F81	85CA	FBR50080
1122	꺢	8F82	85CB	FBR60080*
1123	꺣	8F83	85CC	FBR70080*
1124	꺤	8F84	85CD	FBR80080*
1125	꺥	8F85	85CE	FBR90080*
1126	꺦	8F86	85CF	FBRA0080*
1127	꺧	8F87	85D0	FBRB0080*
1128	꺨	8F88	85D1	FBRC0080*
1129	꺩	8F89	85D2	FBRD0080*
1130	꺪	8F8A	85D3	FBRE0080*
1131	꺫	8F8B	85D4	FBRF0080*
1132	꺬	8F8C	85D5	FBRG0080*
1133	꺭	8F8D	85D6	FBRH0080*
1134	꺮	8F8E	85D7	FBRJ0080*
1135	꺯	8F8F	85D8	FBRK0080*
1136	꺰	8F90	85D9	FBR00080*
1137	꺱	8F91	85DA	FBR10080*
1138	꺲	8F93	85DB	FBRN0080*
1139	꺳	8F94	85DC	FBR00080*
1140	꺴	8F95	85DD	FBRP0080*
1141	꺵	8F96	85DE	FBRQ0080*
1142	꺶	8F97	85DF	FBRR0080*
1143	꺷	8F98	85E0	FBR00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1144	꺾	8F99	85E1	FBRT0080*
1145	꺾	8F9A	85E2	FBRU0080*
1146	꺾	8F9B	85E3	FBRV0080*
1147	꺾	8F9C	85E4	FBRW0080*
1148	꺾	8F9D	85E5	FBRX0080*
1149	끼	8FA1	B3A2	FBS10080
1150	끼	8FA2	B3A3	FBS20080
1151	꺾	8FA3	85E6	FBS30080*
1152	꺾	8FA4	85E7	FBS40080*
1153	꺾	8FA5	B3A4	FBS50080
1154	꺾	8FA6	85E8	FBS60080*
1155	꺾	8FA7	85E9	FBS70080*
1156	꺾	8FA8	85EA	FBS80080*
1157	꺾	8FA9	B3A5	FBS90080
1158	꺾	8FAA	85EB	FBSA0080*
1159	꺾	8FAB	85EC	FBSB0080*
1160	꺾	8FAC	85ED	FBS0080*
1161	꺾	8FAD	85EE	FBSD0080*
1162	꺾	8FAE	85EF	FBSE0080*
1163	꺾	8FAF	85F0	FBSF0080*
1164	꺾	8FB0	85F1	FBSG0080*
1165	꺾	8FB1	B3A6	FBSH0080
1166	꺾	8FB3	B3A7	FBSJ0080
1167	꺾	8FB4	85F2	FBSK0080*
1168	꺾	8FB5	B3A8	FBSL0080
1169	꺾	8FB6	85F3	FBSM0080

Table 13 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1170	꺾	8FB7	B3A9	FBSN0080
1171	꺾	8FB8	85F4	FBSO0080*
1172	꺾	8FB9	85F5	FBSP0080*
1173	꺾	8FBA	85F6	FBSQ0080*
1174	꺾	8FBB	85F7	FBSR0080*
1175	꺾	8FBC	85F8	FBSS0080*
1176	꺾	8FBD	85F9	FBST0080*
1177	나	9061	B3AA	FBVL0080
1178	낙	9062	B3AB	FBVM0080
1179	낙	9063	B3AC	FBVN0080
1180	낙	9064	85FA	FBVO0080*
1181	낙	9065	B3AD	FBVP0080
1182	낙	9066	85FB	FBVQ0080*
1183	낙	9067	85FC	FBVR0080*
1184	낙	9068	B3AE	FBVS0080
1185	낙	9069	B3AF	FBVT0080
1186	낙	906A	B3B0	FBVU0080
1187	낙	906B	B3B1	FBVV0080
1188	낙	906C	85FD	FBVW0080*
1189	낙	906D	85FE	FBVX0080*
1190	낙	906E	8641	FBVY0080*
1191	낙	906F	8642	FBVZ0080*
1192	낙	9070	8643	FBW00080*
1193	낙	9071	B3B2	FBW10080
1194	낙	9073	B3B3	FBW30080
1195	낙	9074	8644	FBW40080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 24 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1196	낫	9075	B3B4	FBW50080
1197	낫	9076	B3B5	FBW60080
1198	낭	9077	B3B6	FBW70080
1199	낫	9078	B3B7	FBW80080
1200	낫	9079	B3B8	FBW90080
1201	낙	907A	8645	FBWA0080*
1202	날	907B	B3B9	FBWB0080
1203	낱	907C	8646	FBWC0080*
1204	냥	907D	B3BA	FBWD0080
1205	내	9081	B3BB	FBWH0080
1206	넉	9082	B3BC	FBWI0080
1207	넉	9083	8647	FBWJ0080*
1208	넉	9084	8648	FBWK0080*
1209	넌	9085	B3BD	FBWL0080
1210	넉	9086	8649	FBWM0080*
1211	넉	9087	864A	FBWN0080*
1212	넌	9088	864B	FBWO0080
1213	넌	9089	B3BE	FBWP0080
1214	넉	908A	864C	FBWQ0080*
1215	넉	908B	864D	FBWR0080*
1216	넉	908C	864E	FBWS0080*
1217	넉	908D	864F	FBWT0080*
1218	넌	908E	8650	FBWU0080*
1219	넉	908F	8651	FBWV0080*
1220	넉	9090	8652	FBWW0080*
1221	넌	9091	B3BF	FBWX0080

Table 13 (Page 24 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1222	넌	9093	B3C0	FBWZ0080
1223	넉	9094	8653	FBX00080*
1224	넉	9095	B3C1	FBX10080
1225	넉	9096	B3C2	FBX20080
1226	넉	9097	B3C3	FBX30080
1227	넉	9098	8654	FBX40080*
1228	넉	9099	8655	FBX50080*
1229	넉	909A	8656	FBX60080*
1230	넌	909B	8657	FBX70080*
1231	넉	909C	8658	FBX80080*
1232	넉	909D	8659	FBX90080*
1233	냐	90A1	B3C4	FBXD0080
1234	냐	90A2	B3C5	FBXE0080
1235	냐	90A3	865A	FBXF0080*
1236	냐	90A4	8661	FBXG0080*
1237	냐	90A5	B3C6	FBXH0080
1238	냐	90A6	8662	FBXI0080*
1239	냐	90A7	8663	FBXJ0080*
1240	냐	90A8	8664	FBXK0080*
1241	냐	90A9	B3C7	FBXL0080
1242	냐	90AA	8665	FBXM0080*
1243	냐	90AB	8666	FBXN0080*
1244	냐	90AC	8667	FBXO0080*
1245	냐	90AD	8668	FBXP0080*
1246	냐	90AE	8669	FBXQ0080*
1247	냐	90AF	866A	FBXR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 25 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1248	낱	90B0	866B	FBXS0080*
1249	남	90B1	B3C8	FBXT0080
1250	납	90B3	866C	FBXV0080*
1251	낱	90B4	866D	FBXW0080*
1252	낫	90B5	866E	FBXX0080*
1253	낱	90B6	866F	FBXY0080*
1254	냥	90B7	B3C9	FBXZ0080
1255	낱	90B8	8670	FBY00080*
1256	낱	90B9	8671	FBY10080*
1257	낱	90BA	8672	FBY20080*
1258	낱	90BB	8673	FBY30080*
1259	낱	90BC	8674	FBY40080*
1260	냥	90BD	8675	FBY50080*
1261	내	90C1	8676	FBY90080
1262	넉	90C2	8677	FBYA0080*
1263	넉	90C3	8678	FBYB0080*
1264	넉	90C4	8679	FBYC0080*
1265	넉	90C5	867A	FBYD0080*
1266	넉	90C6	8681	FBYE0080*
1267	넉	90C7	8682	FBYF0080*
1268	넉	90C8	8683	FBYG0080*
1269	넉	90C9	8684	FBYH0080*
1270	넉	90CA	8685	FBYI0080*
1271	넉	90CB	8686	FBYJ0080*
1272	넉	90CC	8687	FBYK0080*
1273	넉	90CD	8688	FBYL0080*

Table 13 (Page 25 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
1274	넉	90CE	8689	FBYM0080*
1275	넉	90CF	868A	FBYN0080*
1276	넉	90D0	868B	FBYO0080*
1277	넉	90D1	868C	FBYP0080*
1278	넉	90D3	868D	FBYR0080*
1279	넉	90D4	868E	FBYS0080*
1280	넉	90D5	868F	FBYT0080*
1281	넉	90D6	8690	FBYU0080*
1282	넉	90D7	8691	FBYV0080*
1283	넉	90D8	8692	FBYW0080*
1284	넉	90D9	8693	FBYX0080*
1285	넉	90DA	8694	FBYY0080*
1286	넉	90DB	8695	FBYZ0080*
1287	넉	90DC	8696	FBZ00080*
1288	넉	90DD	8697	FBZ10080*
1289	너	90E1	B3CA	FBZ50080
1290	너	90E2	B3CB	FBZ60080
1291	너	90E3	8698	FBZ70080*
1292	너	90E4	B3CC	FBZ80080
1293	너	90E5	B3CD	FBZ90080
1294	넉	90E6	8699	FBZA0080*
1295	넉	90E7	869A	FBZB0080*
1296	넉	90E8	869B	FBZC0080
1297	넉	90E9	B3CE	FBZD0080
1298	넉	90EA	869C	FBZE0080*
1299	넉	90EB	B3CF	FBZF0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 26 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1300	넵	90EC	B3D0	FBZG0080
1301	넶	90ED	869D	FBZH0080*
1302	넷	90EE	869E	FBZI0080*
1303	넸	90EF	869F	FBZJ0080*
1304	넹	90F0	86A0	FBZK0080*
1305	넺	90F1	B3D1	FBZL0080
1306	넻	90F3	B3D2	FBZN0080
1307	넼	90F4	86A1	FBZO0080*
1308	넽	90F5	B3D3	FBZP0080
1309	넾	90F6	B3D4	FBZQ0080
1310	넿	90F7	B3D5	FBZR0080
1311	넺	90F8	86A2	FBZS0080
1312	넻	90F9	86A3	FBZT0080*
1313	넼	90FA	86A4	FBZU0080*
1314	넽	90FB	86A5	FBZV0080*
1315	넾	90FC	86A6	FBZW0080*
1316	넿	90FD	B3D6	FBZX0080
1317	네	9141	B3D7	FC010080
1318	넉	9142	B3D8	FC020080
1319	넊	9143	86A7	FC030080*
1320	넋	9144	86A8	FC040080*
1321	넌	9145	B3D9	FC050080
1322	넍	9146	86A9	FC060080*
1323	넎	9147	86AA	FC070080*
1324	넏	9148	86AB	FC080080*
1325	널	9149	B3DA	FC090080

Table 13 (Page 26 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1326	넑	914A	86AC	FC0A0080*
1327	넒	914B	86AD	FC0B0080*
1328	넓	914C	86AE	FC0C0080*
1329	넔	914D	86AF	FC0D0080*
1330	넕	914E	86B0	FC0E0080*
1331	넖	914F	86B1	FC0F0080*
1332	넗	9150	86B2	FC0G0080*
1333	넘	9151	B3DB	FC0H0080
1334	넙	9153	B3DC	FC0J0080
1335	넚	9154	86B3	FC0K0080*
1336	넛	9155	B3DD	FC0L0080
1337	넜	9156	B3DE	FC0M0080
1338	넝	9157	B3DF	FC0N0080
1339	넞	9158	86B4	FC0O0080*
1340	넟	9159	86B5	FC0P0080*
1341	넠	915A	86B6	FC0Q0080*
1342	넡	915B	86B7	FC0R0080*
1343	넢	915C	86B8	FC0S0080*
1344	넣	915D	86B9	FC0T0080*
1345	네	9161	B3E0	FC0X0080
1346	넦	9162	B3E1	FC0Y0080
1347	넧	9163	86BA	FC0Z0080*
1348	넨	9164	86BB	FC100080*
1349	넩	9165	B3E2	FC110080
1350	넪	9166	86BC	FC120080*
1351	넫	9167	86BD	FC130080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1352	넌	9168	86BE	FC140080
1353	넎	9169	B3E3	FC150080
1354	넏	916A	86BF	FC160080*
1355	널	916B	86C0	FC170080*
1356	넑	916C	86C1	FC180080*
1357	넒	916D	86C2	FC190080*
1358	넓	916E	86C3	FC1A0080*
1359	넔	916F	86C4	FC1B0080*
1360	넕	9170	86C5	FC1C0080*
1361	넖	9171	B3E4	FC1D0080
1362	넗	9173	B3E5	FC1F0080
1363	넘	9174	86C6	FC1G0080*
1364	넙	9175	86C7	FC1H0080
1365	넚	9176	B3E6	FC1I0080
1366	넛	9177	B3E7	FC1J0080
1367	넜	9178	86C8	FC1K0080*
1368	넝	9179	86C9	FC1L0080*
1369	넞	917A	B3E8	FC1M0080
1370	넟	917B	86CA	FC1N0080
1371	넠	917C	86CB	FC1O0080*
1372	넡	917D	86CC	FC1P0080*
1373	넢	9181	B3E9	FC1T0080
1374	넣	9182	86CD	FC1U0080*
1375	네	9183	86CE	FC1V0080*
1376	넦	9184	86CF	FC1W0080*
1377	넧	9185	B3EA	FC1X0080

Line Number	Graphic	Host Code	PC Code	GCGID
1378	넨	9186	86D0	FC1Y0080*
1379	넩	9187	86D1	FC1Z0080*
1380	넪	9188	86D2	FC200080*
1381	넫	9189	86D3	FC210080*
1382	넬	918A	86D4	FC220080*
1383	넭	918B	86D5	FC230080*
1384	넯	918C	86D6	FC240080*
1385	넰	918D	86D7	FC250080*
1386	넱	918E	86D8	FC260080*
1387	넲	918F	86D9	FC270080*
1388	넳	9190	86DA	FC280080*
1389	넴	9191	86DB	FC290080*
1390	넵	9193	86DC	FC2B0080*
1391	넶	9194	86DD	FC2C0080*
1392	넷	9195	86DE	FC2D0080
1393	넸	9196	86DF	FC2E0080*
1394	넹	9197	86E0	FC2F0080*
1395	넺	9198	86E1	FC2G0080*
1396	넻	9199	86E2	FC2H0080*
1397	넼	919A	86E3	FC2I0080*
1398	넽	919B	86E4	FC2J0080*
1399	넾	919C	86E5	FC2K0080*
1400	넿	919D	86E6	FC2L0080*
1401	노	91A1	B3EB	FC2P0080
1402	누	91A2	B3EC	FC2Q0080
1403	뉴	91A3	86E7	FC2R0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1404	눅	91A4	86E8	FC2S0080*
1405	논	91A5	B3ED	FC2T0080
1406	눇	91A6	86E9	FC2U0080*
1407	눉	91A7	86EA	FC2V0080*
1408	논	91A8	86EB	FC2W0080*
1409	늘	91A9	B3EE	FC2X0080
1410	눋	91AA	86EC	FC2Y0080*
1411	눔	91AB	B3EF	FC2Z0080
1412	눍	91AC	86ED	FC300080*
1413	눏	91AD	86EE	FC310080*
1414	눑	91AE	86EF	FC320080*
1415	눓	91AF	86F0	FC330080*
1416	눕	91B0	86F1	FC340080*
1417	눔	91B1	B3F0	FC350080
1418	눏	91B3	B3F1	FC370080
1419	눑	91B4	86F2	FC380080*
1420	눓	91B5	B3F2	FC390080
1421	눕	91B6	86F3	FC3A0080*
1422	눗	91B7	B3F3	FC3B0080
1423	눙	91B8	86F4	FC3C0080*
1424	눛	91B9	86F5	FC3D0080*
1425	눝	91BA	86F6	FC3E0080*
1426	늘	91BB	86F7	FC3F0080*
1427	눏	91BC	B3F4	FC3G0080
1428	눔	91BD	B3F5	FC3H0080
1429	눑	91C1	B3F6	FC3L0080

Table 13 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1430	눇	91C2	86F8	FC3M0080*
1431	눉	91C3	86F9	FC3N0080*
1432	눋	91C4	86FA	FC3O0080*
1433	눍	91C5	B3F7	FC3P0080
1434	눏	91C6	86FB	FC3Q0080*
1435	눑	91C7	86FC	FC3R0080*
1436	눓	91C8	86FD	FC3S0080*
1437	눕	91C9	B3F8	FC3T0080
1438	눗	91CA	86FE	FC3U0080*
1439	눙	91CB	8741	FC3V0080*
1440	눛	91CC	8742	FC3W0080*
1441	눝	91CD	8743	FC3X0080*
1442	늘	91CE	8744	FC3Y0080*
1443	눏	91CF	8745	FC3Z0080*
1444	눔	91D0	8746	FC400080*
1445	눑	91D1	8747	FC410080*
1446	눓	91D3	8748	FC430080*
1447	눕	91D4	8749	FC440080*
1448	눗	91D5	874A	FC450080
1449	눙	91D6	B3F9	FC460080
1450	눛	91D7	874B	FC470080*
1451	눝	91D8	874C	FC480080*
1452	눟	91D9	874D	FC490080*
1453	눡	91DA	874E	FC4A0080*
1454	눣	91DB	874F	FC4B0080*
1455	눥	91DC	8750	FC4C0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1456	낑	91DD	8751	FC4D0080*
1457	넉	91E1	8752	FC4H0080
1458	넒	91E2	8753	FC4I0080*
1459	넓	91E3	8754	FC4J0080*
1460	넔	91E4	8755	FC4K0080*
1461	넕	91E5	8756	FC4L0080*
1462	넖	91E6	8757	FC4M0080*
1463	넗	91E7	8758	FC4N0080*
1464	넘	91E8	8759	FC4O0080*
1465	넙	91E9	875A	FC4P0080*
1466	넚	91EA	8761	FC4Q0080*
1467	넛	91EB	8762	FC4R0080*
1468	넜	91EC	8763	FC4S0080*
1469	넝	91ED	8764	FC4T0080*
1470	넞	91EE	8765	FC4U0080*
1471	넟	91EF	8766	FC4V0080*
1472	넠	91F0	8767	FC4W0080*
1473	넡	91F1	8768	FC4X0080*
1474	넢	91F3	8769	FC4Z0080*
1475	넣	91F4	876A	FC500080*
1476	네	91F5	876B	FC510080*
1477	넦	91F6	876C	FC520080*
1478	넧	91F7	876D	FC530080*
1479	넨	91F8	876E	FC540080*
1480	넩	91F9	876F	FC550080*
1481	넪	91FA	8770	FC560080*

Table 13 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1482	넫	91FB	8771	FC570080*
1483	넬	91FC	8772	FC580080*
1484	넭	91FD	8773	FC590080*
1485	넦	9241	B3FA	FC5D0080
1486	넧	9242	8774	FC5E0080*
1487	넨	9243	8775	FC5F0080*
1488	넩	9244	8776	FC5G0080*
1489	넪	9245	B3FB	FC5H0080
1490	넫	9246	8777	FC5I0080*
1491	넬	9247	8778	FC5J0080*
1492	넭	9248	8779	FC5K0080*
1493	넦	9249	B3FC	FC5L0080
1494	넧	924A	877A	FC5M0080*
1495	넨	924B	8781	FC5N0080*
1496	넩	924C	8782	FC5O0080*
1497	넪	924D	8783	FC5P0080*
1498	넫	924E	8784	FC5Q0080*
1499	넬	924F	8785	FC5R0080*
1500	넭	9250	8786	FC5S0080*
1501	넦	9251	B3FD	FC5T0080
1502	넧	9253	B3FE	FC5V0080
1503	넨	9254	8787	FC5W0080*
1504	넩	9255	B4A1	FC5X0080
1505	넪	9256	8788	FC5Y0080*
1506	넫	9257	8789	FC5Z0080*
1507	넬	9258	878A	FC600080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 30 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1508	ㅛ	9259	878B	FC610080*
1509	ㅜ	925A	878C	FC620080*
1510	ㅠ	925B	878D	FC630080*
1511	ㅡ	925C	878E	FC640080*
1512	ㅣ	925D	878F	FC650080*
1513	ㅑ	9261	B4A2	FC690080
1514	ㅒ	9262	B4A3	FC6A0080
1515	ㅓ	9263	8790	FC6B0080*
1516	ㅔ	9264	8791	FC6C0080*
1517	ㅕ	9265	B4A4	FC6D0080
1518	ㅖ	9266	8792	FC6E0080*
1519	ㅗ	9267	8793	FC6F0080*
1520	ㅘ	9268	8794	FC6G0080*
1521	ㅙ	9269	B4A5	FC6H0080
1522	ㅚ	926A	8795	FC6I0080*
1523	ㅛ	926B	8796	FC6J0080*
1524	ㅜ	926C	8797	FC6K0080*
1525	ㅠ	926D	8798	FC6L0080*
1526	ㅡ	926E	8799	FC6M0080*
1527	ㅣ	926F	879A	FC6N0080*
1528	ㅑ	9270	879B	FC6O0080*
1529	ㅒ	9271	879C	FC6P0080*
1530	ㅓ	9273	B4A6	FC6R0080
1531	ㅔ	9274	879D	FC6S0080*
1532	ㅕ	9275	B4A7	FC6T0080
1533	ㅖ	9276	879E	FC6U0080*

Table 13 (Page 30 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1534	ㅗ	9277	B4A8	FC6V0080
1535	ㅘ	9278	879F	FC6W0080*
1536	ㅙ	9279	87A0	FC6X0080*
1537	ㅚ	927A	87A1	FC6Y0080*
1538	ㅛ	927B	87A2	FC6Z0080*
1539	ㅜ	927C	87A3	FC700080*
1540	ㅠ	927D	87A4	FC710080*
1541	ㅡ	9281	B4A9	FC750080
1542	ㅣ	9282	B4AA	FC760080
1543	ㅑ	9283	87A5	FC770080*
1544	ㅒ	9284	87A6	FC780080*
1545	ㅓ	9285	B4AB	FC790080
1546	ㅔ	9286	87A7	FC7A0080*
1547	ㅕ	9287	87A8	FC7B0080*
1548	ㅖ	9288	B4AC	FC7C0080
1549	ㅗ	9289	B4AD	FC7D0080
1550	ㅘ	928A	87A9	FC7E0080*
1551	ㅙ	928B	87AA	FC7F0080*
1552	ㅚ	928C	87AB	FC7G0080*
1553	ㅛ	928D	87AC	FC7H0080*
1554	ㅜ	928E	87AD	FC7I0080*
1555	ㅠ	928F	87AE	FC7J0080*
1556	ㅡ	9290	87AF	FC7K0080*
1557	ㅣ	9291	B4AE	FC7L0080
1558	ㅑ	9293	B4AF	FC7N0080
1559	ㅒ	9294	87B0	FC7O0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1560	낫	9295	B4B0	FC7P0080
1561	낫	9296	87B1	FC7Q0080*
1562	눔	9297	B4B1	FC7R0080
1563	낫	9298	87B2	FC7S0080*
1564	낫	9299	87B3	FC7T0080*
1565	늑	929A	87B4	FC7U0080*
1566	늑	929B	87B5	FC7V0080*
1567	늑	929C	87B6	FC7W0080*
1568	눔	929D	87B7	FC7X0080*
1569	늑	92A1	B4B2	FC810080
1570	늑	92A2	87B8	FC820080*
1571	늑	92A3	87B9	FC830080*
1572	늑	92A4	87BA	FC840080*
1573	늑	92A5	87BB	FC850080*
1574	늑	92A6	87BC	FC860080*
1575	늑	92A7	87BD	FC870080*
1576	늑	92A8	87BE	FC880080*
1577	늑	92A9	87BF	FC890080*
1578	늑	92AA	87C0	FC8A0080*
1579	늑	92AB	87C1	FC8B0080*
1580	늑	92AC	87C2	FC8C0080*
1581	늑	92AD	87C3	FC8D0080*
1582	늑	92AE	87C4	FC8E0080*
1583	늑	92AF	87C5	FC8F0080*
1584	늑	92B0	87C6	FC8G0080*
1585	늑	92B1	87C7	FC8H0080*

Line Number	Graphic	Host Code	PC Code	GCGID
1586	늑	92B3	87C8	FC8J0080*
1587	늑	92B4	87C9	FC8K0080*
1588	늑	92B5	87CA	FC8L0080
1589	늑	92B6	B4B3	FC8M0080
1590	늑	92B7	87CB	FC8N0080*
1591	늑	92B8	87CC	FC8O0080*
1592	늑	92B9	87CD	FC8P0080*
1593	늑	92BA	87CE	FC8Q0080*
1594	늑	92BB	87CF	FC8R0080*
1595	늑	92BC	87D0	FC8S0080*
1596	늑	92BD	87D1	FC8T0080*
1597	늑	92C1	B4B4	FC8X0080
1598	늑	92C2	87D2	FC8Y0080*
1599	늑	92C3	87D3	FC8Z0080*
1600	늑	92C4	87D4	FC900080*
1601	늑	92C5	87D5	FC910080*
1602	늑	92C6	87D6	FC920080*
1603	늑	92C7	87D7	FC930080*
1604	늑	92C8	87D8	FC940080*
1605	늑	92C9	87D9	FC950080*
1606	늑	92CA	87DA	FC960080*
1607	늑	92CB	87DB	FC970080*
1608	늑	92CC	87DC	FC980080*
1609	늑	92CD	87DD	FC990080*
1610	늑	92CE	87DE	FC9A0080*
1611	늑	92CF	87DF	FC9B0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1612	뵡	92D0	87E0	FC9C0080*
1613	뵣	92D1	87E1	FC9D0080*
1614	뵤	92D3	87E2	FC9F0080*
1615	뵦	92D4	87E3	FC9G0080*
1616	뵧	92D5	87E4	FC9H0080*
1617	뵨	92D6	87E5	FC9I0080*
1618	뵩	92D7	87E6	FC9J0080*
1619	뵪	92D8	87E7	FC9K0080*
1620	뵫	92D9	87E8	FC9L0080*
1621	뵬	92DA	87E9	FC9M0080*
1622	뵭	92DB	87EA	FC9N0080*
1623	뵮	92DC	87EB	FC9O0080*
1624	뵯	92DD	87EC	FC9P0080*
1625	뵰	92E1	B4B5	FC9T0080
1626	뵱	92E2	87ED	FC9U0080*
1627	뵲	92E3	87EE	FC9V0080*
1628	뵳	92E4	87EF	FC9W0080*
1629	뵴	92E5	B4B6	FC9X0080
1630	뵵	92E6	87F0	FC9Y0080*
1631	뵶	92E7	87F1	FC9Z0080*
1632	뵷	92E8	87F2	FCA00080*
1633	뵸	92E9	B4B7	FCA10080
1634	뵹	92EA	87F3	FCA20080*
1635	뵺	92EB	87F4	FCA30080*
1636	뵻	92EC	87F5	FCA40080*
1637	뵼	92ED	87F6	FCA50080*

Table 13 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1638	뵽	92EE	87F7	FCA60080*
1639	뵾	92EF	87F8	FCA70080*
1640	뵿	92F0	87F9	FCA80080*
1641	부	92F1	B4B8	FCA90080
1642	북	92F3	B4B9	FCAB0080
1643	붂	92F4	87FA	FCAC0080*
1644	붃	92F5	87FB	FCAD0080*
1645	분	92F6	87FC	FCAE0080*
1646	붅	92F7	87FD	FCAF0080*
1647	붆	92F8	87FE	FCAG0080*
1648	붇	92F9	8841	FCAH0080*
1649	불	92FA	8842	FCAI0080*
1650	붉	92FB	8843	FCAJ0080*
1651	붊	92FC	8844	FCAK0080*
1652	붋	92FD	8845	FCAL0080*
1653	붌	9341	B4BA	FCAP0080
1654	붍	9342	B4BB	FCAQ0080
1655	붎	9343	8846	FCAR0080*
1656	붏	9344	8847	FCAS0080*
1657	붐	9345	8848	FCAT0080*
1658	붑	9346	8849	FCAU0080*
1659	붒	9347	884A	FCAV0080*
1660	붓	9348	884B	FCAW0080*
1661	붔	9349	B4BC	FCAX0080
1662	붕	934A	884C	FCAY0080*
1663	붖	934B	884D	FCAZ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1664	늑	934C	884E	FCB00080*
1665	늑	934D	884F	FCB10080*
1666	늑	934E	8850	FCB20080*
1667	늑	934F	8851	FCB30080*
1668	늑	9350	8852	FCB40080*
1669	늑	9351	B4BD	FCB50080
1670	늑	9353	B4BE	FCB70080
1671	늑	9354	8853	FCB80080*
1672	늑	9355	8854	FCB90080*
1673	늑	9356	8855	FCBA0080*
1674	늑	9357	B4BF	FCBB0080
1675	늑	9358	8856	FCBC0080*
1676	늑	9359	8857	FCBD0080*
1677	늑	935A	8858	FCBE0080*
1678	늑	935B	8859	FCBF0080*
1679	늑	935C	885A	FCBG0080*
1680	늑	935D	8861	FCBH0080*
1681	늑	9361	B4C0	FCBL0080
1682	늑	9362	B4C1	FCBM0080
1683	늑	9363	8862	FCBN0080*
1684	늑	9364	8863	FCBO0080*
1685	늑	9365	B4C2	FCBP0080
1686	늑	9366	8864	FCBQ0080*
1687	늑	9367	8865	FCBR0080*
1688	늑	9368	8866	FCBS0080*
1689	늑	9369	B4C3	FCBT0080

Table 13 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1690	늑	936A	B4C4	FCBU0080
1691	늑	936B	B4C5	FCBV0080
1692	늑	936C	8867	FCBW0080*
1693	늑	936D	8868	FCBX0080*
1694	늑	936E	8869	FCBY0080*
1695	늑	936F	886A	FCBZ0080*
1696	늑	9370	886B	FCC00080*
1697	늑	9371	B4C6	FCC10080
1698	늑	9373	B4C7	FCC30080
1699	늑	9374	886C	FCC40080*
1700	늑	9375	B4C8	FCC50080
1701	늑	9376	886D	FCC60080*
1702	늑	9377	B4C9	FCC70080
1703	늑	9378	B4CA	FCC80080
1704	늑	9379	886E	FCC90080
1705	늑	937A	886F	FCCA0080*
1706	늑	937B	8870	FCCB0080*
1707	늑	937C	B4CB	FCCC0080
1708	늑	937D	8871	FCCD0080*
1709	늑	9381	B4CC	FCCH0080
1710	늑	9382	8872	FCCI0080*
1711	늑	9383	8873	FCCJ0080*
1712	늑	9384	8874	FCCK0080*
1713	늑	9385	B4CD	FCCL0080
1714	늑	9386	8875	FCCM0080*
1715	늑	9387	8876	FCCN0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1716	낀	9388	8877	FCCO0080*
1717	넌	9389	B4CE	FCCP0080
1718	넋	938A	8878	FCCQ0080*
1719	넌	938B	8879	FCCR0080*
1720	넎	938C	887A	FCCS0080*
1721	넏	938D	8881	FCCT0080*
1722	널	938E	8882	FCCU0080*
1723	넑	938F	8883	FCCV0080*
1724	넒	9390	8884	FCCW0080*
1725	넓	9391	8885	FCCX0080*
1726	넔	9393	8886	FCCZ0080*
1727	넕	9394	8887	FCD00080*
1728	넖	9395	8888	FCD10080*
1729	넗	9396	8889	FCD20080*
1730	넘	9397	888A	FCD30080
1731	넙	9398	888B	FCD40080*
1732	넚	9399	888C	FCD50080*
1733	넛	939A	888D	FCD60080*
1734	넜	939B	888E	FCD70080*
1735	넝	939C	888F	FCD80080*
1736	넞	939D	8890	FCD90080*
1737	니	93A1	B4CF	FCDD0080
1738	닉	93A2	B4D0	FCDE0080
1739	닐	93A3	8891	FCDF0080*
1740	넓	93A4	8892	FCDG0080*
1741	닌	93A5	B4D1	FCDH0080

Table 13 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1742	넔	93A6	8893	FCDI0080*
1743	넕	93A7	8894	FCDJ0080*
1744	넖	93A8	8895	FCDK0080*
1745	넗	93A9	B4D2	FCDL0080
1746	넘	93AA	8896	FCDM0080
1747	넙	93AB	B4D3	FCDN0080
1748	넚	93AC	8897	FCD00080*
1749	넛	93AD	8898	FCDP0080*
1750	넜	93AE	8899	FCDQ0080*
1751	넝	93AF	889A	FCDR0080*
1752	넞	93B0	889B	FCD00080*
1753	넕	93B1	B4D4	FCDT0080
1754	넖	93B3	B4D5	FCDV0080
1755	넗	93B4	889C	FCDW0080*
1756	넘	93B5	B4D6	FCDX0080
1757	넙	93B6	889D	FCDY0080*
1758	넚	93B7	B4D7	FCDZ0080
1759	넛	93B8	889E	FCE00080*
1760	넜	93B9	889F	FCE10080*
1761	넝	93BA	88A0	FCE20080
1762	넞	93BB	88A1	FCE30080*
1763	넟	93BC	B4D8	FCE40080
1764	넠	93BD	88A2	FCE50080*
1765	다	9461	B4D9	FCGX0080
1766	닥	9462	B4DA	FCGY0080
1767	닷	9463	B4DB	FCGZ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
1768	닷	9464	88A3	FCH00080*
1769	단	9465	B4DC	FCH10080
1770	닷	9466	88A4	FCH20080*
1771	달	9467	88A5	FCH30080*
1772	달	9468	B4DD	FCH40080
1773	달	9469	B4DE	FCH50080
1774	닥	946A	B4DF	FCH60080
1775	닭	946B	B4E0	FCH70080
1776	닭	946C	B4E1	FCH80080
1777	닷	946D	88A6	FCH90080*
1778	달	946E	88A7	FCHA0080*
1779	달	946F	88A8	FCHB0080*
1780	달	9470	B4E2	FCHC0080
1781	담	9471	B4E3	FCHD0080
1782	답	9473	B4E4	FCHF0080
1783	닭	9474	88A9	FCHG0080*
1784	닷	9475	B4E5	FCHH0080
1785	닷	9476	B4E6	FCHI0080
1786	당	9477	B4E7	FCHJ0080
1787	닷	9478	B4E8	FCHK0080
1788	닷	9479	B4E9	FCHL0080
1789	닥	947A	88AA	FCHM0080*
1790	달	947B	88AB	FCHN0080*
1791	닭	947C	88AC	FCHO0080*
1792	당	947D	B4EA	FCHP0080
1793	대	9481	B4EB	FCHT0080

Line Number	Graphic	Host Code	PC Code	GCGID
1794	대	9482	B4EC	FCHU0080
1795	दै	9483	88AD	FCHV0080*
1796	दै	9484	88AE	FCHW0080*
1797	댄	9485	B4ED	FCHX0080
1798	दै	9486	88AF	FCHY0080*
1799	दै	9487	88B0	FCHZ0080*
1800	덴	9488	88B1	FCI00080*
1801	델	9489	B4EE	FCI10080
1802	दै	948A	88B2	FCI20080*
1803	दै	948B	88B3	FCI30080*
1804	दै	948C	88B4	FCI40080*
1805	दै	948D	88B5	FCI50080*
1806	델	948E	88B6	FCI60080*
1807	दै	948F	88B7	FCI70080*
1808	दै	9490	88B8	FCI80080*
1809	덤	9491	B4EF	FCI90080
1810	덥	9493	B4F0	FCIB0080
1811	दै	9494	88B9	FCIC0080*
1812	दै	9495	B4F1	FCID0080
1813	दै	9496	B4F2	FCIE0080
1814	댕	9497	B4F3	FCIF0080
1815	दै	9498	88BA	FCIG0080*
1816	दै	9499	88BB	FCIH0080*
1817	दै	949A	88BC	FCII0080*
1818	델	949B	88BD	FCIJ0080*
1819	दै	949C	88BE	FCIK0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 36 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1820	댕	949D	88BF	FCIL0080*
1821	다	94A1	B4F4	FCIP0080
1822	닥	94A2	88C0	FCIQ0080*
1823	닥	94A3	88C1	FCIR0080*
1824	닷	94A4	88C2	FCIS0080*
1825	단	94A5	88C3	FCIT0080*
1826	닷	94A6	88C4	FCIU0080*
1827	닿	94A7	88C5	FCIV0080*
1828	달	94A8	88C6	FCIW0080*
1829	달	94A9	88C7	FCIX0080*
1830	닥	94AA	88C8	FCIY0080*
1831	닿	94AB	88C9	FCIZ0080*
1832	답	94AC	88CA	FCJ00080*
1833	닷	94AD	88CB	FCJ10080*
1834	닿	94AE	88CC	FCJ20080*
1835	닿	94AF	88CD	FCJ30080*
1836	닿	94B0	88CE	FCJ40080*
1837	담	94B1	88CF	FCJ50080*
1838	답	94B3	88D0	FCJ70080*
1839	닷	94B4	88D1	FCJ80080*
1840	닷	94B5	88D2	FCJ90080*
1841	닷	94B6	88D3	FCJA0080*
1842	당	94B7	88D4	FCJB0080
1843	닷	94B8	88D5	FCJC0080*
1844	닷	94B9	88D6	FCJD0080*
1845	닥	94BA	88D7	FCJE0080*

Table 13 (Page 36 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1846	달	94BB	88D8	FCJF0080*
1847	닿	94BC	88D9	FCJG0080*
1848	닿	94BD	88DA	FCJH0080*
1849	대	94C1	88DB	FCJL0080
1850	덕	94C2	88DC	FCJM0080*
1851	덕	94C3	88DD	FCJN0080*
1852	뎃	94C4	88DE	FCJO0080*
1853	뎃	94C5	88DF	FCJP0080*
1854	뎃	94C6	88E0	FCJQ0080*
1855	댕	94C7	88E1	FCJR0080*
1856	뎃	94C8	88E2	FCJS0080*
1857	뎃	94C9	88E3	FCJT0080*
1858	뎃	94CA	88E4	FCJU0080*
1859	뎃	94CB	88E5	FCJV0080*
1860	뎃	94CC	88E6	FCJW0080*
1861	뎃	94CD	88E7	FCJX0080*
1862	뎃	94CE	88E8	FCJY0080*
1863	뎃	94CF	88E9	FCJZ0080*
1864	댕	94D0	88EA	FCK00080*
1865	뎃	94D1	88EB	FCK10080*
1866	뎃	94D3	88EC	FCK30080*
1867	뎃	94D4	88ED	FCK40080*
1868	뎃	94D5	88EE	FCK50080*
1869	뎃	94D6	88EF	FCK60080*
1870	댕	94D7	88F0	FCK70080*
1871	뎃	94D8	88F1	FCK80080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 13 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1872	뎡	94D9	88F2	FCK90080*
1873	뎡	94DA	88F3	FCKA0080*
1874	뎡	94DB	88F4	FCKB0080*
1875	뎡	94DC	88F5	FCKC0080*
1876	뎡	94DD	88F6	FCKD0080*
1877	더	94E1	B4F5	FCKH0080
1878	덕	94E2	B4F6	FCKI0080
1879	뒤	94E3	B4F7	FCKJ0080
1880	뎡	94E4	88F7	FCKK0080*
1881	던	94E5	B4F8	FCKL0080
1882	뎡	94E6	88F8	FCKM0080*
1883	뎡	94E7	88F9	FCKN0080*
1884	던	94E8	B4F9	FCKO0080
1885	뎡	94E9	B4FA	FCKP0080
1886	뎡	94EA	88FA	FCKQ0080*
1887	뎡	94EB	B4FB	FCKR0080
1888	뎡	94EC	B4FC	FCKS0080
1889	뎡	94ED	88FB	FCKT0080*
1890	뎡	94EE	88FC	FCKU0080*
1891	뎡	94EF	88FD	FCKV0080*
1892	뎡	94F0	88FE	FCKW0080*
1893	덤	94F1	B4FD	FCKX0080
1894	덤	94F3	B4FE	FCKZ0080
1895	뎡	94F4	8941	FCL00080*
1896	뎡	94F5	B5A1	FCL10080
1897	뎡	94F6	8942	FCL20080

Table 13 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1898	뎡	94F7	B5A2	FCL30080
1899	뎡	94F8	8943	FCL40080
1900	뎡	94F9	B5A3	FCL50080

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1901	덕	94FA	8944	FCL60080*
1902	덜	94FB	8945	FCL70080*
1903	랴	94FC	B5A4	FCL80080
1904	덩	94FD	8946	FCL90080*
1905	데	9541	B5A5	FCLD0080
1906	덧	9542	B5A6	FCLE0080
1907	뎡	9543	8947	FCLF0080*
1908	덧	9544	8948	FCLG0080*
1909	덴	9545	B5A7	FCLH0080
1910	덧	9546	8949	FCLI0080*
1911	덧	9547	894A	FCLJ0080*
1912	덴	9548	894B	FCLK0080*
1913	델	9549	B5A8	FCLL0080
1914	뎡	954A	894C	FCLM0080*
1915	덧	954B	894D	FCLN0080*
1916	덧	954C	894E	FCLO0080*
1917	덧	954D	894F	FCLP0080*
1918	덧	954E	8950	FCLQ0080*
1919	덧	954F	8951	FCLR0080*
1920	덧	9550	8952	FCLS0080*
1921	덧	9551	B5A9	FCLT0080
1922	덧	9553	B5AA	FCLV0080
1923	덧	9554	8953	FCLW0080*
1924	덧	9555	B5AB	FCLX0080
1925	덧	9556	B5AC	FCLY0080
1926	덧	9557	B5AD	FCLZ0080

Table 14 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1927	덧	9558	8954	FCM00080*
1928	덧	9559	8955	FCM10080*
1929	덧	955A	8956	FCM20080*
1930	덧	955B	8957	FCM30080*
1931	덧	955C	8958	FCM40080*
1932	덧	955D	8959	FCM50080*
1933	더	9561	B5AE	FCM90080
1934	덧	9562	895A	FCMA0080*
1935	더	9563	8961	FCMB0080*
1936	더	9564	8962	FCMC0080*
1937	덴	9565	B5AF	FCMD0080
1938	덧	9566	8963	FCME0080*
1939	덧	9567	8964	FCMF0080*
1940	덜	9568	8965	FCMG0080*
1941	덧	9569	B5B0	FCMH0080
1942	덧	956A	8966	FCMI0080*
1943	덧	956B	8967	FCMJ0080*
1944	덧	956C	8968	FCMK0080*
1945	덧	956D	8969	FCML0080*
1946	덧	956E	896A	FCMM0080*
1947	덧	956F	896B	FCMN0080*
1948	덧	9570	896C	FCMO0080*
1949	덧	9571	896D	FCMP0080
1950	덧	9573	896E	FCMR0080*
1951	덧	9574	896F	FCMS0080*
1952	덧	9575	8970	FCMT0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1953	똥	9576	B5B1	FCMU0080
1954	똥	9577	B5B2	FCMV0080
1955	똥	9578	8971	FCMW0080*
1956	똥	9579	8972	FCMX0080*
1957	똥	957A	8973	FCMY0080*
1958	똥	957B	8974	FCMZ0080*
1959	똥	957C	8975	FCN00080*
1960	똥	957D	8976	FCN10080*
1961	똥	9581	B5B3	FCN50080
1962	똥	9582	8977	FCN60080*
1963	똥	9583	8978	FCN70080*
1964	똥	9584	8979	FCN80080*
1965	똥	9585	B5B4	FCN90080
1966	똥	9586	897A	FCNA0080*
1967	똥	9587	8981	FCNB0080*
1968	똥	9588	8982	FCNC0080*
1969	똥	9589	8983	FCND0080*
1970	똥	958A	8984	FCNE0080*
1971	똥	958B	8985	FCNF0080*
1972	똥	958C	8986	FCNG0080*
1973	똥	958D	8987	FCNH0080*
1974	똥	958E	8988	FCNI0080*
1975	똥	958F	8989	FCNJ0080*
1976	똥	9590	898A	FCNK0080*
1977	똥	9591	898B	FCNL0080*
1978	똥	9593	898C	FCNN0080*

Table 14 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1979	똥	9594	898D	FCNO0080*
1980	똥	9595	898E	FCNP0080*
1981	똥	9596	898F	FCNQ0080*
1982	똥	9597	8990	FCNR0080*
1983	똥	9598	8991	FCNS0080*
1984	똥	9599	8992	FCNT0080*
1985	똥	959A	8993	FCNU0080*
1986	똥	959B	8994	FCNV0080*
1987	똥	959C	8995	FCNW0080*
1988	똥	959D	8996	FCNX0080*
1989	도	95A1	B5B5	FCO10080
1990	독	95A2	B5B6	FCO20080
1991	두	95A3	8997	FCO30080*
1992	둑	95A4	8998	FCO40080*
1993	돈	95A5	B5B7	FCO50080
1994	둑	95A6	8999	FCO60080*
1995	둑	95A7	899A	FCO70080*
1996	둔	95A8	B5B8	FCO80080
1997	돌	95A9	B5B9	FCO90080
1998	둑	95AA	899B	FCOA0080*
1999	둑	95AB	B5BA	FCOB0080
2000	둑	95AC	899C	FCOC0080*
2001	둑	95AD	B5BB	FCOD0080
2002	둑	95AE	899D	FCOE0080*
2003	둑	95AF	899E	FCOF0080*
2004	둑	95B0	899F	FCOG0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2005	듬	95B1	B5BC	FCOH0080
2006	뚝	95B3	B5BD	FCOJ0080
2007	뚛	95B4	89A0	FCOK0080*
2008	뚜	95B5	B5BE	FCOL0080
2009	뚝	95B6	89A1	FCOM0080*
2010	뚞	95B7	B5BF	FCON0080
2011	뚟	95B8	89A2	FCOO0080*
2012	뚠	95B9	B5C0	FCOP0080
2013	뚡	95BA	89A3	FCOQ0080*
2014	뚢	95BB	B5C1	FCOR0080
2015	뚣	95BC	89A4	FCOS0080*
2016	뚤	95BD	89A5	FCOT0080*
2017	뚥	95C1	B5C2	FCOX0080
2018	뚦	95C2	89A6	FCOY0080*
2019	뚧	95C3	89A7	FCOZ0080*
2020	뚨	95C4	89A8	FCP00080*
2021	뚩	95C5	B5C3	FCP10080
2022	뚪	95C6	89A9	FCP20080*
2023	뚫	95C7	89AA	FCP30080*
2024	뚬	95C8	89AB	FCP40080*
2025	뚭	95C9	B5C4	FCP50080
2026	뚮	95CA	89AC	FCP60080*
2027	뚯	95CB	89AD	FCP70080*
2028	뚰	95CC	89AE	FCP80080*
2029	뚱	95CD	89AF	FCP90080*
2030	뚲	95CE	89B0	FCPA0080*

Table 14 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2031	뚳	95CF	89B1	FCPB0080*
2032	뚴	95D0	89B2	FCPC0080*
2033	뚵	95D1	89B3	FCPD0080*
2034	뚶	95D3	89B4	FCPF0080*
2035	뚷	95D4	89B5	FCPG0080*
2036	뚸	95D5	89B6	FCPH0080*
2037	뚹	95D6	89B7	FCPI0080*
2038	뚺	95D7	89B8	FCPJ0080*
2039	뚻	95D8	89B9	FCPK0080*
2040	뚼	95D9	89BA	FCPL0080*
2041	뚽	95DA	89BB	FCPM0080*
2042	뚾	95DB	89BC	FCPN0080*
2043	뚿	95DC	89BD	FCPO0080*
2044	뛀	95DD	89BE	FCPP0080*
2045	뛁	95E1	B5C5	FCPT0080
2046	뛂	95E2	89BF	FCPU0080*
2047	뛃	95E3	89C0	FCPV0080*
2048	뛄	95E4	89C1	FCPW0080*
2049	뛅	95E5	89C2	FCPX0080
2050	뛆	95E6	89C3	FCPY0080*
2051	뛇	95E7	89C4	FCPZ0080*
2052	뛈	95E8	89C5	FCQ00080*
2053	뛉	95E9	89C6	FCQ10080*
2054	뛊	95EA	89C7	FCQ20080*
2055	뛋	95EB	89C8	FCQ30080*
2056	뛌	95EC	89C9	FCQ40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2057	꺾	95ED	89CA	FCQ50080*
2058	꺾	95EE	89CB	FCQ60080*
2059	꺾	95EF	89CC	FCQ70080*
2060	꺾	95F0	89CD	FCQ80080*
2061	꺾	95F1	89CE	FCQ90080*
2062	꺾	95F3	89CF	FCQB0080*
2063	꺾	95F4	89D0	FCQC0080*
2064	꺾	95F5	89D1	FCQD0080
2065	꺾	95F6	B5C6	FCQE0080
2066	꺾	95F7	89D2	FCQF0080*
2067	꺾	95F8	89D3	FCQG0080*
2068	꺾	95F9	89D4	FCQH0080*
2069	꺾	95FA	89D5	FCQI0080*
2070	꺾	95FB	89D6	FCQJ0080*
2071	꺾	95FC	89D7	FCQK0080*
2072	꺾	95FD	89D8	FCQL0080*
2073	꺾	9641	B5C7	FCQP0080
2074	꺾	9642	89D9	FCQQ0080*
2075	꺾	9643	89DA	FCQR0080*
2076	꺾	9644	89DB	FCQS0080*
2077	꺾	9645	B5C8	FCQT0080
2078	꺾	9646	89DC	FCQU0080*
2079	꺾	9647	89DD	FCQV0080*
2080	꺾	9648	89DE	FCQW0080*
2081	꺾	9649	B5C9	FCQX0080
2082	꺾	964A	89DF	FCQY0080*

Table 14 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2083	꺾	964B	89E0	FCQZ0080*
2084	꺾	964C	89E1	FCR00080*
2085	꺾	964D	89E2	FCR10080*
2086	꺾	964E	89E3	FCR20080*
2087	꺾	964F	89E4	FCR30080*
2088	꺾	9650	89E5	FCR40080*
2089	꺾	9651	B5CA	FCR50080
2090	꺾	9653	B5CB	FCR70080
2091	꺾	9654	89E6	FCR80080*
2092	꺾	9655	B5CC	FCR90080
2093	꺾	9656	89E7	FCRA0080
2094	꺾	9657	89E8	FCRB0080*
2095	꺾	9658	89E9	FCRC0080*
2096	꺾	9659	89EA	FCRD0080*
2097	꺾	965A	89EB	FCRE0080*
2098	꺾	965B	89EC	FCRF0080*
2099	꺾	965C	89ED	FCRG0080*
2100	꺾	965D	89EE	FCRH0080*
2101	꺾	9661	B5CD	FCRL0080
2102	꺾	9662	89EF	FCRM0080*
2103	꺾	9663	89F0	FCRN0080*
2104	꺾	9664	89F1	FCRO0080*
2105	꺾	9665	89F2	FCRP0080*
2106	꺾	9666	89F3	FCRQ0080*
2107	꺾	9667	89F4	FCRR0080*
2108	꺾	9668	89F5	FCRS0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2109	돌	9669	89F6	FCRT0080*
2110	돌	966A	89F7	FCRU0080*
2111	돌	966B	89F8	FCRV0080*
2112	돌	966C	89F9	FCRW0080*
2113	돌	966D	89FA	FCRX0080*
2114	돌	966E	89FB	FCRY0080*
2115	돌	966F	89FC	FCRZ0080*
2116	돌	9670	89FD	FCS00080*
2117	돌	9671	89FE	FCS10080*
2118	돌	9673	8A41	FCS30080*
2119	돌	9674	8A42	FCS40080*
2120	돌	9675	8A43	FCS50080*
2121	돌	9676	8A44	FCS60080*
2122	돌	9677	8A45	FCS70080*
2123	돌	9678	8A46	FCS80080*
2124	돌	9679	8A47	FCS90080*
2125	돌	967A	8A48	FCSA0080*
2126	돌	967B	8A49	FCSB0080*
2127	돌	967C	8A4A	FCSC0080*
2128	돌	967D	8A4B	FCSD0080*
2129	두	9681	B5CE	FCSH0080
2130	두	9682	B5CF	FCSI0080
2131	두	9683	8A4C	FCSJ0080*
2132	두	9684	8A4D	FCSK0080*
2133	두	9685	B5D0	FCSL0080
2134	두	9686	8A4E	FCSM0080*

Table 14 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2135	돌	9687	8A4F	FCSN0080*
2136	돌	9688	8A50	FCSO0080
2137	돌	9689	B5D1	FCSP0080
2138	돌	968A	8A51	FCSQ0080*
2139	돌	968B	8A52	FCSR0080*
2140	돌	968C	8A53	FCSS0080*
2141	돌	968D	8A54	FCST0080*
2142	돌	968E	8A55	FCSU0080*
2143	돌	968F	8A56	FCSV0080*
2144	돌	9690	8A57	FCSW0080*
2145	돌	9691	B5D2	FCSX0080
2146	돌	9693	B5D3	FCSZ0080
2147	돌	9694	8A58	FCT00080*
2148	두	9695	B5D4	FCT10080
2149	두	9696	8A59	FCT20080*
2150	두	9697	B5D5	FCT30080
2151	두	9698	8A5A	FCT40080*
2152	두	9699	8A61	FCT50080*
2153	두	969A	8A62	FCT60080*
2154	두	969B	8A63	FCT70080*
2155	두	969C	8A64	FCT80080*
2156	두	969D	8A65	FCT90080*
2157	뒤	96A1	B5D6	FCTD0080
2158	뒤	96A2	8A66	FCTE0080*
2159	뒤	96A3	8A67	FCTF0080*
2160	뒤	96A4	8A68	FCTG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 6 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2161	된	96A5	8A69	FCTH0080*
2162	ړ	96A6	8A6A	FCTI0080*
2163	ړ	96A7	8A6B	FCTJ0080*
2164	된	96A8	8A6C	FCTK0080*
2165	ړ	96A9	8A6D	FCTL0080*
2166	ړ	96AA	8A6E	FCTM0080*
2167	ړ	96AB	8A6F	FCTN0080*
2168	ړ	96AC	8A70	FCTO0080*
2169	ړ	96AD	8A71	FCTP0080*
2170	ړ	96AE	8A72	FCTQ0080*
2171	ړ	96AF	8A73	FCTR0080*
2172	ړ	96B0	8A74	FCTS0080*
2173	ړ	96B1	8A75	FCTT0080*
2174	ړ	96B3	8A76	FCTV0080*
2175	ړ	96B4	8A77	FCTW0080*
2176	ړ	96B5	8A78	FCTX0080
2177	ړ	96B6	B5D7	FCTY0080
2178	ړ	96B7	8A79	FCTZ0080*
2179	ړ	96B8	8A7A	FCU00080*
2180	ړ	96B9	8A81	FCU10080*
2181	ړ	96BA	8A82	FCU20080*
2182	ړ	96BB	8A83	FCU30080*
2183	ړ	96BC	8A84	FCU40080*
2184	ړ	96BD	8A85	FCU50080*
2185	ړ	96C1	B5D8	FCU90080
2186	ړ	96C2	8A86	FCUA0080*

Table 14 (Page 6 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2187	ړ	96C3	8A87	FCUB0080*
2188	ړ	96C4	8A88	FCUC0080*
2189	ړ	96C5	8A89	FCUD0080*
2190	ړ	96C6	8A8A	FCUE0080*
2191	ړ	96C7	8A8B	FCUF0080*
2192	ړ	96C8	8A8C	FCUG0080*
2193	ړ	96C9	8A8D	FCUH0080*
2194	ړ	96CA	8A8E	FCUI0080*
2195	ړ	96CB	8A8F	FCUJ0080*
2196	ړ	96CC	8A90	FCUK0080*
2197	ړ	96CD	8A91	FCUL0080*
2198	ړ	96CE	8A92	FCUM0080*
2199	ړ	96CF	8A93	FCUN0080*
2200	ړ	96D0	8A94	FCUO0080*
2201	ړ	96D1	8A95	FCUP0080*
2202	ړ	96D3	8A96	FCUR0080*
2203	ړ	96D4	8A97	FCUS0080*
2204	ړ	96D5	8A98	FCUT0080*
2205	ړ	96D6	8A99	FCUU0080*
2206	ړ	96D7	B5D9	FCUV0080
2207	ړ	96D8	8A9A	FCUW0080*
2208	ړ	96D9	8A9B	FCUX0080*
2209	ړ	96DA	8A9C	FCUY0080*
2210	ړ	96DB	8A9D	FCUZ0080*
2211	ړ	96DC	8A9E	FCV00080*
2212	ړ	96DD	8A9F	FCV10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
2213	뒤	96E1	B5DA	FCV50080
2214	뒹	96E2	8AA0	FCV60080*
2215	뒤	96E3	8AA1	FCV70080*
2216	뒹	96E4	8AA2	FCV80080*
2217	뒸	96E5	B5DB	FCV90080
2218	뒹	96E6	8AA3	FCVA0080*
2219	뒺	96E7	8AA4	FCVB0080*
2220	뒸	96E8	8AA5	FCVC0080*
2221	뒹	96E9	B5DC	FCVD0080
2222	뒹	96EA	8AA6	FCVE0080*
2223	뒻	96EB	8AA7	FCVF0080*
2224	뒼	96EC	8AA8	FCVG0080*
2225	뒹	96ED	8AA9	FCVH0080*
2226	뒼	96EE	8AAA	FCVI0080*
2227	뒼	96EF	8AAB	FCVJ0080*
2228	뒼	96F0	8AAC	FCVK0080*
2229	뒼	96F1	8AAD	FCVL0080
2230	뒼	96F3	B5DD	FCVN0080
2231	뒼	96F4	8AAE	FCVO0080*
2232	뒼	96F5	B5DE	FCVP0080
2233	뒼	96F6	8AAF	FCVQ0080*
2234	뒼	96F7	B5DF	FCVR0080
2235	뒼	96F8	8AB0	FCVS0080*
2236	뒼	96F9	8AB1	FCVT0080*
2237	뒼	96FA	8AB2	FCVU0080*
2238	뒼	96FB	8AB3	FCVV0080*

Line Number	Graphic	Host Code	PC Code	GCGID
2239	뒼	96FC	8AB4	FCVW0080*
2240	뒼	96FD	8AB5	FCVX0080*
2241	뒼	9741	B5E0	FCW10080
2242	뒼	9742	8AB6	FCW20080
2243	뒼	9743	8AB7	FCW30080*
2244	뒼	9744	8AB8	FCW40080*
2245	뒼	9745	B5E1	FCW50080
2246	뒼	9746	8AB9	FCW60080*
2247	뒼	9747	8ABA	FCW70080*
2248	뒼	9748	8ABB	FCW80080*
2249	뒼	9749	B5E2	FCW90080
2250	뒼	974A	8ABC	FCWA0080*
2251	뒼	974B	8ABD	FCWB0080*
2252	뒼	974C	8ABE	FCWC0080*
2253	뒼	974D	8ABF	FCWD0080*
2254	뒼	974E	8AC0	FCWE0080*
2255	뒼	974F	8AC1	FCWF0080*
2256	뒼	9750	8AC2	FCWG0080*
2257	뒼	9751	B5E3	FCWH0080
2258	뒼	9753	8AC3	FCWJ0080*
2259	뒼	9754	8AC4	FCWK0080*
2260	뒼	9755	8AC5	FCWL0080*
2261	뒼	9756	8AC6	FCWM0080*
2262	뒼	9757	B5E4	FCWN0080
2263	뒼	9758	8AC7	FCWO0080*
2264	뒼	9759	8AC8	FCWP0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 8 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2265	득	975A	8AC9	FCWQ0080*
2266	들	975B	8ACA	FCWR0080*
2267	똥	975C	8ACB	FCWS0080*
2268	똥	975D	8ACC	FCWT0080*
2269	드	9761	B5E5	FCWX0080
2270	득	9762	B5E6	FCWY0080
2271	득	9763	8ACD	FCWZ0080*
2272	들	9764	8ACE	FCX00080*
2273	든	9765	B5E7	FCX10080
2274	들	9766	8ACF	FCX20080*
2275	들	9767	8AD0	FCX30080*
2276	든	9768	B5E8	FCX40080
2277	들	9769	B5E9	FCX50080
2278	들	976A	8AD1	FCX60080*
2279	들	976B	B5EA	FCX70080
2280	들	976C	8AD2	FCX80080
2281	들	976D	8AD3	FCX90080*
2282	들	976E	8AD4	FCXA0080*
2283	들	976F	8AD5	FCXB0080*
2284	들	9770	8AD6	FCXC0080*
2285	듬	9771	B5EB	FCXD0080
2286	듬	9773	B5EC	FCXF0080
2287	들	9774	8AD7	FCXG0080*
2288	들	9775	B5ED	FCXH0080
2289	들	9776	8AD8	FCXI0080*
2290	등	9777	B5EE	FCXJ0080

Table 14 (Page 8 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2291	들	9778	8AD9	FCXK0080*
2292	들	9779	8ADA	FCXL0080*
2293	들	977A	8ADB	FCXM0080*
2294	들	977B	8ADC	FCXN0080*
2295	들	977C	8ADD	FCXO0080*
2296	들	977D	8ADE	FCXP0080*
2297	디	9781	B5EF	FCXT0080
2298	딕	9782	8ADF	FCXU0080*
2299	뒤	9783	8AE0	FCXV0080*
2300	딕	9784	8AE1	FCXW0080*
2301	딘	9785	8AE2	FCXX0080*
2302	들	9786	8AE3	FCXY0080*
2303	들	9787	8AE4	FCXZ0080*
2304	린	9788	8AE5	FCY00080*
2305	린	9789	8AE6	FCY10080*
2306	릭	978A	8AE7	FCY20080*
2307	림	978B	8AE8	FCY30080*
2308	림	978C	8AE9	FCY40080*
2309	림	978D	8AEA	FCY50080*
2310	림	978E	8AEB	FCY60080*
2311	림	978F	8AEC	FCY70080*
2312	림	9790	8AED	FCY80080*
2313	뒤	9791	8AEE	FCY90080*
2314	림	9793	8AEF	FCYB0080*
2315	림	9794	8AF0	FCYC0080*
2316	림	9795	8AF1	FCYD0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2317	뵘	9796	8AF2	FCYE0080*
2318	뵙	9797	8AF3	FCYF0080*
2319	뵚	9798	8AF4	FCYG0080*
2320	뵛	9799	8AF5	FCYH0080*
2321	뵜	979A	8AF6	FCYI0080*
2322	뵝	979B	8AF7	FCYJ0080*
2323	뵞	979C	8AF8	FCYK0080*
2324	뵟	979D	8AF9	FCYL0080*
2325	디	97A1	B5F0	FCYP0080
2326	딀	97A2	B5F1	FCYQ0080
2327	딁	97A3	8AFA	FCYR0080*
2328	딂	97A4	8AFB	FCYS0080*
2329	딘	97A5	B5F2	FCYT0080
2330	딄	97A6	8AFC	FCYU0080*
2331	딅	97A7	8AFD	FCYV0080*
2332	딆	97A8	B5F3	FCYW0080
2333	딇	97A9	B5F4	FCYX0080
2334	딈	97AA	8AFE	FCYY0080*
2335	딉	97AB	8B41	FCYZ0080*
2336	딊	97AC	8B42	FCZ00080*
2337	딋	97AD	8B43	FCZ10080*
2338	딌	97AE	8B44	FCZ20080*
2339	딍	97AF	8B45	FCZ30080*
2340	딎	97B0	8B46	FCZ40080*
2341	딏	97B1	B5F5	FCZ50080
2342	딐	97B3	B5F6	FCZ70080

Table 14 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2343	딑	97B4	8B47	FCZ80080*
2344	딒	97B5	B5F7	FCZ90080
2345	딓	97B6	B5F8	FCZA0080
2346	디	97B7	B5F9	FCZB0080
2347	딕	97B8	B5FA	FCZC0080
2348	딖	97B9	8B48	FCZD0080*
2349	딗	97BA	8B49	FCZE0080*
2350	딘	97BB	8B4A	FCZF0080*
2351	딙	97BC	8B4B	FCZG0080
2352	딚	97BD	8B4C	FCZH0080*
2353	따	9861	B5FB	FD290080
2354	탁	9862	B5FC	FD2A0080
2355	탁	9863	8B4D	FD2B0080
2356	탣	9864	8B4E	FD2C0080*
2357	탄	9865	B5FD	FD2D0080
2358	탤	9866	8B4F	FD2E0080*
2359	탦	9867	8B50	FD2F0080*
2360	탧	9868	8B51	FD2G0080
2361	탨	9869	B5FE	FD2H0080
2362	탩	986A	8B52	FD2I0080*
2363	탪	986B	8B53	FD2J0080*
2364	탫	986C	8B54	FD2K0080*
2365	탬	986D	8B55	FD2L0080*
2366	탮	986E	8B56	FD2M0080*
2367	탯	986F	8B57	FD2N0080*
2368	탰	9870	8B58	FD2O0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 10 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2369	땀	9871	B6A1	FD2P0080
2370	땡	9873	B6A2	FD2R0080
2371	땢	9874	8B59	FD2S0080*
2372	땣	9875	B6A3	FD2T0080
2373	땤	9876	B6A4	FD2U0080
2374	땥	9877	B6A5	FD2V0080
2375	땦	9878	8B5A	FD2W0080*
2376	땧	9879	8B61	FD2X0080*
2377	땨	987A	8B62	FD2Y0080*
2378	땩	987B	8B63	FD2Z0080*
2379	땪	987C	8B64	FD300080*
2380	땫	987D	B6A6	FD310080
2381	땬	9881	B6A7	FD350080
2382	땭	9882	B6A8	FD360080
2383	땮	9883	8B65	FD370080*
2384	땯	9884	8B66	FD380080*
2385	땰	9885	B6A9	FD390080
2386	땱	9886	8B67	FD3A0080*
2387	땲	9887	8B68	FD3B0080*
2388	땳	9888	8B69	FD3C0080*
2389	땴	9889	B6AA	FD3D0080
2390	땵	988A	8B6A	FD3E0080*
2391	땶	988B	8B6B	FD3F0080*
2392	땷	988C	8B6C	FD3G0080*
2393	땸	988D	8B6D	FD3H0080*
2394	땹	988E	8B6E	FD3I0080*

Table 14 (Page 10 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2395	땺	988F	8B6F	FD3J0080*
2396	땻	9890	8B70	FD3K0080*
2397	땼	9891	B6AB	FD3L0080
2398	땽	9893	B6AC	FD3N0080
2399	땾	9894	8B71	FD3O0080*
2400	땿	9895	B6AD	FD3P0080
2401	떀	9896	B6AE	FD3Q0080
2402	떁	9897	B6AF	FD3R0080
2403	떂	9898	8B72	FD3S0080*
2404	떃	9899	8B73	FD3T0080*
2405	떄	989A	8B74	FD3U0080*
2406	떅	989B	8B75	FD3V0080*
2407	떆	989C	8B76	FD3W0080*
2408	떇	989D	8B77	FD3X0080*
2409	떈	98A1	8B78	FD410080
2410	떉	98A2	8B79	FD420080*
2411	떊	98A3	8B7A	FD430080*
2412	떋	98A4	8B81	FD440080*
2413	떌	98A5	8B82	FD450080*
2414	떍	98A6	8B83	FD460080*
2415	떍	98A7	8B84	FD470080*
2416	떎	98A8	8B85	FD480080*
2417	떏	98A9	8B86	FD490080*
2418	떑	98AA	8B87	FD4A0080*
2419	떒	98AB	8B88	FD4B0080*
2420	떓	98AC	8B89	FD4C0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 11 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2421	꺄	98AD	8B8A	FD4D0080*
2422	꺅	98AE	8B8B	FD4E0080*
2423	꺆	98AF	8B8C	FD4F0080*
2424	꺇	98B0	8B8D	FD4G0080*
2425	꺈	98B1	8B8E	FD4H0080*
2426	꺉	98B3	8B8F	FD4J0080*
2427	꺊	98B4	8B90	FD4K0080*
2428	꺋	98B5	8B91	FD4L0080*
2429	꺌	98B6	8B92	FD4M0080*
2430	꺍	98B7	8B93	FD4N0080*
2431	꺎	98B8	8B94	FD4O0080*
2432	꺏	98B9	8B95	FD4P0080*
2433	꺐	98BA	8B96	FD4Q0080*
2434	꺑	98BB	8B97	FD4R0080*
2435	꺒	98BC	8B98	FD4S0080*
2436	꺓	98BD	8B99	FD4T0080*
2437	꺔	98C1	8B9A	FD4X0080
2438	꺕	98C2	8B9B	FD4Y0080*
2439	꺖	98C3	8B9C	FD4Z0080*
2440	꺗	98C4	8B9D	FD500080*
2441	꺘	98C5	8B9E	FD510080*
2442	꺙	98C6	8B9F	FD520080*
2443	꺚	98C7	8BA0	FD530080*
2444	꺛	98C8	8BA1	FD540080*
2445	꺜	98C9	8BA2	FD550080*
2446	꺝	98CA	8BA3	FD560080*

Table 14 (Page 11 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2447	꺞	98CB	8BA4	FD570080*
2448	꺟	98CC	8BA5	FD580080*
2449	꺠	98CD	8BA6	FD590080*
2450	꺡	98CE	8BA7	FD5A0080*
2451	꺢	98CF	8BA8	FD5B0080*
2452	꺣	98D0	8BA9	FD5C0080*
2453	꺤	98D1	8BAA	FD5D0080*
2454	꺥	98D3	8BAB	FD5F0080*
2455	꺦	98D4	8BAC	FD5G0080*
2456	꺧	98D5	8BAD	FD5H0080*
2457	꺨	98D6	8BAE	FD5I0080*
2458	꺩	98D7	8BAF	FD5J0080*
2459	꺪	98D8	8BB0	FD5K0080*
2460	꺫	98D9	8BB1	FD5L0080*
2461	꺬	98DA	8BB2	FD5M0080*
2462	꺭	98DB	8BB3	FD5N0080*
2463	꺮	98DC	8BB4	FD5O0080*
2464	꺯	98DD	8BB5	FD5P0080*
2465	꺰	98E1	B6B0	FD5T0080
2466	꺱	98E2	B6B1	FD5U0080
2467	꺲	98E3	8BB6	FD5V0080*
2468	꺳	98E4	8BB7	FD5W0080*
2469	꺴	98E5	B6B2	FD5X0080
2470	꺵	98E6	8BB8	FD5Y0080*
2471	꺶	98E7	8BB9	FD5Z0080*
2472	꺷	98E8	8BBA	FD600080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 12 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2473	떨	98E9	B6B3	FD610080
2474	떨	98EA	8BBB	FD620080*
2475	떨	98EB	B6B4	FD630080
2476	떨	98EC	B6B5	FD640080
2477	떨	98ED	8BBC	FD650080*
2478	떨	98EE	8BBB	FD660080*
2479	떨	98EF	8BBE	FD670080*
2480	떨	98F0	8BBF	FD680080*
2481	떨	98F1	B6B6	FD690080
2482	떨	98F3	B6B7	FD6B0080
2483	떨	98F4	8BC0	FD6C0080*
2484	떨	98F5	B6B8	FD6D0080
2485	떨	98F6	B6B9	FD6E0080
2486	떨	98F7	B6BA	FD6F0080
2487	떨	98F8	8BC1	FD6G0080*
2488	떨	98F9	8BC2	FD6H0080*
2489	떨	98FA	8BC3	FD6I0080*
2490	떨	98FB	8BC4	FD6J0080*
2491	떨	98FC	8BC5	FD6K0080*
2492	떨	98FD	B6BB	FD6L0080
2493	떨	9941	B6BC	FD6P0080
2494	떨	9942	B6BD	FD6Q0080
2495	떨	9943	8BC6	FD6R0080*
2496	떨	9944	8BC7	FD6S0080*
2497	떨	9945	B6BE	FD6T0080
2498	떨	9946	8BC8	FD6U0080*

Table 14 (Page 12 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2499	떨	9947	8BC9	FD6V0080*
2500	떨	9948	8BCA	FD6W0080*
2501	떨	9949	B6BF	FD6X0080
2502	떨	994A	8BCB	FD6Y0080*
2503	떨	994B	8BCC	FD6Z0080*
2504	떨	994C	8BCD	FD700080*
2505	떨	994D	8BCE	FD710080*
2506	떨	994E	8BCF	FD720080*
2507	떨	994F	8BD0	FD730080*
2508	떨	9950	8BD1	FD740080*
2509	떨	9951	B6C0	FD750080
2510	떨	9953	B6C1	FD770080
2511	떨	9954	8BD2	FD780080*
2512	떨	9955	B6C2	FD790080
2513	떨	9956	B6C3	FD7A0080
2514	떨	9957	B6C4	FD7B0080
2515	떨	9958	8BD3	FD7C0080*
2516	떨	9959	8BD4	FD7D0080*
2517	떨	995A	8BD5	FD7E0080*
2518	떨	995B	8BD6	FD7F0080*
2519	떨	995C	8BD7	FD7G0080*
2520	떨	995D	8BD8	FD7H0080*
2521	떨	9961	B6C5	FD7L0080
2522	떨	9962	8BD9	FD7M0080*
2523	떨	9963	8BDA	FD7N0080*
2524	떨	9964	8BDB	FD7O0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2525	편	9965	8BDC	FD7P0080*
2526	뻬	9966	8BDD	FD7Q0080*
2527	뻬	9967	8BDE	FD7R0080*
2528	편	9968	8BDF	FD7S0080*
2529	뻬	9969	8BE0	FD7T0080*
2530	뻬	996A	8BE1	FD7U0080*
2531	뻬	996B	8BE2	FD7V0080*
2532	뻬	996C	8BE3	FD7W0080*
2533	뻬	996D	8BE4	FD7X0080*
2534	뻬	996E	8BE5	FD7Y0080*
2535	뻬	996F	8BE6	FD7Z0080*
2536	뻬	9970	8BE7	FD800080*
2537	뻬	9971	8BE8	FD810080*
2538	뻬	9973	8BE9	FD830080*
2539	뻬	9974	8BEA	FD840080*
2540	뻬	9975	8BEB	FD850080*
2541	뻬	9976	B6C6	FD860080
2542	뻬	9977	8BEC	FD870080*
2543	뻬	9978	8BED	FD880080*
2544	뻬	9979	8BEE	FD890080*
2545	뻬	997A	8BEF	FD8A0080*
2546	뻬	997B	8BF0	FD8B0080*
2547	뻬	997C	8BF1	FD8C0080*
2548	뻬	997D	8BF2	FD8D0080*
2549	뻬	9981	8BF3	FD8H0080
2550	뻬	9982	8BF4	FD8I0080*

Table 14 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2551	뻬	9983	8BF5	FD8J0080*
2552	뻬	9984	8BF6	FD8K0080*
2553	뻬	9985	8BF7	FD8L0080*
2554	뻬	9986	8BF8	FD8M0080*
2555	뻬	9987	8BF9	FD8N0080*
2556	뻬	9988	8BFA	FD8O0080*
2557	뻬	9989	8BFB	FD8P0080*
2558	뻬	998A	8BFC	FD8Q0080*
2559	뻬	998B	8BFD	FD8R0080*
2560	뻬	998C	8BFE	FD8S0080*
2561	뻬	998D	8C41	FD8T0080*
2562	뻬	998E	8C42	FD8U0080*
2563	뻬	998F	8C43	FD8V0080*
2564	뻬	9990	8C44	FD8W0080*
2565	뻬	9991	8C45	FD8X0080*
2566	뻬	9993	8C46	FD8Z0080*
2567	뻬	9994	8C47	FD900080*
2568	뻬	9995	8C48	FD910080*
2569	뻬	9996	8C49	FD920080*
2570	뻬	9997	8C4A	FD930080*
2571	뻬	9998	8C4B	FD940080*
2572	뻬	9999	8C4C	FD950080*
2573	뻬	999A	8C4D	FD960080*
2574	뻬	999B	8C4E	FD970080*
2575	뻬	999C	8C4F	FD980080*
2576	뻬	999D	8C50	FD990080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2577	또	99A1	B6C7	FD9D0080
2578	똑	99A2	B6C8	FD9E0080
2579	뚜	99A3	8C51	FD9F0080*
2580	뚫	99A4	8C52	FD9G0080*
2581	뚸	99A5	B6C9	FD9H0080
2582	뚹	99A6	8C53	FD9I0080*
2583	뚺	99A7	8C54	FD9J0080*
2584	뚻	99A8	8C55	FD9K0080*
2585	뚼	99A9	B6CA	FD9L0080
2586	뚽	99AA	8C56	FD9M0080*
2587	뚾	99AB	8C57	FD9N0080*
2588	뚿	99AC	8C58	FD9O0080*
2589	뛀	99AD	8C59	FD9P0080*
2590	뛁	99AE	8C5A	FD9Q0080*
2591	뛂	99AF	8C61	FD9R0080*
2592	뛃	99B0	8C62	FD9S0080*
2593	뛄	99B1	8C63	FD9T0080*
2594	뛅	99B3	8C64	FD9V0080*
2595	뛆	99B4	8C65	FD9W0080*
2596	뛇	99B5	8C66	FD9X0080*
2597	뛈	99B6	8C67	FD9Y0080*
2598	뛉	99B7	B6CB	FD9Z0080
2599	뛊	99B8	8C68	FDA00080*
2600	뛋	99B9	8C69	FDA10080*
2601	뛌	99BA	8C6A	FDA20080*
2602	뛍	99BB	8C6B	FDA30080*

Table 14 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2603	뛎	99BC	8C6C	FDA40080*
2604	뛏	99BD	8C6D	FDA50080*
2605	뛐	99C1	B6CC	FDA90080
2606	뛑	99C2	8C6E	FDAA0080*
2607	뛒	99C3	8C6F	FDAB0080*
2608	뛓	99C4	8C70	FDAC0080*
2609	뛔	99C5	8C71	FDAD0080*
2610	뛕	99C6	8C72	FDAE0080*
2611	뛖	99C7	8C73	FDAF0080*
2612	뛗	99C8	8C74	FDAG0080*
2613	뛘	99C9	B6CD	FDAH0080
2614	뛙	99CA	8C75	FDAI0080*
2615	뛚	99CB	8C76	FDAJ0080*
2616	뛛	99CC	8C77	FDAK0080*
2617	뛜	99CD	8C78	FDAL0080*
2618	뛝	99CE	8C79	FDAM0080*
2619	뛞	99CF	8C7A	FDAN0080*
2620	뛟	99D0	8C81	FDAO0080*
2621	뛠	99D1	8C82	FDAP0080*
2622	뛡	99D3	8C83	FDAR0080*
2623	뛢	99D4	8C84	FDAS0080*
2624	뛣	99D5	8C85	FDAT0080*
2625	뛤	99D6	8C86	FDAU0080*
2626	뛥	99D7	8C87	FDAV0080*
2627	뛦	99D8	8C88	FDAW0080*
2628	뛧	99D9	8C89	FDAX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 15 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2629	뜩	99DA	8C8A	FDAY0080*
2630	뜰	99DB	8C8B	FDAZ0080*
2631	뜱	99DC	8C8C	FDB00080*
2632	뜲	99DD	8C8D	FDB10080*
2633	뜳	99E1	B6CE	FDB50080
2634	뜴	99E2	8C8E	FDB60080*
2635	뜵	99E3	8C8F	FDB70080*
2636	뜶	99E4	8C90	FDB80080*
2637	뜷	99E5	8C91	FDB90080*
2638	뜸	99E6	8C92	FDBA0080*
2639	뜹	99E7	8C93	FDBB0080*
2640	뜺	99E8	8C94	FDBC0080*
2641	뜻	99E9	8C95	FDBD0080*
2642	뜼	99EA	8C96	FDBE0080*
2643	뜽	99EB	8C97	FDBF0080*
2644	뜾	99EC	8C98	FDBG0080*
2645	뜿	99ED	8C99	FDBH0080*
2646	쯀	99EE	8C9A	FDBI0080*
2647	쯁	99EF	8C9B	FDBJ0080*
2648	쯂	99F0	8C9C	FDBK0080*
2649	쯃	99F1	8C9D	FDBL0080*
2650	쯄	99F3	8C9E	FDBN0080*
2651	쯅	99F4	8C9F	FDBO0080*
2652	쯆	99F5	8CA0	FDBP0080*
2653	쯇	99F6	8CA1	FDBQ0080*
2654	쯈	99F7	8CA2	FDBR0080*

Table 14 (Page 15 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2655	쯉	99F8	8CA3	FDBS0080*
2656	쯊	99F9	8CA4	FDBT0080*
2657	쯋	99FA	8CA5	FDBU0080*
2658	쯌	99FB	8CA6	FDBV0080*
2659	쯍	99FC	8CA7	FDBW0080*
2660	쯎	99FD	8CA8	FDBX0080*
2661	쯏	9A41	B6CF	FDC10080
2662	쯐	9A42	8CA9	FDC20080*
2663	쯑	9A43	8CAA	FDC30080*
2664	쯒	9A44	8CAB	FDC40080*
2665	쯓	9A45	B6D0	FDC50080
2666	쯔	9A46	8CAC	FDC60080*
2667	쯕	9A47	8CAD	FDC70080*
2668	쯖	9A48	8CAE	FDC80080*
2669	쯗	9A49	8CAF	FDC90080*
2670	쯘	9A4A	8CB0	FDCA0080*
2671	쯙	9A4B	8CB1	FDCB0080*
2672	쯚	9A4C	8CB2	FDCC0080*
2673	쯛	9A4D	8CB3	FDCD0080*
2674	쯜	9A4E	8CB4	FDCE0080*
2675	쯝	9A4F	8CB5	FDCF0080*
2676	쯞	9A50	8CB6	FDCG0080*
2677	쯟	9A51	8CB7	FDCH0080*
2678	쯠	9A53	8CB8	FDCJ0080*
2679	쯡	9A54	8CB9	FDCK0080*
2680	쯢	9A55	8CBA	FDCL0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 16 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2681	궏	9A56	8CBB	FDCM0080*
2682	궑	9A57	8CBC	FDCN0080*
2683	궒	9A58	8CBD	FDCO0080*
2684	궓	9A59	8CBE	FDCP0080*
2685	궔	9A5A	8CBF	FDCQ0080*
2686	궕	9A5B	8CC0	FDCR0080*
2687	궖	9A5C	8CC1	FDCS0080*
2688	궗	9A5D	8CC2	FDCT0080*
2689	궘	9A61	8CC3	FDCX0080
2690	궙	9A62	8CC4	FDCY0080*
2691	궚	9A63	8CC5	FDCZ0080*
2692	궛	9A64	8CC6	FDD00080*
2693	궜	9A65	8CC7	FDD10080*
2694	궝	9A66	8CC8	FDD20080*
2695	궞	9A67	8CC9	FDD30080*
2696	궟	9A68	8CCA	FDD40080*
2697	궠	9A69	8CCB	FDD50080*
2698	궡	9A6A	8CCC	FDD60080*
2699	궢	9A6B	8CCD	FDD70080*
2700	궣	9A6C	8CCE	FDD80080*
2701	궤	9A6D	8CCF	FDD90080*
2702	궥	9A6E	8CD0	FDDA0080*
2703	궦	9A6F	8CD1	FDDB0080*
2704	궧	9A70	8CD2	FDDC0080*
2705	궨	9A71	8CD3	FDDD0080*
2706	궩	9A73	8CD4	FDDF0080*

Table 14 (Page 16 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2707	궪	9A74	8CD5	FDDG0080*
2708	궫	9A75	8CD6	FDDH0080*
2709	궬	9A76	8CD7	FDDI0080*
2710	궭	9A77	8CD8	FDDJ0080*
2711	궮	9A78	8CD9	FDDK0080*
2712	궯	9A79	8CDA	FDDL0080*
2713	궰	9A7A	8CDB	FDDM0080*
2714	궱	9A7B	8CDC	FDDN0080*
2715	궲	9A7C	8CDD	FDDO0080*
2716	궳	9A7D	8CDE	FDDP0080*
2717	궴	9A81	B6D1	FDDT0080
2718	궵	9A82	B6D2	FDDU0080
2719	궶	9A83	8CDF	FDDV0080*
2720	궷	9A84	8CE0	FDDW0080*
2721	궸	9A85	B6D3	FDDX0080
2722	궹	9A86	8CE1	FDDY0080*
2723	궺	9A87	8CE2	FDDZ0080*
2724	궻	9A88	8CE3	FDE00080*
2725	궼	9A89	B6D4	FDE10080
2726	궽	9A8A	8CE4	FDE20080*
2727	궾	9A8B	8CE5	FDE30080*
2728	궿	9A8C	8CE6	FDE40080*
2729	귀	9A8D	8CE7	FDE50080*
2730	귁	9A8E	8CE8	FDE60080*
2731	귂	9A8F	8CE9	FDE70080*
2732	귃	9A90	B6D5	FDE80080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 17 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2733	뚬	9A91	B6D6	FDE90080
2734	뚭	9A93	8CEA	FDEB0080*
2735	뚮	9A94	8CEB	FDEC0080*
2736	뚯	9A95	8CEC	FDED0080*
2737	뚰	9A96	8CED	FDEE0080*
2738	뚱	9A97	B6D7	FDEF0080
2739	뚲	9A98	8CEE	FDEG0080*
2740	뚳	9A99	8CEF	FDEH0080*
2741	뚴	9A9A	8CF0	FDEI0080*
2742	뚵	9A9B	8CF1	FDEJ0080*
2743	뚶	9A9C	8CF2	FDEK0080*
2744	뚷	9A9D	8CF3	FDEL0080*
2745	뚸	9AA1	8CF4	FDEP0080
2746	뚹	9AA2	8CF5	FDEQ0080*
2747	뚺	9AA3	8CF6	FDER0080*
2748	뚻	9AA4	8CF7	FDES0080*
2749	뚼	9AA5	8CF8	FDET0080*
2750	뚽	9AA6	8CF9	FDEU0080*
2751	뚾	9AA7	8CFA	FDEV0080*
2752	뚿	9AA8	8CFB	FDEW0080*
2753	뛀	9AA9	8CFC	FDEX0080*
2754	뛁	9AAA	8CFD	FDEY0080*
2755	뛂	9AAB	8CFE	FDEZ0080*
2756	뛃	9AAC	8D41	FDF00080*
2757	뛄	9AAD	8D42	FDF10080*
2758	뛅	9AAE	8D43	FDF20080*

Table 14 (Page 17 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2759	뛆	9AAF	8D44	FDF30080*
2760	뛇	9AB0	8D45	FDF40080*
2761	뛈	9AB1	8D46	FDF50080*
2762	뛉	9AB3	8D47	FDF70080*
2763	뛊	9AB4	8D48	FDF80080*
2764	뛋	9AB5	8D49	FDF90080*
2765	뛌	9AB6	8D4A	F DFA0080*
2766	뛍	9AB7	8D4B	FDFB0080*
2767	뛎	9AB8	8D4C	FDFC0080*
2768	뛏	9AB9	8D4D	FDFD0080*
2769	뛐	9ABA	8D4E	FDFE0080*
2770	뛑	9ABB	8D4F	FDF F0080*
2771	뛒	9ABC	8D50	FDFG0080*
2772	뛓	9ABD	8D51	FDFH0080*
2773	뛔	9AC1	B6D8	FDFL0080
2774	뛕	9AC2	8D52	FDFM0080*
2775	뛖	9AC3	8D53	FDFN0080*
2776	뛗	9AC4	8D54	FDFO0080*
2777	뛘	9AC5	8D55	FDFP0080*
2778	뛙	9AC6	8D56	FDFQ0080*
2779	뛚	9AC7	8D57	FDFR0080*
2780	뛛	9AC8	8D58	FDFS0080*
2781	뛜	9AC9	8D59	FDF T0080*
2782	뛝	9ACA	8D5A	FDFU0080*
2783	뛞	9ACB	8D61	FDFV0080*
2784	뛟	9ACC	8D62	FDFW0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2785	꺾	9ACD	8D63	FDFX0080*
2786	꺾	9ACE	8D64	FDFY0080*
2787	꺾	9ACF	8D65	FDFZ0080*
2788	꺾	9AD0	8D66	FDG00080*
2789	꺾	9AD1	8D67	FDG10080*
2790	꺾	9AD3	8D68	FDG30080*
2791	꺾	9AD4	8D69	FDG40080*
2792	꺾	9AD5	8D6A	FDG50080*
2793	꺾	9AD6	8D6B	FDG60080*
2794	꺾	9AD7	8D6C	FDG70080*
2795	꺾	9AD8	8D6D	FDG80080*
2796	꺾	9AD9	8D6E	FDG90080*
2797	꺾	9ADA	8D6F	FDGA0080*
2798	꺾	9ADB	8D70	FDGB0080*
2799	꺾	9ADC	8D71	FDGC0080*
2800	꺾	9ADD	8D72	FDGD0080*
2801	꺾	9AE1	B6D9	FDGH0080
2802	꺾	9AE2	8D73	FDGI0080*
2803	꺾	9AE3	8D74	FDGJ0080*
2804	꺾	9AE4	8D75	FDGK0080*
2805	꺾	9AE5	B6DA	FDGL0080
2806	꺾	9AE6	8D76	FDGM0080*
2807	꺾	9AE7	8D77	FDGN0080*
2808	꺾	9AE8	8D78	FDGO0080*
2809	꺾	9AE9	B6DB	FDGP0080
2810	꺾	9AEA	8D79	FDGQ0080*

Table 14 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2811	꺾	9AEB	8D7A	FDGR0080*
2812	꺾	9AEC	8D81	FDGS0080*
2813	꺾	9AED	8D82	FDGT0080*
2814	꺾	9AEE	8D83	FDGU0080*
2815	꺾	9AEF	8D84	FDGV0080*
2816	꺾	9AF0	8D85	FDGW0080*
2817	꺾	9AF1	B6DC	FDGX0080
2818	꺾	9AF3	B6DD	FDGZ0080
2819	꺾	9AF4	8D86	FDH00080*
2820	꺾	9AF5	8D87	FDH10080*
2821	꺾	9AF6	8D88	FDH20080*
2822	꺾	9AF7	B6DE	FDH30080
2823	꺾	9AF8	8D89	FDH40080*
2824	꺾	9AF9	8D8A	FDH50080*
2825	꺾	9AFA	8D8B	FDH60080*
2826	꺾	9AFB	8D8C	FDH70080*
2827	꺾	9AFC	8D8D	FDH80080*
2828	꺾	9AFD	8D8E	FDH90080*
2829	꺾	9B41	8D8F	FDHD0080
2830	꺾	9B42	8D90	FDHE0080*
2831	꺾	9B43	8D91	FDHF0080*
2832	꺾	9B44	8D92	FDHG0080*
2833	꺾	9B45	8D93	FDHH0080*
2834	꺾	9B46	8D94	FDHI0080*
2835	꺾	9B47	8D95	FDHJ0080*
2836	꺾	9B48	8D96	FDHK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 19 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2837	뜰	9B49	8D97	FDHL0080*
2838	뜱	9B4A	8D98	FDHM0080*
2839	뜲	9B4B	8D99	FDHN0080*
2840	뜳	9B4C	8D9A	FDHO0080*
2841	뜴	9B4D	8D9B	FDHP0080*
2842	뜵	9B4E	8D9C	FDHQ0080*
2843	뜶	9B4F	8D9D	FDHR0080*
2844	뜷	9B50	8D9E	FDHS0080*
2845	뜸	9B51	8D9F	FDHT0080*
2846	뜹	9B53	8DA0	FDHV0080*
2847	뜺	9B54	8DA1	FDHW0080*
2848	뜻	9B55	8DA2	FDHX0080*
2849	뜼	9B56	8DA3	FDHY0080*
2850	뜽	9B57	8DA4	FDHZ0080*
2851	뜾	9B58	8DA5	FDI00080*
2852	뜿	9B59	8DA6	FDI10080*
2853	뜿	9B5A	8DA7	FDI20080*
2854	뜿	9B5B	8DA8	FDI30080*
2855	뜿	9B5C	8DA9	FDI40080*
2856	뜿	9B5D	8DAA	FDI50080*
2857	뜨	9B61	B6DF	FDI90080
2858	뜽	9B62	B6E0	FDIA0080
2859	뜿	9B63	8DAB	FDIB0080*
2860	뜿	9B64	8DAC	FDIC0080*
2861	뜿	9B65	B6E1	FDID0080
2862	뜿	9B66	8DAD	FDIE0080*

Table 14 (Page 19 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2863	뜿	9B67	8DAE	FDIF0080*
2864	뜿	9B68	B6E2	FDIG0080
2865	뜿	9B69	B6E3	FDIH0080
2866	뜿	9B6A	8DAF	FDII0080*
2867	뜿	9B6B	8DB0	FDIJ0080*
2868	뜿	9B6C	8DB1	FDIK0080*
2869	뜿	9B6D	8DB2	FDIL0080*
2870	뜿	9B6E	8DB3	FDIM0080*
2871	뜿	9B6F	8DB4	FDIN0080*
2872	뜿	9B70	8DB5	FDIO0080*
2873	뜿	9B71	B6E4	FDIP0080
2874	뜿	9B73	B6E5	FDIR0080
2875	뜿	9B74	8DB6	FDIS0080*
2876	뜿	9B75	B6E6	FDIT0080
2877	뜿	9B76	8DB7	FDIU0080*
2878	뜿	9B77	8DB8	FDIV0080*
2879	뜿	9B78	8DB9	FDIW0080*
2880	뜿	9B79	8DBA	FDIX0080*
2881	뜿	9B7A	8DBB	FDIY0080*
2882	뜿	9B7B	8DBC	FDIZ0080*
2883	뜿	9B7C	8DBD	FDJ00080*
2884	뜿	9B7D	8DBE	FDJ10080*
2885	뜿	9B81	B6E7	FDJ50080
2886	뜿	9B82	8DBF	FDJ60080*
2887	뜿	9B83	8DC0	FDJ70080*
2888	뜿	9B84	8DC1	FDJ80080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2889	편	9B85	B6E8	FDJ90080
2890	뵈	9B86	8DC2	FDJA0080*
2891	뵉	9B87	8DC3	FDJB0080*
2892	뵊	9B88	8DC4	FDJC0080*
2893	뵋	9B89	B6E9	FDJD0080
2894	뵌	9B8A	8DC5	FDJE0080*
2895	뵍	9B8B	8DC6	FDJF0080*
2896	뵑	9B8C	8DC7	FDJG0080*
2897	뵒	9B8D	8DC8	FDJH0080*
2898	뵓	9B8E	8DC9	FDJI0080*
2899	뵔	9B8F	8DCA	FDJJ0080*
2900	뵕	9B90	8DCB	FDJK0080*
2901	뵖	9B91	B6EA	FDJL0080
2902	뵗	9B93	B6EB	FDJN0080
2903	뵘	9B94	8DCC	FDJO0080*
2904	뵙	9B95	8DCD	FDJP0080*
2905	뵚	9B96	8DCE	FDJQ0080*
2906	뵛	9B97	8DCF	FDJR0080*
2907	뵜	9B98	8DD0	FDJS0080*
2908	뵝	9B99	8DD1	FDJT0080*
2909	뵞	9B9A	8DD2	FDJU0080*
2910	뵟	9B9B	8DD3	FDJV0080*
2911	뵠	9B9C	8DD4	FDJW0080*
2912	뵡	9B9D	8DD5	FDJX0080*
2913	뵢	9BA1	B6EC	FDK10080
2914	뵣	9BA2	8DD6	FDK20080*

Table 14 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2915	뵤	9BA3	8DD7	FDK30080*
2916	뵥	9BA4	8DD8	FDK40080*
2917	뵦	9BA5	B6ED	FDK50080
2918	뵧	9BA6	8DD9	FDK60080*
2919	뵨	9BA7	8DDA	FDK70080*
2920	뵩	9BA8	8ddb	FDK80080*
2921	뵪	9BA9	B6EE	FDK90080
2922	뵫	9BAA	8DDC	FDKA0080*
2923	뵬	9BAB	8DDD	FDKB0080*
2924	뵭	9BAC	8DDE	FDKC0080*
2925	뵮	9BAD	8DDF	FDKD0080*
2926	뵯	9BAE	8DE0	FDKE0080*
2927	뵰	9BAF	8DE1	FDKF0080*
2928	뵱	9BB0	8DE2	FDKG0080*
2929	뵲	9BB1	B6EF	FDKH0080
2930	뵳	9BB3	B6F0	FDKJ0080
2931	뵴	9BB4	8DE3	FDKK0080*
2932	뵵	9BB5	B6F1	FDKL0080
2933	뵶	9BB6	8DE4	FDKM0080*
2934	뵷	9BB7	B6F2	FDKN0080
2935	뵸	9BB8	8DE5	FDKO0080*
2936	뵹	9BB9	8DE6	FDKP0080*
2937	뵺	9BBA	8DE7	FDKQ0080*
2938	뵻	9BBB	8DE8	FDKR0080*
2939	뵼	9BBC	8DE9	FDKS0080*
2940	뵽	9BBD	8DEA	FDKT0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 21 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2941	라	9C61	B6F3	FDNL0080
2942	락	9C62	B6F4	FDNM0080
2943	랏	9C63	8DEB	FDNN0080*
2944	랠	9C64	8DEC	FDNO0080*
2945	란	9C65	B6F5	FDNP0080
2946	랡	9C66	8DED	FDNQ0080*
2947	랢	9C67	8DEE	FDNR0080*
2948	랣	9C68	8DEF	FDNS0080*
2949	랄	9C69	B6F6	FDNT0080
2950	랤	9C6A	8DF0	FDNU0080*
2951	랦	9C6B	8DF1	FDNV0080*
2952	랧	9C6C	8DF2	FDNW0080*
2953	램	9C6D	8DF3	FDNX0080*
2954	랩	9C6E	8DF4	FDNY0080*
2955	랪	9C6F	8DF5	FDNZ0080*
2956	랫	9C70	8DF6	FDO00080*
2957	람	9C71	B6F7	FDO10080
2958	랬	9C73	B6F8	FDO30080
2959	랭	9C74	8DF7	FDO40080*
2960	랱	9C75	B6F9	FDO50080
2961	랲	9C76	B6FA	FDO60080
2962	랑	9C77	B6FB	FDO70080
2963	랴	9C78	B6FC	FDO80080
2964	략	9C79	8DF8	FDO90080*
2965	랶	9C7A	8DF9	FDOA0080*
2966	랄	9C7B	8DFA	FDOB0080*

Table 14 (Page 21 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
2967	랷	9C7C	B6FD	FDOC0080
2968	랸	9C7D	B6FE	FDOD0080
2969	래	9C81	B7A1	FDOH0080
2970	랙	9C82	B7A2	FDOI0080
2971	랹	9C83	8DFB	FDOJ0080*
2972	랺	9C84	8DFC	FDOK0080*
2973	랜	9C85	B7A3	FDOL0080
2974	랻	9C86	8DFD	FDOM0080*
2975	랼	9C87	8DFE	FDON0080*
2976	란	9C88	8E41	FDOO0080*
2977	랽	9C89	B7A4	FDOP0080
2978	랾	9C8A	8E42	FDOQ0080*
2979	랿	9C8B	8E43	FDOR0080*
2980	랾	9C8C	8E44	FDOS0080*
2981	랿	9C8D	8E45	FDOT0080*
2982	랿	9C8E	8E46	FDOU0080*
2983	랿	9C8F	8E47	FDOV0080*
2984	랿	9C90	8E48	FDOV0080*
2985	램	9C91	B7A5	FDOX0080
2986	랩	9C93	B7A6	FDOZ0080
2987	랿	9C94	8E49	FDP00080*
2988	랿	9C95	B7A7	FDP10080
2989	랿	9C96	B7A8	FDP20080
2990	랭	9C97	B7A9	FDP30080
2991	랿	9C98	8E4A	FDP40080*
2992	랿	9C99	8E4B	FDP50080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 22 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
2993	랠	9C9A	8E4C	FDP60080*
2994	랡	9C9B	8E4D	FDP70080*
2995	랢	9C9C	8E4E	FDP80080*
2996	랣	9C9D	8E4F	FDP90080*
2997	랤	9CA1	B7AA	FDPD0080
2998	랦	9CA2	B7AB	FDPE0080
2999	랧	9CA3	8E50	FDPF0080*
3000	램	9CA4	8E51	FDPG0080*
3001	랩	9CA5	B7AC	FDPH0080
3002	랪	9CA6	8E52	FDPI0080*
3003	랫	9CA7	8E53	FDPJ0080*
3004	랬	9CA8	8E54	FDPK0080*
3005	랭	9CA9	8E55	FDPL0080*
3006	랱	9CAA	8E56	FDPM0080*
3007	랲	9CAB	8E57	FDPN0080*
3008	랳	9CAC	8E58	FDPO0080*
3009	랴	9CAD	8E59	FDPP0080*
3010	략	9CAE	8E5A	FDPQ0080*
3011	랶	9CAF	8E61	FDPR0080*
3012	랷	9CB0	8E62	FDPS0080*
3013	랸	9CB1	8E63	FDPT0080*
3014	랹	9CB3	8E64	FDPV0080*
3015	랺	9CB4	8E65	FDPW0080*
3016	랻	9CB5	B7AD	FDPX0080
3017	랼	9CB6	8E66	FDPY0080*
3018	랽	9CB7	B7AE	FDPZ0080

Table 14 (Page 22 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3019	랾	9CB8	8E67	FDQ00080*
3020	랿	9CB9	8E68	FDQ10080*
3021	랺	9CBA	8E69	FDQ20080*
3022	랻	9CBB	8E6A	FDQ30080*
3023	랼	9CBC	8E6B	FDQ40080*
3024	랽	9CBD	8E6C	FDQ50080*
3025	래	9CC1	8E6D	FDQ90080
3026	러	9CC2	8E6E	FDQA0080*
3027	렐	9CC3	8E6F	FDQB0080*
3028	렘	9CC4	8E70	FDQC0080*
3029	렌	9CC5	8E71	FDQD0080*
3030	렐	9CC6	8E72	FDQE0080*
3031	렑	9CC7	8E73	FDQF0080*
3032	렒	9CC8	8E74	FDQG0080*
3033	렓	9CC9	8E75	FDQH0080*
3034	렔	9CCA	8E76	FDQI0080*
3035	렕	9CCB	8E77	FDQJ0080*
3036	렖	9CCC	8E78	FDQK0080*
3037	렗	9CCD	8E79	FDQL0080*
3038	렘	9CCE	8E7A	FDQM0080*
3039	렏	9CCF	8E81	FDQN0080*
3040	렐	9CD0	8E82	FDQO0080*
3041	렑	9CD1	8E83	FDQP0080*
3042	렒	9CD3	8E84	FDQR0080*
3043	렓	9CD4	8E85	FDQS0080*
3044	렔	9CD5	8E86	FDQT0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3045	렸	9CD6	8E87	FDQU0080*
3046	랭	9CD7	8E88	FDQV0080*
3047	렛	9CD8	8E89	FDQW0080*
3048	렷	9CD9	8E8A	FDQX0080*
3049	력	9CDA	8E8B	FDQY0080*
3050	렐	9CDB	8E8C	FDQZ0080*
3051	랴	9CDC	8E8D	FDR00080*
3052	랶	9CDD	8E8E	FDR10080*
3053	러	9CE1	B7AF	FDR50080
3054	럭	9CE2	B7B0	FDR60080
3055	뤁	9CE3	8E8F	FDR70080*
3056	뤃	9CE4	8E90	FDR80080*
3057	린	9CE5	B7B1	FDR90080
3058	렸	9CE6	8E91	FDRA0080*
3059	ړ	9CE7	8E92	FDRB0080*
3060	ړ	9CE8	8E93	FDRC0080*
3061	ړ	9CE9	B7B2	FDRD0080
3062	ړ	9CEA	8E94	FDRE0080*
3063	ړ	9CEB	8E95	FDRF0080*
3064	ړ	9CEC	8E96	FDRG0080*
3065	ړ	9CED	8E97	FDRH0080*
3066	ړ	9CEE	8E98	FDRI0080*
3067	ړ	9CEF	8E99	FDRJ0080*
3068	ړ	9CF0	8E9A	FDRK0080*
3069	림	9CF1	B7B3	FDRL0080
3070	ړ	9CF3	B7B4	FDRN0080

Table 14 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3071	ړ	9CF4	8E9B	FDRO0080*
3072	ړ	9CF5	B7B5	FDRP0080
3073	ړ	9CF6	B7B6	FDRQ0080
3074	ړ	9CF7	B7B7	FDRR0080
3075	ړ	9CF8	8E9C	FDRS0080*
3076	ړ	9CF9	8E9D	FDRT0080*
3077	ړ	9CFA	8E9E	FDRU0080*
3078	ړ	9CFB	8E9F	FDRV0080*
3079	ړ	9CFC	8EA0	FDRW0080*
3080	ړ	9CFD	B7B8	FDRX0080
3081	레	9D41	B7B9	FDS10080
3082	렉	9D42	B7BA	FDS20080
3083	뤁	9D43	8EA1	FDS30080*
3084	뤃	9D44	8EA2	FDS40080*
3085	렌	9D45	B7BB	FDS50080
3086	ړ	9D46	8EA3	FDS60080*
3087	ړ	9D47	8EA4	FDS70080*
3088	ړ	9D48	8EA5	FDS80080
3089	ړ	9D49	B7BC	FDS90080
3090	ړ	9D4A	8EA6	FDSA0080*
3091	ړ	9D4B	8EA7	FDSB0080*
3092	ړ	9D4C	8EA8	FDSC0080*
3093	ړ	9D4D	8EA9	FDSD0080*
3094	ړ	9D4E	8EAA	FDSE0080*
3095	ړ	9D4F	8EAB	FDSF0080*
3096	ړ	9D50	8EAC	FDSG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3097	렘	9D51	B7BD	FDSH0080
3098	렘	9D53	B7BE	FDSJ0080
3099	렘	9D54	8EAD	FDSK0080*
3100	렘	9D55	B7BF	FDSL0080
3101	렘	9D56	8EAE	FDSM0080*
3102	렘	9D57	B7C0	FDSN0080
3103	렘	9D58	8EAF	FDSO0080*
3104	렘	9D59	8EB0	FDSP0080*
3105	렘	9D5A	8EB1	FDSQ0080*
3106	렘	9D5B	8EB2	FDSR0080*
3107	렘	9D5C	8EB3	FDSS0080*
3108	렘	9D5D	8EB4	FDST0080*
3109	려	9D61	B7C1	FDSX0080
3110	려	9D62	B7C2	FDSY0080
3111	려	9D63	8EB5	FDSZ0080*
3112	려	9D64	8EB6	FDT00080*
3113	려	9D65	B7C3	FDT10080
3114	려	9D66	8EB7	FDT20080*
3115	려	9D67	8EB8	FDT30080*
3116	려	9D68	8EB9	FDT40080*
3117	려	9D69	B7C4	FDT50080
3118	려	9D6A	8EBA	FDT60080*
3119	려	9D6B	8EBB	FDT70080*
3120	려	9D6C	8EBC	FDT80080*
3121	려	9D6D	8EBD	FDT90080*
3122	려	9D6E	8EBE	FDTA0080*

Line Number	Graphic	Host Code	PC Code	GCGID
3123	려	9D6F	8EBF	FDTB0080*
3124	려	9D70	8EC0	FDTC0080*
3125	려	9D71	B7C5	FDTD0080
3126	려	9D73	B7C6	FDTF0080
3127	려	9D74	8EC1	FDTG0080*
3128	려	9D75	B7C7	FDTH0080
3129	려	9D76	B7C8	FDTI0080
3130	려	9D77	B7C9	FDTJ0080
3131	려	9D78	8EC2	FDTK0080*
3132	려	9D79	8EC3	FDTL0080*
3133	려	9D7A	8EC4	FDTM0080*
3134	려	9D7B	8EC5	FDTN0080*
3135	려	9D7C	8EC6	FDTO0080*
3136	려	9D7D	8EC7	FDTP0080*
3137	려	9D81	B7CA	FDTT0080
3138	려	9D82	8EC8	FDTU0080*
3139	려	9D83	8EC9	FDTV0080*
3140	려	9D84	8ECA	FDTW0080*
3141	려	9D85	B7CB	FDTX0080
3142	려	9D86	8ECB	FDTY0080*
3143	려	9D87	8ECC	FDTZ0080*
3144	려	9D88	8ECD	FDU00080*
3145	려	9D89	8ECE	FDU10080*
3146	려	9D8A	8ECF	FDU20080*
3147	려	9D8B	8ED0	FDU30080*
3148	려	9D8C	8ED1	FDU40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 25 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3149	꺾	9D8D	8ED2	FDU50080*
3150	꺾	9D8E	8ED3	FDU60080*
3151	꺾	9D8F	8ED4	FDU70080*
3152	꺾	9D90	8ED5	FDU80080*
3153	꺾	9D91	8ED6	FDU90080*
3154	꺾	9D93	B7CC	FDUB0080
3155	꺾	9D94	8ED7	FDUC0080*
3156	꺾	9D95	B7CD	FDUD0080
3157	꺾	9D96	8ED8	FDUE0080*
3158	꺾	9D97	8ED9	FDUF0080*
3159	꺾	9D98	8EDA	FDUG0080*
3160	꺾	9D99	8EDB	FDUH0080*
3161	꺾	9D9A	8EDC	FDUI0080*
3162	꺾	9D9B	8EDD	FDUJ0080*
3163	꺾	9D9C	8EDE	FDUK0080*
3164	꺾	9D9D	8EDF	FDUL0080*
3165	로	9DA1	B7CE	FDUP0080
3166	룩	9DA2	B7CF	FDUQ0080
3167	류	9DA3	8EE0	FDUR0080*
3168	룣	9DA4	8EE1	FDUS0080*
3169	룬	9DA5	B7D0	FDUT0080
3170	룣	9DA6	8EE2	FDUU0080*
3171	룣	9DA7	8EE3	FDUV0080*
3172	룬	9DA8	8EE4	FDUW0080*
3173	룰	9DA9	B7D1	FDUX0080
3174	룣	9DAA	8EE5	FDUY0080*

Table 14 (Page 25 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3175	룣	9DAB	8EE6	FDUZ0080*
3176	룣	9DAC	8EE7	FDV00080*
3177	룣	9DAD	8EE8	FDV10080*
3178	룣	9DAE	8EE9	FDV20080*
3179	룣	9DAF	8EEA	FDV30080*
3180	룣	9DB0	8EEB	FDV40080*
3181	룣	9DB1	B7D2	FDV50080
3182	룣	9DB3	B7D3	FDV70080
3183	룣	9DB4	8EEC	FDV80080*
3184	룣	9DB5	B7D4	FDV90080
3185	룣	9DB6	8EED	FDVA0080*
3186	룣	9DB7	B7D5	FDVB0080
3187	룣	9DB8	8EEE	FDVC0080*
3188	룣	9DB9	8EEF	FDVD0080*
3189	룣	9DBA	8EF0	FDVE0080*
3190	룣	9DBB	8EF1	FDVF0080*
3191	룣	9DBC	8EF2	FDVG0080*
3192	룣	9DBD	8EF3	FDVH0080*
3193	룣	9DC1	B7D6	FDVL0080
3194	룣	9DC2	8EF4	FDVM0080*
3195	룣	9DC3	8EF5	FDVN0080*
3196	룣	9DC4	8EF6	FDVO0080*
3197	룣	9DC5	B7D7	FDVP0080
3198	룣	9DC6	8EF7	FDVQ0080*
3199	룣	9DC7	8EF8	FDVR0080*
3200	룣	9DC8	8EF9	FDVS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 26 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3201	랠	9DC9	8EFA	FDVT0080*
3202	랡	9DCA	8EFB	FDVU0080*
3203	랢	9DCB	8EFC	FDVV0080*
3204	랣	9DCC	8EFD	FDVW0080*
3205	랤	9DCD	8EFE	FDVX0080*
3206	랦	9DCE	8F41	FDVY0080*
3207	랧	9DCF	8F42	FDVZ0080*
3208	램	9DD0	8F43	FDW00080*
3209	랩	9DD1	8F44	FDW10080*
3210	랪	9DD3	8F45	FDW30080*
3211	랫	9DD4	8F46	FDW40080*
3212	랬	9DD5	8F47	FDW50080*
3213	랭	9DD6	8F48	FDW60080*
3214	랑	9DD7	B7D8	FDW70080
3215	랱	9DD8	8F49	FDW80080*
3216	랲	9DD9	8F4A	FDW90080*
3217	랳	9DDA	8F4B	FDWA0080*
3218	랴	9ddb	8F4C	FDWB0080*
3219	략	9DDC	8F4D	FDWC0080*
3220	랑	9DDD	8F4E	FDWD0080*
3221	래	9DE1	8F4F	FDWH0080
3222	ړ	9DE2	8F50	FDWI0080*
3223	ړ	9DE3	8F51	FDWJ0080*
3224	ړ	9DE4	8F52	FDWK0080*
3225	ړ	9DE5	8F53	FDWL0080*
3226	ړ	9DE6	8F54	FDWM0080*

Table 14 (Page 26 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
3227	ړ	9DE7	8F55	FDWN0080*
3228	ړ	9DE8	8F56	FDWO0080*
3229	ړ	9DE9	8F57	FDWP0080*
3230	ړ	9DEA	8F58	FDWQ0080*
3231	ړ	9DEB	8F59	FDWR0080*
3232	ړ	9DEC	8F5A	FDWS0080*
3233	ړ	9DED	8F61	FDWT0080*
3234	ړ	9DEE	8F62	FDWU0080*
3235	ړ	9DEF	8F63	FDWV0080*
3236	ړ	9DF0	8F64	FDWW0080*
3237	ړ	9DF1	8F65	FDWX0080*
3238	ړ	9DF3	8F66	FDWZ0080*
3239	ړ	9DF4	8F67	FDX00080*
3240	ړ	9DF5	8F68	FDX10080*
3241	ړ	9DF6	B7D9	FDX20080
3242	ړ	9DF7	8F69	FDX30080*
3243	ړ	9DF8	8F6A	FDX40080*
3244	ړ	9DF9	8F6B	FDX50080*
3245	ړ	9DFA	8F6C	FDX60080*
3246	ړ	9DFB	8F6D	FDX70080*
3247	ړ	9DFC	8F6E	FDX80080*
3248	ړ	9DFD	8F6F	FDX90080*
3249	ړ	9E41	B7DA	FDXD0080
3250	ړ	9E42	8F70	FDXE0080*
3251	ړ	9E43	8F71	FDXF0080*
3252	ړ	9E44	8F72	FDXG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3253	퀸	9E45	B7DB	FDXH0080
3254	퀘	9E46	8F73	FDXI0080*
3255	퀙	9E47	8F74	FDXJ0080*
3256	퀚	9E48	8F75	FDXK0080*
3257	퀛	9E49	B7DC	FDXL0080
3258	퀜	9E4A	8F76	FDXM0080*
3259	퀝	9E4B	8F77	FDXN0080*
3260	퀞	9E4C	8F78	FDXO0080*
3261	퀟	9E4D	8F79	FDXP0080*
3262	퀠	9E4E	8F7A	FDXQ0080*
3263	퀡	9E4F	8F81	FDXR0080*
3264	퀢	9E50	8F82	FDXS0080*
3265	퀣	9E51	B7DD	FDXT0080
3266	퀤	9E53	B7DE	FDXV0080
3267	퀥	9E54	8F83	FDXW0080*
3268	퀦	9E55	B7DF	FDXX0080
3269	퀧	9E56	8F84	FDXY0080*
3270	퀨	9E57	B7E0	FDXZ0080
3271	퀩	9E58	8F85	FDY00080*
3272	퀪	9E59	8F86	FDY10080*
3273	퀫	9E5A	8F87	FDY20080*
3274	퀬	9E5B	8F88	FDY30080*
3275	퀭	9E5C	8F89	FDY40080*
3276	퀮	9E5D	8F8A	FDY50080*
3277	료	9E61	B7E1	FDY90080
3278	룩	9E62	8F8B	FDYA0080*

Line Number	Graphic	Host Code	PC Code	GCGID
3279	류	9E63	8F8C	FDYB0080*
3280	뤰	9E64	8F8D	FDYC0080*
3281	룬	9E65	B7E2	FDYD0080
3282	뤱	9E66	8F8E	FDYE0080*
3283	뤲	9E67	8F8F	FDYF0080*
3284	뤳	9E68	8F90	FDYG0080*
3285	뤴	9E69	B7E3	FDYH0080
3286	뤵	9E6A	8F91	FDYI0080*
3287	뤶	9E6B	8F92	FDYJ0080*
3288	뤷	9E6C	8F93	FDYK0080*
3289	뤸	9E6D	8F94	FDYL0080*
3290	뤹	9E6E	8F95	FDYM0080*
3291	뤺	9E6F	8F96	FDYN0080*
3292	뤻	9E70	8F97	FDYO0080*
3293	뤼	9E71	8F98	FDYP0080
3294	뤽	9E73	B7E4	FDYR0080
3295	뤾	9E74	8F99	FDYS0080*
3296	뤿	9E75	B7E5	FDYT0080
3297	뤼	9E76	8F9A	FDYU0080*
3298	뤽	9E77	B7E6	FDYV0080
3299	뤿	9E78	8F9B	FDYW0080*
3300	뤼	9E79	8F9C	FDYX0080*
3301	뤽	9E7A	8F9D	FDYY0080*
3302	뤿	9E7B	8F9E	FDYZ0080*
3303	뤼	9E7C	8F9F	FDZ00080*
3304	뤽	9E7D	8FA0	FDZ10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3305	루	9E81	B7E7	FDZ50080
3306	룩	9E82	B7E8	FDZ60080
3307	류	9E83	8FA1	FDZ70080*
3308	륵	9E84	8FA2	FDZ80080*
3309	룬	9E85	B7E9	FDZ90080
3310	륶	9E86	8FA3	FDZA0080*
3311	륷	9E87	8FA4	FDZB0080*
3312	른	9E88	8FA5	FDZC0080*
3313	룰	9E89	B7EA	FDZD0080
3314	륹	9E8A	8FA6	FDZE0080*
3315	륺	9E8B	8FA7	FDZF0080*
3316	륻	9E8C	8FA8	FDZG0080*
3317	를	9E8D	8FA9	FDZH0080*
3318	륽	9E8E	8FAA	FDZI0080*
3319	륾	9E8F	8FAB	FDZJ0080*
3320	륿	9E90	8FAC	FDZK0080*
3321	룸	9E91	B7EB	FDZL0080
3322	를	9E93	B7EC	FDZN0080
3323	륽	9E94	8FAD	FDZO0080*
3324	륾	9E95	B7ED	FDZP0080
3325	륿	9E96	8FAE	FDZQ0080*
3326	롱	9E97	B7EE	FDZR0080
3327	룽	9E98	8FAF	FDZS0080*
3328	룸	9E99	8FB0	FDZT0080*
3329	룹	9E9A	8FB1	FDZU0080*
3330	룺	9E9B	8FB2	FDZV0080*

Table 14 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3331	룻	9E9C	8FB3	FDZW0080*
3332	룼	9E9D	8FB4	FDZX0080*
3333	뤼	9EA1	B7EF	FE010080
3334	뤽	9EA2	8FB5	FE020080*
3335	뤼	9EA3	8FB6	FE030080*
3336	뤽	9EA4	8FB7	FE040080*
3337	뤼	9EA5	8FB8	FE050080*
3338	뤽	9EA6	8FB9	FE060080*
3339	뤼	9EA7	8FBA	FE070080*
3340	뤽	9EA8	8FBB	FE080080*
3341	뤼	9EA9	8FBC	FE090080*
3342	뤽	9EAA	8FBD	FE0A0080*
3343	뤼	9EAB	8FBE	FE0B0080*
3344	뤽	9EAC	8FBF	FE0C0080*
3345	뤼	9EAD	8FC0	FE0D0080*
3346	뤽	9EAE	8FC1	FE0E0080*
3347	뤼	9EAF	8FC2	FE0F0080*
3348	뤽	9EB0	8FC3	FE0G0080*
3349	뤼	9EB1	8FC4	FE0H0080*
3350	뤽	9EB3	8FC5	FE0J0080*
3351	뤼	9EB4	8FC6	FE0K0080*
3352	뤽	9EB5	8FC7	FE0L0080
3353	뤼	9EB6	B7F0	FE0M0080
3354	뤽	9EB7	8FC8	FE0N0080*
3355	뤼	9EB8	8FC9	FE0O0080*
3356	뤽	9EB9	8FCA	FE0P0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3357	췁	9EBA	8FCB	FE0Q0080*
3358	췂	9EBB	8FCC	FE0R0080*
3359	췃	9EBC	8FCD	FE0S0080*
3360	췄	9EBD	8FCE	FE0T0080*
3361	췅	9EC1	B7F1	FE0X0080
3362	췆	9EC2	8FCF	FE0Y0080*
3363	췇	9EC3	8FD0	FE0Z0080*
3364	췈	9EC4	8FD1	FE100080*
3365	췉	9EC5	8FD2	FE110080*
3366	췊	9EC6	8FD3	FE120080*
3367	췋	9EC7	8FD4	FE130080*
3368	췌	9EC8	8FD5	FE140080*
3369	췍	9EC9	8FD6	FE150080*
3370	췎	9ECA	8FD7	FE160080*
3371	췏	9ECB	8FD8	FE170080*
3372	췐	9ECC	8FD9	FE180080*
3373	췑	9ECD	8FDA	FE190080*
3374	췒	9ECE	8FDB	FE1A0080*
3375	췓	9ECF	8FDC	FE1B0080*
3376	췔	9ED0	8FDD	FE1C0080*
3377	췕	9ED1	8FDE	FE1D0080*
3378	췖	9ED3	8FDF	FE1F0080*
3379	췗	9ED4	8FE0	FE1G0080*
3380	췘	9ED5	8FE1	FE1H0080*
3381	췙	9ED6	8FE2	FE1I0080*
3382	췚	9ED7	8FE3	FE1J0080*

Table 14 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3383	췛	9ED8	8FE4	FE1K0080*
3384	췜	9ED9	8FE5	FE1L0080*
3385	췝	9EDA	8FE6	FE1M0080*
3386	췞	9EDB	8FE7	FE1N0080*
3387	췟	9EDC	8FE8	FE1O0080*
3388	췠	9EDD	8FE9	FE1P0080*
3389	췡	9EE1	B7F2	FE1T0080
3390	췢	9EE2	B7F3	FE1U0080
3391	췣	9EE3	8FEA	FE1V0080*
3392	췤	9EE4	8FEB	FE1W0080*
3393	췥	9EE5	B7F4	FE1X0080
3394	췦	9EE6	8FEC	FE1Y0080*
3395	췧	9EE7	8FED	FE1Z0080*
3396	취	9EE8	8FEE	FE200080*
3397	췩	9EE9	B7F5	FE210080
3398	췪	9EEA	8FEF	FE220080*
3399	췫	9EEB	8FF0	FE230080*
3400	췬	9EEC	8FF1	FE240080*
3401	췭	9EED	8FF2	FE250080*
3402	췮	9EEE	8FF3	FE260080*
3403	췯	9EEF	8FF4	FE270080*
3404	췰	9EF0	8FF5	FE280080*
3405	췱	9EF1	B7F6	FE290080
3406	췲	9EF3	8FF6	FE2B0080*
3407	췳	9EF4	8FF7	FE2C0080*
3408	췴	9EF5	B7F7	FE2D0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3409	뤘	9EF6	8FF8	FE2E0080*
3410	뤙	9EF7	B7F8	FE2F0080
3411	뤚	9EF8	8FF9	FE2G0080*
3412	뤛	9EF9	8FFA	FE2H0080*
3413	뤜	9EFA	8FFB	FE2I0080*
3414	뤝	9EFB	8FFC	FE2J0080*
3415	뤞	9EFC	8FFD	FE2K0080*
3416	뤟	9EFD	8FFE	FE2L0080*
3417	류	9F41	B7F9	FE2P0080
3418	륙	9F42	B7FA	FE2Q0080
3419	류	9F43	9041	FE2R0080*
3420	뤠	9F44	9042	FE2S0080*
3421	륜	9F45	B7FB	FE2T0080
3422	뤡	9F46	9043	FE2U0080*
3423	륄	9F47	9044	FE2V0080*
3424	륆	9F48	9045	FE2W0080*
3425	륈	9F49	B7FC	FE2X0080
3426	륊	9F4A	9046	FE2Y0080*
3427	륌	9F4B	9047	FE2Z0080*
3428	륎	9F4C	9048	FE300080*
3429	륑	9F4D	9049	FE310080*
3430	륓	9F4E	904A	FE320080*
3431	륕	9F4F	904B	FE330080*
3432	륗	9F50	904C	FE340080*
3433	륙	9F51	B7FD	FE350080
3434	륛	9F53	B7FE	FE370080

Line Number	Graphic	Host Code	PC Code	GCGID
3435	륝	9F54	904D	FE380080*
3436	륟	9F55	B8A1	FE390080
3437	률	9F56	904E	FE3A0080*
3438	륡	9F57	B8A2	FE3B0080
3439	륢	9F58	904F	FE3C0080*
3440	륣	9F59	9050	FE3D0080*
3441	륤	9F5A	9051	FE3E0080*
3442	륦	9F5B	9052	FE3F0080*
3443	륧	9F5C	9053	FE3G0080*
3444	륨	9F5D	9054	FE3H0080*
3445	륩	9F61	B8A3	FE3L0080
3446	륫	9F62	B8A4	FE3M0080
3447	륬	9F63	9055	FE3N0080*
3448	륭	9F64	9056	FE3O0080*
3449	륮	9F65	B8A5	FE3P0080
3450	륯	9F66	9057	FE3Q0080*
3451	륰	9F67	9058	FE3R0080*
3452	륱	9F68	9059	FE3S0080*
3453	륲	9F69	B8A6	FE3T0080
3454	륳	9F6A	905A	FE3U0080*
3455	르	9F6B	9061	FE3V0080*
3456	륵	9F6C	9062	FE3W0080*
3457	륶	9F6D	9063	FE3X0080*
3458	륷	9F6E	9064	FE3Y0080*
3459	른	9F6F	9065	FE3Z0080*
3460	륹	9F70	9066	FE400080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3461	름	9F71	B8A7	FE410080
3462	릅	9F73	B8A8	FE430080
3463	븀	9F74	9067	FE440080*
3464	룣	9F75	B8A9	FE450080
3465	룣	9F76	9068	FE460080*
3466	룞	9F77	B8AA	FE470080
3467	룟	9F78	B8AB	FE480080
3468	룠	9F79	9069	FE490080*
3469	룡	9F7A	906A	FE4A0080*
3470	룢	9F7B	B8AC	FE4B0080
3471	룣	9F7C	B8AD	FE4C0080
3472	룤	9F7D	906B	FE4D0080*
3473	룥	9F81	906C	FE4H0080
3474	룦	9F82	906D	FE4I0080*
3475	룧	9F83	906E	FE4J0080*
3476	루	9F84	906F	FE4K0080*
3477	룩	9F85	9070	FE4L0080*
3478	룪	9F86	9071	FE4M0080*
3479	룫	9F87	9072	FE4N0080*
3480	룬	9F88	9073	FE4O0080*
3481	룭	9F89	9074	FE4P0080*
3482	룮	9F8A	9075	FE4Q0080*
3483	룯	9F8B	9076	FE4R0080*
3484	룰	9F8C	9077	FE4S0080*
3485	룱	9F8D	9078	FE4T0080*
3486	룲	9F8E	9079	FE4U0080*

Table 14 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3487	룳	9F8F	907A	FE4V0080*
3488	룴	9F90	9081	FE4W0080*
3489	룵	9F91	9082	FE4X0080*
3490	룶	9F93	9083	FE4Z0080*
3491	룷	9F94	9084	FE500080*
3492	룸	9F95	9085	FE510080*
3493	룹	9F96	9086	FE520080*
3494	룺	9F97	9087	FE530080*
3495	룻	9F98	9088	FE540080*
3496	룼	9F99	9089	FE550080*
3497	룽	9F9A	908A	FE560080*
3498	룾	9F9B	908B	FE570080*
3499	룿	9F9C	908C	FE580080*
3500	룰	9F9D	908D	FE590080*
3501	리	9FA1	B8AE	FE5D0080
3502	릭	9FA2	B8AF	FE5E0080
3503	뤄	9FA3	908E	FE5F0080*
3504	뤅	9FA4	908F	FE5G0080*
3505	린	9FA5	B8B0	FE5H0080
3506	뤇	9FA6	9090	FE5I0080*
3507	뤈	9FA7	9091	FE5J0080*
3508	뤉	9FA8	9092	FE5K0080*
3509	뤊	9FA9	B8B1	FE5L0080
3510	뤋	9FAA	9093	FE5M0080*
3511	뤌	9FAB	9094	FE5N0080*
3512	뤍	9FAC	9095	FE5O0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3513	꺠	9FAD	9096	FE5P0080*
3514	꺡	9FAE	9097	FE5Q0080*
3515	꺢	9FAF	9098	FE5R0080*
3516	꺣	9FB0	9099	FE5S0080*
3517	꺤	9FB1	B8B2	FE5T0080
3518	꺥	9FB3	B8B3	FE5V0080
3519	꺦	9FB4	909A	FE5W0080*
3520	꺧	9FB5	B8B4	FE5X0080
3521	꺨	9FB6	909B	FE5Y0080*
3522	꺩	9FB7	B8B5	FE5Z0080
3523	꺪	9FB8	909C	FE600080*
3524	꺫	9FB9	909D	FE610080*
3525	꺬	9FBA	909E	FE620080*
3526	꺭	9FBB	909F	FE630080*
3527	꺮	9FBC	90A0	FE640080*
3528	꺯	9FBD	90A1	FE650080*
3529	마	A061	B8B6	FE8X0080
3530	막	A062	B8B7	FE8Y0080
3531	꺰	A063	90A2	FE8Z0080*
3532	꺱	A064	90A3	FE900080*
3533	만	A065	B8B8	FE910080
3534	꺲	A066	90A4	FE920080*
3535	꺳	A067	B8B9	FE930080
3536	꺴	A068	B8BA	FE940080
3537	꺵	A069	B8BB	FE950080
3538	꺶	A06A	B8BC	FE960080

Table 14 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3539	꺷	A06B	B8BD	FE970080
3540	꺸	A06C	90A5	FE980080*
3541	꺹	A06D	90A6	FE990080*
3542	꺺	A06E	90A7	FE9A0080*
3543	꺻	A06F	90A8	FE9B0080*
3544	꺼	A070	90A9	FE9C0080*
3545	꺽	A071	B8BE	FE9D0080
3546	꺾	A073	B8BF	FE9F0080
3547	꺿	A074	90AA	FE9G0080*
3548	꺾	A075	B8C0	FE9H0080
3549	꺿	A076	90AB	FE9I0080*
3550	망	A077	B8C1	FE9J0080
3551	꺿	A078	B8C2	FE9K0080
3552	꺾	A079	90AC	FE9L0080
3553	꺿	A07A	90AD	FE9M0080*
3554	꺾	A07B	B8C3	FE9N0080
3555	꺿	A07C	90AE	FE9O0080*
3556	망	A07D	B8C4	FE9P0080
3557	매	A081	B8C5	FE9T0080
3558	꺾	A082	B8C6	FE9U0080
3559	꺾	A083	90AF	FE9V0080*
3560	꺾	A084	90B0	FE9W0080*
3561	꺾	A085	B8C7	FE9X0080
3562	꺾	A086	90B1	FE9Y0080*
3563	꺾	A087	90B2	FE9Z0080*
3564	꺾	A088	90B3	FEA00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3565	맬	A089	B8C8	FEA10080
3566	랠	A08A	90B4	FEA20080*
3567	랠	A08B	90B5	FEA30080*
3568	랠	A08C	90B6	FEA40080*
3569	랠	A08D	90B7	FEA50080*
3570	랠	A08E	90B8	FEA60080*
3571	랠	A08F	90B9	FEA70080*
3572	랠	A090	90BA	FEA80080*
3573	맴	A091	B8C9	FEA90080
3574	맴	A093	B8CA	FEAB0080
3575	랠	A094	90BB	FEAC0080*
3576	맷	A095	B8CB	FEAD0080
3577	랠	A096	B8CC	FEAE0080
3578	맻	A097	B8CD	FEAF0080
3579	랠	A098	B8CE	FEAG0080
3580	랠	A099	90BC	FEAH0080
3581	랠	A09A	90BD	FEAI0080*
3582	랠	A09B	90BE	FEAJ0080*
3583	랠	A09C	90BF	FEAK0080*
3584	랠	A09D	90C0	FEAL0080*
3585	먀	A0A1	B8CF	FEAP0080
3586	먀	A0A2	B8D0	FEAQ0080
3587	먀	A0A3	90C1	FEAR0080*
3588	랠	A0A4	90C2	FEAS0080*
3589	랠	A0A5	90C3	FEAT0080*
3590	랠	A0A6	90C4	FEAU0080*

Table 14 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3591	랠	A0A7	90C5	FEAV0080*
3592	랠	A0A8	90C6	FEAW0080*
3593	랠	A0A9	B8D1	FEAX0080
3594	랠	A0AA	90C7	FEAY0080*
3595	랠	A0AB	90C8	FEAZ0080*
3596	랠	A0AC	90C9	FEB00080*
3597	랠	A0AD	90CA	FEB10080*
3598	랠	A0AE	90CB	FEB20080*
3599	랠	A0AF	90CC	FEB30080*
3600	랠	A0B0	90CD	FEB40080*
3601	랠	A0B1	90CE	FEB50080*
3602	랠	A0B3	90CF	FEB70080*
3603	랠	A0B4	90D0	FEB80080*
3604	랠	A0B5	90D1	FEB90080*
3605	랠	A0B6	90D2	FEBA0080*
3606	랠	A0B7	B8D2	FEBB0080
3607	랠	A0B8	90D3	FEBC0080*
3608	랠	A0B9	90D4	FEBD0080*
3609	랠	A0BA	90D5	FEBE0080*
3610	랠	A0BB	90D6	FEBF0080*
3611	랠	A0BC	90D7	FEBG0080*
3612	랠	A0BD	90D8	FEBH0080*
3613	랠	A0C1	90D9	FEBL0080
3614	랠	A0C2	90DA	FEBM0080*
3615	랠	A0C3	90DB	FEBN0080*
3616	랠	A0C4	90DC	FEBO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3617	맨	A0C5	90DD	FEBP0080*
3618	몯	A0C6	90DE	FEBQ0080*
3619	몰	A0C7	90DF	FEBR0080*
3620	몱	A0C8	90E0	FEBS0080*
3621	몲	A0C9	90E1	FEBT0080*
3622	몳	A0CA	90E2	FEBU0080*
3623	몴	A0CB	90E3	FEBV0080*
3624	몵	A0CC	90E4	FEBW0080*
3625	몶	A0CD	90E5	FEBX0080*
3626	몷	A0CE	90E6	FEBY0080*
3627	몸	A0CF	90E7	FEBZ0080*
3628	몹	A0D0	90E8	FEC00080*
3629	몺	A0D1	90E9	FEC10080*
3630	못	A0D3	90EA	FEC30080*
3631	몼	A0D4	90EB	FEC40080*
3632	몽	A0D5	90EC	FEC50080*
3633	몾	A0D6	90ED	FEC60080*
3634	몿	A0D7	90EE	FEC70080*
3635	넣	A0D8	90EF	FEC80080*
3636	네	A0D9	90F0	FEC90080*
3637	넦	A0DA	90F1	FECA0080*
3638	넧	A0DB	90F2	FECB0080*
3639	넨	A0DC	90F3	FECC0080*
3640	넩	A0DD	90F4	FECD0080*
3641	머	A0E1	B8D3	FECH0080
3642	멕	A0E2	B8D4	FECI0080

Table 14 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3643	몫	A0E3	90F5	FECJ0080*
3644	몬	A0E4	90F6	FECK0080*
3645	몭	A0E5	B8D5	FECM0080*
3646	몮	A0E6	90F7	FECN0080*
3647	몯	A0E7	90F8	FECO0080*
3648	몰	A0E8	90F9	FECQ0080*
3649	몱	A0E9	B8D6	FECR0080
3650	몲	A0EA	90FA	FECQ0080*
3651	몳	A0EB	B8D7	FECR0080
3652	몴	A0EC	90FB	FECV0080*
3653	몵	A0ED	90FC	FECT0080*
3654	몶	A0EE	90FD	FECU0080*
3655	몷	A0EF	90FE	FECV0080*
3656	몸	A0F0	9141	FECW0080*
3657	몹	A0F1	B8D8	FECX0080
3658	몺	A0F3	B8D9	FECZ0080
3659	못	A0F4	9142	FED00080*
3660	몼	A0F5	B8DA	FED10080
3661	몽	A0F6	9143	FED20080*
3662	몾	A0F7	B8DB	FED30080
3663	몿	A0F8	B8DC	FED40080
3664	넣	A0F9	9144	FED50080*
3665	네	A0FA	9145	FED60080*
3666	넦	A0FB	9146	FED70080*
3667	넧	A0FC	9147	FED80080*
3668	넨	A0FD	B8DD	FED90080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 35 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3669	메	A141	B8DE	FEDD0080
3670	멕	A142	B8DF	FEDE0080
3671	멕	A143	9148	FEDF0080*
3672	멕	A144	9149	FEDG0080*
3673	멘	A145	B8E0	FEDH0080
3674	몐	A146	914A	FEDI0080*
3675	몑	A147	914B	FEDJ0080*
3676	몒	A148	914C	FEDK0080*
3677	몓	A149	B8E1	FEDL0080
3678	몔	A14A	914D	FEDM0080*
3679	몕	A14B	914E	FEDN0080*
3680	몖	A14C	914F	FEDO0080*
3681	몗	A14D	9150	FEDP0080*
3682	몘	A14E	9151	FEDQ0080*
3683	몙	A14F	9152	FEDR0080*
3684	몑	A150	9153	FEDS0080*
3685	멤	A151	B8E2	FEDT0080
3686	몛	A153	B8E3	FEDV0080
3687	몜	A154	9154	FEDW0080*
3688	몝	A155	B8E4	FEDX0080
3689	몞	A156	B8E5	FEDY0080
3690	몟	A157	B8E6	FEDZ0080
3691	몠	A158	9155	FEE00080*
3692	몡	A159	9156	FEE10080
3693	몢	A15A	9157	FEE20080*
3694	몣	A15B	9158	FEE30080

Table 14 (Page 35 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3695	몤	A15C	9159	FEE40080*
3696	몥	A15D	915A	FEE50080*
3697	몦	A161	B8E7	FEE90080
3698	몧	A162	B8E8	FEEA0080
3699	모	A163	9161	FEEB0080*
3700	목	A164	9162	FEEC0080*
3701	몪	A165	B8E9	FEED0080
3702	몫	A166	9163	FEEE0080*
3703	몬	A167	9164	FEEF0080*
3704	몭	A168	9165	FEEG0080*
3705	몮	A169	B8EA	FEEH0080
3706	몯	A16A	9166	FEEI0080*
3707	몰	A16B	9167	FEEJ0080*
3708	몱	A16C	9168	FEEK0080*
3709	몲	A16D	9169	FEEL0080*
3710	몳	A16E	916A	FEEM0080*
3711	몴	A16F	916B	FEEN0080*
3712	몵	A170	916C	FEEO0080*
3713	몶	A171	916D	FEEP0080
3714	몷	A173	916E	FEER0080*
3715	몸	A174	916F	FEES0080*
3716	몹	A175	B8EB	FEET0080
3717	몺	A176	B8EC	FEEU0080
3718	못	A177	B8ED	FEEV0080
3719	몼	A178	9170	FEEW0080*
3720	몽	A179	B8EE	FEEX0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
3721	떡	A17A	9171	FEEY0080*
3722	멸	A17B	9172	FEEZ0080*
3723	몹	A17C	9173	FEF00080*
3724	명	A17D	9174	FEF10080*
3725	메	A181	B8EF	FEF50080
3726	멕	A182	9175	FEF60080*
3727	맥	A183	9176	FEF70080*
3728	몹	A184	9177	FEF80080*
3729	멘	A185	9178	FEF90080*
3730	몹	A186	9179	FEFA0080*
3731	몹	A187	917A	FEFB0080*
3732	몹	A188	9181	FEFC0080*
3733	몹	A189	9182	FEFD0080*
3734	몹	A18A	9183	FEFE0080*
3735	몹	A18B	9184	FEFF0080*
3736	몹	A18C	9185	FEFG0080*
3737	몹	A18D	9186	FEFH0080*
3738	몹	A18E	9187	FEFI0080*
3739	몹	A18F	9188	FEFJ0080*
3740	몹	A190	9189	FEFK0080*
3741	멤	A191	918A	FEFL0080*
3742	몹	A193	918B	FEFN0080*
3743	몹	A194	918C	FEFO0080*
3744	몹	A195	918D	FEFP0080*
3745	몹	A196	918E	FEFQ0080*
3746	명	A197	918F	FEFR0080*

Line Number	Graphic	Host Code	PC Code	GCGID
3747	몹	A198	9190	FEFS0080*
3748	몹	A199	9191	FEFT0080*
3749	몹	A19A	9192	FEFU0080*
3750	몹	A19B	9193	FEFV0080*
3751	몹	A19C	9194	FEFW0080*
3752	몹	A19D	9195	FEFX0080*
3753	모	A1A1	B8F0	FEG10080
3754	목	A1A2	B8F1	FEG20080
3755	무	A1A3	9196	FEG30080*
3756	목	A1A4	B8F2	FEG40080
3757	몬	A1A5	B8F3	FEG50080
3758	목	A1A6	9197	FEG60080*
3759	목	A1A7	9198	FEG70080*
3760	몬	A1A8	9199	FEG80080
3761	물	A1A9	B8F4	FEG90080
3762	목	A1AA	919A	FEGA0080*
3763	목	A1AB	B8F5	FEGB0080
3764	목	A1AC	919B	FEGC0080*
3765	목	A1AD	919C	FEGD0080*
3766	물	A1AE	919D	FEGE0080*
3767	목	A1AF	919E	FEGF0080*
3768	목	A1B0	919F	FEGG0080*
3769	목	A1B1	B8F6	FEGH0080
3770	목	A1B3	B8F7	FEGJ0080
3771	목	A1B4	91A0	FEGK0080*
3772	못	A1B5	B8F8	F EGL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 14 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3773	몫	A1B6	91A1	FEGM0080*
3774	몽	A1B7	B8F9	FEGN0080
3775	몫	A1B8	91A2	FEGO0080*
3776	몫	A1B9	91A3	FEGP0080*
3777	목	A1BA	91A4	FEGQ0080*
3778	몰	A1BB	91A5	FEGR0080*
3779	몫	A1BC	91A6	FEGS0080*
3780	몽	A1BD	91A7	FEGT0080
3781	파	A1C1	B8FA	FEGX0080
3782	팍	A1C2	91A8	FEGY0080*
3783	팍	A1C3	91A9	FEGZ0080*
3784	팍	A1C4	91AA	FEH00080*
3785	판	A1C5	B8FB	FEH10080
3786	팍	A1C6	91AB	FEH20080*
3787	팍	A1C7	91AC	FEH30080*
3788	판	A1C8	91AD	FEH40080*
3789	팍	A1C9	91AE	FEH50080*
3790	팍	A1CA	91AF	FEH60080*
3791	팍	A1CB	91B0	FEH70080*
3792	팍	A1CC	91B1	FEH80080*
3793	팍	A1CD	91B2	FEH90080*
3794	팍	A1CE	91B3	FEHA0080*
3795	팍	A1CF	91B4	FEHB0080*
3796	팍	A1D0	91B5	FEHC0080*
3797	팍	A1D1	91B6	FEHD0080*
3798	팍	A1D3	91B7	FEHF0080*

Table 14 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3799	팍	A1D4	91B8	FEHG0080*
3800	팍	A1D5	91B9	FEHH0080*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3801	왓	A1D6	B8FC	FEHI0080
3802	왕	A1D7	B8FD	FEHJ0080
3803	왓	A1D8	91BA	FEHK0080*
3804	왓	A1D9	91BB	FEHL0080*
3805	왓	A1DA	91BC	FEHM0080*
3806	왓	A1DB	91BD	FEHN0080*
3807	왓	A1DC	91BE	FEHO0080*
3808	왕	A1DD	91BF	FEHP0080*
3809	패	A1E1	91C0	FEHT0080
3810	팩	A1E2	91C1	FEHU0080*
3811	팩	A1E3	91C2	FEHV0080*
3812	팩	A1E4	91C3	FEHW0080*
3813	팩	A1E5	91C4	FEHX0080*
3814	팩	A1E6	91C5	FEHY0080*
3815	팩	A1E7	91C6	FEHZ0080*
3816	팩	A1E8	91C7	FEI00080*
3817	팩	A1E9	91C8	FEI10080*
3818	팩	A1EA	91C9	FEI20080*
3819	팩	A1EB	91CA	FEI30080*
3820	팩	A1EC	91CB	FEI40080*
3821	팩	A1ED	91CC	FEI50080*
3822	팩	A1EE	91CD	FEI60080*
3823	팩	A1EF	91CE	FEI70080*
3824	팩	A1F0	91CF	FEI80080*
3825	팩	A1F1	91D0	FEI90080*
3826	팩	A1F3	91D1	FEIB0080*

Table 15 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3827	팩	A1F4	91D2	FEIC0080*
3828	팩	A1F5	91D3	FEID0080*
3829	팩	A1F6	91D4	FEIE0080*
3830	팩	A1F7	91D5	FEIF0080*
3831	팩	A1F8	91D6	FEIG0080*
3832	팩	A1F9	91D7	FEIH0080*
3833	팩	A1FA	91D8	FEII0080*
3834	팩	A1FB	91D9	FEIJ0080*
3835	팩	A1FC	91DA	FEIK0080*
3836	팩	A1FD	91DB	FEIL0080*
3837	피	A241	B8FE	FEIP0080
3838	피	A242	91DC	FEIQ0080*
3839	피	A243	91DD	FEIR0080*
3840	피	A244	91DE	FEIS0080*
3841	핀	A245	B9A1	FEIT0080
3842	핀	A246	91DF	FEIU0080*
3843	핀	A247	91E0	FEIV0080*
3844	핀	A248	91E1	FEIW0080*
3845	핀	A249	B9A2	FEIX0080
3846	핀	A24A	91E2	FEIY0080*
3847	핀	A24B	91E3	FEIZ0080*
3848	핀	A24C	91E4	FEJ00080*
3849	핀	A24D	91E5	FEJ10080*
3850	핀	A24E	91E6	FEJ20080*
3851	핀	A24F	91E7	FEJ30080*
3852	핀	A250	91E8	FEJ40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3853	뵘	A251	91E9	FEJ50080*
3854	뵙	A253	B9A3	FEJ70080
3855	뵚	A254	91EA	FEJ80080*
3856	뵛	A255	B9A4	FEJ90080
3857	뵜	A256	91EB	FEJA0080*
3858	뵝	A257	B9A5	FEJB0080
3859	뵞	A258	91EC	FEJC0080*
3860	뵟	A259	91ED	FEJD0080*
3861	뵠	A25A	91EE	FEJE0080*
3862	뵡	A25B	91EF	FEJF0080*
3863	뵢	A25C	91F0	FEJG0080*
3864	뵣	A25D	91F1	FEJH0080*
3865	뵤	A261	B9A6	FEJL0080
3866	뵥	A262	91F2	FEJM0080*
3867	뵦	A263	91F3	FEJN0080*
3868	뵧	A264	91F4	FEJO0080*
3869	뵨	A265	B9A7	FEJP0080
3870	뵩	A266	91F5	FEJQ0080*
3871	뵪	A267	91F6	FEJR0080*
3872	뵫	A268	91F7	FEJS0080*
3873	뵬	A269	B9A8	FEJT0080
3874	뵭	A26A	91F8	FEJU0080*
3875	뵮	A26B	91F9	FEJV0080*
3876	뵯	A26C	91FA	FEJW0080*
3877	뵰	A26D	91FB	FEJX0080*
3878	뵱	A26E	91FC	FEJY0080*

Table 15 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3879	뵲	A26F	91FD	FEJZ0080*
3880	뵳	A270	91FE	FEK00080*
3881	뵴	A271	9241	FEK10080*
3882	뵵	A273	B9A9	FEK30080
3883	뵶	A274	9242	FEK40080*
3884	뵷	A275	B9AA	FEK50080
3885	뵸	A276	9243	FEK60080*
3886	뵹	A277	9244	FEK70080*
3887	뵺	A278	9245	FEK80080*
3888	뵻	A279	9246	FEK90080*
3889	뵼	A27A	9247	FEKA0080*
3890	뵽	A27B	9248	FEKB0080*
3891	뵾	A27C	9249	FEKC0080*
3892	뵿	A27D	924A	FEKD0080*
3893	뵠	A281	B9AB	FEKH0080
3894	뵡	A282	B9AC	FEKI0080
3895	뵢	A283	B9AD	FEKJ0080
3896	뵣	A284	924B	FEKK0080*
3897	뵤	A285	B9AE	FEKL0080
3898	뵥	A286	924C	FEKM0080*
3899	뵦	A287	924D	FEKN0080*
3900	뵧	A288	B9AF	FEKO0080
3901	뵨	A289	B9B0	FEKP0080
3902	뵩	A28A	B9B1	FEKQ0080
3903	뵪	A28B	B9B2	FEKR0080
3904	뵫	A28C	924E	FEKS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3905	궁	A28D	924F	FEKT0080*
3906	궂	A28E	9250	FEKU0080*
3907	궃	A28F	9251	FEKV0080*
3908	궄	A290	9252	FEKW0080*
3909	궅	A291	B9B3	FEKX0080
3910	궆	A293	B9B4	FEKZ0080
3911	궇	A294	9253	FEL00080*
3912	궈	A295	B9B5	FEL10080
3913	궉	A296	9254	FEL20080*
3914	궊	A297	B9B6	FEL30080
3915	궋	A298	9255	FEL40080*
3916	권	A299	9256	FEL50080*
3917	궍	A29A	9257	FEL60080*
3918	궎	A29B	B9B7	FEL70080
3919	궏	A29C	9258	FEL80080*
3920	궐	A29D	B9B8	FEL90080
3921	궑	A2A1	B9B9	FELD0080
3922	궒	A2A2	9259	FELE0080*
3923	궓	A2A3	925A	FELF0080*
3924	궔	A2A4	9261	FELG0080*
3925	궕	A2A5	B9BA	FELH0080
3926	궖	A2A6	9262	FELI0080*
3927	궗	A2A7	9263	FELJ0080*
3928	궘	A2A8	9264	FELK0080*
3929	궙	A2A9	B9BB	FELL0080
3930	궚	A2AA	9265	FELM0080*

Table 15 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3931	궛	A2AB	9266	FELN0080*
3932	궜	A2AC	9267	FELO0080*
3933	궝	A2AD	9268	FELP0080*
3934	궞	A2AE	9269	FELQ0080*
3935	궟	A2AF	926A	FELR0080*
3936	궠	A2B0	926B	FELS0080*
3937	궡	A2B1	926C	FELT0080*
3938	궢	A2B3	B9BC	FELV0080
3939	궣	A2B4	926D	FELW0080*
3940	궤	A2B5	B9BD	FELX0080
3941	궥	A2B6	926E	FELY0080*
3942	궦	A2B7	926F	FELZ0080*
3943	궧	A2B8	9270	FEM00080*
3944	궨	A2B9	9271	FEM10080*
3945	궩	A2BA	9272	FEM20080*
3946	궪	A2BB	9273	FEM30080*
3947	궫	A2BC	9274	FEM40080*
3948	궬	A2BD	9275	FEM50080*
3949	궭	A2C1	B9BE	FEM90080
3950	궮	A2C2	9276	FEMA0080*
3951	궯	A2C3	9277	FEMB0080*
3952	궰	A2C4	9278	FEMC0080*
3953	궱	A2C5	9279	FEMD0080*
3954	궲	A2C6	927A	FEME0080*
3955	궳	A2C7	9281	FEMF0080*
3956	궴	A2C8	9282	FEMG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3957	펠	A2C9	9283	FEMH0080*
3958	펄	A2CA	9284	FEMI0080*
3959	펄	A2CB	9285	FEMJ0080*
3960	펄	A2CC	9286	FEMK0080*
3961	펄	A2CD	9287	FEML0080*
3962	펠	A2CE	9288	FEMM0080*
3963	펄	A2CF	9289	FEMN0080*
3964	펄	A2D0	928A	FEMO0080*
3965	펄	A2D1	928B	FEMP0080*
3966	펄	A2D3	928C	FEMR0080*
3967	펄	A2D4	928D	FEMS0080*
3968	펄	A2D5	928E	FEMT0080*
3969	펄	A2D6	928F	FEMU0080*
3970	펄	A2D7	9290	FEMV0080*
3971	펄	A2D8	9291	FEMW0080*
3972	펄	A2D9	9292	FEMX0080*
3973	펄	A2DA	9293	FEMY0080*
3974	펠	A2DB	9294	FEMZ0080*
3975	펄	A2DC	9295	FEN00080*
3976	펄	A2DD	9296	FEN10080*
3977	뫼	A2E1	B9BF	FEN50080
3978	뫼	A2E2	9297	FEN60080*
3979	뫼	A2E3	9298	FEN70080*
3980	뫼	A2E4	9299	FEN80080*
3981	뫼	A2E5	B9C0	FEN90080
3982	뫼	A2E6	929A	FENA0080*

Table 15 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
3983	뫼	A2E7	929B	FENB0080*
3984	뫼	A2E8	929C	FENC0080*
3985	뫼	A2E9	B9C1	FEND0080
3986	뫼	A2EA	929D	FENE0080*
3987	뫼	A2EB	929E	FENF0080*
3988	뫼	A2EC	929F	FENG0080*
3989	뫼	A2ED	92A0	FENH0080*
3990	뫼	A2EE	92A1	FENI0080*
3991	뫼	A2EF	92A2	FENJ0080*
3992	뫼	A2F0	92A3	FENK0080*
3993	뫼	A2F1	92A4	FENL0080*
3994	뫼	A2F3	92A5	FENN0080*
3995	뫼	A2F4	92A6	FENO0080*
3996	뫼	A2F5	92A7	FENP0080*
3997	뫼	A2F6	92A8	FENQ0080*
3998	뫼	A2F7	92A9	FENR0080*
3999	뫼	A2F8	92AA	FENS0080*
4000	뫼	A2F9	92AB	FENT0080*
4001	뫼	A2FA	92AC	FENU0080*
4002	뫼	A2FB	92AD	FENV0080*
4003	뫼	A2FC	92AE	FENW0080*
4004	뫼	A2FD	92AF	FENX0080*
4005	뫼	A341	B9C2	FEO10080
4006	뫼	A342	92B0	FEO20080*
4007	뫼	A343	92B1	FEO30080*
4008	뫼	A344	92B2	FEO40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4009	문	A345	B9C3	FEO50080
4010	문	A346	92B3	FEO60080*
4011	문	A347	92B4	FEO70080*
4012	문	A348	92B5	FEO80080*
4013	문	A349	B9C4	FEO90080
4014	문	A34A	92B6	FEOA0080*
4015	문	A34B	92B7	FEOB0080*
4016	문	A34C	92B8	FEOC0080*
4017	문	A34D	92B9	FEOD0080*
4018	문	A34E	92BA	FEOE0080*
4019	문	A34F	92BB	FEOF0080*
4020	문	A350	92BC	FEOG0080*
4021	문	A351	B9C5	FEOH0080
4022	문	A353	92BD	FEOJ0080*
4023	문	A354	92BE	FEOK0080*
4024	문	A355	B9C6	FEOL0080
4025	문	A356	92BF	FEOM0080*
4026	문	A357	92C0	FEON0080*
4027	문	A358	92C1	FEOO0080*
4028	문	A359	92C2	FEOP0080*
4029	문	A35A	92C3	FEOQ0080*
4030	문	A35B	92C4	FEOR0080*
4031	문	A35C	92C5	FEOS0080*
4032	문	A35D	92C6	FEOT0080*
4033	문	A361	B9C7	FEOX0080
4034	문	A362	92C7	FEOY0080

Table 15 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4035	문	A363	92C8	FEOZ0080*
4036	문	A364	92C9	FEP00080*
4037	문	A365	B9C8	FEP10080
4038	문	A366	92CA	FEP20080*
4039	문	A367	92CB	FEP30080*
4040	문	A368	92CC	FEP40080*
4041	문	A369	B9C9	FEP50080
4042	문	A36A	92CD	FEP60080*
4043	문	A36B	92CE	FEP70080*
4044	문	A36C	92CF	FEP80080*
4045	문	A36D	92D0	FEP90080*
4046	문	A36E	92D1	FEPA0080*
4047	문	A36F	92D2	FEPB0080*
4048	문	A370	92D3	FEPD0080*
4049	문	A371	B9CA	FEPD0080
4050	문	A373	92D4	FEPF0080*
4051	문	A374	92D5	FEPG0080*
4052	문	A375	B9CB	FEPH0080
4053	문	A376	92D6	FEPJ0080*
4054	문	A377	92D7	FEPJ0080
4055	문	A378	92D8	FEPK0080*
4056	문	A379	92D9	FEPK0080*
4057	문	A37A	92DA	FEPM0080*
4058	문	A37B	92DB	FEPN0080*
4059	문	A37C	92DC	FEPN0080*
4060	문	A37D	92DD	FEPN0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 6 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4061	피	A381	92DE	FEPT0080
4062	픽	A382	92DF	FEPV0080*
4063	퓌	A383	92E0	FEPW0080*
4064	퓌	A384	92E1	FEPX0080*
4065	핀	A385	92E2	FEPY0080*
4066	핀	A386	92E3	FEPZ0080*
4067	핀	A387	92E4	FEQ00080*
4068	핀	A388	92E5	FEQ10080*
4069	핀	A389	92E6	FEQ20080*
4070	핀	A38A	92E7	FEQ30080*
4071	핀	A38B	92E8	FEQ40080*
4072	핀	A38C	92E9	FEQ50080*
4073	핀	A38D	92EA	FEQ60080*
4074	핀	A38E	92EB	FEQ70080*
4075	핀	A38F	92EC	FEQ80080*
4076	핀	A390	92ED	FEQ90080*
4077	핀	A391	92EE	FEQB0080*
4078	핀	A393	92EF	FEQC0080*
4079	핀	A394	92F0	FEQD0080*
4080	핀	A395	92F1	FEQE0080*
4081	핀	A396	92F2	FEQF0080*
4082	핀	A397	92F3	FEQG0080*
4083	핀	A398	92F4	FEQH0080*
4084	핀	A399	92F5	FEQI0080*
4085	핀	A39A	92F6	FEQJ0080*
4086	핀	A39B	92F7	

Table 15 (Page 6 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4087	핀	A39C	92F8	FEQK0080*
4088	핀	A39D	92F9	FEQL0080*
4089	미	A3A1	B9CC	FEQP0080
4090	미	A3A2	B9CD	FEQQ0080
4091	미	A3A3	92FA	FEQR0080*
4092	미	A3A4	92FB	FEQS0080*
4093	민	A3A5	B9CE	FEQT0080
4094	민	A3A6	92FC	FEQU0080*
4095	민	A3A7	92FD	FEQV0080*
4096	민	A3A8	B9CF	FEQW0080
4097	민	A3A9	B9D0	FEQX0080
4098	민	A3AA	92FE	FEQY0080*
4099	민	A3AB	B9D1	FEQZ0080
4100	민	A3AC	9341	FER00080*
4101	민	A3AD	9342	FER10080*
4102	민	A3AE	9343	FER20080*
4103	민	A3AF	9344	FER30080*
4104	민	A3B0	9345	FER40080*
4105	민	A3B1	B9D2	FER50080
4106	민	A3B3	B9D3	FER70080
4107	민	A3B4	9346	FER80080*
4108	민	A3B5	B9D4	FER90080
4109	민	A3B6	B9D5	FERA0080
4110	민	A3B7	B9D6	FERB0080
4111	민	A3B8	9347	FERC0080
4112	민	A3B9	B9D7	FERD0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 7 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4113	픽	A3BA	9348	FERE0080*
4114	밀	A3BB	B9D8	FERF0080
4115	뫼	A3BC	9349	FERG0080*
4116	핑	A3BD	934A	FERH0080*
4117	바	A461	B9D9	FEU90080
4118	박	A462	B9DA	FEUA0080
4119	밖	A463	B9DB	FEUB0080
4120	밖	A464	B9DC	FEUC0080
4121	반	A465	B9DD	FEUD0080
4122	밖	A466	934B	FEUE0080*
4123	밖	A467	934C	FEUF0080*
4124	반	A468	B9DE	FEUG0080
4125	발	A469	B9DF	FEUH0080
4126	밖	A46A	B9E0	FEUI0080
4127	밖	A46B	B9E1	FEUJ0080
4128	밖	A46C	B9E2	FEUK0080
4129	밖	A46D	934D	FEUL0080*
4130	밖	A46E	934E	FEUM0080*
4131	밖	A46F	934F	FEUN0080*
4132	밖	A470	9350	FEUO0080*
4133	밤	A471	B9E3	FEUP0080
4134	밥	A473	B9E4	FEUR0080
4135	밖	A474	9351	FEUS0080*
4136	밖	A475	B9E5	FEUT0080
4137	밖	A476	9352	FEUU0080
4138	방	A477	B9E6	FEUV0080

Table 15 (Page 7 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4139	밖	A478	9353	FEUW0080*
4140	밖	A479	9354	FEUX0080*
4141	밖	A47A	9355	FEUY0080*
4142	발	A47B	B9E7	FEUZ0080
4143	밖	A47C	9356	FEV00080*
4144	밖	A47D	9357	FEV10080*
4145	배	A481	B9E8	FEV50080
4146	백	A482	B9E9	FEV60080
4147	백	A483	9358	FEV70080*
4148	백	A484	9359	FEV80080*
4149	번	A485	B9EA	FEV90080
4150	백	A486	935A	FEVA0080*
4151	백	A487	9361	FEVB0080*
4152	번	A488	9362	FEVC0080
4153	백	A489	B9EB	FEVD0080
4154	백	A48A	9363	FEVE0080*
4155	백	A48B	9364	FEVF0080*
4156	백	A48C	9365	FEVG0080*
4157	백	A48D	9366	FEVH0080*
4158	백	A48E	9367	FEVI0080*
4159	백	A48F	9368	FEVJ0080*
4160	백	A490	9369	FEVK0080*
4161	뱀	A491	B9EC	FEVL0080
4162	뱀	A493	B9ED	FEVN0080
4163	백	A494	936A	FEVO0080*
4164	뱀	A495	B9EE	FEVP0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4165	봣	A496	B9EF	FEVQ0080
4166	벵	A497	B9F0	FEVR0080
4167	벹	A498	936B	FEVS0080*
4168	봰	A499	936C	FEVT0080*
4169	벻	A49A	936D	FEVU0080*
4170	벨	A49B	B9F1	FEVV0080
4171	봡	A49C	936E	FEVW0080*
4172	벻	A49D	936F	FEVX0080*
4173	바	A4A1	B9F2	FEW10080
4174	박	A4A2	B9F3	FEW20080
4175	밖	A4A3	9370	FEW30080*
4176	봣	A4A4	9371	FEW40080*
4177	반	A4A5	B9F4	FEW50080
4178	봤	A4A6	9372	FEW60080*
4179	봥	A4A7	9373	FEW70080*
4180	받	A4A8	9374	FEW80080*
4181	밭	A4A9	9375	FEW90080*
4182	밖	A4AA	9376	FEWA0080*
4183	봧	A4AB	9377	FEWB0080*
4184	봨	A4AC	9378	FEWC0080*
4185	봩	A4AD	9379	FEWD0080*
4186	봪	A4AE	937A	FEWE0080*
4187	봫	A4AF	9381	FEWF0080*
4188	봬	A4B0	9382	FEWG0080*
4189	밤	A4B1	9383	FEWH0080
4190	밥	A4B3	B9F5	FEWJ0080

Line Number	Graphic	Host Code	PC Code	GCGID
4191	봭	A4B4	9384	FEWK0080*
4192	봮	A4B5	9385	FEWL0080*
4193	봯	A4B6	9386	FEWM0080*
4194	봰	A4B7	9387	FEWN0080*
4195	봱	A4B8	9388	FEWO0080*
4196	봲	A4B9	9389	FEWP0080*
4197	봳	A4BA	938A	FEWQ0080*
4198	봴	A4BB	938B	FEWR0080*
4199	봵	A4BC	938C	FEWS0080*
4200	봶	A4BD	938D	FEWT0080*
4201	배	A4C1	938E	FEWX0080
4202	백	A4C2	938F	FEWY0080*
4203	뱀	A4C3	9390	FEWZ0080*
4204	봷	A4C4	9391	FEX00080*
4205	뱁	A4C5	9392	FEX10080*
4206	봸	A4C6	9393	FEX20080*
4207	봹	A4C7	9394	FEX30080*
4208	뱂	A4C8	9395	FEX40080*
4209	뱃	A4C9	9396	FEX50080*
4210	뱄	A4CA	9397	FEX60080*
4211	뱅	A4CB	9398	FEX70080*
4212	뱆	A4CC	9399	FEX80080*
4213	봺	A4CD	939A	FEX90080*
4214	뱇	A4CE	939B	FEXA0080*
4215	뱈	A4CF	939C	FEXB0080*
4216	뱉	A4D0	939D	FEXC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4217	뱀	A4D1	939E	FEXD0080*
4218	뱆	A4D3	939F	FEXF0080*
4219	뱇	A4D4	93A0	FEXG0080*
4220	뱈	A4D5	93A1	FEXH0080*
4221	뱉	A4D6	93A2	FEXI0080*
4222	뱊	A4D7	93A3	FEXJ0080*
4223	뱋	A4D8	93A4	FEXK0080*
4224	뱌	A4D9	93A5	FEXL0080*
4225	뱍	A4DA	93A6	FEXM0080*
4226	뱎	A4DB	93A7	FEXN0080*
4227	뱏	A4DC	93A8	FEXO0080*
4228	뱑	A4DD	93A9	FEXP0080*
4229	버	A4E1	B9F6	FEXT0080
4230	벽	A4E2	B9F7	FEXU0080
4231	벽	A4E3	93AA	FEXV0080*
4232	뵀	A4E4	93AB	FEXW0080*
4233	번	A4E5	B9F8	FEXX0080
4234	뵁	A4E6	93AC	FEXY0080*
4235	뵂	A4E7	93AD	FEXZ0080*
4236	벌	A4E8	B9F9	FEY00080
4237	벌	A4E9	B9FA	FEY10080
4238	뵄	A4EA	93AE	FEY20080*
4239	뵅	A4EB	B9FB	FEY30080
4240	뵆	A4EC	93AF	FEY40080*
4241	뵇	A4ED	93B0	FEY50080*
4242	뵈	A4EE	93B1	FEY60080*

Table 15 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4243	뵉	A4EF	93B2	FEY70080*
4244	뵊	A4F0	93B3	FEY80080*
4245	뵋	A4F1	B9FC	FEY90080
4246	뵌	A4F3	B9FD	FEYB0080
4247	뵍	A4F4	93B4	FEYC0080*
4248	뵑	A4F5	B9FE	FEYD0080
4249	뵒	A4F6	93B5	FEYE0080
4250	뵓	A4F7	BAA1	FEYF0080
4251	뵔	A4F8	BAA2	FEYG0080
4252	뵕	A4F9	93B6	FEYH0080*
4253	뵖	A4FA	93B7	FEYI0080
4254	뵗	A4FB	93B8	FEYJ0080*
4255	뵘	A4FC	93B9	FEYK0080*
4256	뵙	A4FD	93BA	FEYL0080*
4257	베	A541	BAA3	FEYP0080
4258	백	A542	BAA4	FEYQ0080
4259	뵛	A543	93BB	FEYR0080*
4260	뵜	A544	93BC	FEYS0080*
4261	벤	A545	BAA5	FEYT0080
4262	뵞	A546	93BD	FEYU0080*
4263	뵟	A547	93BE	FEYV0080*
4264	뵠	A548	BAA6	FEYW0080
4265	뵡	A549	BAA7	FEYX0080
4266	뵢	A54A	93BF	FEYY0080*
4267	뵣	A54B	93C0	FEYZ0080*
4268	뵤	A54C	93C1	FEZ00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 10 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4269	꺾	A54D	93C2	FEZ10080*
4270	꺾	A54E	93C3	FEZ20080*
4271	꺾	A54F	93C4	FEZ30080*
4272	꺾	A550	93C5	FEZ40080*
4273	꺾	A551	BAA8	FEZ50080
4274	꺾	A553	BAA9	FEZ70080
4275	꺾	A554	93C6	FEZ80080*
4276	꺾	A555	BAAA	FEZ90080
4277	꺾	A556	BAAB	FEZA0080
4278	꺾	A557	BAAC	FEZB0080
4279	꺾	A558	93C7	FEZC0080*
4280	꺾	A559	93C8	FEZD0080*
4281	꺾	A55A	93C9	FEZE0080*
4282	꺾	A55B	93CA	FEZF0080
4283	꺾	A55C	93CB	FEZG0080*
4284	꺾	A55D	93CC	FEZH0080*
4285	꺾	A561	BAAD	FEZL0080
4286	꺾	A562	BAAE	FEZM0080
4287	꺾	A563	93CD	FEZN0080*
4288	꺾	A564	93CE	FEZO0080*
4289	꺾	A565	BAAF	FEZP0080
4290	꺾	A566	93CF	FEZQ0080*
4291	꺾	A567	93D0	FEZR0080*
4292	꺾	A568	93D1	FEZS0080*
4293	꺾	A569	BAB0	FEZT0080
4294	꺾	A56A	93D2	FEZU0080*

Table 15 (Page 10 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4295	꺾	A56B	93D3	FEZV0080*
4296	꺾	A56C	93D4	FEZW0080*
4297	꺾	A56D	93D5	FEZX0080*
4298	꺾	A56E	93D6	FEZY0080*
4299	꺾	A56F	93D7	FEZZ0080*
4300	꺾	A570	93D8	FF000080*
4301	꺾	A571	93D9	FF010080
4302	꺾	A573	BAB1	FF030080
4303	꺾	A574	93DA	FF040080*
4304	꺾	A575	BAB2	FF050080
4305	꺾	A576	BAB3	FF060080
4306	꺾	A577	BAB4	FF070080
4307	꺾	A578	93DB	FF080080
4308	꺾	A579	93DC	FF090080
4309	꺾	A57A	93DD	FF0A0080
4310	꺾	A57B	BAB5	FF0B0080
4311	꺾	A57C	93DE	FF0C0080*
4312	꺾	A57D	93DF	FF0D0080*
4313	꺾	A581	BAB6	FF0H0080
4314	꺾	A582	93E0	FF0I0080*
4315	꺾	A583	93E1	FF0J0080*
4316	꺾	A584	93E2	FF0K0080*
4317	꺾	A585	BAB7	FF0L0080
4318	꺾	A586	93E3	FF0M0080*
4319	꺾	A587	93E4	FF0N0080*
4320	꺾	A588	93E5	FF0O0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 11 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4321	벨	A589	93E6	FF0P0080*
4322	벵	A58A	93E7	FF0Q0080*
4323	벨	A58B	93E8	FF0R0080*
4324	벵	A58C	93E9	FF0S0080*
4325	벵	A58D	93EA	FF0T0080*
4326	벨	A58E	93EB	FF0U0080*
4327	벵	A58F	93EC	FF0V0080*
4328	벵	A590	93ED	FF0W0080*
4329	벵	A591	93EE	FF0X0080*
4330	벵	A593	93EF	FF0Z0080*
4331	벵	A594	93F0	FF100080*
4332	벵	A595	93F1	FF110080*
4333	벵	A596	93F2	FF120080*
4334	벵	A597	93F3	FF130080*
4335	벵	A598	93F4	FF140080*
4336	벵	A599	93F5	FF150080*
4337	벵	A59A	93F6	FF160080*
4338	벨	A59B	93F7	FF170080*
4339	벵	A59C	93F8	FF180080*
4340	벵	A59D	93F9	FF190080*
4341	보	A5A1	BAB8	FF1D0080
4342	복	A5A2	BAB9	FF1E0080
4343	복	A5A3	BABA	FF1F0080
4344	복	A5A4	93FA	FF1G0080*
4345	본	A5A5	BABB	FF1H0080
4346	복	A5A6	93FB	FF1I0080*

Table 15 (Page 11 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4347	복	A5A7	93FC	FF1J0080*
4348	본	A5A8	93FD	FF1K0080*
4349	복	A5A9	BABC	FF1L0080
4350	복	A5AA	93FE	FF1M0080*
4351	복	A5AB	9441	FF1N0080*
4352	복	A5AC	9442	FF1O0080*
4353	복	A5AD	9443	FF1P0080*
4354	복	A5AE	9444	FF1Q0080*
4355	복	A5AF	9445	FF1R0080*
4356	복	A5B0	9446	FF1S0080*
4357	복	A5B1	BABD	FF1T0080
4358	복	A5B3	BABE	FF1V0080
4359	복	A5B4	9447	FF1W0080*
4360	복	A5B5	BABF	FF1X0080
4361	복	A5B6	9448	FF1Y0080*
4362	복	A5B7	BAC0	FF1Z0080
4363	복	A5B8	9449	FF200080*
4364	복	A5B9	944A	FF210080*
4365	복	A5BA	944B	FF220080*
4366	복	A5BB	944C	FF230080*
4367	복	A5BC	944D	FF240080*
4368	복	A5BD	944E	FF250080*
4369	복	A5C1	BAC1	FF290080
4370	복	A5C2	944F	FF2A0080*
4371	복	A5C3	9450	FF2B0080*
4372	복	A5C4	9451	FF2C0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 12 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4373	반	A5C5	BAC2	FF2D0080
4374	봇	A5C6	9452	FF2E0080*
4375	봈	A5C7	9453	FF2F0080*
4376	반	A5C8	9454	FF2G0080*
4377	봉	A5C9	9455	FF2H0080*
4378	봊	A5CA	9456	FF2I0080*
4379	봋	A5CB	9457	FF2J0080*
4380	봌	A5CC	9458	FF2K0080*
4381	봍	A5CD	9459	FF2L0080*
4382	봎	A5CE	945A	FF2M0080*
4383	봏	A5CF	9461	FF2N0080*
4384	봐	A5D0	9462	FF2O0080*
4385	봑	A5D1	9463	FF2P0080*
4386	봒	A5D3	9464	FF2R0080*
4387	봓	A5D4	9465	FF2S0080*
4388	봔	A5D5	9466	FF2T0080
4389	봕	A5D6	BAC3	FF2U0080
4390	봖	A5D7	9467	FF2V0080*
4391	봗	A5D8	9468	FF2W0080*
4392	봘	A5D9	9469	FF2X0080*
4393	봙	A5DA	946A	FF2Y0080*
4394	봚	A5DB	946B	FF2Z0080*
4395	봛	A5DC	946C	FF300080*
4396	봜	A5DD	946D	FF310080*
4397	봝	A5E1	BAC4	FF350080
4398	봞	A5E2	946E	FF360080*

Table 15 (Page 12 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4399	봟	A5E3	946F	FF370080*
4400	봠	A5E4	9470	FF380080*
4401	봡	A5E5	9471	FF390080*
4402	봢	A5E6	9472	FF3A0080*
4403	봣	A5E7	9473	FF3B0080*
4404	봤	A5E8	9474	FF3C0080*
4405	봥	A5E9	9475	FF3D0080*
4406	봦	A5EA	9476	FF3E0080*
4407	봧	A5EB	9477	FF3F0080*
4408	봨	A5EC	9478	FF3G0080*
4409	봩	A5ED	9479	FF3H0080*
4410	봪	A5EE	947A	FF3I0080*
4411	봫	A5EF	9481	FF3J0080*
4412	봬	A5F0	9482	FF3K0080*
4413	봭	A5F1	9483	FF3L0080*
4414	봮	A5F3	9484	FF3N0080*
4415	봯	A5F4	9485	FF3O0080*
4416	봰	A5F5	9486	FF3P0080*
4417	봱	A5F6	BAC5	FF3Q0080
4418	봲	A5F7	9487	FF3R0080*
4419	봳	A5F8	9488	FF3S0080*
4420	봴	A5F9	9489	FF3T0080*
4421	봵	A5FA	948A	FF3U0080*
4422	봶	A5FB	948B	FF3V0080*
4423	봷	A5FC	948C	FF3W0080*
4424	봸	A5FD	948D	FF3X0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4425	뵠	A641	BAC6	FF410080
4426	뵡	A642	BAC7	FF420080
4427	뵣	A643	948E	FF430080*
4428	뵤	A644	948F	FF440080*
4429	뵦	A645	BAC8	FF450080
4430	뵧	A646	9490	FF460080*
4431	뵨	A647	9491	FF470080*
4432	뵩	A648	9492	FF480080*
4433	뵪	A649	BAC9	FF490080
4434	뵫	A64A	9493	FF4A0080*
4435	뵬	A64B	9494	FF4B0080*
4436	뵭	A64C	9495	FF4C0080*
4437	뵮	A64D	9496	FF4D0080*
4438	뵯	A64E	9497	FF4E0080*
4439	뵰	A64F	9498	FF4F0080*
4440	뵱	A650	9499	FF4G0080*
4441	뵲	A651	BACA	FF4H0080
4442	뵳	A653	BACB	FF4J0080
4443	뵴	A654	949A	FF4K0080*
4444	뵵	A655	949B	FF4L0080*
4445	뵶	A656	949C	FF4M0080*
4446	뵷	A657	949D	FF4N0080*
4447	뵸	A658	949E	FF4O0080*
4448	뵹	A659	949F	FF4P0080*
4449	뵺	A65A	94A0	FF4Q0080*
4450	뵻	A65B	94A1	FF4R0080*

Table 15 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4451	뵼	A65C	94A2	FF4S0080*
4452	뵽	A65D	94A3	FF4T0080*
4453	뵾	A661	BACC	FF4X0080
4454	뵿	A662	94A4	FF4Y0080*
4455	뿀	A663	94A5	FF4Z0080*
4456	뿁	A664	94A6	FF500080*
4457	뿂	A665	BACD	FF510080
4458	뿃	A666	94A7	FF520080*
4459	뿄	A667	94A8	FF530080*
4460	뿅	A668	94A9	FF540080*
4461	뿆	A669	94AA	FF550080*
4462	뿇	A66A	94AB	FF560080*
4463	뿈	A66B	94AC	FF570080*
4464	뿉	A66C	94AD	FF580080*
4465	뿊	A66D	94AE	FF590080*
4466	뿋	A66E	94AF	FF5A0080*
4467	뿌	A66F	94B0	FF5B0080*
4468	뿍	A670	94B1	FF5C0080*
4469	뿎	A671	94B2	FF5D0080*
4470	뿏	A673	94B3	FF5F0080*
4471	뿐	A674	94B4	FF5G0080*
4472	뿑	A675	94B5	FF5H0080*
4473	뿒	A676	94B6	FF5I0080*
4474	뿓	A677	94B7	FF5J0080*
4475	뿔	A678	94B8	FF5K0080*
4476	뿕	A679	94B9	FF5L0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4477	복	A67A	94BA	FF5M0080*
4478	볼	A67B	94BB	FF5N0080*
4479	분	A67C	94BC	FF5O0080*
4480	봉	A67D	94BD	FF5P0080*
4481	부	A681	BACE	FF5T0080
4482	북	A682	BACF	FF5U0080
4483	부	A683	94BE	FF5V0080*
4484	붓	A684	94BF	FF5W0080*
4485	분	A685	BAD0	FF5X0080
4486	붓	A686	94C0	FF5Y0080*
4487	붕	A687	94C1	FF5Z0080*
4488	븐	A688	BAD1	FF600080
4489	볼	A689	BAD2	FF610080
4490	부	A68A	BAD3	FF620080
4491	붓	A68B	BAD4	FF630080
4492	붓	A68C	94C2	FF640080*
4493	붓	A68D	94C3	FF650080*
4494	붓	A68E	94C4	FF660080*
4495	붓	A68F	94C5	FF670080*
4496	붓	A690	94C6	FF680080*
4497	붓	A691	BAD5	FF690080
4498	붓	A693	BAD6	FF6B0080
4499	붓	A694	94C7	FF6C0080*
4500	붓	A695	BAD7	FF6D0080
4501	붓	A696	94C8	FF6E0080*
4502	붕	A697	BAD8	FF6F0080

Table 15 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4503	붓	A698	94C9	FF6G0080*
4504	붓	A699	94CA	FF6H0080
4505	복	A69A	94CB	FF6I0080*
4506	볼	A69B	BAD9	FF6J0080
4507	분	A69C	BADA	FF6K0080
4508	붕	A69D	94CC	FF6L0080*
4509	뷔	A6A1	BADB	FF6P0080
4510	뷔	A6A2	94CD	FF6Q0080*
4511	뷔	A6A3	94CE	FF6R0080*
4512	뷔	A6A4	94CF	FF6S0080*
4513	뷘	A6A5	94D0	FF6T0080*
4514	뷘	A6A6	94D1	FF6U0080*
4515	뷘	A6A7	94D2	FF6V0080*
4516	뷘	A6A8	94D3	FF6W0080*
4517	뷘	A6A9	BADC	FF6X0080
4518	뷘	A6AA	94D4	FF6Y0080*
4519	뷘	A6AB	94D5	FF6Z0080*
4520	뷘	A6AC	94D6	FF700080*
4521	뷘	A6AD	94D7	FF710080*
4522	뷘	A6AE	94D8	FF720080*
4523	뷘	A6AF	94D9	FF730080*
4524	뷘	A6B0	94DA	FF740080*
4525	뷔	A6B1	94DB	FF750080*
4526	뷔	A6B3	94DC	FF770080*
4527	뷔	A6B4	94DD	FF780080*
4528	뷔	A6B5	94DE	FF790080*




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4529	뵘	A6B6	BADD	FF7A0080
4530	뵙	A6B7	94DF	FF7B0080*
4531	뵚	A6B8	94E0	FF7C0080*
4532	뵛	A6B9	94E1	FF7D0080*
4533	뵜	A6BA	94E2	FF7E0080
4534	뵝	A6BB	94E3	FF7F0080*
4535	뵞	A6BC	94E4	FF7G0080*
4536	뵟	A6BD	94E5	FF7H0080*
4537	뵠	A6C1	BADE	FF7L0080
4538	뵡	A6C2	94E6	FF7M0080*
4539	뵢	A6C3	94E7	FF7N0080*
4540	뵣	A6C4	94E8	FF7O0080*
4541	뵤	A6C5	94E9	FF7P0080*
4542	뵥	A6C6	94EA	FF7Q0080*
4543	뵦	A6C7	94EB	FF7R0080*
4544	뵧	A6C8	94EC	FF7S0080*
4545	뵨	A6C9	94ED	FF7T0080*
4546	뵩	A6CA	94EE	FF7U0080*
4547	뵪	A6CB	94EF	FF7V0080*
4548	뵫	A6CC	94F0	FF7W0080*
4549	뵬	A6CD	94F1	FF7X0080*
4550	뵭	A6CE	94F2	FF7Y0080*
4551	뵮	A6CF	94F3	FF7Z0080*
4552	뵯	A6D0	94F4	FF800080*
4553	뵰	A6D1	94F5	FF810080*
4554	뵱	A6D3	94F6	FF830080*

Line Number	Graphic	Host Code	PC Code	GCGID
4555	뵲	A6D4	94F7	FF840080*
4556	뵳	A6D5	94F8	FF850080*
4557	뵴	A6D6	94F9	FF860080*
4558	뵵	A6D7	94FA	FF870080*
4559	뵶	A6D8	94FB	FF880080*
4560	뵷	A6D9	94FC	FF890080*
4561	뵸	A6DA	94FD	FF8A0080*
4562	뵹	A6DB	94FE	FF8B0080*
4563	뵺	A6DC	9541	FF8C0080*
4564	뵻	A6DD	9542	FF8D0080*
4565	뵼	A6E1	BADF	FF8H0080
4566	뵽	A6E2	BAE0	FF8I0080
4567	뵾	A6E3	9543	FF8J0080*
4568	뵿	A6E4	9544	FF8K0080*
4569	뿀	A6E5	BAE1	FF8L0080
4570	뿁	A6E6	9545	FF8M0080*
4571	뿂	A6E7	9546	FF8N0080*
4572	뿃	A6E8	9547	FF8O0080*
4573	뿄	A6E9	BAE2	FF8P0080
4574	뿅	A6EA	9548	FF8Q0080*
4575	뿆	A6EB	9549	FF8R0080*
4576	뿇	A6EC	954A	FF8S0080*
4577	뿈	A6ED	954B	FF8T0080*
4578	뿉	A6EE	954C	FF8U0080*
4579	뿊	A6EF	954D	FF8V0080*
4580	뿋	A6F0	954E	FF8W0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
4581	뵈	A6F1	954F	FF8X0080*
4582	뵊	A6F3	9550	FF8Z0080*
4583	뵋	A6F4	9551	FF900080*
4584	뵌	A6F5	9552	FF910080*
4585	뵍	A6F6	9553	FF920080*
4586	뵑	A6F7	BAE3	FF930080
4587	뵒	A6F8	9554	FF940080*
4588	뵓	A6F9	9555	FF950080*
4589	뵔	A6FA	9556	FF960080*
4590	뵕	A6FB	9557	FF970080*
4591	뵖	A6FC	9558	FF980080*
4592	뵗	A6FD	9559	FF990080*
4593	뷰	A741	BAE4	FF9D0080
4594	부	A742	955A	FF9E0080*
4595	뷰	A743	9561	FF9F0080*
4596	붓	A744	9562	FF9G0080*
4597	븐	A745	BAE5	FF9H0080
4598	붓	A746	9563	FF9I0080*
4599	붓	A747	9564	FF9J0080*
4600	븐	A748	9565	FF9K0080*
4601	불	A749	BAE6	FF9L0080
4602	붓	A74A	9566	FF9M0080*
4603	붓	A74B	9567	FF9N0080*
4604	붓	A74C	9568	FF9O0080*
4605	붓	A74D	9569	FF9P0080*
4606	붓	A74E	956A	FF9Q0080*

Line Number	Graphic	Host Code	PC Code	GCGID
4607	붓	A74F	956B	FF9R0080*
4608	붓	A750	956C	FF9S0080*
4609	붓	A751	BAE7	FF9T0080
4610	붓	A753	956D	FF9V0080*
4611	붓	A754	956E	FF9W0080*
4612	붓	A755	BAE8	FF9X0080
4613	붓	A756	956F	FF9Y0080*
4614	붓	A757	BAE9	FF9Z0080
4615	붓	A758	9570	FFA00080*
4616	붓	A759	9571	FFA10080*
4617	붓	A75A	9572	FFA20080*
4618	붓	A75B	9573	FFA30080*
4619	붓	A75C	9574	FFA40080*
4620	붓	A75D	9575	FFA50080*
4621	브	A761	BAEA	FFA90080
4622	부	A762	BAEB	FFAA0080
4623	뷰	A763	9576	FFAB0080*
4624	붓	A764	9577	FFAC0080*
4625	븐	A765	BAEC	FFAD0080
4626	붓	A766	9578	FFAE0080*
4627	붓	A767	9579	FFAF0080*
4628	븐	A768	957A	FFAG0080*
4629	불	A769	BAED	FFAH0080
4630	붓	A76A	9581	FFAI0080*
4631	붓	A76B	9582	FFAJ0080*
4632	붓	A76C	9583	FFAK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 17 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4633	붓	A76D	9584	FFAL0080
4634	붓	A76E	9585	FFAM0080*
4635	붓	A76F	9586	FFAN0080*
4636	붓	A770	9587	FFAO0080*
4637	붓	A771	BAEE	FFAP0080
4638	붓	A773	BAEF	FFAR0080
4639	붓	A774	9588	FFAS0080*
4640	붓	A775	BAF0	FFAT0080
4641	붓	A776	9589	FFAU0080*
4642	붕	A777	958A	FFAV0080
4643	붓	A778	958B	FFAW0080*
4644	붓	A779	958C	FFAX0080*
4645	부	A77A	958D	FFAY0080*
4646	부	A77B	958E	FFAZ0080*
4647	부	A77C	958F	FFB00080*
4648	부	A77D	9590	FFB10080*
4649	비	A781	9591	FFB50080
4650	빅	A782	9592	FFB60080*
4651	뷔	A783	9593	FFB70080*
4652	빚	A784	9594	FFB80080*
4653	빈	A785	9595	FFB90080*
4654	빚	A786	9596	FFBA0080*
4655	빚	A787	9597	FFBB0080*
4656	빈	A788	9598	FFBC0080*
4657	빌	A789	9599	FFBD0080*
4658	빚	A78A	959A	FFBE0080*

Table 15 (Page 17 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4659	빚	A78B	959B	FFBF0080*
4660	빚	A78C	959C	FFBG0080*
4661	빚	A78D	959D	FFBH0080*
4662	빚	A78E	959E	FFBI0080*
4663	빚	A78F	959F	FFBJ0080*
4664	빙	A790	95A0	FFBK0080*
4665	빚	A791	95A1	FFBL0080*
4666	빚	A793	95A2	FFBN0080*
4667	빚	A794	95A3	FFBO0080*
4668	빚	A795	95A4	FFBP0080*
4669	빚	A796	95A5	FFBQ0080*
4670	빙	A797	95A6	FFBR0080*
4671	빚	A798	95A7	FFBS0080*
4672	빚	A799	95A8	FFBT0080*
4673	빅	A79A	95A9	FFBU0080*
4674	빌	A79B	95AA	FFBV0080*
4675	빚	A79C	95AB	FFBW0080*
4676	빙	A79D	95AC	FFBX0080*
4677	비	A7A1	BAF1	FFC10080
4678	빅	A7A2	BAF2	FFC20080
4679	뷔	A7A3	95AD	FFC30080*
4680	빚	A7A4	95AE	FFC40080*
4681	빈	A7A5	BAF3	FFC50080
4682	빚	A7A6	95AF	FFC60080*
4683	빙	A7A7	95B0	FFC70080*
4684	빈	A7A8	95B1	FFC80080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4685	빌	A7A9	BAF4	FFC90080
4686	빅	A7AA	95B2	FFCA0080*
4687	빔	A7AB	BAF5	FFCB0080
4688	빙	A7AC	95B3	FFCC0080*
4689	빚	A7AD	95B4	FFCD0080*
4690	빛	A7AE	95B5	FFCE0080*
4691	빜	A7AF	95B6	FFCF0080*
4692	빝	A7B0	95B7	FFCG0080*
4693	빞	A7B1	BAF6	FFCH0080
4694	빟	A7B3	BAF7	FFCJ0080
4695	빠	A7B4	95B8	FFCK0080*
4696	빡	A7B5	BAF8	FFCL0080
4697	빢	A7B6	95B9	FFCM0080*
4698	빣	A7B7	BAF9	FFCN0080
4699	빤	A7B8	BAFA	FFCO0080
4700	빥	A7B9	BAFB	FFCP0080
4701	빅	A7BA	95BA	FFCQ0080*
4702	빌	A7BB	95BB	FFCR0080*
4703	빙	A7BC	95BC	FFCS0080*
4704	빙	A7BD	95BD	FFCT0080*
4705	빠	A861	BAFC	FFFL0080
4706	빱	A862	BAFD	FFFM0080
4707	빲	A863	95BE	FFFN0080*
4708	빳	A864	95BF	FFFO0080*
4709	빴	A865	BAFE	FFFP0080
4710	빵	A866	95C0	FFFQ0080*

Table 15 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4711	빶	A867	95C1	FFFR0080*
4712	빷	A868	95C2	FFFS0080*
4713	빸	A869	BBA1	FFFT0080
4714	빹	A86A	95C3	FFFU0080*
4715	빺	A86B	BBA2	FFFV0080
4716	빻	A86C	95C4	FFFW0080*
4717	빼	A86D	95C5	FFFX0080*
4718	빽	A86E	95C6	FFFY0080*
4719	빾	A86F	95C7	FFFZ0080*
4720	빿	A870	95C8	FFG00080*
4721	باء	A871	BBA3	FFG10080
4722	باء	A873	BBA4	FFG30080
4723	باء	A874	95C9	FFG40080*
4724	باء	A875	BBA5	FFG50080
4725	باء	A876	BBA6	FFG60080
4726	باء	A877	BBA7	FFG70080
4727	باء	A878	95CA	FFG80080*
4728	باء	A879	95CB	FFG90080*
4729	باء	A87A	95CC	FFGA0080*
4730	باء	A87B	95CD	FFGB0080*
4731	باء	A87C	95CE	FFGC0080*
4732	باء	A87D	BBA8	FFGD0080
4733	باء	A881	BBA9	FFGH0080
4734	باء	A882	BBA0	FFGI0080
4735	باء	A883	95CF	FFGJ0080*
4736	باء	A884	95D0	FFGK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 19 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4737	뵠	A885	BBAB	FFGL0080
4738	뵡	A886	95D1	FFGM0080*
4739	뵢	A887	95D2	FFGN0080*
4740	뵣	A888	95D3	FFGO0080*
4741	뵤	A889	BBAC	FFGP0080
4742	뵦	A88A	95D4	FFGQ0080*
4743	뵧	A88B	95D5	FFGR0080*
4744	뵨	A88C	95D6	FFGS0080*
4745	뵩	A88D	95D7	FFGT0080*
4746	뵪	A88E	95D8	FFGU0080*
4747	뵫	A88F	95D9	FFGV0080*
4748	뵬	A890	95DA	FFGW0080*
4749	뵭	A891	BBAD	FFGX0080
4750	뵮	A893	BBAE	FFGZ0080
4751	뵯	A894	95DB	FFH00080*
4752	뵰	A895	BBAF	FFH10080
4753	뵱	A896	BBB0	FFH20080
4754	뵲	A897	BBB1	FFH30080
4755	뵳	A898	95DC	FFH40080*
4756	뵴	A899	95DD	FFH50080*
4757	뵵	A89A	95DE	FFH60080*
4758	뵶	A89B	95DF	FFH70080*
4759	뵷	A89C	95E0	FFH80080*
4760	뵸	A89D	95E1	FFH90080*
4761	뵹	A8A1	BBB2	FFHD0080
4762	뵺	A8A2	BBB3	FFHE0080

Table 15 (Page 19 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
4763	뵻	A8A3	95E2	FFHF0080*
4764	뵼	A8A4	95E3	FFHG0080*
4765	뵽	A8A5	95E4	FFHH0080
4766	뵾	A8A6	95E5	FFHI0080*
4767	뵿	A8A7	95E6	FFHJ0080*
4768	뵠	A8A8	95E7	FFHK0080*
4769	뵡	A8A9	95E8	FFHL0080*
4770	뵢	A8AA	95E9	FFHM0080*
4771	뵣	A8AB	95EA	FFHN0080*
4772	뵤	A8AC	95EB	FFHO0080*
4773	뵥	A8AD	95EC	FFHP0080*
4774	뵦	A8AE	95ED	FFHQ0080*
4775	뵧	A8AF	95EE	FFHR0080*
4776	뵨	A8B0	95EF	FFHS0080*
4777	뵩	A8B1	BBB4	FFHT0080
4778	뵪	A8B3	95F0	FFHV0080*
4779	뵫	A8B4	95F1	FFHW0080*
4780	뵬	A8B5	95F2	FFHX0080*
4781	뵭	A8B6	95F3	FFHY0080*
4782	뵮	A8B7	95F4	FFHZ0080*
4783	뵯	A8B8	95F5	FFI00080*
4784	뵰	A8B9	95F6	FFI10080*
4785	뵱	A8BA	95F7	FFI20080*
4786	뵲	A8BB	95F8	FFI30080*
4787	뵳	A8BC	95F9	FFI40080*
4788	뵴	A8BD	95FA	FFI50080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4789	배	A8C1	95FB	FFI90080
4790	백	A8C2	95FC	FFIA0080*
4791	백	A8C3	95FD	FFIB0080*
4792	백	A8C4	95FE	FFIC0080*
4793	백	A8C5	9641	FFID0080*
4794	백	A8C6	9642	FFIE0080*
4795	백	A8C7	9643	FFIF0080*
4796	백	A8C8	9644	FFIG0080*
4797	백	A8C9	9645	FFIH0080*
4798	백	A8CA	9646	FFII0080*
4799	백	A8CB	9647	FFIJ0080*
4800	백	A8CC	9648	FFIK0080*
4801	백	A8CD	9649	FFIL0080*
4802	백	A8CE	964A	FFIM0080*
4803	백	A8CF	964B	FFIN0080*
4804	백	A8D0	964C	FFIO0080*
4805	백	A8D1	964D	FFIP0080*
4806	백	A8D3	964E	FFIR0080*
4807	백	A8D4	964F	FFIS0080*
4808	백	A8D5	9650	FFIT0080*
4809	백	A8D6	9651	FFIU0080*
4810	백	A8D7	9652	FFIV0080*
4811	백	A8D8	9653	FFIW0080*
4812	백	A8D9	9654	FFIX0080*
4813	백	A8DA	9655	FFIY0080*
4814	백	A8DB	9656	FFIZ0080*

Table 15 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4815	백	A8DC	9657	FFJ00080*
4816	백	A8DD	9658	FFJ10080*
4817	백	A8E1	BBB5	FFJ50080
4818	백	A8E2	BBB6	FFJ60080
4819	백	A8E3	9659	FFJ70080*
4820	백	A8E4	965A	FFJ80080*
4821	백	A8E5	BBB7	FFJ90080
4822	백	A8E6	9661	FFJA0080*
4823	백	A8E7	9662	FFJB0080*
4824	백	A8E8	BBB8	FFJC0080
4825	백	A8E9	BBB9	FFJD0080
4826	백	A8EA	9663	FFJE0080*
4827	백	A8EB	9664	FFJF0080*
4828	백	A8EC	9665	FFJG0080*
4829	백	A8ED	9666	FFJH0080*
4830	백	A8EE	9667	FFJI0080*
4831	백	A8EF	9668	FFJJ0080*
4832	백	A8F0	9669	FFJK0080*
4833	백	A8F1	BBBA	FFJL0080
4834	백	A8F3	966A	FFJN0080*
4835	백	A8F4	966B	FFJO0080*
4836	백	A8F5	BBBB	FFJP0080
4837	백	A8F6	BBBC	FFJQ0080
4838	백	A8F7	BBBD	FFJR0080
4839	백	A8F8	966C	FFJS0080*
4840	백	A8F9	966D	FFJT0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 21 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4841	백	A8FA	966E	FFJU0080*
4842	백	A8FB	966F	FFJV0080*
4843	백	A8FC	9670	FFJW0080*
4844	백	A8FD	9671	FFJX0080*
4845	백	A941	BBBE	FFK10080
4846	백	A942	9672	FFK20080
4847	백	A943	9673	FFK30080*
4848	백	A944	9674	FFK40080*
4849	백	A945	9675	FFK50080
4850	백	A946	9676	FFK60080*
4851	백	A947	9677	FFK70080*
4852	백	A948	9678	FFK80080*
4853	백	A949	9679	FFK90080
4854	백	A94A	967A	FFKA0080*
4855	백	A94B	9681	FFKB0080*
4856	백	A94C	9682	FFKC0080*
4857	백	A94D	9683	FFKD0080*
4858	백	A94E	9684	FFKE0080*
4859	백	A94F	9685	FFKF0080*
4860	백	A950	9686	FFKG0080*
4861	백	A951	9687	FFKH0080*
4862	백	A953	9688	FFKJ0080*
4863	백	A954	9689	FFKK0080*
4864	백	A955	968A	FFKL0080
4865	백	A956	968B	FFKM0080*
4866	백	A957	BBBF	FFKN0080

Table 15 (Page 21 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4867	백	A958	968C	FFKO0080*
4868	백	A959	968D	FFKP0080*
4869	백	A95A	968E	FFKQ0080*
4870	백	A95B	968F	FFKR0080*
4871	백	A95C	9690	FFKS0080*
4872	백	A95D	9691	FFKT0080*
4873	백	A961	BBC0	FFKX0080
4874	백	A962	BBC1	FFKY0080
4875	백	A963	9692	FFKZ0080*
4876	백	A964	9693	FFL00080*
4877	백	A965	9694	FFL10080*
4878	백	A966	9695	FFL20080*
4879	백	A967	9696	FFL30080*
4880	백	A968	9697	FFL40080*
4881	백	A969	9698	FFL50080*
4882	백	A96A	9699	FFL60080*
4883	백	A96B	969A	FFL70080*
4884	백	A96C	969B	FFL80080*
4885	백	A96D	969C	FFL90080*
4886	백	A96E	969D	FFLA0080*
4887	백	A96F	969E	FFLB0080*
4888	백	A970	969F	FFLC0080*
4889	백	A971	BBC2	FFLD0080
4890	백	A973	BBC3	FFLF0080
4891	백	A974	96A0	FFLG0080*
4892	백	A975	BBC4	FFLH0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 22 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4893	뵈	A976	BBC5	FFLI0080
4894	뵉	A977	BBC6	FFLJ0080
4895	뵊	A978	96A1	FFLK0080*
4896	뵋	A979	96A2	FFLL0080*
4897	뵌	A97A	96A3	FFLM0080*
4898	뵍	A97B	96A4	FFLN0080*
4899	뵑	A97C	96A5	FFLO0080*
4900	뵒	A97D	96A6	FFLP0080*
4901	뵓	A981	96A7	FFLT0080
4902	뵔	A982	96A8	FFLU0080*
4903	뵕	A983	96A9	FFLV0080*
4904	뵖	A984	96AA	FFLW0080*
4905	뵗	A985	96AB	FFLX0080*
4906	뵘	A986	96AC	FFLY0080*
4907	뵙	A987	96AD	FFLZ0080*
4908	뵚	A988	96AE	FFM00080*
4909	뵛	A989	96AF	FFM10080*
4910	뵜	A98A	96B0	FFM20080*
4911	뵝	A98B	96B1	FFM30080*
4912	뵞	A98C	96B2	FFM40080*
4913	뵟	A98D	96B3	FFM50080*
4914	뵠	A98E	96B4	FFM60080*
4915	뵡	A98F	96B5	FFM70080*
4916	뵢	A990	96B6	FFM80080*
4917	뵣	A991	96B7	FFM90080*
4918	뵤	A993	96B8	FFMB0080*

Table 15 (Page 22 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4919	뵥	A994	96B9	FFMC0080*
4920	뵦	A995	96BA	FFMD0080*
4921	뵧	A996	96BB	FFME0080*
4922	뵨	A997	96BC	FFMF0080*
4923	뵩	A998	96BD	FFMG0080*
4924	뵪	A999	96BE	FFMH0080*
4925	뵫	A99A	96BF	FFMI0080*
4926	뵬	A99B	96C0	FFMJ0080*
4927	뵭	A99C	96C1	FFMK0080*
4928	뵮	A99D	96C2	FFML0080*
4929	뵯	A9A1	BBC7	FFMP0080
4930	뵰	A9A2	BBC8	FFMQ0080
4931	뵱	A9A3	96C3	FFMR0080*
4932	뵲	A9A4	96C4	FFMS0080*
4933	뵳	A9A5	BBC9	FFMT0080
4934	뵴	A9A6	96C5	FFMU0080*
4935	뵵	A9A7	96C6	FFMV0080*
4936	뵶	A9A8	96C7	FFMW0080*
4937	뵷	A9A9	BBCA	FFMX0080
4938	뵸	A9AA	96C8	FFMY0080*
4939	뵹	A9AB	96C9	FFMZ0080*
4940	뵺	A9AC	96CA	FFN00080*
4941	뵻	A9AD	96CB	FFN10080*
4942	뵼	A9AE	96CC	FFN20080*
4943	뵽	A9AF	96CD	FFN30080*
4944	뵾	A9B0	96CE	FFN40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4945	뵁	A9B1	BBCB	FFN50080
4946	뵂	A9B3	BBCC	FFN70080
4947	뵃	A9B4	96CF	FFN80080*
4948	뵄	A9B5	96D0	FFN90080*
4949	뵅	A9B6	96D1	FFNA0080*
4950	뵆	A9B7	BBCD	FFNB0080
4951	뵇	A9B8	96D2	FFNC0080*
4952	뵈	A9B9	96D3	FFND0080*
4953	뵉	A9BA	96D4	FFNE0080*
4954	뵊	A9BB	96D5	FFNF0080*
4955	뵋	A9BC	96D6	FFNG0080*
4956	뵌	A9BD	96D7	FFNH0080*
4957	뵍	A9C1	96D8	FFNL0080
4958	뵑	A9C2	96D9	FFNM0080*
4959	뵒	A9C3	96DA	FFNN0080*
4960	뵓	A9C4	96DB	FFNO0080*
4961	뵔	A9C5	96DC	FFNP0080*
4962	뵕	A9C6	96DD	FFNQ0080*
4963	뵖	A9C7	96DE	FFNR0080*
4964	뵗	A9C8	96DF	FFNS0080*
4965	뵘	A9C9	96E0	FFNT0080*
4966	뵙	A9CA	96E1	FFNU0080*
4967	뵚	A9CB	96E2	FFNV0080*
4968	뵛	A9CC	96E3	FFNW0080*
4969	뵜	A9CD	96E4	FFNX0080*
4970	뵝	A9CE	96E5	FFNY0080*

Table 15 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4971	뵞	A9CF	96E6	FFNZ0080*
4972	뵟	A9D0	96E7	FFO00080*
4973	뵠	A9D1	96E8	FFO10080*
4974	뵡	A9D3	96E9	FFO30080*
4975	뵢	A9D4	96EA	FFO40080*
4976	뵣	A9D5	96EB	FFO50080*
4977	뵤	A9D6	96EC	FFO60080*
4978	뵥	A9D7	96ED	FFO70080*
4979	뵦	A9D8	96EE	FFO80080*
4980	뵧	A9D9	96EF	FFO90080*
4981	뵨	A9DA	96F0	FFOA0080*
4982	뵩	A9DB	96F1	FFOB0080*
4983	뵪	A9DC	96F2	FFOC0080*
4984	뵫	A9DD	96F3	FFOD0080*
4985	뵬	A9E1	96F4	FFOH0080
4986	뵭	A9E2	96F5	FFOI0080*
4987	뵮	A9E3	96F6	FFOJ0080*
4988	뵯	A9E4	96F7	FFOK0080*
4989	뵰	A9E5	96F8	FFOL0080*
4990	뵱	A9E6	96F9	FFOM0080*
4991	뵲	A9E7	96FA	FFON0080*
4992	뵳	A9E8	96FB	FFOO0080*
4993	뵴	A9E9	96FC	FFOP0080*
4994	뵵	A9EA	96FD	FFOQ0080*
4995	뵶	A9EB	96FE	FFOR0080*
4996	뵷	A9EC	9741	FFOS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 24 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
4997	꺾	A9ED	9742	FFOT0080*
4998	꺾	A9EE	9743	FFOU0080*
4999	꺾	A9EF	9744	FFOV0080*
5000	꺾	A9F0	9745	FFOW0080*
5001	꺾	A9F1	9746	FFOX0080*
5002	꺾	A9F3	9747	FFOZ0080*
5003	꺾	A9F4	9748	FFP00080*
5004	꺾	A9F5	9749	FFP10080*
5005	꺾	A9F6	974A	FFP20080*
5006	꺾	A9F7	974B	FFP30080*
5007	꺾	A9F8	974C	FFP40080*
5008	꺾	A9F9	974D	FFP50080*
5009	꺾	A9FA	974E	FFP60080*
5010	꺾	A9FB	974F	FFP70080*
5011	꺾	A9FC	9750	FFP80080*
5012	꺾	A9FD	9751	FFP90080*
5013	꺾	AA41	BBCE	FFPD0080
5014	꺾	AA42	9752	FFPE0080*
5015	꺾	AA43	9753	FFPF0080*
5016	꺾	AA44	9754	FFPG0080*
5017	꺾	AA45	9755	FFPH0080*
5018	꺾	AA46	9756	FFPI0080*
5019	꺾	AA47	9757	FFPJ0080*
5020	꺾	AA48	9758	FFPK0080*
5021	꺾	AA49	9759	FFPL0080*
5022	꺾	AA4A	975A	FFPM0080*

Table 15 (Page 24 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5023	꺾	AA4B	9761	FFPN0080*
5024	꺾	AA4C	9762	FFPO0080*
5025	꺾	AA4D	9763	FFPP0080*
5026	꺾	AA4E	9764	FFPQ0080*
5027	꺾	AA4F	9765	FFPR0080*
5028	꺾	AA50	9766	FFPS0080*
5029	꺾	AA51	9767	FFPT0080*
5030	꺾	AA53	9768	FFPV0080*
5031	꺾	AA54	9769	FFPW0080*
5032	꺾	AA55	976A	FFPX0080*
5033	꺾	AA56	976B	FFPY0080*
5034	꺾	AA57	976C	FFPZ0080*
5035	꺾	AA58	976D	FFQ00080*
5036	꺾	AA59	976E	FFQ10080*
5037	꺾	AA5A	976F	FFQ20080*
5038	꺾	AA5B	9770	FFQ30080*
5039	꺾	AA5C	9771	FFQ40080*
5040	꺾	AA5D	9772	FFQ50080*
5041	꺾	AA61	BBCF	FFQ90080
5042	꺾	AA62	9773	FFQA0080*
5043	꺾	AA63	9774	FFQB0080*
5044	꺾	AA64	9775	FFQC0080*
5045	꺾	AA65	9776	FFQD0080*
5046	꺾	AA66	9777	FFQE0080*
5047	꺾	AA67	9778	FFQF0080*
5048	꺾	AA68	9779	FFQG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 25 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5049	꺄	AA69	977A	FFQH0080*
5050	꺅	AA6A	9781	FFQI0080*
5051	꺆	AA6B	9782	FFQJ0080*
5052	꺇	AA6C	9783	FFQK0080*
5053	꺈	AA6D	9784	FFQL0080*
5054	꺉	AA6E	9785	FFQM0080*
5055	꺊	AA6F	9786	FFQN0080*
5056	꺋	AA70	9787	FFQO0080*
5057	꺌	AA71	9788	FFQP0080
5058	꺍	AA73	9789	FFQR0080*
5059	꺎	AA74	978A	FFQS0080*
5060	꺏	AA75	978B	FFQT0080*
5061	꺐	AA76	978C	FFQU0080*
5062	꺑	AA77	BBD0	FFQV0080
5063	꺒	AA78	978D	FFQW0080*
5064	꺓	AA79	978E	FFQX0080*
5065	꺔	AA7A	978F	FFQY0080*
5066	꺕	AA7B	9790	FFQZ0080*
5067	꺖	AA7C	9791	FFR00080*
5068	꺗	AA7D	9792	FFR10080*
5069	꺘	AA81	BBD1	FFR50080
5070	꺙	AA82	BBD2	FFR60080
5071	꺚	AA83	9793	FFR70080*
5072	꺛	AA84	9794	FFR80080*
5073	꺜	AA85	BBD3	FFR90080
5074	꺝	AA86	9795	FFRA0080*

Table 15 (Page 25 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5075	꺞	AA87	9796	FFRB0080*
5076	꺟	AA88	9797	FFRC0080*
5077	꺠	AA89	BBD4	FFRD0080
5078	꺡	AA8A	9798	FFRE0080
5079	꺢	AA8B	9799	FFRF0080*
5080	꺣	AA8C	979A	FFRG0080*
5081	꺤	AA8D	979B	FFRH0080*
5082	꺥	AA8E	979C	FFRI0080*
5083	꺦	AA8F	979D	FFRJ0080*
5084	꺧	AA90	979E	FFRK0080*
5085	꺨	AA91	BBD5	FFRL0080
5086	꺩	AA93	979F	FFRN0080
5087	꺪	AA94	97A0	FFRO0080*
5088	꺫	AA95	BBD6	FFRP0080
5089	꺬	AA96	97A1	FFRQ0080*
5090	꺭	AA97	BBD7	FFRR0080
5091	꺮	AA98	97A2	FFRS0080*
5092	꺯	AA99	97A3	FFRT0080*
5093	꺰	AA9A	97A4	FFRU0080*
5094	꺱	AA9B	97A5	FFRV0080*
5095	꺲	AA9C	97A6	FFRW0080*
5096	꺳	AA9D	97A7	FFRX0080*
5097	꺴	AAA1	97A8	FFS10080
5098	꺵	AAA2	97A9	FFS20080*
5099	꺶	AAA3	97AA	FFS30080*
5100	꺷	AAA4	97AB	FFS40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 26 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5101	뵎	AAA5	97AC	FFS50080*
5102	뵑	AAA6	97AD	FFS60080*
5103	뵒	AAA7	97AE	FFS70080*
5104	뵓	AAA8	97AF	FFS80080*
5105	뵔	AAA9	97B0	FFS90080*
5106	뵕	AAAA	97B1	FFSA0080*
5107	뵖	AAAB	97B2	FFSB0080*
5108	뵗	AAAC	97B3	FFSC0080*
5109	뵘	AAAD	97B4	FFSD0080*
5110	뵙	AAAE	97B5	FFSE0080*
5111	뵚	AAAF	97B6	FFSF0080*
5112	뵛	AAB0	97B7	FFSG0080*
5113	뵜	AAB1	97B8	FFSH0080*
5114	뵝	AAB3	97B9	FFSJ0080*
5115	뵞	AAB4	97BA	FFSK0080*
5116	뵟	AAB5	97BB	FFSL0080*
5117	뵠	AAB6	97BC	FFSM0080*
5118	뵡	AAB7	97BD	FFSN0080*
5119	뵢	AAB8	97BE	FFSO0080*
5120	뵣	AAB9	97BF	FFSP0080*
5121	뵤	AABA	97C0	FFSQ0080*
5122	뵥	AABB	97C1	FFSR0080*
5123	뵦	AABC	97C2	FFSS0080*
5124	뵧	AABD	97C3	FFST0080*
5125	뵨	AAC1	97C4	FFSX0080
5126	뵩	AAC2	97C5	FFSY0080*

Table 15 (Page 26 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5127	뵪	AAC3	97C6	FFSZ0080*
5128	뵫	AAC4	97C7	FFT00080*
5129	뵬	AAC5	97C8	FFT10080*
5130	뵭	AAC6	97C9	FFT20080*
5131	뵮	AAC7	97CA	FFT30080*
5132	뵯	AAC8	97CB	FFT40080*
5133	뵰	AAC9	97CC	FFT50080*
5134	뵱	AACA	97CD	FFT60080*
5135	뵲	AACB	97CE	FFT70080*
5136	뵳	AACC	97CF	FFT80080*
5137	뵴	AACD	97D0	FFT90080*
5138	뵵	AACE	97D1	FFTA0080*
5139	뵶	AACF	97D2	FFTB0080*
5140	뵷	AAD0	97D3	FFTC0080*
5141	뵸	AAD1	97D4	FFTD0080*
5142	뵹	AAD3	97D5	FFTF0080*
5143	뵺	AAD4	97D6	FFTG0080*
5144	뵻	AAD5	97D7	FFTH0080*
5145	뵼	AAD6	97D8	FFTI0080*
5146	뵽	AAD7	97D9	FFTJ0080*
5147	뵾	AAD8	97DA	FFTK0080*
5148	뵿	AAD9	97DB	FFTL0080*
5149	뵀	AADA	97DC	FFTM0080*
5150	뵁	AADB	97DD	FFTN0080*
5151	뵂	AADC	97DE	FFTO0080*
5152	뵃	AADD	97DF	FFTP0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 27 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5153	뿌	AAE1	97E0	FFTT0080
5154	뿌	AAE2	97E1	FFTU0080*
5155	뿌	AAE3	97E2	FFTV0080*
5156	뿌	AAE4	97E3	FFTW0080*
5157	뿌	AAE5	97E4	FFTX0080*
5158	뿌	AAE6	97E5	FFTY0080*
5159	뿌	AAE7	97E6	FFTZ0080*
5160	뿌	AAE8	97E7	FFU00080*
5161	뿌	AAE9	97E8	FFU10080*
5162	뿌	AAEA	97E9	FFU20080*
5163	뿌	AAEB	97EA	FFU30080*
5164	뿌	AAEC	97EB	FFU40080*
5165	뿌	AAED	97EC	FFU50080*
5166	뿌	AAEE	97ED	FFU60080*
5167	뿌	AAEF	97EE	FFU70080*
5168	뿌	AAF0	97EF	FFU80080*
5169	뿌	AAF1	97F0	FFU90080*
5170	뿌	AAF3	97F1	FFUB0080*
5171	뿌	AAF4	97F2	FFUC0080*
5172	뿌	AAF5	97F3	FFUD0080*
5173	뿌	AAF6	97F4	FFUE0080*
5174	뿌	AAF7	97F5	FFUF0080*
5175	뿌	AAF8	97F6	FFUG0080*
5176	뿌	AAF9	97F7	FFUH0080*
5177	뿌	AAFA	97F8	FFUI0080*
5178	뿌	AAFB	97F9	FFUJ0080*

Table 15 (Page 27 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5179	뿌	AAFC	97FA	FFUK0080*
5180	뿌	AAFD	97FB	FFUL0080*
5181	뿌	AB41	BBD8	FFUP0080
5182	뿌	AB42	97FC	FFUQ0080*
5183	뿌	AB43	97FD	FFUR0080*
5184	뿌	AB44	97FE	FFUS0080*
5185	뿌	AB45	9841	FFUT0080*
5186	뿌	AB46	9842	FFUU0080*
5187	뿌	AB47	9843	FFUV0080*
5188	뿌	AB48	9844	FFUW0080*
5189	뿌	AB49	9845	FFUX0080*
5190	뿌	AB4A	9846	FFUY0080*
5191	뿌	AB4B	9847	FFUZ0080*
5192	뿌	AB4C	9848	FFV00080*
5193	뿌	AB4D	9849	FFV10080*
5194	뿌	AB4E	984A	FFV20080*
5195	뿌	AB4F	984B	FFV30080*
5196	뿌	AB50	984C	FFV40080*
5197	뿌	AB51	984D	FFV50080*
5198	뿌	AB53	984E	FFV70080*
5199	뿌	AB54	984F	FFV80080*
5200	뿌	AB55	9850	FFV90080*
5201	뿌	AB56	9851	FFVA0080*
5202	뿌	AB57	BBD9	FFVB0080
5203	뿌	AB58	9852	FFVC0080*
5204	뿌	AB59	9853	FFVD0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5205	뵁	AB5A	9854	FFVE0080*
5206	뵂	AB5B	9855	FFVF0080*
5207	뵃	AB5C	9856	FFVG0080*
5208	뵄	AB5D	9857	FFVH0080*
5209	뵅	AB61	BBDA	FFVL0080
5210	뵆	AB62	9858	FFVM0080
5211	뵇	AB63	9859	FFVN0080*
5212	뵈	AB64	985A	FFVO0080*
5213	뵉	AB65	BBDB	FFVP0080
5214	뵊	AB66	9861	FFVQ0080*
5215	뵋	AB67	9862	FFVR0080*
5216	뵌	AB68	9863	FFVS0080*
5217	뵍	AB69	BBDC	FFVT0080
5218	뵑	AB6A	9864	FFVU0080*
5219	뵒	AB6B	9865	FFVV0080*
5220	뵓	AB6C	9866	FFVW0080*
5221	뵔	AB6D	9867	FFVX0080*
5222	뵕	AB6E	9868	FFVY0080*
5223	뵖	AB6F	9869	FFVZ0080*
5224	뵗	AB70	986A	FFW00080*
5225	뵘	AB71	BBDD	FFW10080
5226	뵙	AB73	BBDE	FFW30080
5227	뵚	AB74	986B	FFW40080*
5228	뵛	AB75	986C	FFW50080*
5229	뵜	AB76	986D	FFW60080*
5230	뵝	AB77	986E	FFW70080*

Table 15 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5231	뵞	AB78	986F	FFW80080*
5232	뵟	AB79	9870	FFW90080*
5233	뵠	AB7A	9871	FFWA0080*
5234	뵡	AB7B	9872	FFWB0080*
5235	뵢	AB7C	9873	FFWC0080*
5236	뵣	AB7D	9874	FFWD0080*
5237	뵤	AB81	9875	FFWH0080
5238	뵥	AB82	9876	FFWI0080*
5239	뵦	AB83	9877	FFWJ0080*
5240	뵧	AB84	9878	FFWK0080*
5241	뵨	AB85	9879	FFWL0080*
5242	뵩	AB86	987A	FFWM0080*
5243	뵪	AB87	9881	FFWN0080*
5244	뵫	AB88	9882	FFWO0080*
5245	뵬	AB89	9883	FFWP0080*
5246	뵭	AB8A	9884	FFWQ0080*
5247	뵮	AB8B	9885	FFWR0080*
5248	뵯	AB8C	9886	FFWS0080*
5249	뵰	AB8D	9887	FFWT0080*
5250	뵱	AB8E	9888	FFWU0080*
5251	뵲	AB8F	9889	FFWV0080*
5252	뵳	AB90	988A	FFWW0080*
5253	뵴	AB91	988B	FFWX0080*
5254	뵵	AB93	988C	FFWZ0080*
5255	뵶	AB94	988D	FFX00080*
5256	뵷	AB95	988E	FFX10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5257	꺾	AB96	988F	FFX20080*
5258	꺾	AB97	9890	FFX30080*
5259	꺾	AB98	9891	FFX40080*
5260	꺾	AB99	9892	FFX50080*
5261	꺾	AB9A	9893	FFX60080*
5262	꺾	AB9B	9894	FFX70080*
5263	꺾	AB9C	9895	FFX80080*
5264	꺾	AB9D	9896	FFX90080*
5265	꺾	ABA1	BBDF	FFXD0080
5266	꺾	ABA2	BBE0	FFXE0080
5267	꺾	ABA3	9897	FFXF0080*
5268	꺾	ABA4	9898	FFXG0080*
5269	꺾	ABA5	BBE1	FFXH0080
5270	꺾	ABA6	9899	FFXI0080*
5271	꺾	ABA7	989A	FFXJ0080*
5272	꺾	ABA8	989B	FFXK0080*
5273	꺾	ABA9	BBE2	FFXL0080
5274	꺾	ABAA	989C	FFXM0080*
5275	꺾	ABAB	989D	FFXN0080*
5276	꺾	ABAC	989E	FFXO0080*
5277	꺾	ABAD	989F	FFXP0080*
5278	꺾	ABAE	98A0	FFXQ0080*
5279	꺾	ABAF	98A1	FFXR0080*
5280	꺾	ABB0	98A2	FFXS0080*
5281	꺾	ABB1	BBE3	FFXT0080
5282	꺾	ABB3	BBE4	FFXV0080

Table 15 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5283	꺾	ABB4	98A3	FFXW0080*
5284	꺾	ABB5	BBE5	FFXX0080
5285	꺾	ABB6	98A4	FFXY0080*
5286	꺾	ABB7	BBE6	FFXZ0080
5287	꺾	ABB8	98A5	FFY00080*
5288	꺾	ABB9	98A6	FFY10080*
5289	꺾	ABBA	98A7	FFY20080*
5290	꺾	ABBB	98A8	FFY30080*
5291	꺾	ABBC	98A9	FFY40080*
5292	꺾	ABBD	98AA	FFY50080*
5293	꺾	AC61	BBE7	FG0X0080
5294	꺾	AC62	BBE8	FG0Y0080
5295	꺾	AC63	98AB	FG0Z0080
5296	꺾	AC64	BBE9	FG100080
5297	꺾	AC65	BBEA	FG110080
5298	꺾	AC66	98AC	FG120080*
5299	꺾	AC67	98AD	FG130080*
5300	꺾	AC68	BBEB	FG140080
5301	꺾	AC69	BBEC	FG150080
5302	꺾	AC6A	BBED	FG160080
5303	꺾	AC6B	BBEE	FG170080
5304	꺾	AC6C	98AE	FG180080
5305	꺾	AC6D	98AF	FG190080*
5306	꺾	AC6E	98B0	FG1A0080*
5307	꺾	AC6F	98B1	FG1B0080*
5308	꺾	AC70	98B2	FG1C0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 30 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5309	삼	AC71	BBEF	FG1D0080
5310	삽	AC73	BBF0	FG1F0080
5311	삼	AC74	98B3	FG1G0080*
5312	삿	AC75	BBF1	FG1H0080
5313	삿	AC76	BBF2	FG1I0080
5314	상	AC77	BBF3	FG1J0080
5315	삿	AC78	98B4	FG1K0080*
5316	삿	AC79	98B5	FG1L0080
5317	삿	AC7A	98B6	FG1M0080*
5318	살	AC7B	BBF4	FG1N0080
5319	살	AC7C	98B7	FG1O0080*
5320	삼	AC7D	98B8	FG1P0080
5321	새	AC81	BBF5	FG1T0080
5322	색	AC82	BBF6	FG1U0080
5323	색	AC83	98B9	FG1V0080*
5324	색	AC84	98BA	FG1W0080*
5325	센	AC85	BBF7	FG1X0080
5326	색	AC86	98BB	FG1Y0080*
5327	색	AC87	98BC	FG1Z0080*
5328	색	AC88	98BD	FG200080
5329	색	AC89	BBF8	FG210080
5330	색	AC8A	98BE	FG220080*
5331	색	AC8B	98BF	FG230080*
5332	색	AC8C	98C0	FG240080*
5333	색	AC8D	98C1	FG250080*
5334	색	AC8E	98C2	FG260080*

Table 15 (Page 30 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5335	색	AC8F	98C3	FG270080*
5336	색	AC90	98C4	FG280080*
5337	색	AC91	BBF9	FG290080
5338	색	AC93	BBFA	FG2B0080
5339	색	AC94	98C5	FG2C0080*
5340	색	AC95	BBFB	FG2D0080
5341	색	AC96	BBFC	FG2E0080
5342	생	AC97	BBFD	FG2F0080
5343	색	AC98	98C6	FG2G0080*
5344	색	AC99	98C7	FG2H0080*
5345	색	AC9A	98C8	FG2I0080*
5346	색	AC9B	98C9	FG2J0080*
5347	색	AC9C	98CA	FG2K0080*
5348	생	AC9D	98CB	FG2L0080*
5349	샤	ACA1	BBFE	FG2P0080
5350	삭	ACA2	BCA1	FG2Q0080
5351	샤	ACA3	98CC	FG2R0080*
5352	샤	ACA4	98CD	FG2S0080*
5353	산	ACA5	BCA2	FG2T0080
5354	샤	ACA6	98CE	FG2U0080*
5355	샡	ACA7	98CF	FG2V0080*
5356	샡	ACA8	98D0	FG2W0080*
5357	샡	ACA9	BCA3	FG2X0080
5358	삭	ACAA	98D1	FG2Y0080*
5359	샡	ACAB	98D2	FG2Z0080*
5360	샡	ACAC	98D3	FG300080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5361	샅	ACAD	98D4	FG310080*
5362	샅	ACAE	98D5	FG320080*
5363	샅	ACAF	98D6	FG330080*
5364	샅	ACB0	98D7	FG340080*
5365	삼	ACB1	BCA4	FG350080
5366	삽	ACB3	BCA5	FG370080
5367	샅	ACB4	98D8	FG380080*
5368	삿	ACB5	BCA6	FG390080
5369	삿	ACB6	98D9	FG3A0080*
5370	상	ACB7	BCA7	FG3B0080
5371	삿	ACB8	98DA	FG3C0080*
5372	삿	ACB9	98DB	FG3D0080*
5373	삿	ACBA	98DC	FG3E0080*
5374	샅	ACBB	98DD	FG3F0080*
5375	샅	ACBC	98DE	FG3G0080*
5376	샅	ACBD	98DF	FG3H0080*
5377	새	ACC1	BCA8	FG3L0080
5378	색	ACC2	98E0	FG3M0080*
5379	색	ACC3	98E1	FG3N0080*
5380	색	ACC4	98E2	FG3O0080*
5381	센	ACC5	BCA9	FG3P0080
5382	색	ACC6	98E3	FG3Q0080*
5383	색	ACC7	98E4	FG3R0080*
5384	센	ACC8	98E5	FG3S0080*
5385	셀	ACC9	BCAA	FG3T0080
5386	셀	ACCA	98E6	FG3U0080*

Table 15 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5387	색	ACCB	98E7	FG3V0080*
5388	색	ACCC	98E8	FG3W0080*
5389	색	ACCD	98E9	FG3X0080*
5390	색	ACCE	98EA	FG3Y0080*
5391	색	ACCF	98EB	FG3Z0080*
5392	색	ACD0	98EC	FG400080*
5393	셈	ACD1	BCAB	FG410080
5394	셈	ACD3	98ED	FG430080*
5395	색	ACD4	98EE	FG440080*
5396	셋	ACD5	98EF	FG450080*
5397	셋	ACD6	98F0	FG460080*
5398	생	ACD7	BCAC	FG470080
5399	셋	ACD8	98F1	FG480080*
5400	셋	ACD9	98F2	FG490080*
5401	색	ACDA	98F3	FG4A0080*
5402	셀	ACDB	98F4	FG4B0080*
5403	색	ACDC	98F5	FG4C0080*
5404	색	ACDD	98F6	FG4D0080*
5405	서	ACE1	BCAD	FG4H0080
5406	석	ACE2	BCAE	FG4I0080
5407	쉬	ACE3	BCAF	FG4J0080
5408	쉬	ACE4	BCB0	FG4K0080
5409	선	ACE5	BCB1	FG4L0080
5410	섯	ACE6	98F7	FG4M0080*
5411	섯	ACE7	98F8	FG4N0080*
5412	설	ACE8	BCB2	FG4O0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5413	설	ACE9	BCB3	FG4P0080
5414	셴	ACEA	98F9	FG4Q0080
5415	셸	ACEB	BCB4	FG4R0080
5416	셴	ACEC	BCB5	FG4S0080
5417	셴	ACED	98FA	FG4T0080*
5418	셴	ACEE	98FB	FG4U0080*
5419	셴	ACEF	98FC	FG4V0080*
5420	셴	ACF0	98FD	FG4W0080*
5421	셴	ACF1	BCB6	FG4X0080
5422	셴	ACF3	BCB7	FG4Z0080
5423	셴	ACF4	98FE	FG500080*
5424	셴	ACF5	BCB8	FG510080
5425	셴	ACF6	BCB9	FG520080
5426	셴	ACF7	BCBA	FG530080
5427	셴	ACF8	9941	FG540080*
5428	셴	ACF9	9942	FG550080*
5429	셴	ACFA	9943	FG560080*
5430	셴	ACFB	9944	FG570080*
5431	셴	ACFC	BCBB	FG580080
5432	셴	ACFD	9945	FG590080*
5433	셴	AD41	BCBC	FG5D0080
5434	셴	AD42	BCBD	FG5E0080
5435	셴	AD43	9946	FG5F0080*
5436	셴	AD44	9947	FG5G0080*
5437	셴	AD45	BCBE	FG5H0080
5438	셴	AD46	9948	FG5I0080*

Table 15 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5439	셴	AD47	9949	FG5J0080*
5440	셴	AD48	994A	FG5K0080
5441	셴	AD49	BCBF	FG5L0080
5442	셴	AD4A	994B	FG5M0080*
5443	셴	AD4B	994C	FG5N0080*
5444	셴	AD4C	994D	FG5O0080*
5445	셴	AD4D	994E	FG5P0080*
5446	셴	AD4E	994F	FG5Q0080*
5447	셴	AD4F	9950	FG5R0080*
5448	셴	AD50	9951	FG5S0080*
5449	셴	AD51	BCC0	FG5T0080
5450	셴	AD53	BCC1	FG5V0080
5451	셴	AD54	9952	FG5W0080*
5452	셴	AD55	BCC2	FG5X0080
5453	셴	AD56	BCC3	FG5Y0080
5454	셴	AD57	BCC4	FG5Z0080
5455	셴	AD58	9953	FG600080*
5456	셴	AD59	9954	FG610080*
5457	셴	AD5A	9955	FG620080*
5458	셴	AD5B	9956	FG630080
5459	셴	AD5C	9957	FG640080*
5460	셴	AD5D	9958	FG650080*
5461	셴	AD61	BCC5	FG690080
5462	셴	AD62	BCC6	FG6A0080
5463	셴	AD63	9959	FG6B0080*
5464	셴	AD64	995A	FG6C0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 33 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5465	선	AD65	BCC7	FG6D0080
5466	섧	AD66	9961	FG6E0080*
5467	섨	AD67	9962	FG6F0080*
5468	셀	AD68	9963	FG6G0080*
5469	셁	AD69	BCC8	FG6H0080
5470	셂	AD6A	9964	FG6I0080*
5471	셃	AD6B	9965	FG6J0080*
5472	셄	AD6C	9966	FG6K0080*
5473	셅	AD6D	9967	FG6L0080*
5474	셆	AD6E	9968	FG6M0080*
5475	셇	AD6F	9969	FG6N0080*
5476	셈	AD70	996A	FG6O0080*
5477	셉	AD71	BCC9	FG6P0080
5478	셊	AD73	BCCA	FG6R0080
5479	셋	AD74	996B	FG6S0080*
5480	셌	AD75	BCCB	FG6T0080
5481	셍	AD76	BCCC	FG6U0080
5482	셎	AD77	BCCD	FG6V0080
5483	셏	AD78	996C	FG6W0080*
5484	셐	AD79	996D	FG6X0080*
5485	셑	AD7A	996E	FG6Y0080*
5486	셒	AD7B	996F	FG6Z0080*
5487	셓	AD7C	9970	FG700080*
5488	셔	AD7D	9971	FG710080*
5489	셕	AD81	BCCE	FG750080
5490	셖	AD82	9972	FG760080*

Table 15 (Page 33 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5491	셗	AD83	9973	FG770080*
5492	션	AD84	9974	FG780080*
5493	셙	AD85	BCCF	FG790080
5494	셚	AD86	9975	FG7A0080*
5495	셛	AD87	9976	FG7B0080*
5496	셜	AD88	9977	FG7C0080*
5497	셝	AD89	BCD0	FG7D0080
5498	셞	AD8A	9978	FG7E0080*
5499	셟	AD8B	9979	FG7F0080*
5500	셠	AD8C	997A	FG7G0080*
5501	셡	AD8D	9981	FG7H0080*
5502	셢	AD8E	9982	FG7I0080*
5503	셣	AD8F	9983	FG7J0080*
5504	셤	AD90	9984	FG7K0080*
5505	셥	AD91	9985	FG7L0080*
5506	셦	AD93	9986	FG7N0080*
5507	셧	AD94	9987	FG7O0080*
5508	셨	AD95	9988	FG7P0080*
5509	셩	AD96	9989	FG7Q0080*
5510	셪	AD97	BCD1	FG7R0080
5511	셫	AD98	998A	FG7S0080*
5512	셬	AD99	998B	FG7T0080*
5513	셭	AD9A	998C	FG7U0080*
5514	셮	AD9B	998D	FG7V0080*
5515	셯	AD9C	998E	FG7W0080*
5516	셰	AD9D	998F	FG7X0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5517	소	ADA1	BCD2	FG810080
5518	속	ADA2	BCD3	FG820080
5519	슈	ADA3	BCD4	FG830080
5520	쑈	ADA4	9990	FG840080*
5521	손	ADA5	BCD5	FG850080
5522	슌	ADA6	9991	FG860080*
5523	슔	ADA7	9992	FG870080*
5524	솔	ADA8	9993	FG880080
5525	솔	ADA9	BCD6	FG890080
5526	슉	ADAA	9994	FG8A0080*
5527	슊	ADAB	BCD7	FG8B0080
5528	슋	ADAC	9995	FG8C0080*
5529	슌	ADAD	9996	FG8D0080*
5530	슍	ADAE	9997	FG8E0080*
5531	슎	ADAF	9998	FG8F0080*
5532	슏	ADB0	9999	FG8G0080*
5533	슴	ADB1	BCD8	FG8H0080
5534	슴	ADB3	BCD9	FG8J0080
5535	슑	ADB4	999A	FG8K0080*
5536	슒	ADB5	BCDA	FG8L0080
5537	슓	ADB6	999B	FG8M0080*
5538	슔	ADB7	BCDB	FG8N0080
5539	슕	ADB8	999C	FG8O0080*
5540	슖	ADB9	999D	FG8P0080*
5541	슗	ADBA	999E	FG8Q0080*
5542	솔	ADBB	BCDC	FG8R0080

Table 15 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5543	슘	ADBC	999F	FG8S0080*
5544	슙	ADBD	99A0	FG8T0080*
5545	슚	ADC1	BCDD	FG8X0080
5546	슛	ADC2	BCDE	FG8Y0080
5547	슜	ADC3	99A1	FG8Z0080*
5548	슝	ADC4	99A2	FG900080*
5549	산	ADC5	BCDF	FG910080
5550	쌌	ADC6	99A3	FG920080*
5551	쌍	ADC7	99A4	FG930080*
5552	쌂	ADC8	99A5	FG940080*
5553	쌃	ADC9	BCE0	FG950080
5554	쌄	ADCA	99A6	FG960080*
5555	쌅	ADCB	99A7	FG970080*
5556	쌆	ADCC	99A8	FG980080*
5557	쌇	ADCD	99A9	FG990080*
5558	쌈	ADCE	99AA	FG9A0080*
5559	쌉	ADCF	99AB	FG9B0080*
5560	쌊	ADD0	99AC	FG9C0080*
5561	쌋	ADD1	99AD	FG9D0080*
5562	쌄	ADD3	99AE	FG9F0080*
5563	쌅	ADD4	99AF	FG9G0080*
5564	쌆	ADD5	99B0	FG9H0080
5565	쌇	ADD6	99B1	FG9I0080*
5566	쌈	ADD7	BCE1	FG9J0080
5567	쌉	ADD8	99B2	FG9K0080*
5568	쌊	ADD9	99B3	FG9L0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
5569	촬	ADDA	99B4	FG9M0080*
5570	촬	ADDB	99B5	FG9N0080*
5571	촬	ADDC	99B6	FG9O0080*
5572	촬	ADDD	99B7	FG9P0080*
5573	쇄	ADE1	BCE2	FG9T0080
5574	쇄	ADE2	99B8	FG9U0080*
5575	쇄	ADE3	99B9	FG9V0080*
5576	쇄	ADE4	99BA	FG9W0080*
5577	센	ADE5	BCE3	FG9X0080
5578	센	ADE6	99BB	FG9Y0080*
5579	센	ADE7	99BC	FG9Z0080*
5580	센	ADE8	99BD	FGA00080*
5581	셀	ADE9	BCE4	FGA10080
5582	셀	ADEA	99BE	FGA20080*
5583	셀	ADEB	99BF	FGA30080*
5584	셀	ADEC	99C0	FGA40080*
5585	셀	ADED	99C1	FGA50080*
5586	셀	ADEE	99C2	FGA60080*
5587	셀	ADEF	99C3	FGA70080*
5588	셀	ADF0	99C4	FGA80080*
5589	첵	ADF1	BCE5	FGA90080
5590	첵	ADF3	99C5	FGAB0080*
5591	첵	ADF4	99C6	FGAC0080*
5592	셋	ADF5	BCE6	FGAD0080
5593	셋	ADF6	BCE7	FGAE0080
5594	셋	ADF7	99C7	FGAF0080*

Line Number	Graphic	Host Code	PC Code	GCGID
5595	셋	ADF8	99C8	FGAG0080*
5596	셋	ADF9	99C9	FGAH0080*
5597	셋	ADFA	99CA	FGAI0080*
5598	셋	ADFB	99CB	FGAJ0080*
5599	셋	ADFC	99CC	FGAK0080*
5600	셋	ADFD	99CD	FGAL0080*
5601	쇠	AE41	BCE8	FGAP0080
5602	쇠	AE42	99CE	FGAQ0080*
5603	쉬	AE43	99CF	FGAR0080*
5604	쉬	AE44	99D0	FGAS0080*
5605	신	AE45	BCE9	FGAT0080
5606	신	AE46	99D1	FGAU0080*
5607	신	AE47	99D2	FGAV0080*
5608	신	AE48	99D3	FGAW0080*
5609	설	AE49	BCEA	FGAX0080
5610	설	AE4A	99D4	FGAY0080*
5611	설	AE4B	99D5	FGAZ0080*
5612	설	AE4C	99D6	FGB00080*
5613	설	AE4D	99D7	FGB10080*
5614	설	AE4E	99D8	FGB20080*
5615	설	AE4F	99D9	FGB30080*
5616	설	AE50	99DA	FGB40080*
5617	쉽	AE51	BCEB	FGB50080
5618	쉽	AE53	BCEC	FGB70080
5619	쉽	AE54	99DB	FGB80080*
5620	셋	AE55	BCED	FGB90080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
5621	췀	AE56	99DC	FGBA0080*
5622	췁	AE57	99DD	FGBB0080*
5623	췂	AE58	99DE	FGBC0080*
5624	췃	AE59	99DF	FGBD0080*
5625	췄	AE5A	99E0	FGBE0080*
5626	췅	AE5B	99E1	FGBF0080*
5627	췆	AE5C	99E2	FGBG0080*
5628	췇	AE5D	99E3	FGBH0080*
5629	쇼	AE61	BCEE	FGBL0080
5630	숙	AE62	BCEF	FGBM0080
5631	췈	AE63	99E4	FGBN0080*
5632	췉	AE64	99E5	FGBO0080*
5633	손	AE65	BCF0	FGBP0080
5634	췊	AE66	99E6	FGBQ0080*
5635	췋	AE67	99E7	FGBR0080*
5636	손	AE68	99E8	FGBS0080*
5637	솔	AE69	BCF1	FGBT0080
5638	췌	AE6A	99E9	FGBU0080*
5639	췍	AE6B	99EA	FGBV0080*
5640	췎	AE6C	99EB	FGBW0080*
5641	췏	AE6D	99EC	FGBX0080*
5642	췐	AE6E	99ED	FGBY0080*
5643	췑	AE6F	99EE	FGBZ0080*
5644	췒	AE70	99EF	FGC00080*
5645	슴	AE71	BCF2	FGC10080
5646	습	AE73	BCF3	FGC30080

Line Number	Graphic	Host Code	PC Code	GCGID
5647	췓	AE74	99F0	FGC40080*
5648	췔	AE75	BCF4	FGC50080
5649	췕	AE76	99F1	FGC60080*
5650	송	AE77	BCF5	FGC70080
5651	췖	AE78	99F2	FGC80080*
5652	췗	AE79	99F3	FGC90080*
5653	췘	AE7A	99F4	FGCA0080*
5654	솔	AE7B	99F5	FGCB0080*
5655	췙	AE7C	99F6	FGCC0080*
5656	송	AE7D	99F7	FGCD0080*
5657	수	AE81	BCF6	FGCH0080
5658	췚	AE82	BCF7	FGCI0080
5659	췛	AE83	99F8	FGCJ0080*
5660	췜	AE84	99F9	FGCK0080*
5661	순	AE85	BCF8	FGCL0080
5662	췝	AE86	99FA	FGCM0080*
5663	췞	AE87	99FB	FGCN0080*
5664	솔	AE88	BCF9	FGCO0080
5665	솔	AE89	BCFA	FGCP0080
5666	췟	AE8A	99FC	FGCQ0080*
5667	췠	AE8B	99FD	FGCR0080*
5668	췡	AE8C	99FE	FGCS0080*
5669	췢	AE8D	9A41	FGCT0080*
5670	췣	AE8E	9A42	FGCU0080*
5671	췤	AE8F	9A43	FGCV0080*
5672	췥	AE90	9A44	FGCW0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 15 (Page 37 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5673	슴	AE91	BCFB	FGCX0080
5674	습	AE93	BCFC	FGCZ0080
5675	슌	AE94	9A45	FGD00080*
5676	스	AE95	BCFD	FGD10080
5677	슘	AE96	9A46	FGD20080*
5678	승	AE97	BCFE	FGD30080
5679	슙	AE98	9A47	FGD40080*
5680	수	AE99	BDA1	FGD50080
5681	슈	AE9A	9A48	FGD60080*
5682	솔	AE9B	BDA2	FGD70080
5683	숀	AE9C	BDA3	FGD80080
5684	송	AE9D	9A49	FGD90080*
5685	쉬	AEA1	BDA4	FGDD0080
5686	쑈	AEA2	9A4A	FGDE0080*
5687	쑉	AEA3	9A4B	FGDF0080*
5688	쑊	AEA4	9A4C	FGDG0080*
5689	쑋	AEA5	9A4D	FGDH0080*
5690	쑌	AEA6	9A4E	FGDI0080*
5691	쑍	AEA7	9A4F	FGDJ0080*
5692	쑎	AEA8	9A50	FGDK0080*
5693	쑏	AEA9	9A51	FGDL0080*
5694	쑑	AEEA	9A52	FGDM0080*
5695	쑒	AEAB	9A53	FGDN0080*
5696	쑓	AEAC	9A54	FGDO0080*
5697	쑔	AEAD	9A55	FGDP0080*
5698	쑕	AEAE	9A56	FGDQ0080*

Table 15 (Page 37 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5699	쑖	AFAF	9A57	FGDR0080*
5700	쑗	AEB0	9A58	FGDS0080*
Note: * These characters are the expanded Hangeul/Hangeul Jamo characters.				

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
Note:				
* These characters are the expanded Hangeul/Hangeul Jamo characters.				
5701	쑈	AEB1	9A59	FGDT0080*
5702	쑉	AEB3	9A5A	FGDV0080*
5703	쑊	AEB4	9A61	FGDW0080*
5704	쑋	AEB5	9A62	FGDX0080*
5705	쑌	AEB6	BDA5	FGDY0080
5706	쑍	AEB7	9A63	FGDZ0080*
5707	쑎	AEB8	9A64	FGE00080*
5708	쑏	AEB9	9A65	FGE10080*
5709	쑑	AEBA	9A66	FGE20080*
5710	쑒	AEBB	9A67	FGE30080*
5711	쑓	AEBC	9A68	FGE40080*
5712	쑔	AEBD	9A69	FGE50080*
5713	쑕	AEC1	BDA6	FGE90080
5714	쑖	AEC2	BDA7	FGEA0080
5715	쑗	AEC3	9A6A	FGEB0080*
5716	쑘	AEC4	9A6B	FGEC0080*
5717	쑙	AEC5	BDA8	FGED0080
5718	쑚	AEC6	9A6C	FGEE0080*
5719	쑛	AEC7	9A6D	FGEF0080*
5720	쑜	AEC8	9A6E	FGEG0080*
5721	쑝	AEC9	BDA9	FGEH0080
5722	쑞	AECA	9A6F	FGEI0080*
5723	쑟	AECB	9A70	FGEJ0080*
5724	쑠	Aecc	9A71	FGEK0080*

Table 16 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5725	쑡	AECD	9A72	FGEL0080*
5726	쑢	AECE	9A73	FGEM0080*
5727	쑣	AECF	9A74	FGEN0080*
5728	쑤	AED0	9A75	FGEO0080*
5729	쑥	AED1	BDAA	FGEP0080
5730	쑦	AED3	9A76	FGER0080*
5731	쑧	AED4	9A77	FGES0080*
5732	쑨	AED5	9A78	FGET0080*
5733	쑩	AED6	9A79	FGEU0080*
5734	쑪	AED7	BDAB	FGEV0080
5735	쑫	AED8	9A7A	FGEW0080*
5736	쑬	AED9	9A81	FGEX0080*
5737	쑭	AEDA	9A82	FGEY0080*
5738	쑮	AEDB	9A83	FGEZ0080*
5739	쑯	AEDC	9A84	FGF00080*
5740	쑰	AEDD	9A85	FGF10080*
5741	쑱	AEE1	BDAC	FGF50080
5742	쑲	AEE2	BDAD	FGF60080
5743	쑳	AEE3	9A86	FGF70080*
5744	쑴	AEE4	9A87	FGF80080*
5745	쑵	AEE5	BDAE	FGF90080
5746	쑶	AEE6	9A88	FGFA0080*
5747	쑷	AEE7	9A89	FGFB0080*
5748	쑸	AEE8	9A8A	FGFC0080*
5749	쑹	AEE9	BDAF	FGFD0080
5750	쑺	AEEA	9A8B	FGFE0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5751	쑈	AEEB	9A8C	FGFF0080*
5752	쑉	AEEC	9A8D	FGFG0080*
5753	쑊	AEED	9A8E	FGFH0080*
5754	쑋	AEEE	9A8F	FGFI0080*
5755	쑌	AEEF	9A90	FGFJ0080*
5756	쑍	AEF0	9A91	FGFK0080*
5757	쑎	AEF1	BDB0	FGFL0080
5758	쑏	AEF3	BDB1	FGFN0080
5759	쑐	AEF4	9A92	FGFO0080*
5760	쑑	AEF5	BDB2	FGFP0080
5761	쑒	AEF6	9A93	FGFQ0080*
5762	쑓	AEF7	BDB3	FGFR0080
5763	쑔	AEF8	9A94	FGFS0080*
5764	쑕	AEF9	9A95	FGFT0080*
5765	쑖	AEFA	9A96	FGFU0080*
5766	쑗	AEFB	9A97	FGFV0080*
5767	쑘	AEFC	9A98	FGFW0080*
5768	쑙	AEFD	9A99	FGFX0080*
5769	쑚	AF41	BDB4	FGG10080
5770	쑛	AF42	BDB5	FGG20080
5771	쑜	AF43	9A9A	FGG30080*
5772	쑝	AF44	9A9B	FGG40080*
5773	쑞	AF45	9A9C	FGG50080
5774	쑟	AF46	9A9D	FGG60080*
5775	쑠	AF47	9A9E	FGG70080*
5776	쑡	AF48	9A9F	FGG80080*

Table 16 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5777	쑣	AF49	BDB6	FGG90080
5778	쑤	AF4A	9AA0	FGGA0080*
5779	쑥	AF4B	9AA1	FGGB0080*
5780	쑦	AF4C	9AA2	FGGC0080*
5781	쑧	AF4D	9AA3	FGGD0080*
5782	쑨	AF4E	9AA4	FGGE0080*
5783	쑩	AF4F	9AA5	FGGF0080*
5784	쑪	AF50	9AA6	FGGG0080*
5785	쑫	AF51	BDB7	FGGH0080
5786	쑬	AF53	9AA7	FGGJ0080*
5787	쑭	AF54	9AA8	FGGK0080*
5788	쑮	AF55	BDB8	FGGL0080
5789	쑯	AF56	9AA9	FGGM0080*
5790	쑰	AF57	BDB9	FGGN0080
5791	쑱	AF58	9AAA	FGGO0080*
5792	쑲	AF59	9AAB	FGGP0080*
5793	쑳	AF5A	9AAC	FGGQ0080*
5794	쑴	AF5B	9AAD	FGGR0080*
5795	쑵	AF5C	9AAE	FGGS0080*
5796	쑶	AF5D	9AAF	FGGT0080*
5797	쑷	AF61	BDBA	FGGX0080
5798	쑸	AF62	BDBB	FGGY0080
5799	쑹	AF63	9AB0	FGGZ0080*
5800	쑺	AF64	9AB1	FGH00080*
5801	쑻	AF65	BDBC	FGH10080
5802	쑼	AF66	9AB2	FGH20080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5803	슉	AF67	9AB3	FGH30080*
5804	슊	AF68	9AB4	FGH40080*
5805	슋	AF69	BDBD	FGH50080
5806	슌	AF6A	BDBE	FGH60080
5807	슍	AF6B	9AB5	FGH70080*
5808	슎	AF6C	9AB6	FGH80080*
5809	슏	AF6D	9AB7	FGH90080*
5810	슐	AF6E	9AB8	FGHA0080*
5811	슑	AF6F	9AB9	FGHB0080*
5812	슒	AF70	9ABA	FGHC0080
5813	슓	AF71	BDBF	FGHD0080
5814	슔	AF73	BDC0	FGHF0080
5815	슕	AF74	9ABB	FGHG0080*
5816	슖	AF75	BDC1	FGHH0080
5817	슗	AF76	9ABC	FGHI0080*
5818	슘	AF77	BDC2	FGHJ0080
5819	슙	AF78	9ABD	FGHK0080*
5820	슚	AF79	9ABE	FGHL0080*
5821	슛	AF7A	9ABF	FGHM0080*
5822	슜	AF7B	9AC0	FGHN0080*
5823	슝	AF7C	9AC1	FGHO0080*
5824	슞	AF7D	9AC2	FGHP0080*
5825	슟	AF81	9AC3	FGHT0080
5826	슠	AF82	9AC4	FGHU0080*
5827	슡	AF83	9AC5	FGHV0080*
5828	슢	AF84	9AC6	FGHW0080*

Table 16 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5829	슣	AF85	9AC7	FGHX0080*
5830	스	AF86	9AC8	FGHY0080*
5831	슥	AF87	9AC9	FGHZ0080*
5832	슦	AF88	9ACA	FGI00080*
5833	슧	AF89	9ACB	FGI10080*
5834	슨	AF8A	9ACC	FGI20080*
5835	슩	AF8B	9ACD	FGI30080*
5836	슪	AF8C	9ACE	FGI40080*
5837	슫	AF8D	9ACF	FGI50080*
5838	슬	AF8E	9AD0	FGI60080*
5839	슭	AF8F	9AD1	FGI70080*
5840	슮	AF90	9AD2	FGI80080*
5841	슯	AF91	9AD3	FGI90080*
5842	슰	AF93	9AD4	FGIB0080*
5843	슱	AF94	9AD5	FGIC0080*
5844	슲	AF95	9AD6	FGID0080*
5845	슳	AF96	9AD7	FGIE0080*
5846	슴	AF97	9AD8	FGIF0080*
5847	습	AF98	9AD9	FGIG0080*
5848	슶	AF99	9ADA	FGIH0080*
5849	슷	AF9A	9ADB	FGII0080*
5850	슸	AF9B	9ADC	FGIJ0080*
5851	승	AF9C	9ADD	FGIK0080*
5852	슺	AF9D	9ADE	FGIL0080*
5853	시	AFA1	BDC3	FGIP0080
5854	식	AFA2	BDC4	FGIQ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5855	쉬	AFA3	9ADF	FGIR0080*
5856	췀	AFA4	9AE0	FGIS0080*
5857	신	AFA5	BDC5	FGIT0080
5858	싯	AFA6	9AE1	FGIU0080*
5859	싹	AFA7	9AE2	FGIV0080*
5860	실	AFA8	BDC6	FGIW0080
5861	실	AFA9	BDC7	FGIX0080
5862	싣	AFAA	9AE3	FGIY0080*
5863	싵	AFAB	9AE4	FGIZ0080
5864	싶	AFAC	9AE5	FGJ00080*
5865	싷	AFAD	9AE6	FGJ10080*
5866	싸	AFAE	9AE7	FGJ20080*
5867	싹	AFAF	9AE8	FGJ30080*
5868	싺	AFB0	BDC8	FGJ40080
5869	싻	AFB1	BDC9	FGJ50080
5870	싼	AFB3	BDCA	FGJ70080
5871	싽	AFB4	9AE9	FGJ80080*
5872	싿	AFB5	BDCB	FGJ90080
5873	싿	AFB6	9AEA	FGJA0080*
5874	싱	AFB7	BDCC	FGJB0080
5875	싿	AFB8	9AEB	FGJC0080*
5876	싿	AFB9	9AEC	FGJD0080*
5877	식	AFBA	9AED	FGJE0080*
5878	싿	AFBB	9AEE	FGJF0080*
5879	싿	AFBC	BDCD	FGJG0080
5880	싿	AFBD	9AEF	FGJH0080*

Table 16 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5881	싸	B061	BDCE	FGM90080
5882	쌈	B062	BDCF	FGMA0080
5883	쌉	B063	9AF0	FGMB0080*
5884	쌊	B064	BDD0	FGMC0080
5885	쌋	B065	BDD1	FGMD0080
5886	쌄	B066	9AF1	FGME0080*
5887	쌅	B067	9AF2	FGMF0080*
5888	쌆	B068	9AF3	FGMG0080*
5889	쌇	B069	BDD2	FGMH0080
5890	쌈	B06A	9AF4	FGMI0080*
5891	쌉	B06B	9AF5	FGMJ0080
5892	쌊	B06C	9AF6	FGMK0080*
5893	쌋	B06D	9AF7	FGML0080*
5894	쌄	B06E	9AF8	FGMM0080*
5895	쌅	B06F	9AF9	FGMN0080*
5896	쌆	B070	9AFA	FGMO0080*
5897	쌇	B071	BDD3	FGMP0080
5898	쌈	B073	BDD4	FGMR0080
5899	쌉	B074	9AFB	FGMS0080*
5900	쌊	B075	9AFC	FGMT0080
5901	쌋	B076	BDD5	FGMU0080
5902	쌄	B077	BDD6	FGMV0080
5903	쌅	B078	9AFD	FGMW0080*
5904	쌆	B079	9AFE	FGMX0080*
5905	쌇	B07A	9B41	FGMY0080*
5906	쌈	B07B	9B42	FGMZ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5907	쌌	B07C	9B43	FGN00080*
5908	쌍	B07D	BDD7	FGN10080
5909	쌘	B081	BDD8	FGN50080
5910	쌙	B082	BDD9	FGN60080
5911	쌚	B083	9B44	FGN70080*
5912	쌛	B084	9B45	FGN80080*
5913	쌜	B085	BDDA	FGN90080
5914	쌝	B086	9B46	FGNA0080*
5915	쌞	B087	9B47	FGNB0080*
5916	쌟	B088	9B48	FGNC0080*
5917	쌠	B089	BDDB	FGND0080
5918	쌡	B08A	9B49	FGNE0080*
5919	쌢	B08B	9B4A	FGNF0080*
5920	쌣	B08C	9B4B	FGNG0080*
5921	쌤	B08D	9B4C	FGNH0080*
5922	쌦	B08E	9B4D	FGNI0080*
5923	쌧	B08F	9B4E	FGNJ0080*
5924	쌨	B090	9B4F	FGNK0080*
5925	쌩	B091	BDDC	FGNL0080
5926	쌪	B093	BDDD	FGNN0080
5927	쌫	B094	9B50	FGNO0080*
5928	쌬	B095	9B51	FGNP0080
5929	쌭	B096	BDDE	FGNQ0080
5930	쌮	B097	BDDF	FGNR0080
5931	쌯	B098	9B52	FGNS0080*
5932	쌰	B099	9B53	FGNT0080*

Table 16 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
5933	쌱	B09A	9B54	FGNU0080*
5934	쌲	B09B	9B55	FGNV0080*
5935	쌳	B09C	9B56	FGNW0080*
5936	쌴	B09D	9B57	FGNX0080*
5937	쌵	B0A1	9B58	FGO10080
5938	쌶	B0A2	9B59	FGO20080*
5939	쌷	B0A3	9B5A	FGO30080*
5940	쌸	B0A4	9B61	FGO40080*
5941	쌹	B0A5	9B62	FGO50080*
5942	쌺	B0A6	9B63	FGO60080*
5943	쌻	B0A7	9B64	FGO70080*
5944	쌼	B0A8	9B65	FGO80080*
5945	쌽	B0A9	9B66	FGO90080*
5946	쌾	B0AA	9B67	FGOA0080*
5947	쌿	B0AB	9B68	FGOB0080*
5948	쌺	B0AC	9B69	FGOC0080*
5949	쌻	B0AD	9B6A	FGOD0080*
5950	쌼	B0AE	9B6B	FGOE0080*
5951	쌽	B0AF	9B6C	FGOF0080*
5952	쌾	B0B0	9B6D	FGOG0080*
5953	쌿	B0B1	9B6E	FGOH0080*
5954	쌺	B0B3	9B6F	FGOJ0080*
5955	쌻	B0B4	9B70	FGOK0080*
5956	쌼	B0B5	9B71	FGOL0080
5957	쌽	B0B6	9B72	FGOM0080*
5958	쌾	B0B7	BDE0	FGON0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 6 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5959	쫏	B0B8	9B73	FGOO0080*
5960	쫑	B0B9	9B74	FGOP0080*
5961	쫒	B0BA	9B75	FGOQ0080*
5962	쫓	B0BB	9B76	FGOR0080*
5963	쫔	B0BC	9B77	FGOS0080*
5964	쫕	B0BD	9B78	FGOT0080*
5965	쫖	B0C1	9B79	FGOX0080
5966	쫗	B0C2	9B7A	FGOY0080*
5967	쫘	B0C3	9B81	FGOZ0080*
5968	쫙	B0C4	9B82	FGP00080*
5969	쫚	B0C5	9B83	FGP10080*
5970	쫛	B0C6	9B84	FGP20080*
5971	쫜	B0C7	9B85	FGP30080*
5972	쫝	B0C8	9B86	FGP40080*
5973	쫞	B0C9	9B87	FGP50080*
5974	쫟	B0CA	9B88	FGP60080*
5975	쫠	B0CB	9B89	FGP70080*
5976	쫡	B0CC	9B8A	FGP80080*
5977	쫢	B0CD	9B8B	FGP90080*
5978	쫣	B0CE	9B8C	FGPA0080*
5979	쫤	B0CF	9B8D	FGPB0080*
5980	쫥	B0D0	9B8E	FGPC0080*
5981	쫦	B0D1	9B8F	FGPD0080*
5982	쫧	B0D3	9B90	FGPF0080*
5983	쫨	B0D4	9B91	FGPG0080*
5984	쫩	B0D5	9B92	FGPH0080*

Table 16 (Page 6 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
5985	쫪	B0D6	9B93	FGPI0080*
5986	쫫	B0D7	9B94	FGPJ0080*
5987	쫬	B0D8	9B95	FGPK0080*
5988	쫭	B0D9	9B96	FGPL0080*
5989	쫮	B0DA	9B97	FGPM0080*
5990	쫯	B0DB	9B98	FGPN0080*
5991	쫰	B0DC	9B99	FGPO0080*
5992	쫱	B0DD	9B9A	FGPP0080*
5993	쫲	B0E1	BDE1	FGPT0080
5994	쫳	B0E2	BDE2	FGPU0080
5995	쫵	B0E3	9B9B	FGPV0080*
5996	쫶	B0E4	9B9C	FGPW0080*
5997	쫷	B0E5	BDE3	FGPX0080
5998	쫸	B0E6	9B9D	FGPY0080*
5999	쫹	B0E7	9B9E	FGPZ0080*
6000	쫺	B0E8	9B9F	FGQ00080*
6001	쫻	B0E9	BDE4	FGQ10080
6002	쫼	B0EA	9BA0	FGQ20080*
6003	쫽	B0EB	BDE5	FGQ30080
6004	쫾	B0EC	9BA1	FGQ40080*
6005	쫿	B0ED	9BA2	FGQ50080*
6006	쫠	B0EE	9BA3	FGQ60080*
6007	쫡	B0EF	9BA4	FGQ70080*
6008	쫢	B0F0	9BA5	FGQ80080*
6009	쫣	B0F1	BDE6	FGQ90080
6010	쫤	B0F3	BDE7	FGQB0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
6011	꺇	B0F4	9BA6	FGQC0080*
6012	꺈	B0F5	9BA7	FGQD0080
6013	꺉	B0F6	BDE8	FGQE0080
6014	꺊	B0F7	BDE9	FGQF0080
6015	꺋	B0F8	9BA8	FGQG0080*
6016	꺌	B0F9	9BA9	FGQH0080*
6017	꺍	B0FA	9BAA	FGQI0080*
6018	꺎	B0FB	9BAB	FGQJ0080*
6019	꺏	B0FC	9BAC	FGQK0080*
6020	꺐	B0FD	9BAD	FGQL0080*
6021	꺑	B141	BDEA	FGQP0080
6022	꺒	B142	9BAE	FGQQ0080
6023	꺓	B143	9BAF	FGQR0080*
6024	꺔	B144	9BB0	FGQS0080*
6025	꺕	B145	BDEB	FGQT0080
6026	꺖	B146	9BB1	FGQU0080*
6027	꺗	B147	9BB2	FGQV0080*
6028	꺘	B148	9BB3	FGQW0080*
6029	꺙	B149	BDEC	FGQX0080
6030	꺚	B14A	9BB4	FGQY0080*
6031	꺛	B14B	9BB5	FGQZ0080*
6032	꺜	B14C	9BB6	FGR00080*
6033	꺝	B14D	9BB7	FGR10080*
6034	꺞	B14E	9BB8	FGR20080*
6035	꺟	B14F	9BB9	FGR30080*
6036	꺠	B150	9BBA	FGR40080*

Line Number	Graphic	Host Code	PC Code	GCGID
6037	꺡	B151	9BBB	FGR50080*
6038	꺢	B153	9BBC	FGR70080*
6039	꺣	B154	9BBD	FGR80080*
6040	꺤	B155	9BBE	FGR90080*
6041	꺥	B156	9BBF	FGRA0080*
6042	꺦	B157	9BC0	FGRB0080
6043	꺧	B158	9BC1	FGRC0080*
6044	꺨	B159	9BC2	FGRD0080*
6045	꺩	B15A	9BC3	FGRE0080*
6046	꺪	B15B	9BC4	FGRF0080*
6047	꺫	B15C	9BC5	FGRG0080*
6048	꺬	B15D	9BC6	FGRH0080*
6049	꺭	B161	9BC7	FGRL0080
6050	꺮	B162	9BC8	FGRM0080*
6051	꺯	B163	9BC9	FGRN0080*
6052	꺰	B164	9BCA	FGRO0080*
6053	꺱	B165	9BCB	FGRP0080*
6054	꺲	B166	9BCC	FGRQ0080*
6055	꺳	B167	9BCD	FGRR0080*
6056	꺴	B168	9BCE	FGRS0080*
6057	꺵	B169	9BCF	FGRT0080*
6058	꺶	B16A	9BD0	FGRU0080*
6059	꺷	B16B	9BD1	FGRV0080*
6060	꺸	B16C	9BD2	FGRW0080*
6061	꺹	B16D	9BD3	FGRX0080*
6062	꺺	B16E	9BD4	FGRY0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 8 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6063	쨈	B16F	9BD5	FGRZ0080*
6064	쨉	B170	9BD6	FGS00080*
6065	쨊	B171	9BD7	FGS10080*
6066	쨋	B173	9BD8	FGS30080*
6067	쨌	B174	9BD9	FGS40080*
6068	쨍	B175	9BDA	FGS50080*
6069	쨎	B176	9BDB	FGS60080*
6070	쨏	B177	9BDC	FGS70080*
6071	쨐	B178	9BDD	FGS80080*
6072	쨑	B179	9BDE	FGS90080*
6073	쨒	B17A	9BDF	FGSA0080*
6074	쨓	B17B	9BE0	FGSB0080*
6075	쨔	B17C	9BE1	FGSC0080*
6076	쨕	B17D	9BE2	FGSD0080*
6077	쨖	B181	9BE3	FGSH0080
6078	쨗	B182	9BE4	FGSI0080*
6079	쨘	B183	9BE5	FGSJ0080*
6080	쨙	B184	9BE6	FGSK0080*
6081	쨚	B185	BDED	FGSL0080
6082	쨛	B186	9BE7	FGSM0080*
6083	쨜	B187	9BE8	FGSN0080*
6084	쨝	B188	9BE9	FGSO0080*
6085	쨞	B189	9BEA	FGSP0080*
6086	쨟	B18A	9BEB	FGSQ0080*
6087	쨠	B18B	9BEC	FGSR0080*
6088	쨡	B18C	9BED	FGSS0080*

Table 16 (Page 8 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6089	쨢	B18D	9BEE	FGST0080*
6090	쨣	B18E	9BEF	FGSU0080*
6091	쨤	B18F	9BF0	FGSV0080*
6092	쨥	B190	9BF1	FGSW0080*
6093	쨦	B191	9BF2	FGSX0080*
6094	쨧	B193	9BF3	FGSZ0080*
6095	쨨	B194	9BF4	FGT00080*
6096	쨩	B195	9BF5	FGT10080*
6097	쨪	B196	9BF6	FGT20080*
6098	쨫	B197	9BF7	FGT30080*
6099	쨬	B198	9BF8	FGT40080*
6100	쨭	B199	9BF9	FGT50080*
6101	쨮	B19A	9BFA	FGT60080*
6102	쨯	B19B	9BFB	FGT70080*
6103	쨰	B19C	9BFC	FGT80080*
6104	쨱	B19D	9BFD	FGT90080*
6105	쏘	B1A1	BDEE	FGTD0080
6106	속	B1A2	BDEF	FGTE0080
6107	쑈	B1A3	9BFE	FGTF0080*
6108	쑉	B1A4	9C41	FGTG0080*
6109	쑊	B1A5	BDF0	FGTH0080
6110	쑋	B1A6	9C42	FGTI0080*
6111	쑌	B1A7	9C43	FGTJ0080*
6112	쑍	B1A8	BDF1	FGTK0080
6113	쑎	B1A9	BDF2	FGTL0080
6114	쑏	B1AA	9C44	FGTM0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6115	쑈	B1AB	BDF3	FGTN0080
6116	쑉	B1AC	9C45	FGTO0080*
6117	쑊	B1AD	9C46	FGTP0080*
6118	쑋	B1AE	9C47	FGTQ0080*
6119	쑌	B1AF	9C48	FGTR0080*
6120	쑍	B1B0	9C49	FGTS0080*
6121	쑎	B1B1	BDF4	FGTT0080
6122	쑏	B1B3	BDF5	FGTV0080
6123	쑐	B1B4	9C4A	FGTW0080*
6124	쑑	B1B5	9C4B	FGTX0080*
6125	쑒	B1B6	9C4C	FGTY0080*
6126	쑓	B1B7	BDF6	FGTZ0080
6127	쑔	B1B8	9C4D	FGU00080*
6128	쑕	B1B9	9C4E	FGU10080*
6129	쑖	B1BA	9C4F	FGU20080*
6130	쑗	B1BB	9C50	FGU30080*
6131	쑘	B1BC	9C51	FGU40080*
6132	쑙	B1BD	9C52	FGU50080*
6133	쑚	B1C1	BDF7	FGU90080
6134	쑛	B1C2	BDF8	FGUA0080
6135	쑜	B1C3	9C53	FGUB0080*
6136	쑝	B1C4	9C54	FGUC0080*
6137	쑞	B1C5	BDF9	FGUD0080
6138	쑟	B1C6	9C55	FGUE0080*
6139	쑠	B1C7	9C56	FGUF0080*
6140	쑡	B1C8	9C57	FGUG0080*

Table 16 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6141	쑢	B1C9	9C58	FGUH0080
6142	쑣	B1CA	9C59	FGUI0080*
6143	쑤	B1CB	9C5A	FGUJ0080*
6144	쑥	B1CC	9C61	FGUK0080*
6145	쑦	B1CD	9C62	FGUL0080*
6146	쑧	B1CE	9C63	FGUM0080*
6147	쑨	B1CF	9C64	FGUN0080*
6148	쑩	B1D0	9C65	FGUO0080*
6149	쑪	B1D1	9C66	FGUP0080*
6150	쑫	B1D3	9C67	FGUR0080*
6151	쑬	B1D4	9C68	FGUS0080*
6152	쑭	B1D5	9C69	FGUT0080*
6153	쑮	B1D6	BDF A	FGUU0080
6154	쑯	B1D7	9C6A	FGUV0080*
6155	쑰	B1D8	9C6B	FGUW0080*
6156	쑱	B1D9	9C6C	FGUX0080*
6157	쑲	B1DA	9C6D	FGUY0080*
6158	쑳	B1DB	9C6E	FGUZ0080*
6159	쑴	B1DC	9C6F	FGV00080*
6160	쑵	B1DD	9C70	FGV10080*
6161	쑶	B1E1	BDF B	FGV50080
6162	쑷	B1E2	9C71	FGV60080*
6163	쑸	B1E3	9C72	FGV70080*
6164	쑹	B1E4	9C73	FGV80080*
6165	쑺	B1E5	9C74	FGV90080*
6166	쑻	B1E6	9C75	FGVA0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 10 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
6167	쨈	B1E7	9C76	FGVB0080*
6168	쨉	B1E8	9C77	FGVC0080*
6169	쨊	B1E9	9C78	FGVD0080*
6170	쨋	B1EA	9C79	FGVE0080*
6171	쨌	B1EB	9C7A	FGVF0080*
6172	쨍	B1EC	9C81	FGVG0080*
6173	쨎	B1ED	9C82	FGVH0080*
6174	쨏	B1EE	9C83	FGVI0080*
6175	쨐	B1EF	9C84	FGVJ0080*
6176	쨑	B1F0	9C85	FGVK0080*
6177	쨒	B1F1	9C86	FGVL0080*
6178	쨓	B1F3	9C87	FGVN0080*
6179	쨔	B1F4	9C88	FGVO0080*
6180	쨕	B1F5	9C89	FGVP0080*
6181	쨖	B1F6	BDFC	FGVQ0080
6182	쨗	B1F7	9C8A	FGVR0080*
6183	쨘	B1F8	9C8B	FGVS0080*
6184	쨙	B1F9	9C8C	FGVT0080*
6185	쨚	B1FA	9C8D	FGVU0080*
6186	쨛	B1FB	9C8E	FGVV0080*
6187	쨜	B1FC	9C8F	FGVW0080*
6188	쨝	B1FD	9C90	FGVX0080*
6189	쨞	B241	BDFD	FGW10080
6190	쨟	B242	9C91	FGW20080*
6191	쨠	B243	9C92	FGW30080*
6192	쨡	B244	9C93	FGW40080*

Table 16 (Page 10 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
6193	쨢	B245	BDFE	FGW50080
6194	쨣	B246	9C94	FGW60080*
6195	쨤	B247	9C95	FGW70080*
6196	쨥	B248	9C96	FGW80080*
6197	쨦	B249	BEA1	FGW90080
6198	쨧	B24A	9C97	FGWA0080*
6199	쨨	B24B	9C98	FGWB0080*
6200	쨩	B24C	9C99	FGWC0080*
6201	쨪	B24D	9C9A	FGWD0080*
6202	쨫	B24E	9C9B	FGWE0080*
6203	쨬	B24F	9C9C	FGWF0080*
6204	쨭	B250	9C9D	FGWG0080*
6205	쨮	B251	BEA2	FGWH0080
6206	쨯	B253	BEA3	FGWJ0080
6207	쨰	B254	9C9E	FGWK0080*
6208	쨱	B255	9C9F	FGWL0080
6209	쨲	B256	9CA0	FGWM0080*
6210	쨳	B257	9CA1	FGWN0080*
6211	쨴	B258	9CA2	FGWO0080*
6212	쨵	B259	9CA3	FGWP0080*
6213	쨶	B25A	9CA4	FGWQ0080*
6214	쨷	B25B	9CA5	FGWR0080*
6215	쨸	B25C	9CA6	FGWS0080*
6216	쨹	B25D	9CA7	FGWT0080*
6217	쨺	B261	BEA4	FGWX0080
6218	쨻	B262	9CA8	FGWY0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 11 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6219	筭	B263	9CA9	FGWZ0080*
6220	筭	B264	9CAA	FGX00080*
6221	筭	B265	9CAB	FGX10080*
6222	筭	B266	9CAC	FGX20080*
6223	筭	B267	9CAD	FGX30080*
6224	筭	B268	9CAE	FGX40080*
6225	筭	B269	9CAF	FGX50080*
6226	筭	B26A	9CB0	FGX60080*
6227	筭	B26B	9CB1	FGX70080*
6228	筭	B26C	9CB2	FGX80080*
6229	筭	B26D	9CB3	FGX90080*
6230	筭	B26E	9CB4	FGXA0080*
6231	筭	B26F	9CB5	FGXB0080*
6232	筭	B270	9CB6	FGXC0080*
6233	筭	B271	9CB7	FGXD0080*
6234	筭	B273	9CB8	FGXF0080*
6235	筭	B274	9CB9	FGXG0080*
6236	筭	B275	9CBA	FGXH0080*
6237	筭	B276	9CBB	FGXI0080*
6238	筭	B277	9CBC	FGXJ0080*
6239	筭	B278	9CBD	FGXK0080*
6240	筭	B279	9CBE	FGXL0080*
6241	筭	B27A	9CBF	FGXM0080*
6242	筭	B27B	9CC0	FGXN0080*
6243	筭	B27C	9CC1	FGXO0080*
6244	筭	B27D	9CC2	FGXP0080*

Table 16 (Page 11 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6245	筭	B281	BEA5	FGXT0080
6246	筭	B282	BEA6	FGXU0080
6247	筭	B283	9CC3	FGXV0080*
6248	筭	B284	9CC4	FGXW0080*
6249	筭	B285	BEA7	FGXX0080
6250	筭	B286	9CC5	FGXY0080*
6251	筭	B287	9CC6	FGXZ0080*
6252	筭	B288	9CC7	FGY00080*
6253	筭	B289	BEA8	FGY10080
6254	筭	B28A	9CC8	FGY20080*
6255	筭	B28B	9CC9	FGY30080*
6256	筭	B28C	9CCA	FGY40080*
6257	筭	B28D	9CCB	FGY50080*
6258	筭	B28E	9CCC	FGY60080*
6259	筭	B28F	9CCD	FGY70080*
6260	筭	B290	9CCE	FGY80080*
6261	筭	B291	BEA9	FGY90080
6262	筭	B293	BEAA	FGYB0080
6263	筭	B294	9CCF	FGYC0080*
6264	筭	B295	9CD0	FGYD0080
6265	筭	B296	9CD1	FGYE0080*
6266	筭	B297	BEAB	FGYF0080
6267	筭	B298	9CD2	FGYG0080*
6268	筭	B299	9CD3	FGYH0080*
6269	筭	B29A	9CD4	FGYI0080*
6270	筭	B29B	9CD5	FGYJ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
6271	쑈	B29C	9CD6	FGYK0080*
6272	쑉	B29D	9CD7	FGYL0080*
6273	쑊	B2A1	BEAC	FGYP0080
6274	쑋	B2A2	9CD8	FGYQ0080*
6275	쑌	B2A3	9CD9	FGYR0080*
6276	쑍	B2A4	9CDA	FGYS0080*
6277	쑎	B2A5	9CDB	FGYT0080*
6278	쑏	B2A6	9CDC	FGYU0080*
6279	쑑	B2A7	9CDD	FGYV0080*
6280	쑒	B2A8	9CDE	FGYW0080*
6281	쑓	B2A9	9CDF	FGYX0080*
6282	쑔	B2AA	9CE0	FGYY0080*
6283	쑕	B2AB	9CE1	FGYZ0080*
6284	쑖	B2AC	9CE2	FGZ00080*
6285	쑗	B2AD	9CE3	FGZ10080*
6286	쑘	B2AE	9CE4	FGZ20080*
6287	쑙	B2AF	9CE5	FGZ30080*
6288	쑚	B2B0	9CE6	FGZ40080*
6289	쑛	B2B1	9CE7	FGZ50080*
6290	쑜	B2B3	9CE8	FGZ70080*
6291	쑝	B2B4	9CE9	FGZ80080*
6292	쑞	B2B5	9CEA	FGZ90080
6293	쑟	B2B6	BEAD	FGZA0080
6294	쑠	B2B7	9CEB	FGZB0080*
6295	쑡	B2B8	9CEC	FGZC0080*
6296	쑢	B2B9	9CED	FGZD0080*

Line Number	Graphic	Host Code	PC Code	GCGID
6297	쑣	B2BA	9CEE	FGZE0080*
6298	쑤	B2BB	9CEF	FGZF0080*
6299	쑥	B2BC	9CF0	FGZG0080*
6300	쑦	B2BD	9CF1	FGZH0080*
6301	쑧	B2C1	BEAE	FGZL0080
6302	쑨	B2C2	9CF2	FGZM0080*
6303	쑩	B2C3	9CF3	FGZN0080*
6304	쑪	B2C4	9CF4	FGZO0080*
6305	쑫	B2C5	9CF5	FGZP0080*
6306	쑬	B2C6	9CF6	FGZQ0080*
6307	쑭	B2C7	9CF7	FGZR0080*
6308	쑮	B2C8	9CF8	FGZS0080*
6309	쑯	B2C9	9CF9	FGZT0080*
6310	쑰	B2CA	9CFA	FGZU0080*
6311	쑱	B2CB	9CFB	FGZV0080*
6312	쑲	B2CC	9CFC	FGZW0080*
6313	쑳	B2CD	9CFD	FGZX0080*
6314	쑴	B2CE	9CFE	FGZY0080*
6315	쑵	B2CF	9D41	FGZZ0080*
6316	쑶	B2D0	9D42	FH000080*
6317	쑷	B2D1	9D43	FH010080*
6318	쑸	B2D3	9D44	FH030080*
6319	쑹	B2D4	9D45	FH040080*
6320	쑺	B2D5	9D46	FH050080*
6321	쑻	B2D6	9D47	FH060080*
6322	쑼	B2D7	9D48	FH070080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6323	췠	B2D8	9D49	FH080080*
6324	췡	B2D9	9D4A	FH090080*
6325	췢	B2DA	9D4B	FH0A0080*
6326	췣	B2DB	9D4C	FH0B0080*
6327	췤	B2DC	9D4D	FH0C0080*
6328	췥	B2DD	9D4E	FH0D0080*
6329	췦	B2E1	BEAF	FH0H0080
6330	췧	B2E2	9D4F	FH0I0080*
6331	취	B2E3	9D50	FH0J0080*
6332	췩	B2E4	9D51	FH0K0080*
6333	췪	B2E5	BEB0	FH0L0080
6334	췫	B2E6	9D52	FH0M0080*
6335	췬	B2E7	9D53	FH0N0080*
6336	췭	B2E8	9D54	FH0O0080*
6337	췮	B2E9	9D55	FH0P0080*
6338	췯	B2EA	9D56	FH0Q0080*
6339	췰	B2EB	9D57	FH0R0080*
6340	췱	B2EC	9D58	FH0S0080*
6341	췲	B2ED	9D59	FH0T0080*
6342	췳	B2EE	9D5A	FH0U0080*
6343	췴	B2EF	9D61	FH0V0080*
6344	췵	B2F0	9D62	FH0W0080*
6345	췶	B2F1	9D63	FH0X0080*
6346	췷	B2F3	9D64	FH0Z0080*
6347	췸	B2F4	9D65	FH100080*
6348	췹	B2F5	9D66	FH110080*

Table 16 (Page 13 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6349	췺	B2F6	9D67	FH120080*
6350	췻	B2F7	9D68	FH130080*
6351	췼	B2F8	9D69	FH140080*
6352	췽	B2F9	9D6A	FH150080*
6353	췾	B2FA	9D6B	FH160080*
6354	췿	B2FB	9D6C	FH170080*
6355	췠	B2FC	9D6D	FH180080*
6356	췡	B2FD	9D6E	FH190080
6357	췢	B341	9D6F	FH1D0080
6358	췣	B342	9D70	FH1E0080*
6359	췤	B343	9D71	FH1F0080*
6360	췥	B344	9D72	FH1G0080*
6361	췦	B345	9D73	FH1H0080*
6362	췧	B346	9D74	FH1I0080*
6363	취	B347	9D75	FH1J0080*
6364	췩	B348	9D76	FH1K0080*
6365	췪	B349	9D77	FH1L0080*
6366	췫	B34A	9D78	FH1M0080*
6367	췬	B34B	9D79	FH1N0080*
6368	췭	B34C	9D7A	FH1O0080*
6369	췮	B34D	9D81	FH1P0080*
6370	췯	B34E	9D82	FH1Q0080*
6371	췰	B34F	9D83	FH1R0080*
6372	췱	B350	9D84	FH1S0080*
6373	췲	B351	9D85	FH1T0080*
6374	췳	B353	9D86	FH1V0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6375	꺾	B354	9D87	FH1W0080*
6376	꺾	B355	9D88	FH1X0080*
6377	꺾	B356	9D89	FH1Y0080*
6378	꺾	B357	BEB1	FH1Z0080
6379	꺾	B358	9D8A	FH200080*
6380	꺾	B359	9D8B	FH210080*
6381	꺾	B35A	9D8C	FH220080*
6382	꺾	B35B	9D8D	FH230080*
6383	꺾	B35C	9D8E	FH240080*
6384	꺾	B35D	9D8F	FH250080*
6385	꺾	B361	BEB2	FH290080
6386	꺾	B362	BEB3	FH2A0080
6387	꺾	B363	9D90	FH2B0080*
6388	꺾	B364	9D91	FH2C0080*
6389	꺾	B365	BEB4	FH2D0080
6390	꺾	B366	9D92	FH2E0080*
6391	꺾	B367	9D93	FH2F0080*
6392	꺾	B368	9D94	FH2G0080*
6393	꺾	B369	BEB5	FH2H0080
6394	꺾	B36A	9D95	FH2I0080*
6395	꺾	B36B	BEB6	FH2J0080
6396	꺾	B36C	9D96	FH2K0080*
6397	꺾	B36D	9D97	FH2L0080*
6398	꺾	B36E	9D98	FH2M0080*
6399	꺾	B36F	9D99	FH2N0080*
6400	꺾	B370	BEB7	FH2O0080

Table 16 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6401	꺾	B371	BEB8	FH2P0080
6402	꺾	B373	BEB9	FH2R0080
6403	꺾	B374	9D9A	FH2S0080*
6404	꺾	B375	9D9B	FH2T0080*
6405	꺾	B376	9D9C	FH2U0080*
6406	꺾	B377	9D9D	FH2V0080*
6407	꺾	B378	9D9E	FH2W0080*
6408	꺾	B379	9D9F	FH2X0080*
6409	꺾	B37A	9DA0	FH2Y0080*
6410	꺾	B37B	9DA1	FH2Z0080*
6411	꺾	B37C	9DA2	FH300080*
6412	꺾	B37D	9DA3	FH310080*
6413	꺾	B381	BEBA	FH350080
6414	꺾	B382	9DA4	FH360080*
6415	꺾	B383	9DA5	FH370080*
6416	꺾	B384	9DA6	FH380080*
6417	꺾	B385	BEBA	FH390080
6418	꺾	B386	9DA7	FH3A0080*
6419	꺾	B387	9DA8	FH3B0080*
6420	꺾	B388	9DA9	FH3C0080*
6421	꺾	B389	BEBC	FH3D0080
6422	꺾	B38A	9DAA	FH3E0080*
6423	꺾	B38B	9DAB	FH3F0080*
6424	꺾	B38C	9DAC	FH3G0080*
6425	꺾	B38D	9DAD	FH3H0080*
6426	꺾	B38E	9DAE	FH3I0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 15 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6427	쑈	B38F	9DAF	FH3J0080*
6428	쑉	B390	9DB0	FH3K0080*
6429	쑊	B391	BEED	FH3L0080
6430	쑋	B393	9DB1	FH3N0080*
6431	쑌	B394	9DB2	FH3O0080*
6432	쑍	B395	9DB3	FH3P0080*
6433	쑎	B396	9DB4	FH3Q0080*
6434	쑏	B397	9DB5	FH3R0080*
6435	쑐	B398	9DB6	FH3S0080*
6436	쑑	B399	9DB7	FH3T0080*
6437	쑒	B39A	9DB8	FH3U0080*
6438	쑓	B39B	9DB9	FH3V0080*
6439	쑔	B39C	9DBA	FH3W0080*
6440	쑕	B39D	9DBB	FH3X0080*
6441	씨	B3A1	BEED	FH4I0080
6442	씩	B3A2	BEED	FH4J0080
6443	쑊	B3A3	9DBC	FH4K0080*
6444	쑋	B3A4	9DBD	FH4L0080*
6445	쑌	B3A5	BEC0	FH4M0080
6446	쑍	B3A6	9DBE	FH4N0080*
6447	쑎	B3A7	9DBF	FH4O0080*
6448	쑏	B3A8	9DC0	FH4P0080*
6449	쑐	B3A9	BEC1	FH4Q0080
6450	쑑	B3AA	9DC1	FH4R0080*
6451	쑒	B3AB	9DC2	FH4S0080*
6452	쑓	B3AC	9DC3	FH4T0080*

Table 16 (Page 15 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6453	쑔	B3AD	9DC4	FH4U0080*
6454	쑕	B3AE	9DC5	FH4V0080*
6455	쑖	B3AF	9DC6	FH4W0080*
6456	쑗	B3B0	9DC7	FH4X0080*
6457	쑘	B3B1	BEC2	FH4Y0080
6458	쑙	B3B3	BEC3	FH4Z0080
6459	쑚	B3B4	9DC8	FH4A0080*
6460	쑛	B3B5	BEC4	FH4B0080
6461	쑜	B3B6	9DC9	FH4C0080
6462	쑝	B3B7	BEC5	FH4D0080
6463	쑞	B3B8	9DCA	FH4E0080*
6464	쑟	B3B9	9DCB	FH4F0080
6465	쑠	B3BA	9DCC	FH4G0080*
6466	쑡	B3BB	9DCD	FH4H0080*
6467	쑢	B3BC	9DCE	FH4I0080*
6468	쑣	B3BD	9DCF	FH4J0080*
6469	아	B461	BEC6	FH7L0080
6470	악	B462	BEC7	FH7M0080
6471	압	B463	9DD0	FH7N0080*
6472	앗	B464	9DD1	FH7O0080*
6473	안	B465	BEC8	FH7P0080
6474	앓	B466	BEC9	FH7Q0080
6475	았	B467	BECA	FH7R0080
6476	안	B468	9DD2	FH7S0080*
6477	알	B469	BECB	FH7T0080
6478	압	B46A	BECC	FH7U0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 16 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
6479	압	B46B	BECD	FH7V0080
6480	압	B46C	9DD3	FH7W0080
6481	압	B46D	9DD4	FH7X0080*
6482	압	B46E	9DD5	FH7Y0080*
6483	압	B46F	9DD6	FH7Z0080*
6484	압	B470	BECE	FH800080
6485	압	B471	BECF	FH810080
6486	압	B473	BED0	FH830080
6487	압	B474	9DD7	FH840080*
6488	압	B475	BED1	FH850080
6489	압	B476	BED2	FH860080
6490	압	B477	BED3	FH870080
6491	압	B478	9DD8	FH880080*
6492	압	B479	9DD9	FH890080*
6493	압	B47A	9DDA	FH8A0080*
6494	압	B47B	BED4	FH8B0080
6495	압	B47C	BED5	FH8C0080
6496	압	B47D	9DDB	FH8D0080
6497	애	B481	BED6	FH8H0080
6498	액	B482	BED7	FH8I0080
6499	액	B483	9DDC	FH8J0080*
6500	액	B484	9DDD	FH8K0080*
6501	앤	B485	BED8	FH8L0080
6502	앤	B486	9DDE	FH8M0080*
6503	앤	B487	9DDF	FH8N0080*
6504	앤	B488	9DE0	FH8O0080*

Table 16 (Page 16 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
6505	앨	B489	BED9	FH8P0080
6506	앨	B48A	9DE1	FH8Q0080*
6507	앨	B48B	9DE2	FH8R0080*
6508	앨	B48C	9DE3	FH8S0080*
6509	앨	B48D	9DE4	FH8T0080*
6510	앨	B48E	9DE5	FH8U0080*
6511	앨	B48F	9DE6	FH8V0080*
6512	앨	B490	9DE7	FH8W0080*
6513	앰	B491	BEDA	FH8X0080
6514	앰	B493	BEDB	FH8Z0080
6515	앰	B494	9DE8	FH900080*
6516	앳	B495	BEDC	FH910080
6517	앳	B496	BEDD	FH920080
6518	앵	B497	BEDE	FH930080
6519	앳	B498	9DE9	FH940080*
6520	앳	B499	9DEA	FH950080*
6521	앳	B49A	9DEB	FH960080*
6522	앳	B49B	9DEC	FH970080*
6523	앳	B49C	9DED	FH980080*
6524	앵	B49D	9DEE	FH990080*
6525	야	B4A1	BEDF	FH9D0080
6526	약	B4A2	BEE0	FH9E0080
6527	약	B4A3	9DEF	FH9F0080*
6528	얏	B4A4	9DF0	FH9G0080*
6529	얀	B4A5	BEE1	FH9H0080
6530	얏	B4A6	9DF1	FH9I0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 17 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6531	얗	B4A7	9DF2	FH9J0080*
6532	얘	B4A8	9DF3	FH9K0080*
6533	얙	B4A9	BEE2	FH9L0080
6534	얚	B4AA	9DF4	FH9M0080*
6535	얛	B4AB	9DF5	FH9N0080*
6536	얜	B4AC	BEE3	FH9O0080
6537	얝	B4AD	9DF6	FH9P0080*
6538	얞	B4AE	9DF7	FH9Q0080*
6539	얟	B4AF	9DF8	FH9R0080*
6540	얠	B4B0	9DF9	FH9S0080*
6541	얡	B4B1	BEE4	FH9T0080
6542	얢	B4B3	BEE5	FH9V0080
6543	얣	B4B4	9DFA	FH9W0080*
6544	얤	B4B5	BEE6	FH9X0080
6545	얦	B4B6	9DFB	FH9Y0080
6546	얧	B4B7	BEE7	FH9Z0080
6547	얨	B4B8	9DFC	FHA00080*
6548	얩	B4B9	9DFD	FHA10080*
6549	얪	B4BA	9DFE	FHA20080*
6550	얫	B4BB	BEE8	FHA30080
6551	얬	B4BC	9E41	FHA40080*
6552	얭	B4BD	BEE9	FHA50080
6553	얮	B4C1	BEEA	FHA90080
6554	얯	B4C2	9E42	FHAA0080*
6555	얰	B4C3	9E43	FHAB0080*
6556	얱	B4C4	9E44	FHAC0080*

Table 16 (Page 17 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6557	얲	B4C5	BEEB	FHAD0080
6558	얳	B4C6	9E45	FHAE0080*
6559	어	B4C7	9E46	FHAF0080*
6560	억	B4C8	9E47	FHAG0080*
6561	얶	B4C9	BEEC	FHAH0080
6562	얷	B4CA	9E48	FHAI0080*
6563	언	B4CB	9E49	FHAJ0080*
6564	얹	B4CC	9E4A	FHAK0080*
6565	얺	B4CD	9E4B	FHAL0080*
6566	얻	B4CE	9E4C	FHAM0080*
6567	얼	B4CF	9E4D	FHAN0080*
6568	얽	B4D0	9E4E	FHAO0080*
6569	얾	B4D1	9E4F	FHAP0080*
6570	얿	B4D3	BEED	FHAR0080
6571	얽	B4D4	9E50	FHAS0080*
6572	얾	B4D5	9E51	FHAT0080
6573	얿	B4D6	9E52	FHAU0080*
6574	얽	B4D7	9E53	FHAV0080*
6575	얿	B4D8	9E54	FHAW0080*
6576	얿	B4D9	9E55	FHAX0080*
6577	얿	B4DA	9E56	FHAY0080*
6578	얿	B4DB	9E57	FHAZ0080*
6579	얿	B4DC	9E58	FHB00080*
6580	얿	B4DD	9E59	FHB10080*
6581	어	B4E1	BEEE	FHB50080
6582	억	B4E2	BEEF	FHB60080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6583	억	B4E3	9E5A	FHB70080
6584	엣	B4E4	9E61	FHB80080*
6585	언	B4E5	BEF0	FHB90080
6586	엤	B4E6	BEF1	FHBA0080
6587	엥	B4E7	9E62	FHBB0080*
6588	엔	B4E8	BEF2	FHBC0080
6589	엔	B4E9	BEF3	FHBD0080
6590	엣	B4EA	BEF4	FHBE0080
6591	엣	B4EB	BEF5	FHBF0080
6592	엣	B4EC	9E63	FHBG0080*
6593	엣	B4ED	9E64	FHBH0080*
6594	엣	B4EE	9E65	FHBI0080*
6595	엣	B4EF	9E66	FHBJ0080*
6596	엣	B4F0	9E67	FHBK0080*
6597	엣	B4F1	BEF6	FHBL0080
6598	엣	B4F3	BEF7	FHBN0080
6599	엣	B4F4	BEF8	FHBO0080
6600	엣	B4F5	BEF9	FHBP0080
6601	엣	B4F6	BEFA	FHBQ0080
6602	엣	B4F7	BEFB	FHBR0080
6603	엣	B4F8	BEFC	FHBS0080
6604	엣	B4F9	9E68	FHBT0080*
6605	엣	B4FA	BEFD	FHBU0080
6606	엣	B4FB	9E69	FHBV0080*
6607	엣	B4FC	BEFE	FHBW0080
6608	엣	B4FD	9E6A	FHBX0080*

Table 16 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6609	에	B541	BFA1	FHC10080
6610	엑	B542	BFA2	FHC20080
6611	엣	B543	9E6B	FHC30080*
6612	엣	B544	9E6C	FHC40080*
6613	엔	B545	BFA3	FHC50080
6614	엣	B546	9E6D	FHC60080*
6615	엣	B547	9E6E	FHC70080*
6616	엔	B548	9E6F	FHC80080*
6617	엘	B549	BFA4	FHC90080
6618	엑	B54A	9E70	FHCA0080*
6619	엣	B54B	9E71	FHCB0080*
6620	엣	B54C	9E72	FHCC0080*
6621	엣	B54D	9E73	FHCD0080*
6622	엣	B54E	9E74	FHCE0080*
6623	엣	B54F	9E75	FHCF0080*
6624	엣	B550	9E76	FHCG0080*
6625	엠	B551	BFA5	FHCH0080
6626	엣	B553	BFA6	FHCJ0080
6627	엣	B554	9E77	FHCK0080*
6628	엣	B555	BFA7	FHCL0080
6629	엣	B556	9E78	FHCM0080*
6630	엣	B557	BFA8	FHCN0080
6631	엣	B558	9E79	FHCO0080*
6632	엣	B559	9E7A	FHCP0080*
6633	엑	B55A	9E81	FHCQ0080*
6634	엘	B55B	9E82	FHCR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 19 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6635	을	B55C	9E83	FHCS0080*
6636	을	B55D	9E84	FHCT0080*
6637	으	B561	BFA9	FHCX0080
6638	을	B562	BFAA	FHCY0080
6639	우	B563	BFAB	FHCZ0080
6640	을	B564	9E85	FHD00080*
6641	은	B565	BFAC	FHD10080
6642	을	B566	9E86	FHD20080
6643	을	B567	9E87	FHD30080*
6644	은	B568	9E88	FHD40080
6645	은	B569	BFAD	FHD50080
6646	을	B56A	9E89	FHD60080*
6647	을	B56B	BFAE	FHD70080
6648	을	B56C	BFAF	FHD80080
6649	을	B56D	9E8A	FHD90080*
6650	을	B56E	9E8B	FHDA0080*
6651	을	B56F	9E8C	FHDB0080*
6652	을	B570	9E8D	FHDC0080*
6653	엄	B571	BFB0	FHDD0080
6654	엄	B573	BFB1	FHDF0080
6655	을	B574	BFB2	FHDG0080
6656	을	B575	BFB3	FHDH0080
6657	을	B576	BFB4	FHDI0080
6658	영	B577	BFB5	FHDJ0080
6659	을	B578	9E8E	FHDK0080*
6660	을	B579	9E8F	FHDL0080*

Table 16 (Page 19 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6661	을	B57A	9E90	FHDM0080*
6662	을	B57B	BFB6	FHDN0080
6663	을	B57C	BFB7	FHDO0080
6664	을	B57D	BFB8	FHDP0080
6665	예	B581	BFB9	FHDT0080
6666	을	B582	9E91	FHDU0080*
6667	예	B583	9E92	FHDV0080*
6668	을	B584	9E93	FHDW0080*
6669	엔	B585	BFBA	FHDX0080
6670	을	B586	9E94	FHDY0080*
6671	을	B587	9E95	FHDZ0080*
6672	엔	B588	9E96	FHE00080*
6673	을	B589	BFBB	FHE10080
6674	을	B58A	9E97	FHE20080*
6675	을	B58B	9E98	FHE30080*
6676	을	B58C	9E99	FHE40080*
6677	을	B58D	9E9A	FHE50080*
6678	을	B58E	9E9B	FHE60080*
6679	을	B58F	9E9C	FHE70080*
6680	을	B590	9E9D	FHE80080*
6681	엄	B591	BFBC	FHE90080
6682	을	B593	BFBD	FHEB0080
6683	을	B594	9E9E	FHEC0080*
6684	을	B595	BFBE	FHED0080
6685	을	B596	BFBF	FHEE0080
6686	영	B597	9E9F	FHEF0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
6687	옛	B598	9EA0	FHEG0080*
6688	엷	B599	9EA1	FHEH0080*
6689	엸	B59A	9EA2	FHEI0080*
6690	엹	B59B	9EA3	FHEJ0080*
6691	엺	B59C	9EA4	FHEK0080*
6692	엻	B59D	9EA5	FHEL0080*
6693	오	B5A1	BFC0	FHEP0080
6694	옥	B5A2	BFC1	FHEQ0080
6695	유	B5A3	9EA6	FHER0080*
6696	우	B5A4	9EA7	FHES0080*
6697	은	B5A5	BFC2	FHET0080
6698	으	B5A6	9EA8	FHEU0080*
6699	웅	B5A7	9EA9	FHEV0080*
6700	은	B5A8	9EAA	FHEW0080
6701	을	B5A9	BFC3	FHEX0080
6702	읍	B5AA	BFC4	FHEY0080
6703	읍	B5AB	BFC5	FHEZ0080
6704	읍	B5AC	9EAB	FHF00080*
6705	우	B5AD	BFC6	FHF10080
6706	우	B5AE	9EAC	FHF20080*
6707	우	B5AF	9EAD	FHF30080*
6708	우	B5B0	BFC7	FHF40080
6709	음	B5B1	BFC8	FHF50080
6710	음	B5B3	BFC9	FHF70080
6711	우	B5B4	9EAE	FHF80080*
6712	우	B5B5	BFCA	FHF90080

Line Number	Graphic	Host Code	PC Code	GCGID
6713	우	B5B6	9EAF	FHFA0080*
6714	웅	B5B7	BFCB	FHFB0080
6715	우	B5B8	9EB0	FHFC0080
6716	우	B5B9	BFCB	FHFD0080
6717	우	B5BA	9EB1	FHFE0080*
6718	을	B5BB	9EB2	FHFF0080*
6719	우	B5BC	9EB3	FHFG0080*
6720	웅	B5BD	9EB4	FHFH0080*
6721	와	B5C1	BFCB	FHFL0080
6722	와	B5C2	BFCB	FHFM0080
6723	워	B5C3	9EB5	FHFN0080*
6724	워	B5C4	9EB6	FHFO0080*
6725	완	B5C5	BFCF	FHFP0080
6726	완	B5C6	9EB7	FHFQ0080*
6727	완	B5C7	9EB8	FHFR0080*
6728	완	B5C8	9EB9	FHFS0080*
6729	왈	B5C9	BFD0	FHFT0080
6730	워	B5CA	9EBA	FHFU0080*
6731	왓	B5CB	9EBB	FHFV0080*
6732	왓	B5CC	9EBC	FHFW0080*
6733	왓	B5CD	9EBD	FHFX0080*
6734	왓	B5CE	9EBE	FHFY0080*
6735	왓	B5CF	9EBF	FHFZ0080*
6736	왓	B5D0	9EC0	FHG00080*
6737	왓	B5D1	BFD1	FHG10080
6738	왓	B5D3	BFD2	FHG30080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 21 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6739	왁	B5D4	9EC1	FHG40080*
6740	왓	B5D5	BFD3	FHG50080
6741	왕	B5D6	BFD4	FHG60080
6742	왕	B5D7	BFD5	FHG70080
6743	왘	B5D8	9EC2	FHG80080*
6744	왙	B5D9	9EC3	FHG90080*
6745	왚	B5DA	9EC4	FHGA0080*
6746	왛	B5DB	9EC5	FHGB0080*
6747	왜	B5DC	9EC6	FHGC0080*
6748	왕	B5DD	9EC7	FHGD0080*
6749	왜	B5E1	BFD6	FHGH0080
6750	웁	B5E2	BFD7	FHGI0080
6751	웃	B5E3	9EC8	FHGJ0080*
6752	웅	B5E4	9EC9	FHGK0080*
6753	웇	B5E5	BFD8	FHGL0080
6754	웉	B5E6	9ECA	FHGM0080*
6755	웋	B5E7	9ECB	FHGN0080*
6756	웍	B5E8	9ECC	FHGO0080*
6757	웓	B5E9	9ECD	FHGP0080*
6758	웕	B5EA	9ECE	FHGQ0080*
6759	웗	B5EB	9ECF	FHGR0080*
6760	웙	B5EC	9ED0	FHGS0080*
6761	웛	B5ED	9ED1	FHGT0080*
6762	웝	B5EE	9ED2	FHGU0080*
6763	웟	B5EF	9ED3	FHGV0080*
6764	웡	B5F0	9ED4	FHGW0080*

Table 16 (Page 21 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6765	웣	B5F1	BFD9	FHGX0080
6766	웥	B5F3	9ED5	FHGZ0080*
6767	웨	B5F4	9ED6	FHH00080*
6768	웪	B5F5	BFDA	FHH10080
6769	웬	B5F6	9ED7	FHH20080*
6770	웰	B5F7	BFDB	FHH30080
6771	웲	B5F8	9ED8	FHH40080*
6772	웴	B5F9	9ED9	FHH50080*
6773	웶	B5FA	9EDA	FHH60080*
6774	웸	B5FB	9EDB	FHH70080*
6775	웺	B5FC	9EDC	FHH80080*
6776	웼	B5FD	9EDD	FHH90080*
6777	외	B641	BFDC	FHHD0080
6778	웻	B642	BFDD	FHHE0080
6779	위	B643	9EDE	FHHF0080*
6780	웽	B644	9EDF	FHHG0080*
6781	윈	B645	BFDE	FHHH0080
6782	웿	B646	9EE0	FHHI0080*
6783	윌	B647	9EE1	FHHJ0080*
6784	윎	B648	9EE2	FHHK0080*
6785	윐	B649	BFDG	FHHL0080
6786	윒	B64A	9EE3	FHHM0080*
6787	윔	B64B	9EE4	FHHN0080*
6788	윖	B64C	9EE5	FHHO0080*
6789	윘	B64D	9EE6	FHHP0080*
6790	윚	B64E	9EE7	FHHQ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
6791	윽	B64F	9EE8	FHHR0080*
6792	윸	B650	9EE9	FHHS0080*
6793	윺	B651	BFE0	FHHT0080
6794	윻	B653	BFE1	FHHV0080
6795	으	B654	9EEA	FHHW0080*
6796	윽	B655	BFE2	FHHX0080
6797	윿	B656	9EEB	FHHY0080*
6798	윿	B657	BFE3	FHHZ0080
6799	윿	B658	9EEC	FHI00080*
6800	윿	B659	9EED	FHI10080*
6801	윿	B65A	9EEE	FHI20080*
6802	윿	B65B	9EEF	FHI30080*
6803	윿	B65C	9EF0	FHI40080*
6804	윿	B65D	9EF1	FHI50080*
6805	요	B661	BFE4	FHI90080
6806	육	B662	BFE5	FHIA0080
6807	유	B663	9EF2	FHIB0080*
6808	유	B664	9EF3	FHIC0080*
6809	윤	B665	BFE6	FHID0080
6810	유	B666	9EF4	FHIE0080*
6811	유	B667	9EF5	FHIF0080*
6812	윤	B668	9EF6	FHIG0080*
6813	울	B669	BFE7	FHIH0080
6814	유	B66A	9EF7	FHII0080*
6815	유	B66B	9EF8	FHIJ0080*
6816	유	B66C	9EF9	FHIK0080*

Line Number	Graphic	Host Code	PC Code	GCGID
6817	유	B66D	9EFA	FHIL0080*
6818	유	B66E	9EFB	FHIM0080*
6819	유	B66F	9EFC	FHIN0080*
6820	유	B670	9EFD	FHIO0080*
6821	음	B671	BFE8	FHIP0080
6822	음	B673	BFE9	FHIR0080
6823	유	B674	9EFE	FHIS0080*
6824	유	B675	BFEA	FHIT0080
6825	유	B676	9F41	FHIU0080*
6826	음	B677	BFEB	FHIV0080
6827	유	B678	9F42	FHIW0080*
6828	유	B679	9F43	FHIX0080*
6829	유	B67A	9F44	FHIY0080*
6830	유	B67B	9F45	FHIZ0080*
6831	유	B67C	9F46	FHJ00080*
6832	유	B67D	9F47	FHJ10080*
6833	우	B681	BFEC	FHJ50080
6834	유	B682	BFED	FHJ60080
6835	유	B683	9F48	FHJ70080*
6836	유	B684	9F49	FHJ80080*
6837	운	B685	BFEE	FHJ90080
6838	유	B686	9F4A	FHJA0080*
6839	유	B687	9F4B	FHJB0080*
6840	운	B688	9F4C	FHJC0080
6841	유	B689	BFEF	FHJD0080
6842	유	B68A	BFF0	FHJE0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6843	움	B68B	BFF1	FHJF0080
6844	웁	B68C	9F4D	FHJG0080*
6845	웂	B68D	9F4E	FHJH0080*
6846	웃	B68E	9F4F	FHJI0080*
6847	웄	B68F	9F50	FHJJ0080*
6848	웅	B690	9F51	FHJK0080*
6849	움	B691	BFF2	FHJL0080
6850	웇	B693	BFF3	FHJN0080
6851	웈	B694	9F52	FHJO0080*
6852	웉	B695	BFF4	FHJP0080
6853	웊	B696	9F53	FHJQ0080*
6854	웋	B697	BFF5	FHJR0080
6855	워	B698	9F54	FHJS0080*
6856	웍	B699	9F55	FHJT0080*
6857	웎	B69A	9F56	FHJU0080*
6858	웏	B69B	9F57	FHJV0080*
6859	원	B69C	9F58	FHJW0080*
6860	웑	B69D	9F59	FHJX0080*
6861	위	B6A1	BFF6	FHK10080
6862	웓	B6A2	BFF7	FHK20080
6863	월	B6A3	9F5A	FHK30080*
6864	웕	B6A4	9F61	FHK40080*
6865	원	B6A5	BFF8	FHK50080
6866	웗	B6A6	9F62	FHK60080*
6867	웘	B6A7	9F63	FHK70080*
6868	웙	B6A8	9F64	FHK80080*

Table 16 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6869	월	B6A9	BFF9	FHK90080
6870	웜	B6AA	9F65	FHKA0080*
6871	웝	B6AB	9F66	FHKB0080*
6872	웞	B6AC	9F67	FHKC0080*
6873	웟	B6AD	9F68	FHKD0080*
6874	웠	B6AE	9F69	FHKE0080*
6875	웡	B6AF	9F6A	FHKF0080*
6876	웢	B6B0	9F6B	FHKG0080*
6877	웣	B6B1	BFFA	FHKH0080
6878	웤	B6B3	BFFB	FHKJ0080
6879	웦	B6B4	9F6C	FHKK0080*
6880	웧	B6B5	9F6D	FHKL0080
6881	웨	B6B6	BFFC	FHKM0080
6882	웩	B6B7	BFFD	FHKN0080
6883	웪	B6B8	9F6E	FHKO0080*
6884	웫	B6B9	9F6F	FHKP0080*
6885	웬	B6BA	9F70	FHKQ0080*
6886	웭	B6BB	9F71	FHKR0080*
6887	웮	B6BC	9F72	FHKS0080*
6888	웯	B6BD	9F73	FHKT0080*
6889	웰	B6C1	BFFE	FHKX0080
6890	웱	B6C2	C0A1	FHKY0080
6891	웲	B6C3	9F74	FHKZ0080*
6892	웳	B6C4	9F75	FHL00080*
6893	웴	B6C5	C0A2	FHL10080
6894	웵	B6C6	9F76	FHL20080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
6895	웁	B6C7	9F77	FHL30080*
6896	웁	B6C8	9F78	FHL40080*
6897	웁	B6C9	C0A3	FHL50080
6898	웁	B6CA	9F79	FHL60080*
6899	웁	B6CB	9F7A	FHL70080*
6900	웁	B6CC	9F81	FHL80080*
6901	웁	B6CD	9F82	FHL90080*
6902	웁	B6CE	9F83	FHLA0080*
6903	웁	B6CF	9F84	FHLB0080*
6904	웁	B6D0	9F85	FHLC0080*
6905	웁	B6D1	C0A4	FHLD0080
6906	웁	B6D3	C0A5	FHLE0080
6907	웁	B6D4	9F86	FHLG0080*
6908	웁	B6D5	9F87	FHLH0080*
6909	웁	B6D6	9F88	FHLI0080*
6910	웁	B6D7	C0A6	FHLJ0080
6911	웁	B6D8	9F89	FHLK0080*
6912	웁	B6D9	9F8A	FHLL0080*
6913	웁	B6DA	9F8B	FHLM0080*
6914	웁	B6DB	9F8C	FHLN0080*
6915	웁	B6DC	9F8D	FHLO0080*
6916	웁	B6DD	9F8E	FHLP0080*
6917	웁	B6E1	C0A7	FHLT0080
6918	웁	B6E2	C0A8	FHLU0080
6919	웁	B6E3	9F8F	FHLV0080*
6920	웁	B6E4	9F90	FHLW0080*

Line Number	Graphic	Host Code	PC Code	GCGID
6921	웁	B6E5	C0A9	FHLX0080
6922	웁	B6E6	9F91	FHLY0080*
6923	웁	B6E7	9F92	FHLZ0080*
6924	웁	B6E8	9F93	FHM00080
6925	웁	B6E9	C0AA	FHM10080
6926	웁	B6EA	9F94	FHM20080*
6927	웁	B6EB	9F95	FHM30080*
6928	웁	B6EC	9F96	FHM40080*
6929	웁	B6ED	9F97	FHM50080*
6930	웁	B6EE	9F98	FHM60080*
6931	웁	B6EF	9F99	FHM70080*
6932	웁	B6F0	9F9A	FHM80080*
6933	웁	B6F1	C0AB	FHM90080
6934	웁	B6F3	C0AC	FHMB0080
6935	웁	B6F4	9F9B	FHMC0080*
6936	웁	B6F5	C0AD	FHMD0080
6937	웁	B6F6	9F9C	FHME0080*
6938	웁	B6F7	C0AE	FHMF0080
6939	웁	B6F8	9F9D	FHMG0080*
6940	웁	B6F9	9F9E	FHMH0080*
6941	웁	B6FA	9F9F	FHMI0080*
6942	웁	B6FB	9FA0	FHMJ0080*
6943	웁	B6FC	9FA1	FHMK0080*
6944	웁	B6FD	9FA2	FHML0080*
6945	웁	B741	C0AF	FHMP0080
6946	웁	B742	C0B0	FHMQ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 25 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6947	유히	B743	9FA3	FHMR0080*
6948	유히	B744	9FA4	FHMS0080*
6949	윤	B745	C0B1	FHMT0080
6950	유히	B746	9FA5	FHMU0080*
6951	유히	B747	9FA6	FHMV0080*
6952	윤	B748	9FA7	FHMW0080*
6953	을	B749	C0B2	FHMX0080
6954	유히	B74A	9FA8	FHMY0080*
6955	유히	B74B	9FA9	FHMZ0080*
6956	유히	B74C	9FAA	FHN00080*
6957	유히	B74D	9FAB	FHN10080*
6958	유히	B74E	9FAC	FHN20080*
6959	유히	B74F	9FAD	FHN30080*
6960	유히	B750	9FAE	FHN40080*
6961	음	B751	C0B3	FHN50080
6962	음	B753	C0B4	FHN70080
6963	유히	B754	9FAF	FHN80080*
6964	웃	B755	C0B5	FHN90080
6965	유히	B756	9FB0	FHNA0080*
6966	응	B757	C0B6	FHNB0080
6967	웃	B758	9FB1	FHNC0080
6968	웃	B759	C0B7	FHND0080
6969	유히	B75A	9FB2	FHNE0080*
6970	을	B75B	9FB3	FHNF0080*
6971	유히	B75C	9FB4	FHNG0080*
6972	응	B75D	9FB5	FHNH0080*

Table 16 (Page 25 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
6973	으	B761	C0B8	FHNL0080
6974	유히	B762	C0B9	FHNM0080
6975	유히	B763	9FB6	FHNN0080*
6976	유히	B764	9FB7	FHNO0080*
6977	은	B765	C0BA	FHNP0080
6978	유히	B766	9FB8	FHNQ0080*
6979	유히	B767	9FB9	FHNR0080*
6980	은	B768	9FBA	FHNS0080*
6981	을	B769	C0BB	FHNT0080
6982	유히	B76A	9FBB	FHNU0080*
6983	유히	B76B	9FBC	FHNV0080*
6984	유히	B76C	9FBD	FHNW0080*
6985	유히	B76D	9FBE	FHNX0080*
6986	유히	B76E	9FBF	FHNY0080*
6987	음	B76F	C0BC	FHNZ0080
6988	유히	B770	9FC0	FHO00080*
6989	음	B771	C0BD	FHO10080
6990	음	B773	C0BE	FHO30080
6991	유히	B774	9FC1	FHO40080*
6992	웃	B775	C0BF	FHO50080
6993	유히	B776	9FC2	FHO60080*
6994	응	B777	C0C0	FHO70080
6995	웃	B778	C0C1	FHO80080
6996	웃	B779	C0C2	FHO90080
6997	유히	B77A	C0C3	FHOA0080
6998	을	B77B	C0C4	FHOB0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
6999	을	B77C	C0C5	FHOC0080
7000	웅	B77D	C0C6	FHOD0080
7001	의	B781	C0C7	FHOH0080
7002	익	B782	9FC3	FHOI0080*
7003	위	B783	9FC4	FHOJ0080*
7004	윳	B784	9FC5	FHOK0080*
7005	윈	B785	C0C8	FHOL0080
7006	윸	B786	9FC6	FHOM0080*
7007	윹	B787	9FC7	FHON0080*
7008	윈	B788	9FC8	FHOO0080*
7009	윰	B789	C0C9	FHOP0080
7010	윱	B78A	9FC9	FHOQ0080*
7011	윲	B78B	9FCA	FHOR0080*
7012	윳	B78C	9FCB	FHOS0080*
7013	윴	B78D	9FCC	FHOT0080*
7014	융	B78E	9FCD	FHOU0080*
7015	윶	B78F	9FCE	FHOV0080*
7016	윷	B790	9FCF	FHOW0080*
7017	웁	B791	C0CA	FHOX0080
7018	웂	B793	9FD0	FHOZ0080*
7019	윸	B794	9FD1	FHP00080*
7020	윹	B795	C0CB	FHP10080
7021	윺	B796	9FD2	FHP20080*
7022	윻	B797	9FD3	FHP30080*
7023	으	B798	9FD4	FHP40080*
7024	윽	B799	9FD5	FHP50080*

Line Number	Graphic	Host Code	PC Code	GCGID
7025	윿	B79A	9FD6	FHP60080*
7026	윺	B79B	9FD7	FHP70080*
7027	윻	B79C	9FD8	FHP80080*
7028	으	B79D	9FD9	FHP90080*
7029	이	B7A1	C0CC	FHPD0080
7030	익	B7A2	C0CD	FHPE0080
7031	위	B7A3	9FDA	FHPF0080*
7032	윳	B7A4	9FDB	FHPG0080*
7033	인	B7A5	C0CE	FHPH0080
7034	윸	B7A6	9FDC	FHPI0080*
7035	윹	B7A7	9FDD	FHPJ0080*
7036	인	B7A8	9FDE	FHPK0080
7037	일	B7A9	C0CF	FHPL0080
7038	윱	B7AA	C0D0	FHPM0080
7039	윲	B7AB	C0D1	FHPN0080
7040	윳	B7AC	9FDF	FHPO0080*
7041	윴	B7AD	9FE0	FHPP0080*
7042	융	B7AE	9FE1	FHPQ0080*
7043	윶	B7AF	9FE2	FHPR0080*
7044	윷	B7B0	C0D2	FHPS0080
7045	웁	B7B1	C0D3	FHPT0080
7046	웂	B7B3	C0D4	FHPV0080
7047	윸	B7B4	9FE3	FHPW0080*
7048	윹	B7B5	C0D5	FHPX0080
7049	윺	B7B6	C0D6	FHPY0080
7050	윻	B7B7	C0D7	FHPZ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 27 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7051	잇	B7B8	C0D8	FHQ00080
7052	읷	B7B9	9FE4	FHQ10080*
7053	익	B7BA	9FE5	FHQ20080*
7054	일	B7BB	9FE6	FHQ30080*
7055	읻	B7BC	C0D9	FHQ40080
7056	읽	B7BD	9FE7	FHQ50080*
7057	자	B861	C0DA	FHSX0080
7058	작	B862	C0DB	FHSY0080
7059	작	B863	9FE8	FHSZ0080*
7060	쟈	B864	9FE9	FHT00080*
7061	잔	B865	C0DC	FHT10080
7062	쟈	B866	9FEA	FHT20080*
7063	쟈	B867	C0DD	FHT30080
7064	잔	B868	C0DE	FHT40080
7065	쟈	B869	C0DF	FHT50080
7066	쟈	B86A	9FEB	FHT60080*
7067	쟈	B86B	C0E0	FHT70080
7068	쟈	B86C	9FEC	FHT80080*
7069	쟈	B86D	9FED	FHT90080*
7070	쟈	B86E	9FEE	FHTA0080*
7071	쟈	B86F	9FEF	FHTB0080*
7072	쟈	B870	9FF0	FHTC0080*
7073	잠	B871	C0E1	FHTD0080
7074	잡	B873	C0E2	FHTF0080
7075	쟈	B874	9FF1	FHTG0080*
7076	쟈	B875	C0E3	FHTH0080

Table 16 (Page 27 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7077	쟈	B876	C0E4	FHTI0080
7078	쟈	B877	C0E5	FHTJ0080
7079	쟈	B878	C0E6	FHTK0080
7080	쟈	B879	9FF2	FHTL0080
7081	쟈	B87A	9FF3	FHTM0080*
7082	쟈	B87B	9FF4	FHTN0080*
7083	쟈	B87C	9FF5	FHTO0080
7084	쟈	B87D	9FF6	FHTP0080*
7085	재	B881	C0E7	FHTT0080
7086	재	B882	C0E8	FHTU0080
7087	재	B883	9FF7	FHTV0080*
7088	재	B884	9FF8	FHTW0080*
7089	재	B885	C0E9	FHTX0080
7090	재	B886	9FF9	FHTY0080*
7091	재	B887	9FFA	FHTZ0080*
7092	재	B888	9FFB	FHU00080*
7093	재	B889	C0EA	FHU10080
7094	재	B88A	9FFC	FHU20080*
7095	재	B88B	9FFD	FHU30080*
7096	재	B88C	9FFE	FHU40080*
7097	재	B88D	A041	FHU50080*
7098	재	B88E	A042	FHU60080*
7099	재	B88F	A043	FHU70080*
7100	재	B890	A044	FHU80080*
7101	재	B891	C0EB	FHU90080
7102	재	B893	C0EC	FHUB0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
7103	꺾	B894	A045	FHUC0080*
7104	꺿	B895	C0ED	FHUD0080
7105	꺾	B896	C0EE	FHUE0080
7106	꺾	B897	C0EF	FHUF0080
7107	꺾	B898	A046	FHUG0080*
7108	꺾	B899	A047	FHUH0080*
7109	꺾	B89A	A048	FHUI0080*
7110	꺾	B89B	A049	FHUJ0080*
7111	꺾	B89C	A04A	FHUK0080*
7112	꺾	B89D	A04B	FHUL0080*
7113	꺾	B8A1	C0F0	FHUP0080
7114	꺾	B8A2	C0F1	FHUQ0080
7115	꺾	B8A3	A04C	FHUR0080*
7116	꺾	B8A4	A04D	FHUS0080*
7117	꺾	B8A5	C0F2	FHUT0080
7118	꺾	B8A6	A04E	FHUU0080*
7119	꺾	B8A7	C0F3	FHUV0080
7120	꺾	B8A8	A04F	FHUW0080*
7121	꺾	B8A9	C0F4	FHUX0080
7122	꺾	B8AA	A050	FHUY0080*
7123	꺾	B8AB	A051	FHUZ0080*
7124	꺾	B8AC	A052	FHV00080*
7125	꺾	B8AD	A053	FHV10080*
7126	꺾	B8AE	A054	FHV20080*
7127	꺾	B8AF	A055	FHV30080*
7128	꺾	B8B0	A056	FHV40080*

Line Number	Graphic	Host Code	PC Code	GCGID
7129	꺾	B8B1	C0F5	FHV50080
7130	꺾	B8B3	A057	FHV70080*
7131	꺾	B8B4	A058	FHV80080*
7132	꺾	B8B5	A059	FHV90080*
7133	꺾	B8B6	A05A	FHVA0080*
7134	꺾	B8B7	C0F6	FHVB0080
7135	꺾	B8B8	A061	FHVC0080*
7136	꺾	B8B9	A062	FHVD0080*
7137	꺾	B8BA	A063	FHVE0080*
7138	꺾	B8BB	A064	FHVF0080*
7139	꺾	B8BC	A065	FHVG0080*
7140	꺾	B8BD	A066	FHVH0080*
7141	꺾	B8C1	C0F7	FHVL0080
7142	꺾	B8C2	A067	FHVM0080*
7143	꺾	B8C3	A068	FHVN0080*
7144	꺾	B8C4	A069	FHVO0080*
7145	꺾	B8C5	C0F8	FHVP0080
7146	꺾	B8C6	A06A	FHVQ0080*
7147	꺾	B8C7	A06B	FHVR0080*
7148	꺾	B8C8	A06C	FHVS0080*
7149	꺾	B8C9	C0F9	FHVT0080
7150	꺾	B8CA	A06D	FHVU0080*
7151	꺾	B8CB	A06E	FHVV0080*
7152	꺾	B8CC	A06F	FHVW0080*
7153	꺾	B8CD	A070	FHVX0080*
7154	꺾	B8CE	A071	FHVV0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7155	꺄	B8CF	A072	FHVZ0080*
7156	꺅	B8D0	A073	FHW00080*
7157	꺆	B8D1	A074	FHW10080*
7158	꺇	B8D3	A075	FHW30080*
7159	꺈	B8D4	A076	FHW40080*
7160	꺉	B8D5	A077	FHW50080*
7161	꺊	B8D6	A078	FHW60080*
7162	꺋	B8D7	A079	FHW70080*
7163	꺌	B8D8	A07A	FHW80080*
7164	꺍	B8D9	A081	FHW90080*
7165	꺎	B8DA	A082	FHWA0080*
7166	꺏	B8DB	A083	FHWB0080*
7167	꺐	B8DC	A084	FHWC0080*
7168	꺑	B8DD	A085	FHWD0080*
7169	저	B8E1	C0FA	FHWH0080
7170	적	B8E2	C0FB	FHWI0080
7171	꺒	B8E3	A086	FHWJ0080*
7172	꺓	B8E4	A087	FHWK0080*
7173	꺔	B8E5	C0FC	FHWL0080
7174	꺕	B8E6	A088	FHWM0080*
7175	꺖	B8E7	A089	FHWN0080*
7176	꺗	B8E8	A08A	FHWO0080
7177	꺘	B8E9	C0FD	FHWP0080
7178	꺙	B8EA	A08B	FHWQ0080*
7179	꺚	B8EB	C0FE	FHWR0080
7180	꺛	B8EC	A08C	FHWS0080*

Table 16 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7181	꺜	B8ED	A08D	FHWT0080*
7182	꺝	B8EE	A08E	FHWU0080*
7183	꺞	B8EF	A08F	FHWV0080*
7184	꺟	B8F0	A090	FHWW0080*
7185	꺠	B8F1	C1A1	FHWX0080
7186	꺡	B8F3	C1A2	FHWZ0080
7187	꺢	B8F4	A091	FHX00080*
7188	꺣	B8F5	C1A3	FHX10080
7189	꺤	B8F6	A092	FHX20080
7190	꺥	B8F7	C1A4	FHX30080
7191	꺦	B8F8	C1A5	FHX40080
7192	꺧	B8F9	A093	FHX50080*
7193	꺨	B8FA	A094	FHX60080*
7194	꺩	B8FB	A095	FHX70080*
7195	꺪	B8FC	A096	FHX80080*
7196	꺫	B8FD	A097	FHX90080
7197	꺬	B941	C1A6	FHXD0080
7198	꺭	B942	C1A7	FHXE0080
7199	꺮	B943	A098	FHXF0080*
7200	꺯	B944	A099	FHXG0080*
7201	꺰	B945	C1A8	FHXH0080
7202	꺱	B946	A09A	FHXI0080*
7203	꺲	B947	A09B	FHXJ0080*
7204	꺳	B948	A09C	FHXK0080*
7205	꺴	B949	C1A9	FHXL0080
7206	꺵	B94A	A09D	FHXM0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
7207	꺾	B94B	A09E	FHXN0080*
7208	꺾	B94C	A09F	FHXO0080*
7209	꺾	B94D	A0A0	FHXP0080*
7210	꺾	B94E	A0A1	FHXQ0080*
7211	꺾	B94F	A0A2	FHXR0080*
7212	꺾	B950	A0A3	FHXS0080*
7213	꺾	B951	C1AA	FHXT0080
7214	꺾	B953	C1AB	FHXV0080
7215	꺾	B954	A0A4	FHXW0080*
7216	꺾	B955	C1AC	FHXX0080
7217	꺾	B956	A0A5	FHXY0080*
7218	꺾	B957	C1AD	FHXZ0080
7219	꺾	B958	A0A6	FHY00080*
7220	꺾	B959	A0A7	FHY10080*
7221	꺾	B95A	A0A8	FHY20080*
7222	꺾	B95B	A0A9	FHY30080*
7223	꺾	B95C	A0AA	FHY40080*
7224	꺾	B95D	A0AB	FHY50080*
7225	꺾	B961	C1AE	FHY90080
7226	꺾	B962	A0AC	FHYA0080
7227	꺾	B963	A0AD	FHYB0080*
7228	꺾	B964	A0AE	FHYC0080*
7229	꺾	B965	C1AF	FHYD0080
7230	꺾	B966	A0AF	FHYE0080*
7231	꺾	B967	A0B0	FHYF0080*
7232	꺾	B968	A0B1	FHYG0080*

Line Number	Graphic	Host Code	PC Code	GCGID
7233	꺾	B969	C1B0	FHYH0080
7234	꺾	B96A	A0B2	FHYI0080*
7235	꺾	B96B	A0B3	FHYJ0080*
7236	꺾	B96C	A0B4	FHYK0080*
7237	꺾	B96D	A0B5	FHYL0080*
7238	꺾	B96E	A0B6	FHYM0080*
7239	꺾	B96F	A0B7	FHYN0080*
7240	꺾	B970	A0B8	FHYO0080*
7241	꺾	B971	C1B1	FHYP0080
7242	꺾	B973	C1B2	FHYR0080
7243	꺾	B974	A0B9	FHYS0080*
7244	꺾	B975	A0BA	FHYT0080
7245	꺾	B976	C1B3	FHYU0080
7246	꺾	B977	C1B4	FHYV0080
7247	꺾	B978	A0BB	FHYW0080*
7248	꺾	B979	A0BC	FHYX0080*
7249	꺾	B97A	A0BD	FHY Y0080*
7250	꺾	B97B	A0BE	FHYZ0080*
7251	꺾	B97C	A0BF	FHZ00080*
7252	꺾	B97D	A0C0	FHZ10080*
7253	꺾	B981	C1B5	FHZ50080
7254	꺾	B982	A0C1	FHZ60080*
7255	꺾	B983	A0C2	FHZ70080*
7256	꺾	B984	A0C3	FHZ80080*
7257	꺾	B985	A0C4	FHZ90080*
7258	꺾	B986	A0C5	FHZA0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7259	꺄	B987	A0C6	FHZB0080*
7260	꺅	B988	A0C7	FHZC0080*
7261	꺆	B989	A0C8	FHZD0080*
7262	꺇	B98A	A0C9	FHZE0080*
7263	꺈	B98B	A0CA	FHZF0080*
7264	꺉	B98C	A0CB	FHZG0080*
7265	꺊	B98D	A0CC	FHZH0080*
7266	꺋	B98E	A0CD	FHZI0080*
7267	꺌	B98F	A0CE	FHZJ0080*
7268	꺍	B990	A0CF	FHZK0080*
7269	꺎	B991	A0D0	FHZL0080*
7270	꺏	B993	A0D1	FHZN0080*
7271	꺑	B994	A0D2	FHZO0080*
7272	꺒	B995	A0D3	FHZP0080*
7273	꺓	B996	A0D4	FHZQ0080*
7274	꺔	B997	A0D5	FHZR0080*
7275	꺕	B998	A0D6	FHZS0080*
7276	꺖	B999	A0D7	FHZT0080*
7277	꺗	B99A	A0D8	FHZU0080*
7278	꺘	B99B	A0D9	FHZV0080*
7279	꺙	B99C	A0DA	FHZW0080*
7280	꺚	B99D	A0DB	FHZX0080*
7281	조	B9A1	C1B6	FI010080
7282	죽	B9A2	C1B7	FI020080
7283	쭈	B9A3	A0DC	FI030080*
7284	쭉	B9A4	A0DD	FI040080*

Table 16 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7285	존	B9A5	C1B8	FI050080
7286	쭈	B9A6	A0DE	FI060080*
7287	쭉	B9A7	A0DF	FI070080*
7288	준	B9A8	A0E0	FI080080*
7289	줄	B9A9	C1B9	FI090080
7290	죽	B9AA	A0E1	FI0A0080*
7291	쭈	B9AB	C1BA	FI0B0080
7292	쭉	B9AC	A0E2	FI0C0080*
7293	쭈	B9AD	A0E3	FI0D0080*
7294	쭉	B9AE	A0E4	FI0E0080*
7295	쭈	B9AF	A0E5	FI0F0080*
7296	쭉	B9B0	A0E6	FI0G0080*
7297	쭈	B9B1	C1BB	FI0H0080
7298	쭉	B9B3	C1BC	FI0J0080
7299	쭈	B9B4	A0E7	FI0K0080*
7300	쭉	B9B5	C1BD	FI0L0080
7301	쭈	B9B6	A0E8	FI0M0080*
7302	쭉	B9B7	C1BE	FI0N0080
7303	쭈	B9B8	C1BF	FI0O0080
7304	쭉	B9B9	C1C0	FI0P0080
7305	죽	B9BA	A0E9	FI0Q0080*
7306	줄	B9BB	A0EA	FI0R0080*
7307	쭈	B9BC	A0EB	FI0S0080*
7308	쭉	B9BD	C1C1	FI0T0080
7309	쭈	B9C1	C1C2	FI0X0080
7310	쭉	B9C2	C1C3	FI0Y0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
7311	쥬	B9C3	A0EC	FI0Z0080*
7312	쥬	B9C4	A0ED	FI100080*
7313	쥬	B9C5	A0EE	FI110080
7314	쥬	B9C6	A0EF	FI120080*
7315	쥬	B9C7	A0F0	FI130080*
7316	쥬	B9C8	A0F1	FI140080*
7317	쥬	B9C9	C1C4	FI150080
7318	쥬	B9CA	A0F2	FI160080*
7319	쥬	B9CB	A0F3	FI170080*
7320	쥬	B9CC	A0F4	FI180080*
7321	쥬	B9CD	A0F5	FI190080*
7322	쥬	B9CE	A0F6	FI1A0080*
7323	쥬	B9CF	A0F7	FI1B0080*
7324	쥬	B9D0	A0F8	FI1C0080*
7325	쥬	B9D1	A0F9	FI1D0080
7326	쥬	B9D3	C1C5	FI1F0080
7327	쥬	B9D4	A0FA	FI1G0080*
7328	쥬	B9D5	C1C6	FI1H0080
7329	쥬	B9D6	A0FB	FI1I0080
7330	쥬	B9D7	C1C7	FI1J0080
7331	쥬	B9D8	A0FC	FI1K0080*
7332	쥬	B9D9	A0FD	FI1L0080*
7333	쥬	B9DA	A0FE	FI1M0080*
7334	쥬	B9DB	A141	FI1N0080*
7335	쥬	B9DC	A142	FI1O0080*
7336	쥬	B9DD	A143	FI1P0080*

Line Number	Graphic	Host Code	PC Code	GCGID
7337	쥬	B9E1	C1C8	FI1T0080
7338	쥬	B9E2	A144	FI1U0080*
7339	쥬	B9E3	A145	FI1V0080*
7340	쥬	B9E4	A146	FI1W0080*
7341	쥬	B9E5	A147	FI1X0080
7342	쥬	B9E6	A148	FI1Y0080*
7343	쥬	B9E7	A149	FI1Z0080*
7344	쥬	B9E8	A14A	FI200080*
7345	쥬	B9E9	A14B	FI210080
7346	쥬	B9EA	A14C	FI220080*
7347	쥬	B9EB	A14D	FI230080*
7348	쥬	B9EC	A14E	FI240080*
7349	쥬	B9ED	A14F	FI250080*
7350	쥬	B9EE	A150	FI260080*
7351	쥬	B9EF	A151	FI270080*
7352	쥬	B9F0	A152	FI280080*
7353	쥬	B9F1	A153	FI290080
7354	쥬	B9F3	A154	FI2B0080*
7355	쥬	B9F4	A155	FI2C0080*
7356	쥬	B9F5	A156	FI2D0080*
7357	쥬	B9F6	C1C9	FI2E0080
7358	쥬	B9F7	C1CA	FI2F0080
7359	쥬	B9F8	A157	FI2G0080*
7360	쥬	B9F9	A158	FI2H0080*
7361	쥬	B9FA	A159	FI2I0080*
7362	쥬	B9FB	A15A	FI2J0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7363	쨈	B9FC	A161	FI2K0080*
7364	쨉	B9FD	A162	FI2L0080*
7365	쨊	BA41	C1CB	FI2P0080
7366	쨋	BA42	A163	FI2Q0080*
7367	쨌	BA43	A164	FI2R0080*
7368	쨍	BA44	A165	FI2S0080*
7369	쨎	BA45	C1CC	FI2T0080
7370	쨏	BA46	A166	FI2U0080*
7371	쨐	BA47	A167	FI2V0080*
7372	쨑	BA48	A168	FI2W0080*
7373	쨒	BA49	C1CD	FI2X0080
7374	쨓	BA4A	A169	FI2Y0080*
7375	쨔	BA4B	A16A	FI2Z0080*
7376	쨕	BA4C	A16B	FI300080*
7377	쨖	BA4D	A16C	FI310080*
7378	쨗	BA4E	A16D	FI320080*
7379	쨘	BA4F	A16E	FI330080*
7380	쨙	BA50	A16F	FI340080*
7381	쨚	BA51	C1CE	FI350080
7382	쨛	BA53	C1CF	FI370080
7383	쨜	BA54	A170	FI380080*
7384	쨝	BA55	C1D0	FI390080
7385	쨞	BA56	A171	FI3A0080*
7386	쨟	BA57	C1D1	FI3B0080
7387	쨠	BA58	A172	FI3C0080*
7388	쨡	BA59	A173	FI3D0080*

Table 16 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7389	쨢	BA5A	A174	FI3E0080*
7390	쨣	BA5B	A175	FI3F0080*
7391	쨤	BA5C	A176	FI3G0080*
7392	쨥	BA5D	A177	FI3H0080*
7393	쨦	BA61	C1D2	FI3L0080
7394	쨧	BA62	C1D3	FI3M0080
7395	쨨	BA63	A178	FI3N0080*
7396	쨩	BA64	A179	FI3O0080*
7397	쨪	BA65	C1D4	FI3P0080
7398	쨫	BA66	A17A	FI3Q0080*
7399	쨬	BA67	A181	FI3R0080*
7400	쨭	BA68	A182	FI3S0080*
7401	쨮	BA69	A183	FI3T0080
7402	쨯	BA6A	A184	FI3U0080*
7403	쨰	BA6B	A185	FI3V0080*
7404	쨱	BA6C	A186	FI3W0080*
7405	쨲	BA6D	A187	FI3X0080*
7406	쨳	BA6E	A188	FI3Y0080*
7407	쨴	BA6F	A189	FI3Z0080*
7408	쨵	BA70	A18A	FI400080*
7409	쨶	BA71	A18B	FI410080
7410	쨷	BA73	A18C	FI430080
7411	쨸	BA74	A18D	FI440080*
7412	쨹	BA75	A18E	FI450080*
7413	쨺	BA76	A18F	FI460080*
7414	쨻	BA77	C1D5	FI470080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
7415	쑤	BA78	A190	FI480080*
7416	쑥	BA79	A191	FI490080*
7417	쑦	BA7A	A192	FI4A0080*
7418	쑧	BA7B	A193	FI4B0080*
7419	쑨	BA7C	A194	FI4C0080*
7420	쑩	BA7D	A195	FI4D0080*
7421	주	BA81	C1D6	FI4H0080
7422	죽	BA82	C1D7	FI4I0080
7423	쑪	BA83	A196	FI4J0080*
7424	쑫	BA84	A197	FI4K0080*
7425	준	BA85	C1D8	FI4L0080
7426	쑬	BA86	A198	FI4M0080*
7427	쑭	BA87	A199	FI4N0080*
7428	쑮	BA88	A19A	FI4O0080*
7429	쑯	BA89	C1D9	FI4P0080
7430	쑰	BA8A	C1DA	FI4Q0080
7431	쑱	BA8B	C1DB	FI4R0080
7432	쑲	BA8C	A19B	FI4S0080*
7433	쑳	BA8D	A19C	FI4T0080*
7434	쑴	BA8E	A19D	FI4U0080*
7435	쑵	BA8F	A19E	FI4V0080*
7436	쑶	BA90	A19F	FI4W0080*
7437	쑷	BA91	C1DC	FI4X0080
7438	쑸	BA93	C1DD	FI4Z0080
7439	쑹	BA94	A1A0	FI500080*
7440	쑺	BA95	C1DE	FI510080

Line Number	Graphic	Host Code	PC Code	GCGID
7441	쑻	BA96	A241	FI520080*
7442	쑼	BA97	C1DF	FI530080
7443	쑽	BA98	A242	FI540080*
7444	쑾	BA99	A243	FI550080*
7445	쑿	BA9A	A244	FI560080*
7446	쐀	BA9B	A245	FI570080*
7447	쐁	BA9C	A246	FI580080*
7448	쐂	BA9D	A247	FI590080*
7449	쐃	BAA1	C1E0	FI5D0080
7450	쐄	BAA2	A248	FI5E0080*
7451	쐅	BAA3	A249	FI5F0080*
7452	쐆	BAA4	A24A	FI5G0080*
7453	쐇	BAA5	A24B	FI5H0080*
7454	쐈	BAA6	A24C	FI5I0080*
7455	쐉	BAA7	A24D	FI5J0080*
7456	쐊	BAA8	A24E	FI5K0080*
7457	쐋	BAA9	A24F	FI5L0080*
7458	쐌	BAAA	A250	FI5M0080*
7459	쐍	BAAB	A251	FI5N0080*
7460	쐎	BAAC	A252	FI5O0080*
7461	쐏	BAAD	A253	FI5P0080*
7462	쐐	BAAE	A254	FI5Q0080*
7463	쐑	BAAF	A255	FI5R0080*
7464	쐒	BAB0	A256	FI5S0080*
7465	쐓	BAB1	A257	FI5T0080*
7466	쐔	BAB3	A258	FI5V0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 35 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7467	꺇	BAB4	A259	FI5W0080*
7468	꺉	BAB5	A25A	FI5X0080
7469	꺊	BAB6	C1E1	FI5Y0080
7470	꺋	BAB7	A261	FI5Z0080*
7471	꺌	BAB8	A262	FI600080*
7472	꺍	BAB9	A263	FI610080*
7473	꺎	BABA	A264	FI620080*
7474	꺏	BABB	A265	FI630080*
7475	꺐	BABC	A266	FI640080*
7476	꺑	BABD	A267	FI650080*
7477	꺒	BAC1	C1E2	FI690080
7478	꺓	BAC2	A268	FI6A0080*
7479	꺔	BAC3	A269	FI6B0080*
7480	꺕	BAC4	A26A	FI6C0080*
7481	꺖	BAC5	A26B	FI6D0080*
7482	꺗	BAC6	A26C	FI6E0080*
7483	꺘	BAC7	A26D	FI6F0080*
7484	꺙	BAC8	A26E	FI6G0080*
7485	꺚	BAC9	A26F	FI6H0080*
7486	꺛	BACA	A270	FI6I0080*
7487	꺜	BACB	A271	FI6J0080*
7488	꺝	BACC	A272	FI6K0080*
7489	꺞	BACD	A273	FI6L0080*
7490	꺟	BACE	A274	FI6M0080*
7491	꺠	BACF	A275	FI6N0080*
7492	꺡	BAD0	A276	FI6O0080*

Table 16 (Page 35 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7493	꺢	BAD1	A277	FI6P0080*
7494	꺣	BAD3	A278	FI6R0080*
7495	꺤	BAD4	A279	FI6S0080*
7496	꺥	BAD5	A27A	FI6T0080*
7497	꺦	BAD6	A281	FI6U0080*
7498	꺧	BAD7	A282	FI6V0080*
7499	꺨	BAD8	A283	FI6W0080*
7500	꺩	BAD9	A284	FI6X0080*
7501	꺪	BADA	A285	FI6Y0080*
7502	꺫	BADB	A286	FI6Z0080*
7503	꺬	BADC	A287	FI700080*
7504	꺭	BADD	A288	FI710080*
7505	꺮	BAE1	C1E3	FI750080
7506	꺯	BAE2	C1E4	FI760080
7507	꺰	BAE3	A289	FI770080*
7508	꺱	BAE4	A28A	FI780080*
7509	꺲	BAE5	C1E5	FI790080
7510	꺳	BAE6	A28B	FI7A0080*
7511	꺴	BAE7	A28C	FI7B0080*
7512	꺵	BAE8	A28D	FI7C0080*
7513	꺶	BAE9	C1E6	FI7D0080
7514	꺷	BAEA	A28E	FI7E0080*
7515	꺸	BAEB	A28F	FI7F0080*
7516	꺹	BAEC	A290	FI7G0080*
7517	꺺	BAED	A291	FI7H0080*
7518	꺻	BAEE	A292	FI7I0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 36 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7519	궘	BAEF	A293	FI7J0080*
7520	궙	BAF0	A294	FI7K0080*
7521	궚	BAF1	C1E7	FI7L0080
7522	궛	BAF3	C1E8	FI7N0080
7523	궜	BAF4	A295	FI7O0080*
7524	궝	BAF5	C1E9	FI7P0080
7525	궞	BAF6	A296	FI7Q0080*
7526	궟	BAF7	A297	FI7R0080*
7527	궠	BAF8	A298	FI7S0080*
7528	궡	BAF9	A299	FI7T0080*
7529	궢	BAFA	A29A	FI7U0080*
7530	궣	BAFB	A29B	FI7V0080*
7531	궤	BAFC	A29C	FI7W0080*
7532	궥	BAFD	A29D	FI7X0080*
7533	쥀	BB41	C1EA	FI810080
7534	쥁	BB42	A29E	FI820080
7535	쥂	BB43	A29F	FI830080*
7536	쥃	BB44	A2A0	FI840080*
7537	쥄	BB45	C1EB	FI850080
7538	쥅	BB46	A341	FI860080*
7539	쥆	BB47	A342	FI870080*
7540	쥇	BB48	A343	FI880080*
7541	쥈	BB49	C1EC	FI890080
7542	쥉	BB4A	A344	FI8A0080*
7543	쥊	BB4B	A345	FI8B0080*
7544	쥋	BB4C	A346	FI8C0080*

Table 16 (Page 36 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7545	쥌	BB4D	A347	FI8D0080*
7546	쥍	BB4E	A348	FI8E0080*
7547	쥎	BB4F	A349	FI8F0080*
7548	쥏	BB50	A34A	FI8G0080*
7549	쥐	BB51	C1ED	FI8H0080
7550	쥑	BB53	A34B	FI8J0080*
7551	쥒	BB54	A34C	FI8K0080*
7552	쥓	BB55	A34D	FI8L0080*
7553	쥔	BB56	A34E	FI8M0080*
7554	쥕	BB57	A34F	FI8N0080*
7555	쥖	BB58	A350	FI8O0080*
7556	쥗	BB59	A351	FI8P0080*
7557	쥘	BB5A	A352	FI8Q0080*
7558	쥙	BB5B	A353	FI8R0080*
7559	쥚	BB5C	A354	FI8S0080*
7560	쥛	BB5D	A355	FI8T0080*
7561	즈	BB61	C1EE	FI8X0080
7562	쥜	BB62	C1EF	FI8Y0080
7563	쥝	BB63	A356	FI8Z0080*
7564	쥞	BB64	A357	FI900080*
7565	즌	BB65	C1F0	FI910080
7566	쥟	BB66	A358	FI920080*
7567	쥠	BB67	A359	FI930080*
7568	쥡	BB68	A35A	FI940080*
7569	쥢	BB69	C1F1	FI950080
7570	쥣	BB6A	A361	FI960080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 16 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7571	츄	BB6B	A362	FI970080*
7572	츄	BB6C	A363	FI980080*
7573	츄	BB6D	A364	FI990080*
7574	츄	BB6E	A365	FI9A0080*
7575	츄	BB6F	A366	FI9B0080*
7576	츄	BB70	A367	FI9C0080*
7577	츄	BB71	C1F2	FI9D0080
7578	츄	BB73	C1F3	FI9F0080
7579	츄	BB74	A368	FI9G0080*
7580	츄	BB75	C1F4	FI9H0080
7581	츄	BB76	A369	FI9I0080*
7582	츄	BB77	C1F5	FI9J0080
7583	츄	BB78	A36A	FI9K0080*
7584	츄	BB79	A36B	FI9L0080*
7585	츄	BB7A	A36C	FI9M0080*
7586	츄	BB7B	A36D	FI9N0080*
7587	츄	BB7C	A36E	FI9O0080*
7588	츄	BB7D	A36F	FI9P0080*
7589	츄	BB81	A370	FI9T0080
7590	츄	BB82	A371	FI9U0080*
7591	츄	BB83	A372	FI9V0080*
7592	츄	BB84	A373	FI9W0080*
7593	츄	BB85	A374	FI9X0080*
7594	츄	BB86	A375	FI9Y0080*
7595	츄	BB87	A376	FI9Z0080*
7596	츄	BB88	A377	FIA00080*

Table 16 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7597	츄	BB89	A378	FIA10080*
7598	츄	BB8A	A379	FIA20080*
7599	츄	BB8B	A37A	FIA30080*
7600	츄	BB8C	A381	FIA40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7601	꺾	BB8D	A382	FIA50080*
7602	꺾	BB8E	A383	FIA60080*
7603	꺾	BB8F	A384	FIA70080*
7604	꺾	BB90	A385	FIA80080*
7605	꺾	BB91	A386	FIA90080*
7606	꺾	BB93	A387	FIAB0080*
7607	꺾	BB94	A388	FIAC0080*
7608	꺾	BB95	A389	FIAD0080*
7609	꺾	BB96	A38A	FIAE0080*
7610	꺾	BB97	A38B	FIAF0080*
7611	꺾	BB98	A38C	FIAG0080*
7612	꺾	BB99	A38D	FIAH0080*
7613	꺾	BB9A	A38E	FIAI0080*
7614	꺾	BB9B	A38F	FIAJ0080*
7615	꺾	BB9C	A390	FIAK0080*
7616	꺾	BB9D	A391	FIAL0080*
7617	꺾	BBA1	C1F6	FIAP0080
7618	꺾	BBA2	C1F7	FIAQ0080
7619	꺾	BBA3	A392	FIAR0080*
7620	꺾	BBA4	A393	FIAS0080*
7621	꺾	BBA5	C1F8	FIAT0080
7622	꺾	BBA6	A394	FIAU0080*
7623	꺾	BBA7	A395	FIAV0080*
7624	꺾	BBA8	C1F9	FIAW0080
7625	꺾	BBA9	C1FA	FIAX0080
7626	꺾	BBAA	A396	FIAY0080*

Table 17 (Page 1 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7627	꺾	BBAB	C1FB	FIAZ0080
7628	꺾	BBAC	A397	FIB00080*
7629	꺾	BBAD	A398	FIB10080*
7630	꺾	BBAE	A399	FIB20080*
7631	꺾	BBAF	A39A	FIB30080*
7632	꺾	BBB0	A39B	FIB40080*
7633	꺾	BBB1	C1FC	FIB50080
7634	꺾	BBB3	C1FD	FIB70080
7635	꺾	BBB4	A39C	FIB80080*
7636	꺾	BBB5	C1FE	FIB90080
7637	꺾	BBB6	A39D	FIBA0080
7638	꺾	BBB7	C2A1	FIBB0080
7639	꺾	BBB8	C2A2	FIBC0080
7640	꺾	BBB9	A39E	FIBD0080*
7641	꺾	BBBA	A39F	FIBE0080*
7642	꺾	BBBB	C2A3	FIBF0080
7643	꺾	BBBC	C2A4	FIBG0080
7644	꺾	BBBD	A3A0	FIBH0080*
7645	꺾	BC61	C2A5	FIE90080
7646	꺾	BC62	C2A6	FIEA0080
7647	꺾	BC63	A441	FIEB0080*
7648	꺾	BC64	A442	FIEC0080*
7649	꺾	BC65	C2A7	FIED0080
7650	꺾	BC66	A443	FIEE0080*
7651	꺾	BC67	C2A8	FIEF0080
7652	꺾	BC68	A444	FIEG0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7653	짤	BC69	C2A9	FIEH0080
7654	짤	BC6A	A445	FIEI0080*
7655	짤	BC6B	A446	FIEJ0080*
7656	짤	BC6C	C2AA	FIEK0080
7657	짤	BC6D	A447	FIEL0080*
7658	짤	BC6E	A448	FIEM0080*
7659	짤	BC6F	A449	FIEN0080*
7660	짤	BC70	A44A	FIEO0080*
7661	짤	BC71	C2AB	FIEP0080
7662	짤	BC73	C2AC	FIER0080
7663	짤	BC74	A44B	FIES0080*
7664	짤	BC75	C2AD	FIET0080
7665	짤	BC76	C2AE	FIEU0080
7666	짤	BC77	C2AF	FIEV0080
7667	짤	BC78	A44C	FIEW0080*
7668	짤	BC79	A44D	FIEX0080*
7669	짤	BC7A	A44E	FIEY0080*
7670	짤	BC7B	A44F	FIEZ0080*
7671	짤	BC7C	A450	FIF00080*
7672	짤	BC7D	A451	FIF10080*
7673	짜	BC81	C2B0	FIF50080
7674	짜	BC82	C2B1	FIF60080
7675	짜	BC83	A452	FIF70080*
7676	짜	BC84	A453	FIF80080*
7677	짜	BC85	C2B2	FIF90080
7678	짜	BC86	A454	FIFA0080*

Table 17 (Page 2 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7679	짜	BC87	A455	FIFB0080*
7680	짜	BC88	A456	FIFC0080*
7681	짜	BC89	C2B3	FIFD0080
7682	짜	BC8A	A457	FIFE0080*
7683	짜	BC8B	A458	FIFF0080*
7684	짜	BC8C	A459	FIFG0080*
7685	짜	BC8D	A45A	FIFH0080*
7686	짜	BC8E	A461	FIFI0080*
7687	짜	BC8F	A462	FIFJ0080*
7688	짜	BC90	A463	FIFK0080*
7689	짜	BC91	C2B4	FIFL0080
7690	짜	BC93	C2B5	FIFN0080
7691	짜	BC94	A464	FIFO0080*
7692	짜	BC95	C2B6	FIFP0080
7693	짜	BC96	C2B7	FIFQ0080
7694	짜	BC97	C2B8	FIFR0080
7695	짜	BC98	A465	FIFS0080*
7696	짜	BC99	A466	FIFT0080*
7697	짜	BC9A	A467	FIFU0080*
7698	짜	BC9B	A468	FIFV0080*
7699	짜	BC9C	A469	FIFW0080*
7700	짜	BC9D	A46A	FIFX0080*
7701	짜	BCA1	C2B9	FIG10080
7702	짜	BCA2	A46B	FIG20080*
7703	짜	BCA3	A46C	FIG30080*
7704	짜	BCA4	A46D	FIG40080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7705	짚	BCA5	C2BA	FIG50080
7706	짚	BCA6	A46E	FIG60080*
7707	짚	BCA7	A46F	FIG70080*
7708	짚	BCA8	A470	FIG80080*
7709	짚	BCA9	A471	FIG90080*
7710	짚	BCAA	A472	FIGA0080*
7711	짚	BCAB	A473	FIGB0080*
7712	짚	BCAC	A474	FIGC0080*
7713	짚	BCAD	A475	FIGD0080*
7714	짚	BCAE	A476	FIGE0080*
7715	짚	BCAF	A477	FIGF0080*
7716	짚	BCB0	A478	FIGG0080*
7717	짚	BCB1	A479	FIGH0080*
7718	짚	BCB3	A47A	FIGJ0080*
7719	짚	BCB4	A481	FIGK0080*
7720	짚	BCB5	A482	FIGL0080*
7721	짚	BCB6	A483	FIGM0080*
7722	짚	BCB7	C2BB	FIGN0080
7723	짚	BCB8	A484	FIGO0080*
7724	짚	BCB9	A485	FIGP0080*
7725	짚	BCBA	A486	FIGQ0080*
7726	짚	BCBB	A487	FIGR0080*
7727	짚	BCBC	A488	FIGS0080*
7728	짚	BCBD	A489	FIGT0080*
7729	짚	BCC1	A48A	FIGX0080
7730	짚	BCC2	A48B	FIGY0080*

Table 17 (Page 3 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7731	짚	BCC3	A48C	FIGZ0080*
7732	짚	BCC4	A48D	FIH00080*
7733	짚	BCC5	A48E	FIH10080*
7734	짚	BCC6	A48F	FIH20080*
7735	짚	BCC7	A490	FIH30080*
7736	짚	BCC8	A491	FIH40080*
7737	짚	BCC9	A492	FIH50080*
7738	짚	BCCA	A493	FIH60080*
7739	짚	BCCB	A494	FIH70080*
7740	짚	BCCC	A495	FIH80080*
7741	짚	BCCD	A496	FIH90080*
7742	짚	BCCE	A497	FIHA0080*
7743	짚	BCCF	A498	FIHB0080*
7744	짚	BCD0	A499	FIHC0080*
7745	짚	BCD1	A49A	FIHD0080*
7746	짚	BCD3	A49B	FIHF0080*
7747	짚	BCD4	A49C	FIHG0080*
7748	짚	BCD5	A49D	FIHH0080*
7749	짚	BCD6	A49E	FIHI0080*
7750	짚	BCD7	A49F	FIHJ0080*
7751	짚	BCD8	A4A0	FIHK0080*
7752	짚	BCD9	A541	FIHL0080*
7753	짚	BCDA	A542	FIHM0080*
7754	짚	BCDB	A543	FIHN0080*
7755	짚	BCDC	A544	FIHO0080*
7756	짚	BCDD	A545	FIHP0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7757	찌	BCE1	C2BC	FIHT0080
7758	척	BCE2	C2BD	FIHU0080
7759	취	BCE3	A546	FIHV0080*
7760	찢	BCE4	A547	FIHW0080*
7761	천	BCE5	C2BE	FIHX0080
7762	찢	BCE6	A548	FIHY0080*
7763	짚	BCE7	A549	FIHZ0080*
7764	찢	BCE8	A54A	FII00080*
7765	찢	BCE9	C2BF	FII10080
7766	찢	BCEA	A54B	FII20080*
7767	찢	BCEB	A54C	FII30080*
7768	찢	BCEC	A54D	FII40080
7769	찢	BCED	A54E	FII50080*
7770	찢	BCEE	A54F	FII60080*
7771	찢	BCEF	A550	FII70080*
7772	찢	BCF0	A551	FII80080*
7773	찢	BCF1	C2C0	FII90080
7774	찢	BCF3	C2C1	FIIB0080
7775	찢	BCF4	A552	FIIC0080*
7776	찢	BCF5	C2C2	FIID0080
7777	찢	BCF6	C2C3	FIIE0080
7778	찢	BCF7	C2C4	FIIF0080
7779	찢	BCF8	A553	FIIG0080*
7780	찢	BCF9	A554	FIIH0080*
7781	찢	BCFA	A555	FIII0080*
7782	찢	BCFB	A556	FIIJ0080*

Table 17 (Page 4 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7783	찢	BCFC	A557	FIIK0080*
7784	찢	BCFD	A558	FII L0080*
7785	찌	BD41	C2C5	FII P0080
7786	찢	BD42	A559	FII Q0080*
7787	찢	BD43	A55A	FII R0080*
7788	찢	BD44	A561	FII S0080*
7789	찢	BD45	A562	FII T0080*
7790	찢	BD46	A563	FII U0080*
7791	찢	BD47	A564	FII V0080*
7792	찢	BD48	A565	FII W0080*
7793	찢	BD49	A566	FII X0080
7794	찢	BD4A	A567	FII Y0080*
7795	찢	BD4B	A568	FII Z0080*
7796	찢	BD4C	A569	FIJ00080*
7797	찢	BD4D	A56A	FIJ10080*
7798	찢	BD4E	A56B	FIJ20080*
7799	찢	BD4F	A56C	FIJ30080*
7800	찢	BD50	A56D	FIJ40080*
7801	찢	BD51	A56E	FIJ50080*
7802	찢	BD53	A56F	FIJ70080*
7803	찢	BD54	A570	FIJ80080*
7804	찢	BD55	A571	FIJ90080*
7805	찢	BD56	A572	FIJA0080*
7806	찢	BD57	C2C6	FIJB0080
7807	찢	BD58	A573	FIJC0080*
7808	찢	BD59	A574	FIJD0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7809	쩍	BD5A	A575	FIJE0080*
7810	쩎	BD5B	A576	FIJF0080*
7811	쩏	BD5C	A577	FIJG0080*
7812	쩑	BD5D	A578	FIJH0080*
7813	쩒	BD61	C2C7	FIJL0080
7814	쩓	BD62	A579	FIJM0080*
7815	쩔	BD63	A57A	FIJN0080*
7816	쩕	BD64	A581	FIJO0080*
7817	쩖	BD65	A582	FIJP0080*
7818	쩗	BD66	A583	FIJQ0080*
7819	쩘	BD67	A584	FIJR0080*
7820	쩙	BD68	A585	FIJS0080*
7821	쩚	BD69	A586	FIJT0080*
7822	쩛	BD6A	A587	FIJU0080*
7823	쩜	BD6B	A588	FIJV0080*
7824	쩝	BD6C	A589	FIJW0080*
7825	쩞	BD6D	A58A	FIJX0080*
7826	쩟	BD6E	A58B	FIJY0080*
7827	쩠	BD6F	A58C	FIJZ0080*
7828	쩡	BD70	A58D	FIK00080*
7829	쩢	BD71	A58E	FIK10080*
7830	쩣	BD73	A58F	FIK30080*
7831	쩤	BD74	A590	FIK40080*
7832	쩥	BD75	A591	FIK50080
7833	쩦	BD76	C2C8	FIK60080
7834	쩧	BD77	A592	FIK70080*

Table 17 (Page 5 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7835	쩨	BD78	A593	FIK80080*
7836	쩩	BD79	A594	FIK90080*
7837	쩪	BD7A	A595	FIKA0080*
7838	쩫	BD7B	A596	FIKB0080*
7839	쩬	BD7C	A597	FIKC0080*
7840	쩭	BD7D	A598	FIKD0080*
7841	쩮	BD81	A599	FIKH0080
7842	쩯	BD82	A59A	FIKI0080*
7843	쩰	BD83	A59B	FIKJ0080*
7844	쩱	BD84	A59C	FIKK0080*
7845	쩲	BD85	A59D	FIKL0080*
7846	쩳	BD86	A59E	FIKM0080*
7847	쩴	BD87	A59F	FIKN0080*
7848	쩵	BD88	A5A0	FIKO0080*
7849	쩶	BD89	A641	FIKP0080*
7850	쩷	BD8A	A642	FIKQ0080*
7851	쩸	BD8B	A643	FIKR0080*
7852	쩹	BD8C	A644	FIKS0080*
7853	쩺	BD8D	A645	FIKT0080*
7854	쩻	BD8E	A646	FIKU0080*
7855	쩼	BD8F	A647	FIKV0080*
7856	쩽	BD90	A648	FIKW0080*
7857	쩾	BD91	A649	FIKX0080*
7858	쩿	BD93	A64A	FIKZ0080*
7859	꺀	BD94	A64B	FIL00080*
7860	꺁	BD95	A64C	FIL10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 6 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7861	쨈	BD96	A64D	FIL20080*
7862	쨉	BD97	A64E	FIL30080*
7863	쨊	BD98	A64F	FIL40080*
7864	쨋	BD99	A650	FIL50080*
7865	쨌	BD9A	A651	FIL60080*
7866	쨍	BD9B	A652	FIL70080*
7867	쨎	BD9C	A653	FIL80080*
7868	쨏	BD9D	A654	FIL90080*
7869	쨐	BDA1	C2C9	FILD0080
7870	쨑	BDA2	C2CA	FILE0080
7871	쨒	BDA3	A655	FILF0080*
7872	쨓	BDA4	A656	FILG0080*
7873	쨔	BDA5	C2CB	FILH0080
7874	쨕	BDA6	A657	FILI0080*
7875	쨖	BDA7	A658	FILJ0080*
7876	쨗	BDA8	A659	FILK0080*
7877	쨘	BDA9	C2CC	FILL0080
7878	쨙	BDAA	A65A	FILM0080*
7879	쨚	BDAB	A661	FILN0080*
7880	쨛	BDAC	A662	FILO0080*
7881	쨜	BDAD	A663	FILP0080*
7882	쨝	BDAE	A664	FILQ0080*
7883	쨞	BDAF	A665	FILR0080*
7884	쨟	BDB0	A666	FILS0080*
7885	쨠	BDB1	C2CD	FILT0080
7886	쨡	BDB3	C2CE	FILV0080

Table 17 (Page 6 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7887	쨢	BDB4	A667	FILW0080*
7888	쨣	BDB5	C2CF	FILX0080
7889	쨤	BDB6	A668	FILY0080*
7890	쨥	BDB7	C2D0	FILZ0080
7891	쨦	BDB8	A669	FIM00080
7892	쨧	BDB9	C2D1	FIM10080
7893	쨨	BDBA	A66A	FIM20080*
7894	쨩	BDBB	A66B	FIM30080*
7895	쨪	BDBC	A66C	FIM40080*
7896	쨫	BDBD	A66D	FIM50080*
7897	쨬	BDC1	C2D2	FIM90080
7898	쨭	BDC2	C2D3	FIMA0080
7899	쨮	BDC3	A66E	FIMB0080*
7900	쨯	BDC4	A66F	FIMC0080*
7901	쨰	BDC5	A670	FIMD0080*
7902	쨱	BDC6	A671	FIME0080*
7903	쨲	BDC7	A672	FIMF0080*
7904	쨳	BDC8	A673	FIMG0080*
7905	쨴	BDC9	C2D4	FIMH0080
7906	쨵	BDCA	A674	FIMI0080*
7907	쨶	BDCB	A675	FIMJ0080*
7908	쨷	BDCC	A676	FIMK0080*
7909	쨸	BDCD	A677	FIML0080*
7910	쨹	BDCE	A678	FIMM0080*
7911	쨺	BDCF	A679	FIMN0080*
7912	쨻	BDD0	A67A	FIMO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 7 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7913	쨍	BDD1	A681	FIMP0080*
7914	쨎	BDD3	A682	FIMR0080*
7915	쨏	BDD4	A683	FIMS0080*
7916	쨐	BDD5	A684	FIMT0080*
7917	쨑	BDD6	C2D5	FIMU0080
7918	쨒	BDD7	A685	FIMV0080*
7919	쨓	BDD8	A686	FIMW0080*
7920	쨔	BDD9	A687	FIMX0080*
7921	쨕	BDDA	A688	FIMY0080*
7922	쨖	BDDB	A689	FIMZ0080*
7923	쨗	BDDC	A68A	FIN00080*
7924	쨘	BDDD	A68B	FIN10080*
7925	쨙	BDE1	C2D6	FIN50080
7926	쨚	BDE2	A68C	FIN60080*
7927	쨛	BDE3	A68D	FIN70080*
7928	쨜	BDE4	A68E	FIN80080*
7929	쨝	BDE5	A68F	FIN90080*
7930	쨞	BDE6	A690	FINA0080*
7931	쨟	BDE7	A691	FINB0080*
7932	쨠	BDE8	A692	FINC0080*
7933	쨡	BDE9	A693	FIND0080*
7934	쨢	BDEA	A694	FINE0080*
7935	쨣	BDEB	A695	FINF0080*
7936	쨤	BDEC	A696	FING0080*
7937	쨥	BDED	A697	FINH0080*
7938	쨦	BDEE	A698	FINI0080*

Table 17 (Page 7 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7939	쨧	BDEF	A699	FINJ0080*
7940	쨨	BDF0	A69A	FINK0080*
7941	쨩	BDF1	A69B	FINL0080*
7942	쨪	BDF3	A69C	FINN0080*
7943	쨫	BDF4	A69D	FINO0080*
7944	쨬	BDF5	A69E	FINP0080*
7945	쨭	BDF6	C2D7	FINQ0080
7946	쨮	BDF7	A69F	FINR0080*
7947	쨯	BDF8	A6A0	FINS0080*
7948	쨰	BDF9	A741	FINT0080*
7949	쨱	BDFA	A742	FINU0080*
7950	쨲	BDFB	A743	FINV0080*
7951	쨳	BDFC	A744	FINW0080*
7952	쨴	BDFD	A745	FINX0080*
7953	쨵	BE41	C2D8	FIO10080
7954	쨶	BE42	A746	FIO20080*
7955	쨷	BE43	A747	FIO30080*
7956	쨸	BE44	A748	FIO40080*
7957	쨹	BE45	C2D9	FIO50080
7958	쨺	BE46	A749	FIO60080*
7959	쨻	BE47	A74A	FIO70080*
7960	쨼	BE48	A74B	FIO80080*
7961	쨽	BE49	C2DA	FIO90080
7962	쨾	BE4A	A74C	FIOA0080*
7963	쨿	BE4B	A74D	FIOB0080*
7964	쨿	BE4C	A74E	FIOC0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 8 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7965	꺾	BE4D	A74F	FIOD0080*
7966	꺾	BE4E	A750	FIOE0080*
7967	꺾	BE4F	A751	FIOF0080*
7968	꺾	BE50	A752	FIOG0080*
7969	꺾	BE51	C2DB	FIOH0080
7970	꺾	BE53	C2DC	FIOJ0080
7971	꺾	BE54	A753	FIOK0080*
7972	꺾	BE55	A754	FIOL0080*
7973	꺾	BE56	A755	FIOM0080*
7974	꺾	BE57	A756	FION0080*
7975	꺾	BE58	A757	FIOO0080*
7976	꺾	BE59	A758	FIOP0080*
7977	꺾	BE5A	A759	FIOQ0080*
7978	꺾	BE5B	A75A	FIOR0080*
7979	꺾	BE5C	A761	FIOS0080*
7980	꺾	BE5D	A762	FIOT0080*
7981	꺾	BE61	A763	FIOX0080
7982	꺾	BE62	A764	FIOY0080*
7983	꺾	BE63	A765	FIOZ0080*
7984	꺾	BE64	A766	FIP00080*
7985	꺾	BE65	A767	FIP10080*
7986	꺾	BE66	A768	FIP20080*
7987	꺾	BE67	A769	FIP30080*
7988	꺾	BE68	A76A	FIP40080*
7989	꺾	BE69	A76B	FIP50080*
7990	꺾	BE6A	A76C	FIP60080*

Table 17 (Page 8 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
7991	꺾	BE6B	A76D	FIP70080*
7992	꺾	BE6C	A76E	FIP80080*
7993	꺾	BE6D	A76F	FIP90080*
7994	꺾	BE6E	A770	FIPA0080*
7995	꺾	BE6F	A771	FIPB0080*
7996	꺾	BE70	A772	FIPC0080*
7997	꺾	BE71	A773	FIPD0080*
7998	꺾	BE73	A774	FIPF0080*
7999	꺾	BE74	A775	FIPG0080*
8000	꺾	BE75	A776	FIPH0080*
8001	꺾	BE76	A777	FIPJ0080*
8002	꺾	BE77	C2DD	FIPJ0080
8003	꺾	BE78	A778	FIPK0080*
8004	꺾	BE79	A779	FIPL0080*
8005	꺾	BE7A	A77A	FIPM0080*
8006	꺾	BE7B	A781	FIPN0080*
8007	꺾	BE7C	A782	FIPO0080*
8008	꺾	BE7D	A783	FIPP0080*
8009	꺾	BE81	C2DE	FIPT0080
8010	꺾	BE82	C2DF	FIPU0080
8011	꺾	BE83	A784	FIPV0080*
8012	꺾	BE84	A785	FIPW0080*
8013	꺾	BE85	C2E0	FIPX0080
8014	꺾	BE86	A786	FIPY0080*
8015	꺾	BE87	A787	FIPZ0080*
8016	꺾	BE88	A788	FIQ00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8017	쫀	BE89	C2E1	FIQ10080
8018	쫁	BE8A	A789	FIQ20080*
8019	쫂	BE8B	A78A	FIQ30080*
8020	쫃	BE8C	A78B	FIQ40080*
8021	쫄	BE8D	A78C	FIQ50080*
8022	쫅	BE8E	A78D	FIQ60080*
8023	쫆	BE8F	A78E	FIQ70080*
8024	쫇	BE90	A78F	FIQ80080*
8025	쫈	BE91	C2E2	FIQ90080
8026	쫉	BE93	C2E3	FIQB0080
8027	쫊	BE94	A790	FIQC0080*
8028	쫋	BE95	A791	FIQD0080*
8029	쫌	BE96	A792	FIQE0080*
8030	쫍	BE97	C2E4	FIQF0080
8031	쫎	BE98	A793	FIQG0080*
8032	쫏	BE99	A794	FIQH0080*
8033	쫑	BE9A	A795	FIQI0080*
8034	쫒	BE9B	A796	FIQJ0080*
8035	쫓	BE9C	A797	FIQK0080*
8036	쫔	BE9D	A798	FIQL0080*
8037	쫕	BEA1	C2E5	FIQP0080
8038	쫖	BEA2	A799	FIQQ0080*
8039	쫗	BEA3	A79A	FIQR0080*
8040	쫘	BEA4	A79B	FIQS0080*
8041	쫙	BEA5	A79C	FIQT0080*
8042	쫚	BEA6	A79D	FIQU0080*

Table 17 (Page 9 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8043	쫛	BEA7	A79E	FIQV0080*
8044	쫜	BEA8	A79F	FIQW0080*
8045	쫝	BEA9	A7A0	FIQX0080*
8046	쫞	BEAA	A841	FIQY0080*
8047	쫟	BEAB	A842	FIQZ0080*
8048	쫠	BEAC	A843	FIR00080*
8049	쫡	BEAD	A844	FIR10080*
8050	쫢	BEAE	A845	FIR20080*
8051	쫣	BEAF	A846	FIR30080*
8052	쫤	BEB0	A847	FIR40080*
8053	쫥	BEB1	A848	FIR50080*
8054	쫦	BEB3	A849	FIR70080*
8055	쫧	BEB4	A84A	FIR80080*
8056	쫨	BEB5	A84B	FIR90080*
8057	쫩	BEB6	C2E6	FIRA0080
8058	쫪	BEB7	C2E7	FIRB0080
8059	쫫	BEB8	A84C	FIRC0080*
8060	쫬	BEB9	A84D	FIRD0080*
8061	쫭	BEBA	A84E	FIRE0080*
8062	쫮	BEBB	A84F	FIRF0080*
8063	쫯	BEBC	A850	FIRG0080*
8064	쫰	BEBD	A851	FIRH0080*
8065	쫱	BEC1	A852	FIRL0080
8066	쫲	BEC2	A853	FIRM0080*
8067	쫳	BEC3	A854	FIRN0080*
8068	쫵	BEC4	A855	FIRO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 10 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8069	췠	BEC5	A856	FIRP0080*
8070	췡	BEC6	A857	FIRQ0080*
8071	췢	BEC7	A858	FIRR0080*
8072	췣	BEC8	A859	FIRS0080*
8073	췤	BEC9	A85A	FIRT0080*
8074	췥	BECA	A861	FIRU0080*
8075	췦	BECB	A862	FIRV0080*
8076	췧	BECC	A863	FIRW0080*
8077	취	BECD	A864	FIRX0080*
8078	췩	BECE	A865	FIRY0080*
8079	췪	BECF	A866	FIRZ0080*
8080	췫	BED0	A867	FIS00080*
8081	췬	BED1	A868	FIS10080*
8082	췭	BED3	A869	FIS30080*
8083	췮	BED4	A86A	FIS40080*
8084	췯	BED5	A86B	FIS50080*
8085	췰	BED6	A86C	FIS60080*
8086	췱	BED7	A86D	FIS70080*
8087	췲	BED8	A86E	FIS80080*
8088	췳	BED9	A86F	FIS90080*
8089	췴	BEDA	A870	FISA0080*
8090	췵	BEDB	A871	FISB0080*
8091	췶	BEDC	A872	FISC0080*
8092	췷	BEDD	A873	FISD0080*
8093	췸	BEE1	C2E8	FISH0080
8094	췹	BEE2	A874	FISI0080*

Table 17 (Page 10 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8095	췺	BEE3	A875	FISJ0080*
8096	췻	BEE4	A876	FISK0080*
8097	췼	BEE5	A877	FISL0080*
8098	췽	BEE6	A878	FISM0080*
8099	췾	BEE7	A879	FISN0080*
8100	췿	BEE8	A87A	FISO0080*
8101	췠	BEE9	A881	FISP0080*
8102	췡	BEEA	A882	FISQ0080*
8103	췢	BEEB	A883	FISR0080*
8104	췣	BEEC	A884	FISS0080*
8105	췤	BEED	A885	FIST0080*
8106	췥	BEEE	A886	FISU0080*
8107	췦	BEEF	A887	FISV0080*
8108	췧	BEF0	A888	FISW0080*
8109	취	BEF1	A889	FISX0080*
8110	췩	BEF3	A88A	FISZ0080*
8111	췪	BEF4	A88B	FIT00080*
8112	췫	BEF5	A88C	FIT10080*
8113	췬	BEF6	A88D	FIT20080*
8114	췭	BEF7	A88E	FIT30080*
8115	췮	BEF8	A88F	FIT40080*
8116	췯	BEF9	A890	FIT50080*
8117	췰	BEFA	A891	FIT60080*
8118	췱	BEFB	A892	FIT70080*
8119	췲	BEFC	A893	FIT80080*
8120	췳	BEFD	A894	FIT90080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 11 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
8121	썈	BF41	C2E9	FITD0080
8122	썉	BF42	A895	FITE0080*
8123	썊	BF43	A896	FITF0080*
8124	썋	BF44	A897	FITG0080*
8125	썅	BF45	A898	FITH0080*
8126	썆	BF46	A899	FITI0080*
8127	썇	BF47	A89A	FITJ0080*
8128	썈	BF48	A89B	FITK0080*
8129	썉	BF49	A89C	FITL0080*
8130	썊	BF4A	A89D	FITM0080*
8131	썋	BF4B	A89E	FITN0080*
8132	썅	BF4C	A89F	FITO0080*
8133	썆	BF4D	A8A0	FITP0080*
8134	썇	BF4E	A941	FITQ0080*
8135	썈	BF4F	A942	FITR0080*
8136	썉	BF50	A943	FITS0080*
8137	썊	BF51	A944	FITT0080*
8138	썋	BF53	A945	FITV0080*
8139	썅	BF54	A946	FITW0080*
8140	썆	BF55	A947	FITX0080*
8141	썇	BF56	A948	FITY0080*
8142	썈	BF57	A949	FITZ0080*
8143	썉	BF58	A94A	FIU00080*
8144	썊	BF59	A94B	FIU10080*
8145	썋	BF5A	A94C	FIU20080*
8146	썅	BF5B	A94D	FIU30080*

Table 17 (Page 11 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
8147	썆	BF5C	A94E	FIU40080*
8148	썇	BF5D	A94F	FIU50080*
8149	썈	BF61	C2EA	FIU90080
8150	썉	BF62	A950	FIUA0080*
8151	썊	BF63	A951	FIUB0080*
8152	썋	BF64	A952	FIUC0080*
8153	썅	BF65	A953	FIUD0080*
8154	썆	BF66	A954	FIUE0080*
8155	썇	BF67	A955	FIUF0080*
8156	썈	BF68	A956	FIUG0080*
8157	썉	BF69	A957	FIUH0080*
8158	썊	BF6A	A958	FIUI0080*
8159	썋	BF6B	A959	FIUJ0080*
8160	썅	BF6C	A95A	FIUK0080*
8161	썆	BF6D	A961	FIUL0080*
8162	썇	BF6E	A962	FIUM0080*
8163	썈	BF6F	A963	FIUN0080*
8164	썉	BF70	A964	FIUO0080*
8165	썊	BF71	C2EB	FIUP0080
8166	썋	BF73	A965	FIUR0080
8167	썅	BF74	A966	FIUS0080*
8168	썆	BF75	C2EC	FIUT0080
8169	썇	BF76	A967	FIUU0080*
8170	썈	BF77	C2ED	FIUV0080
8171	썉	BF78	A968	FIUW0080*
8172	썊	BF79	A969	FIUX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 12 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8173	쪽	BF7A	A96A	FIUY0080*
8174	꼳	BF7B	A96B	FIUZ0080*
8175	쑤	BF7C	A96C	FIV00080*
8176	쑥	BF7D	A96D	FIV10080*
8177	쪽	BF81	A96E	FIV50080
8178	쪽	BF82	A96F	FIV60080*
8179	쪽	BF83	A970	FIV70080*
8180	쪽	BF84	A971	FIV80080*
8181	쪽	BF85	A972	FIV90080*
8182	쪽	BF86	A973	FIVA0080*
8183	쪽	BF87	A974	FIVB0080*
8184	쪽	BF88	A975	FIVC0080*
8185	쪽	BF89	A976	FIVD0080*
8186	쪽	BF8A	A977	FIVE0080*
8187	쪽	BF8B	A978	FIVF0080*
8188	쪽	BF8C	A979	FIVG0080*
8189	쪽	BF8D	A97A	FIVH0080*
8190	쪽	BF8E	A981	FIVI0080*
8191	쪽	BF8F	A982	FIVJ0080*
8192	쪽	BF90	A983	FIVK0080*
8193	쪽	BF91	A984	FIVL0080*
8194	쪽	BF93	A985	FIVN0080*
8195	쪽	BF94	A986	FIVO0080*
8196	쪽	BF95	A987	FIVP0080*
8197	쪽	BF96	A988	FIVQ0080*
8198	쪽	BF97	A989	FIVR0080*

Table 17 (Page 12 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8199	쪽	BF98	A98A	FIVS0080*
8200	쪽	BF99	A98B	FIVT0080*
8201	쪽	BF9A	A98C	FIVU0080*
8202	쪽	BF9B	A98D	FIVV0080*
8203	쪽	BF9C	A98E	FIVW0080*
8204	쪽	BF9D	A98F	FIVX0080*
8205	쪽	BFA1	C2EE	FIW10080
8206	쪽	BFA2	C2EF	FIW20080
8207	쪽	BFA3	A990	FIW30080*
8208	쪽	BFA4	A991	FIW40080*
8209	쪽	BFA5	C2F0	FIW50080
8210	쪽	BFA6	A992	FIW60080*
8211	쪽	BFA7	A993	FIW70080*
8212	쪽	BFA8	A994	FIW80080*
8213	쪽	BFA9	C2F1	FIW90080
8214	쪽	BFAA	A995	FIWA0080*
8215	쪽	BFAB	A996	FIWB0080*
8216	쪽	BFAC	A997	FIWC0080*
8217	쪽	BFAD	A998	FIWD0080*
8218	쪽	BFAE	A999	FIWE0080*
8219	쪽	BFAF	A99A	FIWF0080*
8220	쪽	BFB0	A99B	FIWG0080*
8221	쪽	BFB1	C2F2	FIWH0080
8222	쪽	BFB3	C2F3	FIWJ0080
8223	쪽	BFB4	A99C	FIWK0080*
8224	쪽	BFB5	A99D	FIWL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
8225	짖	BFB6	A99E	FIWM0080*
8226	짙	BFB7	C2F4	FIWN0080
8227	짚	BFB8	C2F5	FIWO0080
8228	짛	BFB9	A99F	FIWP0080*
8229	짜	BFBA	A9A0	FIWQ0080*
8230	짝	BFBB	AA41	FIWR0080*
8231	짞	BFBC	AA42	FIWS0080
8232	짟	BFBD	C2F6	FIWT0080
8233	차	C061	C2F7	FIZL0080
8234	차	C062	C2F8	FIZM0080
8235	차	C063	AA43	FIZN0080*
8236	차	C064	AA44	FIZO0080*
8237	차	C065	C2F9	FIZP0080
8238	차	C066	AA45	FIZQ0080*
8239	차	C067	C2FA	FIZR0080
8240	차	C068	AA46	FIZS0080
8241	차	C069	C2FB	FIZT0080
8242	차	C06A	AA47	FIZU0080*
8243	차	C06B	AA48	FIZV0080*
8244	차	C06C	AA49	FIZW0080*
8245	차	C06D	AA4A	FIZX0080*
8246	차	C06E	AA4B	FIZY0080*
8247	차	C06F	AA4C	FIZZ0080*
8248	차	C070	AA4D	FJ000080*
8249	차	C071	C2FC	FJ010080
8250	차	C073	C2FD	FJ030080

Line Number	Graphic	Host Code	PC Code	GCGID
8251	차	C074	AA4E	FJ040080*
8252	차	C075	C2FE	FJ050080
8253	차	C076	C3A1	FJ060080
8254	차	C077	C3A2	FJ070080
8255	차	C078	C3A3	FJ080080
8256	차	C079	AA4F	FJ090080
8257	차	C07A	AA50	FJ0A0080*
8258	차	C07B	AA51	FJ0B0080*
8259	차	C07C	AA52	FJ0C0080
8260	차	C07D	AA53	FJ0D0080*
8261	차	C081	C3A4	FJ0H0080
8262	차	C082	C3A5	FJ0I0080
8263	차	C083	AA54	FJ0J0080*
8264	차	C084	AA55	FJ0K0080*
8265	차	C085	C3A6	FJ0L0080
8266	차	C086	AA56	FJ0M0080*
8267	차	C087	AA57	FJ0N0080*
8268	차	C088	AA58	FJ0O0080*
8269	차	C089	C3A7	FJ0P0080
8270	차	C08A	AA59	FJ0Q0080*
8271	차	C08B	AA5A	FJ0R0080*
8272	차	C08C	AA61	FJ0S0080*
8273	차	C08D	AA62	FJ0T0080*
8274	차	C08E	AA63	FJ0U0080*
8275	차	C08F	AA64	FJ0V0080*
8276	차	C090	AA65	FJ0W0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8277	첸	C091	C3A8	FJ0X0080
8278	첸	C093	C3A9	FJ0Z0080
8279	첸	C094	AA66	FJ100080*
8280	첸	C095	C3AA	FJ110080
8281	첸	C096	C3AB	FJ120080
8282	첸	C097	C3AC	FJ130080
8283	첸	C098	AA67	FJ140080*
8284	첸	C099	AA68	FJ150080*
8285	첸	C09A	AA69	FJ160080*
8286	첸	C09B	AA6A	FJ170080*
8287	첸	C09C	AA6B	FJ180080*
8288	첸	C09D	AA6C	FJ190080*
8289	차	C0A1	C3AD	FJ1D0080
8290	차	C0A2	AA6D	FJ1E0080*
8291	차	C0A3	AA6E	FJ1F0080*
8292	차	C0A4	AA6F	FJ1G0080*
8293	차	C0A5	C3AE	FJ1H0080
8294	차	C0A6	AA70	FJ1I0080*
8295	차	C0A7	C3AF	FJ1J0080
8296	차	C0A8	AA71	FJ1K0080*
8297	차	C0A9	C3B0	FJ1L0080
8298	차	C0AA	AA72	FJ1M0080*
8299	차	C0AB	AA73	FJ1N0080*
8300	차	C0AC	AA74	FJ1O0080*
8301	차	C0AD	AA75	FJ1P0080*
8302	차	C0AE	AA76	FJ1Q0080*

Table 17 (Page 14 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8303	차	C0AF	AA77	FJ1R0080*
8304	차	C0B0	AA78	FJ1S0080*
8305	차	C0B1	C3B1	FJ1T0080
8306	차	C0B3	AA79	FJ1V0080
8307	차	C0B4	AA7A	FJ1W0080*
8308	차	C0B5	AA81	FJ1X0080*
8309	차	C0B6	AA82	FJ1Y0080*
8310	차	C0B7	C3B2	FJ1Z0080
8311	차	C0B8	AA83	FJ200080*
8312	차	C0B9	AA84	FJ210080*
8313	차	C0BA	AA85	FJ220080*
8314	차	C0BB	AA86	FJ230080*
8315	차	C0BC	AA87	FJ240080*
8316	차	C0BD	AA88	FJ250080*
8317	차	C0C1	AA89	FJ290080
8318	차	C0C2	AA8A	FJ2A0080*
8319	차	C0C3	AA8B	FJ2B0080*
8320	차	C0C4	AA8C	FJ2C0080*
8321	차	C0C5	AA8D	FJ2D0080*
8322	차	C0C6	AA8E	FJ2E0080*
8323	차	C0C7	AA8F	FJ2F0080*
8324	차	C0C8	AA90	FJ2G0080*
8325	차	C0C9	AA91	FJ2H0080*
8326	차	C0CA	AA92	FJ2I0080*
8327	차	C0CB	AA93	FJ2J0080*
8328	차	C0CC	AA94	FJ2K0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
8329	궘	C0CD	AA95	FJ2L0080*
8330	궙	C0CE	AA96	FJ2M0080*
8331	궚	C0CF	AA97	FJ2N0080*
8332	궛	C0D0	AA98	FJ2O0080*
8333	궜	C0D1	AA99	FJ2P0080*
8334	궝	C0D3	AA9A	FJ2R0080*
8335	궞	C0D4	AA9B	FJ2S0080*
8336	궟	C0D5	AA9C	FJ2T0080*
8337	궠	C0D6	AA9D	FJ2U0080*
8338	궡	C0D7	AA9E	FJ2V0080*
8339	궢	C0D8	AA9F	FJ2W0080*
8340	궣	C0D9	AAA0	FJ2X0080*
8341	궤	C0DA	AB41	FJ2Y0080*
8342	궥	C0DB	AB42	FJ2Z0080*
8343	궦	C0DC	AB43	FJ300080*
8344	궧	C0DD	AB44	FJ310080*
8345	처	C0E1	C3B3	FJ350080
8346	척	C0E2	C3B4	FJ360080
8347	취	C0E3	AB45	FJ370080*
8348	궩	C0E4	AB46	FJ380080*
8349	천	C0E5	C3B5	FJ390080
8350	궫	C0E6	AB47	FJ3A0080*
8351	궬	C0E7	AB48	FJ3B0080*
8352	첸	C0E8	AB49	FJ3C0080*
8353	첼	C0E9	C3B6	FJ3D0080
8354	궮	C0EA	AB4A	FJ3E0080*

Line Number	Graphic	Host Code	PC Code	GCGID
8355	궯	C0EB	AB4B	FJ3F0080*
8356	궰	C0EC	AB4C	FJ3G0080*
8357	궱	C0ED	AB4D	FJ3H0080*
8358	궲	C0EE	AB4E	FJ3I0080*
8359	궳	C0EF	AB4F	FJ3J0080*
8360	궴	C0F0	AB50	FJ3K0080*
8361	침	C0F1	C3B7	FJ3L0080
8362	첩	C0F3	C3B8	FJ3N0080
8363	궷	C0F4	AB51	FJ3O0080*
8364	첸	C0F5	C3B9	FJ3P0080
8365	궹	C0F6	C3BA	FJ3Q0080
8366	칭	C0F7	C3BB	FJ3R0080
8367	궻	C0F8	AB52	FJ3S0080*
8368	궼	C0F9	AB53	FJ3T0080*
8369	궽	C0FA	AB54	FJ3U0080*
8370	궾	C0FB	AB55	FJ3V0080*
8371	궿	C0FC	AB56	FJ3W0080*
8372	궽	C0FD	AB57	FJ3X0080*
8373	체	C141	C3BC	FJ410080
8374	궿	C142	C3BD	FJ420080
8375	궽	C143	AB58	FJ430080*
8376	궽	C144	AB59	FJ440080*
8377	첸	C145	C3BE	FJ450080
8378	궽	C146	AB5A	FJ460080*
8379	궽	C147	AB61	FJ470080*
8380	첸	C148	AB62	FJ480080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 16 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8381	첼	C149	C3BF	FJ490080
8382	첼	C14A	AB63	FJ4A0080*
8383	첼	C14B	AB64	FJ4B0080*
8384	첼	C14C	AB65	FJ4C0080*
8385	첼	C14D	AB66	FJ4D0080*
8386	첼	C14E	AB67	FJ4E0080*
8387	첼	C14F	AB68	FJ4F0080*
8388	첼	C150	AB69	FJ4G0080*
8389	첼	C151	C3C0	FJ4H0080
8390	첼	C153	C3C1	FJ4J0080
8391	첼	C154	AB6A	FJ4K0080*
8392	첼	C155	C3C2	FJ4L0080
8393	첼	C156	AB6B	FJ4M0080*
8394	첼	C157	C3C3	FJ4N0080
8395	첼	C158	AB6C	FJ4O0080*
8396	첼	C159	AB6D	FJ4P0080*
8397	첼	C15A	AB6E	FJ4Q0080*
8398	첼	C15B	AB6F	FJ4R0080*
8399	첼	C15C	AB70	FJ4S0080*
8400	첼	C15D	AB71	FJ4T0080*
8401	처	C161	C3C4	FJ4X0080
8402	처	C162	AB72	FJ4Y0080*
8403	처	C163	AB73	FJ4Z0080*
8404	처	C164	AB74	FJ500080*
8405	천	C165	C3C5	FJ510080
8406	천	C166	AB75	FJ520080*

Table 17 (Page 16 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8407	천	C167	AB76	FJ530080*
8408	천	C168	AB77	FJ540080*
8409	천	C169	AB78	FJ550080*
8410	천	C16A	AB79	FJ560080*
8411	천	C16B	AB7A	FJ570080*
8412	천	C16C	AB81	FJ580080*
8413	천	C16D	AB82	FJ590080*
8414	천	C16E	AB83	FJ5A0080*
8415	천	C16F	AB84	FJ5B0080*
8416	천	C170	AB85	FJ5C0080*
8417	천	C171	AB86	FJ5D0080*
8418	천	C173	AB87	FJ5F0080*
8419	천	C174	AB88	FJ5G0080*
8420	천	C175	AB89	FJ5H0080
8421	천	C176	C3C6	FJ5I0080
8422	천	C177	AB8A	FJ5J0080
8423	천	C178	AB8B	FJ5K0080*
8424	천	C179	AB8C	FJ5L0080*
8425	천	C17A	AB8D	FJ5M0080*
8426	천	C17B	AB8E	FJ5N0080*
8427	천	C17C	AB8F	FJ5O0080*
8428	천	C17D	AB90	FJ5P0080*
8429	천	C181	C3C7	FJ5T0080
8430	천	C182	AB91	FJ5U0080*
8431	천	C183	AB92	FJ5V0080*
8432	천	C184	AB93	FJ5W0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
8433	첸	C185	C3C8	FJ5X0080
8434	첼	C186	AB94	FJ5Y0080*
8435	첽	C187	AB95	FJ5Z0080*
8436	첾	C188	AB96	FJ600080*
8437	첿	C189	AB97	FJ610080*
8438	첻	C18A	AB98	FJ620080*
8439	첼	C18B	AB99	FJ630080*
8440	첽	C18C	AB9A	FJ640080*
8441	첾	C18D	AB9B	FJ650080*
8442	첿	C18E	AB9C	FJ660080*
8443	첻	C18F	AB9D	FJ670080*
8444	첼	C190	AB9E	FJ680080*
8445	첽	C191	AB9F	FJ690080*
8446	첾	C193	ABA0	FJ6B0080*
8447	첿	C194	AC41	FJ6C0080*
8448	첻	C195	AC42	FJ6D0080*
8449	첼	C196	AC43	FJ6E0080*
8450	첽	C197	C3C9	FJ6F0080
8451	첾	C198	AC44	FJ6G0080*
8452	첿	C199	AC45	FJ6H0080*
8453	첻	C19A	AC46	FJ6I0080*
8454	첼	C19B	AC47	FJ6J0080*
8455	첽	C19C	AC48	FJ6K0080*
8456	첾	C19D	AC49	FJ6L0080*
8457	초	C1A1	C3CA	FJ6P0080
8458	추	C1A2	C3CB	FJ6Q0080

Line Number	Graphic	Host Code	PC Code	GCGID
8459	추	C1A3	AC4A	FJ6R0080*
8460	츄	C1A4	AC4B	FJ6S0080*
8461	츅	C1A5	C3CC	FJ6T0080
8462	츆	C1A6	AC4C	FJ6U0080*
8463	츇	C1A7	AC4D	FJ6V0080*
8464	츈	C1A8	AC4E	FJ6W0080*
8465	츉	C1A9	C3CD	FJ6X0080
8466	츊	C1AA	AC4F	FJ6Y0080*
8467	츋	C1AB	AC50	FJ6Z0080*
8468	츌	C1AC	AC51	FJ700080*
8469	츍	C1AD	AC52	FJ710080*
8470	츎	C1AE	AC53	FJ720080*
8471	츏	C1AF	AC54	FJ730080*
8472	츐	C1B0	AC55	FJ740080*
8473	츑	C1B1	C3CE	FJ750080
8474	츒	C1B3	C3CF	FJ770080
8475	츓	C1B4	AC56	FJ780080*
8476	츔	C1B5	C3D0	FJ790080
8477	츕	C1B6	AC57	FJ7A0080*
8478	츖	C1B7	C3D1	FJ7B0080
8479	츗	C1B8	AC58	FJ7C0080*
8480	츘	C1B9	AC59	FJ7D0080*
8481	츙	C1BA	AC5A	FJ7E0080*
8482	츚	C1BB	AC61	FJ7F0080*
8483	츛	C1BC	AC62	FJ7G0080*
8484	츜	C1BD	AC63	FJ7H0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8485	취	C1C1	C3D2	FJ7L0080
8486	취	C1C2	AC64	FJ7M0080*
8487	취	C1C3	AC65	FJ7N0080*
8488	취	C1C4	AC66	FJ7O0080*
8489	취	C1C5	C3D3	FJ7P0080
8490	취	C1C6	AC67	FJ7Q0080*
8491	취	C1C7	AC68	FJ7R0080*
8492	취	C1C8	AC69	FJ7S0080*
8493	취	C1C9	C3D4	FJ7T0080
8494	취	C1CA	AC6A	FJ7U0080*
8495	취	C1CB	AC6B	FJ7V0080*
8496	취	C1CC	AC6C	FJ7W0080*
8497	취	C1CD	AC6D	FJ7X0080*
8498	취	C1CE	AC6E	FJ7Y0080*
8499	취	C1CF	AC6F	FJ7Z0080*
8500	취	C1D0	AC70	FJ800080*
8501	취	C1D1	AC71	FJ810080*
8502	취	C1D3	AC72	FJ830080*
8503	취	C1D4	AC73	FJ840080*
8504	취	C1D5	AC74	FJ850080*
8505	취	C1D6	AC75	FJ860080*
8506	취	C1D7	C3D5	FJ870080
8507	취	C1D8	AC76	FJ880080*
8508	취	C1D9	AC77	FJ890080*
8509	취	C1DA	AC78	FJ8A0080*
8510	취	C1DB	AC79	FJ8B0080*

Table 17 (Page 18 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8511	취	C1DC	AC7A	FJ8C0080*
8512	취	C1DD	AC81	FJ8D0080*
8513	취	C1E1	AC82	FJ8H0080
8514	취	C1E2	AC83	FJ8I0080*
8515	취	C1E3	AC84	FJ8J0080*
8516	취	C1E4	AC85	FJ8K0080*
8517	취	C1E5	AC86	FJ8L0080*
8518	취	C1E6	AC87	FJ8M0080*
8519	취	C1E7	AC88	FJ8N0080*
8520	취	C1E8	AC89	FJ8O0080*
8521	취	C1E9	AC8A	FJ8P0080*
8522	취	C1EA	AC8B	FJ8Q0080*
8523	취	C1EB	AC8C	FJ8R0080*
8524	취	C1EC	AC8D	FJ8S0080*
8525	취	C1ED	AC8E	FJ8T0080*
8526	취	C1EE	AC8F	FJ8U0080*
8527	취	C1EF	AC90	FJ8V0080*
8528	취	C1F0	AC91	FJ8W0080*
8529	취	C1F1	AC92	FJ8X0080*
8530	취	C1F3	AC93	FJ8Z0080*
8531	취	C1F4	AC94	FJ900080*
8532	취	C1F5	AC95	FJ910080*
8533	취	C1F6	AC96	FJ920080*
8534	취	C1F7	AC97	FJ930080*
8535	취	C1F8	AC98	FJ940080*
8536	취	C1F9	AC99	FJ950080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
8537	첵	C1FA	AC9A	FJ960080*
8538	첶	C1FB	AC9B	FJ970080*
8539	첷	C1FC	AC9C	FJ980080*
8540	첸	C1FD	AC9D	FJ990080*
8541	최	C241	C3D6	FJ9D0080
8542	척	C242	AC9E	FJ9E0080*
8543	취	C243	AC9F	FJ9F0080*
8544	첼	C244	ACA0	FJ9G0080*
8545	첽	C245	C3D7	FJ9H0080
8546	첾	C246	AD41	FJ9I0080*
8547	첿	C247	AD42	FJ9J0080*
8548	첺	C248	AD43	FJ9K0080*
8549	첻	C249	C3D8	FJ9L0080
8550	첼	C24A	AD44	FJ9M0080*
8551	첽	C24B	AD45	FJ9N0080*
8552	첾	C24C	AD46	FJ9O0080*
8553	첿	C24D	AD47	FJ9P0080*
8554	첺	C24E	AD48	FJ9Q0080*
8555	첻	C24F	AD49	FJ9R0080*
8556	첼	C250	AD4A	FJ9S0080*
8557	첽	C251	C3D9	FJ9T0080
8558	첾	C253	C3DA	FJ9V0080
8559	첿	C254	AD4B	FJ9W0080*
8560	최	C255	C3DB	FJ9X0080
8561	첼	C256	AD4C	FJ9Y0080*
8562	첽	C257	C3DC	FJ9Z0080

Line Number	Graphic	Host Code	PC Code	GCGID
8563	첿	C258	AD4D	FJA00080*
8564	첺	C259	AD4E	FJA10080*
8565	첻	C25A	AD4F	FJA20080*
8566	첼	C25B	AD50	FJA30080*
8567	첽	C25C	AD51	FJA40080*
8568	첾	C25D	AD52	FJA50080*
8569	첿	C261	C3DD	FJA90080
8570	추	C262	AD53	FJAA0080*
8571	츄	C263	AD54	FJAB0080*
8572	츅	C264	AD55	FJAC0080*
8573	츆	C265	AD56	FJAD0080*
8574	츇	C266	AD57	FJAE0080*
8575	츈	C267	AD58	FJAF0080*
8576	츉	C268	AD59	FJAG0080*
8577	츊	C269	AD5A	FJAH0080*
8578	츋	C26A	AD61	FJAI0080*
8579	츌	C26B	AD62	FJAJ0080*
8580	츍	C26C	AD63	FJAK0080*
8581	츎	C26D	AD64	FJAL0080*
8582	츏	C26E	AD65	FJAM0080*
8583	츐	C26F	AD66	FJAN0080*
8584	츑	C270	AD67	FJAO0080*
8585	츒	C271	C3DE	FJAP0080
8586	츓	C273	AD68	FJAR0080*
8587	츔	C274	AD69	FJAS0080*
8588	츕	C275	AD6A	FJAT0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8589	쑈	C276	AD6B	FJAU0080*
8590	쑉	C277	AD6C	FJAV0080*
8591	쑊	C278	AD6D	FJAW0080*
8592	쑋	C279	AD6E	FJAX0080*
8593	쑌	C27A	AD6F	FJAY0080*
8594	쑍	C27B	AD70	FJAZ0080*
8595	쑎	C27C	AD71	FJB00080*
8596	쑏	C27D	AD72	FJB10080*
8597	쑑	C281	C3DF	FJB50080
8598	쑒	C282	C3E0	FJB60080
8599	쑓	C283	AD73	FJB70080*
8600	쑔	C284	AD74	FJB80080*
8601	쑕	C285	C3E1	FJB90080
8602	쑖	C286	AD75	FJBA0080*
8603	쑗	C287	AD76	FJBB0080*
8604	쑘	C288	AD77	FJBC0080*
8605	쑙	C289	C3E2	FJBD0080
8606	쑚	C28A	AD78	FJBE0080*
8607	쑛	C28B	AD79	FJBF0080*
8608	쑜	C28C	AD7A	FJBG0080*
8609	쑝	C28D	AD81	FJBH0080*
8610	쑞	C28E	AD82	FJBI0080*
8611	쑟	C28F	AD83	FJBJ0080*
8612	쑠	C290	AD84	FJBK0080*
8613	쑡	C291	C3E3	FJBL0080
8614	쑢	C293	C3E4	FJBN0080

Table 17 (Page 20 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8615	쑣	C294	AD85	FJBO0080*
8616	쑤	C295	C3E5	FJBP0080
8617	쑥	C296	AD86	FJBQ0080*
8618	쑦	C297	C3E6	FJBR0080
8619	쑧	C298	AD87	FJBS0080*
8620	쑨	C299	AD88	FJBT0080*
8621	쑩	C29A	AD89	FJBU0080*
8622	쑪	C29B	AD8A	FJBV0080*
8623	쑫	C29C	AD8B	FJBW0080*
8624	쑬	C29D	AD8C	FJBX0080*
8625	쑭	C2A1	C3E7	FJC10080
8626	쑮	C2A2	AD8D	FJC20080*
8627	쑯	C2A3	AD8E	FJC30080*
8628	쑰	C2A4	AD8F	FJC40080*
8629	쑱	C2A5	AD90	FJC50080*
8630	쑲	C2A6	AD91	FJC60080*
8631	쑳	C2A7	AD92	FJC70080*
8632	쑴	C2A8	AD93	FJC80080*
8633	쑵	C2A9	AD94	FJC90080*
8634	쑶	C2AA	AD95	FJCA0080*
8635	쑷	C2AB	AD96	FJCB0080*
8636	쑸	C2AC	AD97	FJCC0080*
8637	쑹	C2AD	AD98	FJCD0080*
8638	쑺	C2AE	AD99	FJCE0080*
8639	쑻	C2AF	AD9A	FJCF0080*
8640	쑼	C2B0	AD9B	FJCG0080*




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
8641	침	C2B1	AD9C	FJCH0080*
8642	침	C2B3	AD9D	FJCJ0080*
8643	침	C2B4	AD9E	FJCK0080*
8644	침	C2B5	AD9F	FJCL0080
8645	침	C2B6	C3E8	FJCM0080
8646	침	C2B7	ADA0	FJCN0080*
8647	침	C2B8	AE41	FJCO0080*
8648	침	C2B9	AE42	FJCP0080*
8649	침	C2BA	AE43	FJCO0080*
8650	침	C2BB	AE44	FJCR0080*
8651	침	C2BC	AE45	FJCS0080*
8652	침	C2BD	AE46	FJCT0080*
8653	침	C2C1	C3E9	FJCX0080
8654	침	C2C2	AE47	FJCY0080*
8655	침	C2C3	AE48	FJCZ0080*
8656	침	C2C4	AE49	FJD00080*
8657	침	C2C5	C3EA	FJD10080
8658	침	C2C6	AE4A	FJD20080*
8659	침	C2C7	AE4B	FJD30080*
8660	침	C2C8	AE4C	FJD40080*
8661	침	C2C9	AE4D	FJD50080*
8662	침	C2CA	AE4E	FJD60080*
8663	침	C2CB	AE4F	FJD70080*
8664	침	C2CC	AE50	FJD80080*
8665	침	C2CD	AE51	FJD90080*
8666	침	C2CE	AE52	FJDA0080*

Line Number	Graphic	Host Code	PC Code	GCGID
8667	침	C2CF	AE53	FJDB0080*
8668	침	C2D0	AE54	FJDC0080*
8669	침	C2D1	AE55	FJDD0080*
8670	침	C2D3	AE56	FJDF0080*
8671	침	C2D4	AE57	FJDG0080*
8672	침	C2D5	AE58	FJDH0080*
8673	침	C2D6	AE59	FJDI0080*
8674	침	C2D7	AE5A	FJDJ0080*
8675	침	C2D8	AE61	FJDK0080*
8676	침	C2D9	AE62	FJDL0080*
8677	침	C2DA	AE63	FJDM0080*
8678	침	C2DB	AE64	FJDN0080*
8679	침	C2DC	AE65	FJDO0080*
8680	침	C2DD	AE66	FJDP0080*
8681	침	C2E1	C3EB	FJDT0080
8682	침	C2E2	AE67	FJDU0080*
8683	침	C2E3	AE68	FJDV0080*
8684	침	C2E4	AE69	FJDW0080*
8685	침	C2E5	C3EC	FJDX0080
8686	침	C2E6	AE6A	FJDY0080*
8687	침	C2E7	AE6B	FJZ0080*
8688	침	C2E8	AE6C	FJE0080*
8689	침	C2E9	C3ED	FJE10080
8690	침	C2EA	AE6D	FJE20080*
8691	침	C2EB	AE6E	FJE30080*
8692	침	C2EC	AE6F	FJE40080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 22 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8693	췁	C2ED	AE70	FJE50080*
8694	췁	C2EE	AE71	FJE60080*
8695	췁	C2EF	AE72	FJE70080*
8696	췁	C2F0	AE73	FJE80080*
8697	췁	C2F1	C3EE	FJE90080
8698	췁	C2F3	C3EF	FJEB0080
8699	췁	C2F4	AE74	FJEC0080*
8700	췁	C2F5	C3F0	FJED0080
8701	췁	C2F6	AE75	FJEE0080*
8702	췁	C2F7	C3F1	FJEF0080
8703	췁	C2F8	AE76	FJEG0080*
8704	췁	C2F9	AE77	FJEH0080*
8705	췁	C2FA	AE78	FJEI0080*
8706	췁	C2FB	AE79	FJEJ0080*
8707	췁	C2FC	AE7A	FJEK0080*
8708	췁	C2FD	AE81	FJEL0080*
8709	췁	C341	C3F2	FJEP0080
8710	췁	C342	AE82	FJEQ0080*
8711	췁	C343	AE83	FJER0080*
8712	췁	C344	AE84	FJES0080*
8713	췁	C345	C3F3	FJET0080
8714	췁	C346	AE85	FJEU0080*
8715	췁	C347	AE86	FJEV0080*
8716	췁	C348	AE87	FJEW0080*
8717	췁	C349	C3F4	FJEX0080
8718	췁	C34A	AE88	FJEY0080*

Table 17 (Page 22 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8719	췁	C34B	AE89	FJEZ0080*
8720	췁	C34C	AE8A	FJF00080*
8721	췁	C34D	AE8B	FJF10080*
8722	췁	C34E	AE8C	FJF20080*
8723	췁	C34F	AE8D	FJF30080*
8724	췁	C350	AE8E	FJF40080*
8725	췁	C351	C3F5	FJF50080
8726	췁	C353	AE8F	FJF70080*
8727	췁	C354	AE90	FJF80080*
8728	췁	C355	AE91	FJF90080*
8729	췁	C356	AE92	FJFA0080*
8730	췁	C357	C3F6	FJFB0080
8731	췁	C358	AE93	FJFC0080*
8732	췁	C359	AE94	FJFD0080*
8733	췁	C35A	AE95	FJFE0080*
8734	췁	C35B	AE96	FJFF0080*
8735	췁	C35C	AE97	FJFG0080*
8736	췁	C35D	AE98	FJFH0080*
8737	췁	C361	C3F7	FJFL0080
8738	췁	C362	C3F8	FJFM0080
8739	췁	C363	AE99	FJFN0080*
8740	췁	C364	AE9A	FJFO0080*
8741	췁	C365	C3F9	FJFP0080
8742	췁	C366	AE9B	FJFQ0080*
8743	췁	C367	AE9C	FJFR0080*
8744	췁	C368	AE9D	FJFS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8745	출	C369	C3FA	FJFT0080
8746	츄	C36A	AE9E	FJFU0080*
8747	츄	C36B	AE9F	FJFV0080*
8748	츄	C36C	AEA0	FJFW0080*
8749	츄	C36D	AF41	FJFX0080*
8750	츄	C36E	AF42	FJFY0080*
8751	츄	C36F	AF43	FJFZ0080*
8752	츄	C370	AF44	FJG00080*
8753	츄	C371	C3FB	FJG10080
8754	츄	C373	C3FC	FJG30080
8755	츄	C374	AF45	FJG40080*
8756	츄	C375	C3FD	FJG50080
8757	츄	C376	AF46	FJG60080*
8758	츄	C377	C3FE	FJG70080
8759	츄	C378	AF47	FJG80080*
8760	츄	C379	AF48	FJG90080*
8761	츄	C37A	AF49	FJGA0080*
8762	츄	C37B	AF4A	FJGB0080*
8763	츄	C37C	AF4B	FJGC0080*
8764	츄	C37D	AF4C	FJGD0080*
8765	츄	C381	AF4D	FJGH0080
8766	츄	C382	AF4E	FJGI0080*
8767	츄	C383	AF4F	FJGJ0080*
8768	츄	C384	AF50	FJGK0080*
8769	츄	C385	AF51	FJGL0080*
8770	츄	C386	AF52	FJGM0080*

Table 17 (Page 23 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8771	츄	C387	AF53	FJGN0080*
8772	츄	C388	AF54	FJGO0080*
8773	츄	C389	AF55	FJGP0080*
8774	츄	C38A	AF56	FJGQ0080*
8775	츄	C38B	AF57	FJGR0080*
8776	츄	C38C	AF58	FJGS0080*
8777	츄	C38D	AF59	FJGT0080*
8778	츄	C38E	AF5A	FJGU0080*
8779	츄	C38F	AF61	FJGV0080*
8780	츄	C390	AF62	FJGW0080*
8781	츄	C391	AF63	FJGX0080*
8782	츄	C393	AF64	FJGZ0080*
8783	츄	C394	AF65	FJH00080*
8784	츄	C395	AF66	FJH10080*
8785	츄	C396	AF67	FJH20080*
8786	츄	C397	AF68	FJH30080*
8787	츄	C398	AF69	FJH40080*
8788	츄	C399	AF6A	FJH50080*
8789	츄	C39A	AF6B	FJH60080*
8790	츄	C39B	AF6C	FJH70080*
8791	츄	C39C	AF6D	FJH80080*
8792	츄	C39D	AF6E	FJH90080*
8793	치	C3A1	C4A1	FJHD0080
8794	치	C3A2	C4A2	FJHE0080
8795	치	C3A3	AF6F	FJHF0080*
8796	치	C3A4	AF70	FJHG0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 24 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8797	친	C3A5	C4A3	FJHH0080
8798	츨	C3A6	AF71	FJHI0080*
8799	츭	C3A7	AF72	FJHJ0080*
8800	츮	C3A8	C4A4	FJHK0080
8801	츯	C3A9	C4A5	FJHL0080
8802	츰	C3AA	C4A6	FJHM0080
8803	츱	C3AB	AF73	FJHN0080*
8804	츲	C3AC	AF74	FJHO0080*
8805	츳	C3AD	AF75	FJHP0080*
8806	츴	C3AE	AF76	FJHQ0080*
8807	층	C3AF	AF77	FJHR0080*
8808	츶	C3B0	AF78	FJHS0080*
8809	츷	C3B1	C4A7	FJHT0080
8810	츸	C3B3	C4A8	FJHV0080
8811	츹	C3B4	AF79	FJHW0080*
8812	츺	C3B5	C4A9	FJHX0080
8813	츻	C3B6	AF7A	FJHY0080*
8814	츼	C3B7	C4AA	FJHZ0080
8815	츽	C3B8	AF81	FJI00080*
8816	츾	C3B9	AF82	FJI10080*
8817	츿	C3BA	AF83	FJI20080*
8818	쑀	C3BB	AF84	FJI30080*
8819	쑁	C3BC	AF85	FJI40080*
8820	쑂	C3BD	AF86	FJI50080*
8821	카	C461	C4AB	FJKX0080
8822	카	C462	C4AC	FJKY0080

Table 17 (Page 24 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8823	캁	C463	AF87	FJKZ0080*
8824	캂	C464	AF88	FJL00080*
8825	칸	C465	C4AD	FJL10080
8826	캃	C466	AF89	FJL20080*
8827	캄	C467	AF8A	FJL30080*
8828	캅	C468	AF8B	FJL40080
8829	캆	C469	C4AE	FJL50080
8830	캇	C46A	AF8C	FJL60080*
8831	캈	C46B	AF8D	FJL70080*
8832	캉	C46C	AF8E	FJL80080*
8833	캊	C46D	AF8F	FJL90080*
8834	캋	C46E	AF90	FJLA0080*
8835	캌	C46F	AF91	FJLB0080*
8836	캍	C470	AF92	FJLC0080*
8837	캎	C471	C4AF	FJLD0080
8838	캏	C473	C4B0	FJLF0080
8839	캐	C474	AF93	FJLG0080*
8840	캑	C475	C4B1	FJLH0080
8841	캒	C476	AF94	FJLI0080*
8842	캓	C477	C4B2	FJLJ0080
8843	캔	C478	AF95	FJLK0080*
8844	캕	C479	AF96	FJLL0080*
8845	캖	C47A	AF97	FJLM0080*
8846	캗	C47B	AF98	FJLN0080*
8847	캘	C47C	AF99	FJLO0080*
8848	캙	C47D	AF9A	FJLP0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 25 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
8849	캐	C481	C4B3	FJLT0080
8850	켈	C482	C4B4	FJLU0080
8851	퀘	C483	AF9B	FJLV0080*
8852	켄	C484	AF9C	FJLW0080*
8853	켐	C485	C4B5	FJLX0080
8854	켑	C486	AF9D	FJLY0080*
8855	켒	C487	AF9E	FJLZ0080*
8856	켓	C488	AF9F	FJM00080
8857	켔	C489	C4B6	FJM10080
8858	켕	C48A	AFA0	FJM20080*
8859	켖	C48B	B041	FJM30080*
8860	켗	C48C	B042	FJM40080*
8861	켘	C48D	B043	FJM50080*
8862	켙	C48E	B044	FJM60080*
8863	켚	C48F	B045	FJM70080*
8864	켛	C490	B046	FJM80080*
8865	켜	C491	C4B7	FJM90080
8866	켝	C493	C4B8	FJMB0080
8867	켞	C494	B047	FJMC0080*
8868	켟	C495	C4B9	FJMD0080
8869	켠	C496	C4BA	FJME0080
8870	켡	C497	C4BB	FJMF0080
8871	켢	C498	B048	FJMG0080*
8872	켣	C499	B049	FJMH0080*
8873	켤	C49A	B04A	FJMI0080*
8874	켥	C49B	B04B	FJMJ0080

Table 17 (Page 25 of 37). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
8875	켦	C49C	B04C	FJMK0080*
8876	켧	C49D	B04D	FJML0080*
8877	카	C4A1	C4BC	FJMP0080
8878	작	C4A2	C4BD	FJMQ0080
8879	랴	C4A3	B04E	FJMR0080*
8880	략	C4A4	B04F	FJMS0080*
8881	칸	C4A5	B050	FJMT0080*
8882	랹	C4A6	B051	FJMU0080*
8883	랺	C4A7	B052	FJMV0080*
8884	칸	C4A8	B053	FJMW0080*
8885	칼	C4A9	B054	FJMX0080*
8886	랻	C4AA	B055	FJMY0080*
8887	랼	C4AB	B056	FJMZ0080*
8888	캄	C4AC	B057	FJN00080*
8889	랽	C4AD	B058	FJN10080*
8890	캅	C4AE	B059	FJN20080*
8891	캆	C4AF	B05A	FJN30080*
8892	캇	C4B0	B061	FJN40080*
8893	캈	C4B1	B062	FJN50080*
8894	캉	C4B3	B063	FJN70080*
8895	캊	C4B4	B064	FJN80080*
8896	캋	C4B5	B065	FJN90080*
8897	캄	C4B6	B066	FJNA0080*
8898	캅	C4B7	C4BE	FJNB0080
8899	캆	C4B8	B067	FJNC0080*
8900	캇	C4B9	B068	FJND0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 26 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8901	꺾	C4BA	B069	FJNE0080*
8902	꺼	C4BB	B06A	FJNF0080*
8903	꺾	C4BC	B06B	FJNG0080*
8904	꺾	C4BD	B06C	FJNH0080*
8905	꺾	C4C1	B06D	FJNL0080
8906	꺾	C4C2	B06E	FJNM0080*
8907	꺾	C4C3	B06F	FJNN0080*
8908	꺾	C4C4	B070	FJNO0080*
8909	꺾	C4C5	B071	FJNP0080*
8910	꺾	C4C6	B072	FJNQ0080*
8911	꺾	C4C7	B073	FJNR0080*
8912	꺾	C4C8	B074	FJNS0080*
8913	꺾	C4C9	B075	FJNT0080*
8914	꺾	C4CA	B076	FJNU0080*
8915	꺾	C4CB	B077	FJNV0080*
8916	꺾	C4CC	B078	FJNW0080*
8917	꺾	C4CD	B079	FJNX0080*
8918	꺾	C4CE	B07A	FJNY0080*
8919	꺾	C4CF	B081	FJNZ0080*
8920	꺾	C4D0	B082	FJO00080*
8921	꺾	C4D1	B083	FJO10080*
8922	꺾	C4D3	B084	FJO30080*
8923	꺾	C4D4	B085	FJO40080*
8924	꺾	C4D5	B086	FJO50080*
8925	꺾	C4D6	B087	FJO60080*
8926	꺾	C4D7	B088	FJO70080*

Table 17 (Page 26 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
8927	꺾	C4D8	B089	FJO80080*
8928	꺾	C4D9	B08A	FJO90080*
8929	꺾	C4DA	B08B	FJOA0080*
8930	꺾	C4DB	B08C	FJOB0080*
8931	꺾	C4DC	B08D	FJOC0080*
8932	꺾	C4DD	B08E	FJOD0080*
8933	꺾	C4E1	C4BF	FJOH0080
8934	꺾	C4E2	C4C0	FJOI0080
8935	꺾	C4E3	B08F	FJOJ0080*
8936	꺾	C4E4	B090	FJOK0080*
8937	꺾	C4E5	C4C1	FJOL0080
8938	꺾	C4E6	B091	FJOM0080*
8939	꺾	C4E7	B092	FJON0080*
8940	꺾	C4E8	C4C2	FJOO0080
8941	꺾	C4E9	C4C3	FJOP0080
8942	꺾	C4EA	B093	FJOQ0080*
8943	꺾	C4EB	B094	FJOR0080*
8944	꺾	C4EC	B095	FJOS0080*
8945	꺾	C4ED	B096	FJOT0080*
8946	꺾	C4EE	B097	FJOU0080*
8947	꺾	C4EF	B098	FJOV0080*
8948	꺾	C4F0	B099	FJOW0080*
8949	꺾	C4F1	C4C4	FJOX0080
8950	꺾	C4F3	C4C5	FJOZ0080
8951	꺾	C4F4	B09A	FJP00080*
8952	꺾	C4F5	C4C6	FJP10080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
8953	꺤	C4F6	C4C7	FJP20080
8954	꺥	C4F7	C4C8	FJP30080
8955	꺦	C4F8	B09B	FJP40080*
8956	꺧	C4F9	B09C	FJP50080*
8957	꺨	C4FA	B09D	FJP60080*
8958	꺩	C4FB	B09E	FJP70080
8959	꺪	C4FC	B09F	FJP80080*
8960	꺫	C4FD	B0A0	FJP90080*
8961	꺬	C541	C4C9	FJPD0080
8962	꺭	C542	C4CA	FJPE0080
8963	꺮	C543	B141	FJPF0080*
8964	꺯	C544	B142	FJPG0080*
8965	꺰	C545	C4CB	FJPH0080
8966	꺱	C546	B143	FJPI0080*
8967	꺲	C547	B144	FJPJ0080*
8968	꺳	C548	B145	FJPK0080*
8969	꺴	C549	C4CC	FJPL0080
8970	꺵	C54A	B146	FJPM0080*
8971	꺶	C54B	B147	FJPN0080*
8972	꺷	C54C	B148	FJPO0080*
8973	꺸	C54D	B149	FJPP0080*
8974	꺹	C54E	B14A	FJPQ0080*
8975	꺺	C54F	B14B	FJPR0080*
8976	꺻	C550	B14C	FJPS0080*
8977	꺼	C551	C4CD	FJPT0080
8978	꺽	C553	C4CE	FJPV0080

Line Number	Graphic	Host Code	PC Code	GCGID
8979	꺾	C554	B14D	FJPW0080*
8980	꺿	C555	C4CF	FJPX0080
8981	껀	C556	B14E	FJPY0080*
8982	껁	C557	C4D0	FJPZ0080
8983	껂	C558	B14F	FJQ00080*
8984	껃	C559	B150	FJQ10080*
8985	껄	C55A	B151	FJQ20080*
8986	껅	C55B	B152	FJQ30080
8987	껆	C55C	B153	FJQ40080*
8988	껇	C55D	B154	FJQ50080*
8989	껈	C561	C4D1	FJQ90080
8990	껉	C562	B155	FJQA0080*
8991	껊	C563	B156	FJQB0080*
8992	껋	C564	B157	FJQC0080*
8993	껌	C565	C4D2	FJQD0080
8994	껍	C566	B158	FJQE0080*
8995	껎	C567	B159	FJQF0080*
8996	껏	C568	B15A	FJQG0080*
8997	껐	C569	C4D3	FJQH0080
8998	껑	C56A	B161	FJQI0080*
8999	껒	C56B	B162	FJQJ0080*
9000	껓	C56C	B163	FJQK0080*
9001	껔	C56D	B164	FJQL0080*
9002	껕	C56E	B165	FJQM0080*
9003	껖	C56F	B166	FJQN0080*
9004	껗	C570	B167	FJQO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9005	컴	C571	C4D4	FJQP0080
9006	첩	C573	C4D5	FJQR0080
9007	곶	C574	B168	FJQS0080*
9008	켓	C575	C4D6	FJQT0080
9009	켰	C576	C4D7	FJQU0080
9010	경	C577	C4D8	FJQV0080
9011	곶	C578	B169	FJQW0080*
9012	곶	C579	B16A	FJQX0080*
9013	곶	C57A	B16B	FJQY0080*
9014	곶	C57B	B16C	FJQZ0080*
9015	곶	C57C	B16D	FJR00080*
9016	곶	C57D	B16E	FJR10080*
9017	계	C581	C4D9	FJR50080
9018	곶	C582	B16F	FJR60080*
9019	곶	C583	B170	FJR70080*
9020	곶	C584	B171	FJR80080*
9021	곶	C585	B172	FJR90080*
9022	곶	C586	B173	FJRA0080*
9023	곶	C587	B174	FJRB0080*
9024	곶	C588	B175	FJRC0080*
9025	곶	C589	B176	FJRD0080*
9026	곶	C58A	B177	FJRE0080*
9027	곶	C58B	B178	FJRF0080*
9028	곶	C58C	B179	FJRG0080*
9029	곶	C58D	B17A	FJRH0080*
9030	곶	C58E	B181	FJRI0080*

Table 17 (Page 28 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9031	곶	C58F	B182	FJRJ0080*
9032	곶	C590	B183	FJRK0080*
9033	곶	C591	B184	FJRL0080*
9034	곶	C593	B185	FJRN0080*
9035	곶	C594	B186	FJRO0080*
9036	곶	C595	B187	FJRP0080*
9037	곶	C596	B188	FJRQ0080*
9038	곶	C597	B189	FJRR0080*
9039	곶	C598	B18A	FJRS0080*
9040	곶	C599	B18B	FJRT0080*
9041	곶	C59A	B18C	FJRU0080*
9042	곶	C59B	B18D	FJRV0080*
9043	곶	C59C	B18E	FJRW0080*
9044	곶	C59D	B18F	FJRX0080*
9045	코	C5A1	C4DA	FJS10080
9046	곶	C5A2	C4DB	FJS20080
9047	곶	C5A3	B190	FJS30080*
9048	곶	C5A4	B191	FJS40080*
9049	곶	C5A5	C4DC	FJS50080
9050	곶	C5A6	B192	FJS60080*
9051	곶	C5A7	B193	FJS70080*
9052	곶	C5A8	B194	FJS80080*
9053	곶	C5A9	C4DD	FJS90080
9054	곶	C5AA	B195	FJSA0080*
9055	곶	C5AB	B196	FJSB0080*
9056	곶	C5AC	B197	FJSC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9057	꺄	C5AD	B198	FJSD0080*
9058	꺅	C5AE	B199	FJSE0080*
9059	꺆	C5AF	B19A	FJSF0080*
9060	꺇	C5B0	B19B	FJSG0080*
9061	꺈	C5B1	C4DE	FJSH0080
9062	꺉	C5B3	C4DF	FJSJ0080
9063	꺊	C5B4	B19C	FJSK0080*
9064	꺋	C5B5	C4E0	FJSL0080
9065	꺌	C5B6	B19D	FJSM0080*
9066	꺍	C5B7	C4E1	FJSN0080
9067	꺎	C5B8	B19E	FJSO0080*
9068	꺏	C5B9	B19F	FJSP0080*
9069	꺑	C5BA	B1A0	FJSQ0080*
9070	꺒	C5BB	B241	FJSR0080*
9071	꺓	C5BC	B242	FJSS0080*
9072	꺔	C5BD	B243	FJST0080*
9073	꺕	C5C1	C4E2	FJSX0080
9074	꺖	C5C2	C4E3	FJSY0080
9075	꺗	C5C3	B244	FJSZ0080*
9076	꺘	C5C4	B245	FJT00080*
9077	꺙	C5C5	C4E4	FJT10080
9078	꺚	C5C6	B246	FJT20080*
9079	꺛	C5C7	B247	FJT30080*
9080	꺜	C5C8	B248	FJT40080*
9081	꺝	C5C9	C4E5	FJT50080
9082	꺞	C5CA	B249	FJT60080*

Table 17 (Page 29 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9083	꺟	C5CB	B24A	FJT70080*
9084	꺠	C5CC	B24B	FJT80080*
9085	꺡	C5CD	B24C	FJT90080*
9086	꺢	C5CE	B24D	FJTA0080*
9087	꺣	C5CF	B24E	FJTB0080*
9088	꺤	C5D0	B24F	FJTC0080*
9089	꺥	C5D1	C4E6	FJTD0080
9090	꺦	C5D3	B250	FJTJ0080*
9091	꺧	C5D4	B251	FJTG0080*
9092	꺨	C5D5	B252	FJTH0080*
9093	꺩	C5D6	B253	FJTI0080*
9094	꺪	C5D7	C4E7	FJTJ0080
9095	꺫	C5D8	B254	FJTK0080*
9096	꺬	C5D9	B255	FJTL0080*
9097	꺭	C5DA	B256	FJTM0080*
9098	꺮	C5DB	B257	FJTN0080*
9099	꺯	C5DC	B258	FJTO0080*
9100	꺰	C5DD	B259	FJTP0080*
9101	꺱	C5E1	C4E8	FJTT0080
9102	꺲	C5E2	B25A	FJTU0080
9103	꺳	C5E3	B261	FJTV0080*
9104	꺴	C5E4	B262	FJTW0080*
9105	꺵	C5E5	B263	FJTX0080
9106	꺶	C5E6	B264	FJTY0080*
9107	꺷	C5E7	B265	FJTZ0080*
9108	꺸	C5E8	B266	FJU00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 30 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9109	퀵	C5E9	B267	FJU10080*
9110	퀶	C5EA	B268	FJU20080*
9111	퀷	C5EB	B269	FJU30080*
9112	퀸	C5EC	B26A	FJU40080*
9113	퀹	C5ED	B26B	FJU50080*
9114	퀺	C5EE	B26C	FJU60080*
9115	퀻	C5EF	B26D	FJU70080*
9116	퀼	C5F0	B26E	FJU80080*
9117	퀽	C5F1	B26F	FJU90080*
9118	퀾	C5F3	B270	FJUB0080*
9119	퀿	C5F4	B271	FJUC0080*
9120	퀸	C5F5	B272	FJUD0080
9121	퀹	C5F6	B273	FJUE0080*
9122	퀺	C5F7	C4E9	FJUF0080
9123	퀻	C5F8	B274	FJUG0080*
9124	퀼	C5F9	B275	FJUH0080*
9125	퀽	C5FA	B276	FJUI0080*
9126	퀼	C5FB	B277	FJUJ0080*
9127	퀾	C5FC	B278	FJUK0080*
9128	퀿	C5FD	B279	FJUL0080*
9129	퀸	C641	C4EA	FJUP0080
9130	퀹	C642	B27A	FJUQ0080*
9131	퀺	C643	B281	FJUR0080*
9132	퀻	C644	B282	FJUS0080*
9133	퀼	C645	B283	FJUT0080
9134	퀽	C646	B284	FJUU0080*

Table 17 (Page 30 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9135	퀼	C647	B285	FJUV0080*
9136	퀽	C648	B286	FJUW0080*
9137	퀼	C649	C4EB	FJUX0080
9138	퀼	C64A	B287	FJUY0080*
9139	퀼	C64B	B288	FJUZ0080*
9140	퀼	C64C	B289	FJV00080*
9141	퀼	C64D	B28A	FJV10080*
9142	퀼	C64E	B28B	FJV20080*
9143	퀼	C64F	B28C	FJV30080*
9144	퀼	C650	B28D	FJV40080*
9145	퀼	C651	B28E	FJV50080*
9146	퀼	C653	B28F	FJV70080*
9147	퀼	C654	B290	FJV80080*
9148	퀼	C655	B291	FJV90080*
9149	퀼	C656	B292	FJVA0080*
9150	퀼	C657	B293	FJVB0080
9151	퀼	C658	B294	FJVC0080*
9152	퀼	C659	B295	FJVD0080*
9153	퀼	C65A	B296	FJVE0080*
9154	퀼	C65B	B297	FJVF0080*
9155	퀼	C65C	B298	FJVG0080*
9156	퀼	C65D	B299	FJVH0080*
9157	퀼	C661	C4EC	FJVL0080
9158	퀼	C662	B29A	FJVM0080*
9159	퀼	C663	B29B	FJVN0080*
9160	퀼	C664	B29C	FJVO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9161	큰	C665	B29D	FJVP0080*
9162	큰	C666	B29E	FJVQ0080*
9163	큰	C667	B29F	FJVR0080*
9164	큰	C668	B2A0	FJVS0080*
9165	큰	C669	B341	FJVT0080*
9166	큰	C66A	B342	FJVV0080*
9167	큰	C66B	B343	FJVV0080*
9168	큰	C66C	B344	FJVV0080*
9169	큰	C66D	B345	FJVX0080*
9170	큰	C66E	B346	FJVV0080*
9171	큰	C66F	B347	FJVZ0080*
9172	큰	C670	B348	FJW00080*
9173	큰	C671	B349	FJW10080*
9174	큰	C673	B34A	FJW30080*
9175	큰	C674	B34B	FJW40080*
9176	큰	C675	B34C	FJW50080*
9177	큰	C676	B34D	FJW60080*
9178	큰	C677	B34E	FJW70080*
9179	큰	C678	B34F	FJW80080*
9180	큰	C679	B350	FJW90080*
9181	큰	C67A	B351	FJWA0080*
9182	큰	C67B	B352	FJWB0080*
9183	큰	C67C	B353	FJWC0080*
9184	큰	C67D	B354	FJWD0080*
9185	쿠	C681	C4ED	FJWH0080
9186	쿠	C682	C4EE	FJWI0080

Table 17 (Page 31 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9187	쿠	C683	B355	FJWJ0080*
9188	쿠	C684	B356	FJWK0080*
9189	큰	C685	C4EF	FJWL0080
9190	큰	C686	B357	FJWM0080*
9191	큰	C687	B358	FJWN0080*
9192	큰	C688	B359	FJWO0080*
9193	큰	C689	C4F0	FJWP0080
9194	큰	C68A	B35A	FJWQ0080*
9195	큰	C68B	B361	FJWR0080*
9196	큰	C68C	B362	FJWS0080*
9197	큰	C68D	B363	FJWT0080*
9198	큰	C68E	B364	FJWU0080*
9199	큰	C68F	B365	FJWV0080*
9200	큰	C690	B366	FJWW0080*
9201	큰	C691	C4F1	FJWX0080
9202	큰	C693	C4F2	FJWZ0080
9203	큰	C694	B367	FJX00080*
9204	큰	C695	C4F3	FJX10080
9205	큰	C696	B368	FJX20080*
9206	큰	C697	C4F4	FJX30080
9207	큰	C698	B369	FJX40080*
9208	큰	C699	B36A	FJX50080*
9209	큰	C69A	B36B	FJX60080*
9210	큰	C69B	B36C	FJX70080*
9211	큰	C69C	B36D	FJX80080*
9212	큰	C69D	B36E	FJX90080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9213	꺀	C6A1	C4F5	FJXD0080
9214	꺁	C6A2	B36F	FJXE0080*
9215	꺂	C6A3	B370	FJXF0080*
9216	꺃	C6A4	B371	FJXG0080*
9217	꺄	C6A5	C4F6	FJXH0080
9218	꺅	C6A6	B372	FJXI0080*
9219	꺆	C6A7	B373	FJXJ0080*
9220	꺇	C6A8	B374	FJXK0080*
9221	꺈	C6A9	C4F7	FJXL0080
9222	꺉	C6AA	B375	FJXM0080*
9223	꺊	C6AB	B376	FJXN0080*
9224	꺋	C6AC	B377	FJXO0080*
9225	꺌	C6AD	B378	FJXP0080*
9226	꺍	C6AE	B379	FJXQ0080*
9227	꺎	C6AF	B37A	FJXR0080*
9228	꺏	C6B0	B381	FJXS0080*
9229	꺐	C6B1	B382	FJXT0080*
9230	꺑	C6B3	B383	FJXV0080*
9231	꺒	C6B4	B384	FJXW0080*
9232	꺓	C6B5	B385	FJXX0080*
9233	꺔	C6B6	B386	FJXY0080*
9234	꺕	C6B7	C4F8	FJXZ0080
9235	꺖	C6B8	B387	FJY00080*
9236	꺗	C6B9	B388	FJY10080*
9237	꺘	C6BA	B389	FJY20080*
9238	꺙	C6BB	B38A	FJY30080*

Table 17 (Page 32 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9239	꺚	C6BC	B38B	FJY40080*
9240	꺛	C6BD	B38C	FJY50080*
9241	꺜	C6C1	C4F9	FJY90080
9242	꺝	C6C2	B38D	FJYA0080*
9243	꺞	C6C3	B38E	FJYB0080*
9244	꺟	C6C4	B38F	FJYC0080*
9245	꺠	C6C5	B390	FJYD0080*
9246	꺡	C6C6	B391	FJYE0080*
9247	꺢	C6C7	B392	FJYF0080*
9248	꺣	C6C8	B393	FJYG0080*
9249	꺤	C6C9	B394	FJYH0080*
9250	꺥	C6CA	B395	FJYI0080*
9251	꺦	C6CB	B396	FJYJ0080*
9252	꺧	C6CC	B397	FJYK0080*
9253	꺨	C6CD	B398	FJYL0080*
9254	꺩	C6CE	B399	FJYM0080*
9255	꺪	C6CF	B39A	FJYN0080*
9256	꺫	C6D0	B39B	FJYO0080*
9257	꺬	C6D1	B39C	FJYP0080*
9258	꺭	C6D3	B39D	FJYR0080*
9259	꺮	C6D4	B39E	FJYS0080*
9260	꺯	C6D5	B39F	FJYT0080*
9261	꺰	C6D6	B3A0	FJYU0080*
9262	꺱	C6D7	C4FA	FJYV0080
9263	꺲	C6D8	B441	FJYW0080*
9264	꺳	C6D9	B442	FJYX0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9265	퀵	C6DA	B443	FJYY0080*
9266	퀵	C6DB	B444	FJYZ0080*
9267	퀵	C6DC	B445	FJZ00080*
9268	퀵	C6DD	B446	FJZ10080*
9269	퀴	C6E1	C4FB	FJZ50080
9270	퀵	C6E2	C4FC	FJZ60080
9271	퀴	C6E3	B447	FJZ70080*
9272	퀵	C6E4	B448	FJZ80080*
9273	퀵	C6E5	C4FD	FJZ90080
9274	퀵	C6E6	B449	FJZA0080*
9275	퀵	C6E7	B44A	FJZB0080*
9276	퀵	C6E8	B44B	FJZC0080*
9277	퀵	C6E9	C4FE	FJZD0080
9278	퀵	C6EA	B44C	FJZE0080*
9279	퀵	C6EB	B44D	FJZF0080*
9280	퀵	C6EC	B44E	FJZG0080*
9281	퀵	C6ED	B44F	FJZH0080*
9282	퀵	C6EE	B450	FJZI0080*
9283	퀵	C6EF	B451	FJZJ0080*
9284	퀵	C6F0	B452	FJZK0080*
9285	퀵	C6F1	C5A1	FJZL0080
9286	퀵	C6F3	C5A2	FJZN0080
9287	퀵	C6F4	B453	FJZO0080*
9288	퀵	C6F5	C5A3	FJZP0080
9289	퀵	C6F6	B454	FJZQ0080*
9290	퀵	C6F7	C5A4	FJZR0080

Table 17 (Page 33 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9291	퀵	C6F8	B455	FJZS0080*
9292	퀵	C6F9	B456	FJZT0080*
9293	퀵	C6FA	B457	FJZU0080*
9294	퀵	C6FB	B458	FJZV0080*
9295	퀵	C6FC	B459	FJZW0080*
9296	퀵	C6FD	B45A	FJZX0080*
9297	큐	C741	C5A5	FK010080
9298	큐	C742	B461	FK020080*
9299	큐	C743	B462	FK030080*
9300	큐	C744	B463	FK040080*
9301	큐	C745	C5A6	FK050080
9302	큐	C746	B464	FK060080*
9303	큐	C747	B465	FK070080*
9304	큐	C748	B466	FK080080*
9305	큐	C749	C5A7	FK090080
9306	큐	C74A	B467	FK0A0080*
9307	큐	C74B	B468	FK0B0080*
9308	큐	C74C	B469	FK0C0080*
9309	큐	C74D	B46A	FK0D0080*
9310	큐	C74E	B46B	FK0E0080*
9311	큐	C74F	B46C	FK0F0080*
9312	큐	C750	B46D	FK0G0080*
9313	큐	C751	C5A8	FK0H0080
9314	큐	C753	B46E	FK0J0080*
9315	큐	C754	B46F	FK0K0080*
9316	큐	C755	B470	FK0L0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9317	꺄	C756	B471	FK0M0080*
9318	꺅	C757	B472	FK0N0080*
9319	꺆	C758	B473	FK0O0080*
9320	꺇	C759	B474	FK0P0080*
9321	꺈	C75A	B475	FK0Q0080*
9322	꺉	C75B	B476	FK0R0080*
9323	꺊	C75C	B477	FK0S0080*
9324	꺋	C75D	B478	FK0T0080*
9325	크	C761	C5A9	FK0X0080
9326	쿠	C762	C5AA	FK0Y0080
9327	큐	C763	B479	FK0Z0080*
9328	꺌	C764	B47A	FK100080*
9329	큰	C765	C5AB	FK110080
9330	꺍	C766	B481	FK120080*
9331	꺎	C767	B482	FK130080*
9332	큰	C768	B483	FK140080*
9333	꺏	C769	C5AC	FK150080
9334	꺑	C76A	B484	FK160080*
9335	꺒	C76B	B485	FK170080*
9336	꺓	C76C	B486	FK180080*
9337	꺔	C76D	B487	FK190080*
9338	꺕	C76E	B488	FK1A0080*
9339	꺖	C76F	B489	FK1B0080*
9340	꺗	C770	B48A	FK1C0080*
9341	금	C771	C5AD	FK1D0080
9342	꺘	C773	C5AE	FK1F0080

Table 17 (Page 34 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9343	꺙	C774	B48B	FK1G0080*
9344	꺚	C775	B48C	FK1H0080*
9345	꺛	C776	B48D	FK1I0080*
9346	꺜	C777	C5AF	FK1J0080
9347	꺝	C778	B48E	FK1K0080*
9348	꺞	C779	B48F	FK1L0080*
9349	꺟	C77A	B490	FK1M0080*
9350	꺠	C77B	B491	FK1N0080*
9351	꺡	C77C	B492	FK1O0080*
9352	꺢	C77D	B493	FK1P0080*
9353	꺣	C781	B494	FK1T0080
9354	꺤	C782	B495	FK1U0080*
9355	꺥	C783	B496	FK1V0080*
9356	꺦	C784	B497	FK1W0080*
9357	꺧	C785	B498	FK1X0080*
9358	꺨	C786	B499	FK1Y0080*
9359	꺩	C787	B49A	FK1Z0080*
9360	꺪	C788	B49B	FK200080*
9361	꺫	C789	B49C	FK210080*
9362	꺬	C78A	B49D	FK220080*
9363	꺭	C78B	B49E	FK230080*
9364	꺮	C78C	B49F	FK240080*
9365	꺯	C78D	B4A0	FK250080*
9366	꺰	C78E	B541	FK260080*
9367	꺱	C78F	B542	FK270080*
9368	꺲	C790	B543	FK280080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
9369	킴	C791	B544	FK290080*
9370	킵	C793	B545	FK2B0080*
9371	킞	C794	B546	FK2C0080*
9372	킟	C795	B547	FK2D0080*
9373	킠	C796	B548	FK2E0080*
9374	킡	C797	B549	FK2F0080*
9375	킢	C798	B54A	FK2G0080*
9376	킣	C799	B54B	FK2H0080*
9377	키	C79A	B54C	FK2I0080*
9378	킥	C79B	B54D	FK2J0080*
9379	킦	C79C	B54E	FK2K0080*
9380	킧	C79D	B54F	FK2L0080*
9381	키	C7A1	C5B0	FK2P0080
9382	킈	C7A2	C5B1	FK2Q0080
9383	킉	C7A3	B550	FK2R0080*
9384	킊	C7A4	B551	FK2S0080*
9385	킨	C7A5	C5B2	FK2T0080
9386	킋	C7A6	B552	FK2U0080*
9387	킌	C7A7	B553	FK2V0080*
9388	킍	C7A8	B554	FK2W0080*
9389	킎	C7A9	C5B3	FK2X0080
9390	킏	C7AA	B555	FK2Y0080*
9391	킐	C7AB	B556	FK2Z0080*
9392	킑	C7AC	B557	FK300080*
9393	킒	C7AD	B558	FK310080*
9394	킓	C7AE	B559	FK320080*

Line Number	Graphic	Host Code	PC Code	GCGID
9395	킔	C7AF	B55A	FK330080*
9396	킕	C7B0	B561	FK340080*
9397	킖	C7B1	C5B4	FK350080
9398	킗	C7B3	C5B5	FK370080
9399	킘	C7B4	B562	FK380080*
9400	킙	C7B5	C5B6	FK390080
9401	킚	C7B6	B563	FK3A0080*
9402	킛	C7B7	C5B7	FK3B0080
9403	킜	C7B8	B564	FK3C0080*
9404	킝	C7B9	B565	FK3D0080*
9405	킞	C7BA	B566	FK3E0080*
9406	킟	C7BB	B567	FK3F0080*
9407	킠	C7BC	B568	FK3G0080*
9408	킡	C7BD	B569	FK3H0080*
9409	타	C861	C5B8	FK690080
9410	탁	C862	C5B9	FK6A0080
9411	투	C863	B56A	FK6B0080*
9412	툄	C864	B56B	FK6C0080*
9413	탄	C865	C5BA	FK6D0080
9414	툅	C866	B56C	FK6E0080*
9415	탈	C867	B56D	FK6F0080*
9416	탈	C868	B56E	FK6G0080*
9417	탈	C869	C5BB	FK6H0080
9418	툇	C86A	C5BC	FK6I0080
9419	툈	C86B	B56F	FK6J0080*
9420	툉	C86C	B570	FK6K0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 36 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9421	탁	C86D	B571	FK6L0080*
9422	탈	C86E	B572	FK6M0080*
9423	달	C86F	B573	FK6N0080*
9424	탈	C870	B574	FK6O0080*
9425	탐	C871	C5BD	FK6P0080
9426	탐	C873	C5BE	FK6R0080
9427	탁	C874	B575	FK6S0080*
9428	탓	C875	C5BF	FK6T0080
9429	탓	C876	C5C0	FK6U0080
9430	탕	C877	C5C1	FK6V0080
9431	탓	C878	B576	FK6W0080*
9432	탓	C879	B577	FK6X0080*
9433	탁	C87A	B578	FK6Y0080*
9434	탈	C87B	B579	FK6Z0080*
9435	달	C87C	B57A	FK700080*
9436	탕	C87D	B581	FK710080*
9437	태	C881	C5C2	FK750080
9438	택	C882	C5C3	FK760080
9439	택	C883	B582	FK770080*
9440	택	C884	B583	FK780080*
9441	텐	C885	C5C4	FK790080
9442	택	C886	B584	FK7A0080*
9443	탈	C887	B585	FK7B0080*
9444	텐	C888	B586	FK7C0080*
9445	탈	C889	C5C5	FK7D0080
9446	택	C88A	B587	FK7E0080*

Table 17 (Page 36 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9447	택	C88B	B588	FK7F0080*
9448	택	C88C	B589	FK7G0080*
9449	택	C88D	B58A	FK7H0080*
9450	택	C88E	B58B	FK7I0080*
9451	택	C88F	B58C	FK7J0080*
9452	택	C890	B58D	FK7K0080*
9453	탐	C891	C5C6	FK7L0080
9454	탐	C893	C5C7	FK7N0080
9455	택	C894	B58E	FK7O0080*
9456	택	C895	C5C8	FK7P0080
9457	택	C896	C5C9	FK7Q0080
9458	탱	C897	C5CA	FK7R0080
9459	택	C898	B58F	FK7S0080*
9460	택	C899	B590	FK7T0080*
9461	택	C89A	B591	FK7U0080*
9462	탈	C89B	B592	FK7V0080*
9463	택	C89C	B593	FK7W0080*
9464	탱	C89D	B594	FK7X0080*
9465	타	C8A1	C5CB	FK810080
9466	탁	C8A2	B595	FK820080*
9467	탁	C8A3	B596	FK830080*
9468	탁	C8A4	B597	FK840080*
9469	탄	C8A5	B598	FK850080*
9470	탁	C8A6	B599	FK860080*
9471	탈	C8A7	B59A	FK870080*
9472	탈	C8A8	B59B	FK880080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 17 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9473	탈	C8A9	B59C	FK890080*
9474	탁	C8AA	B59D	FK8A0080*
9475	탈	C8AB	B59E	FK8B0080*
9476	탁	C8AC	B59F	FK8C0080*
9477	랏	C8AD	B5A0	FK8D0080*
9478	탈	C8AE	B641	FK8E0080*
9479	탈	C8AF	B642	FK8F0080*
9480	랏	C8B0	B643	FK8G0080*
9481	탐	C8B1	B644	FK8H0080*
9482	답	C8B3	B645	FK8J0080*
9483	랏	C8B4	B646	FK8K0080*
9484	랏	C8B5	B647	FK8L0080*
9485	랏	C8B6	B648	FK8M0080*
9486	탕	C8B7	C5CC	FK8N0080
9487	랏	C8B8	B649	FK8O0080*
9488	랏	C8B9	B64A	FK8P0080*
9489	탁	C8BA	B64B	FK8Q0080*
9490	탈	C8BB	B64C	FK8R0080*
9491	탈	C8BC	B64D	FK8S0080*
9492	탕	C8BD	B64E	FK8T0080*
9493	태	C8C1	B64F	FK8X0080
9494	택	C8C2	B650	FK8Y0080*
9495	택	C8C3	B651	FK8Z0080*
9496	텃	C8C4	B652	FK900080*
9497	텐	C8C5	B653	FK910080*
9498	텃	C8C6	B654	FK920080*

Table 17 (Page 37 of 37). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9499	탕	C8C7	B655	FK930080*
9500	텐	C8C8	B656	FK940080*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 1 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9501	탈	C8C9	B657	FK950080*
9502	택	C8CA	B658	FK960080*
9503	탈	C8CB	B659	FK970080*
9504	택	C8CC	B65A	FK980080*
9505	탈	C8CD	B661	FK990080*
9506	탈	C8CE	B662	FK9A0080*
9507	탈	C8CF	B663	FK9B0080*
9508	탈	C8D0	B664	FK9C0080*
9509	택	C8D1	B665	FK9D0080*
9510	택	C8D3	B666	FK9F0080*
9511	탈	C8D4	B667	FK9G0080*
9512	택	C8D5	B668	FK9H0080*
9513	탈	C8D6	B669	FK9I0080*
9514	택	C8D7	B66A	FK9J0080*
9515	탈	C8D8	B66B	FK9K0080*
9516	택	C8D9	B66C	FK9L0080*
9517	탈	C8DA	B66D	FK9M0080*
9518	탈	C8DB	B66E	FK9N0080*
9519	탈	C8DC	B66F	FK9O0080*
9520	택	C8DD	B670	FK9P0080*
9521	터	C8E1	C5CD	FK9T0080
9522	터	C8E2	C5CE	FK9U0080
9523	터	C8E3	B671	FK9V0080*
9524	터	C8E4	B672	FK9W0080*
9525	터	C8E5	C5CF	FK9X0080
9526	터	C8E6	B673	FK9Y0080*

Table 18 (Page 1 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9527	탈	C8E7	B674	FK9Z0080*
9528	탈	C8E8	B675	FKA00080*
9529	탈	C8E9	C5D0	FKA10080
9530	탈	C8EA	B676	FKA20080*
9531	탈	C8EB	C5D1	FKA30080
9532	탈	C8EC	B677	FKA40080*
9533	탈	C8ED	B678	FKA50080*
9534	탈	C8EE	B679	FKA60080*
9535	탈	C8EF	B67A	FKA70080*
9536	탈	C8F0	B681	FKA80080*
9537	택	C8F1	C5D2	FKA90080
9538	택	C8F3	C5D3	FKAB0080
9539	탈	C8F4	B682	FKAC0080*
9540	택	C8F5	C5D4	FKAD0080
9541	탈	C8F6	C5D5	FKAE0080
9542	택	C8F7	C5D6	FKAF0080
9543	탈	C8F8	B683	FKAG0080*
9544	탈	C8F9	B684	FKAH0080*
9545	탈	C8FA	B685	FKAI0080*
9546	탈	C8FB	B686	FKAJ0080*
9547	탈	C8FC	B687	FKAK0080*
9548	탈	C8FD	B688	FKAL0080*
9549	테	C941	C5D7	FKAP0080
9550	택	C942	C5D8	FKAQ0080
9551	택	C943	B689	FKAR0080*
9552	택	C944	B68A	FKAS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 2 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9553	텐	C945	C5D9	FKAT0080
9554	택	C946	B68B	FKAU0080*
9555	탱	C947	B68C	FKAV0080*
9556	틴	C948	B68D	FKAW0080*
9557	텔	C949	C5DA	FKAX0080
9558	텍	C94A	B68E	FKAY0080*
9559	텨	C94B	B68F	FKAZ0080*
9560	텨	C94C	B690	FKB00080*
9561	텨	C94D	B691	FKB10080*
9562	텨	C94E	B692	FKB20080*
9563	텨	C94F	B693	FKB30080*
9564	텨	C950	B694	FKB40080*
9565	템	C951	C5DB	FKB50080
9566	텨	C953	C5DC	FKB70080
9567	텨	C954	B695	FKB80080*
9568	텨	C955	C5DD	FKB90080
9569	텨	C956	B696	FKBA0080
9570	텨	C957	C5DE	FKBB0080
9571	텨	C958	B697	FKBC0080*
9572	텨	C959	B698	FKBD0080*
9573	텨	C95A	B699	FKBE0080*
9574	텔	C95B	B69A	FKBF0080*
9575	텨	C95C	B69B	FKBG0080*
9576	텨	C95D	B69C	FKBH0080*
9577	터	C961	C5DF	FKBL0080
9578	텨	C962	B69D	FKBM0080

Table 18 (Page 2 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9579	텨	C963	B69E	FKBN0080*
9580	텨	C964	B69F	FKBO0080*
9581	텐	C965	C5E0	FKBP0080
9582	텨	C966	B6A0	FKBQ0080*
9583	텨	C967	B741	FKBR0080*
9584	텨	C968	B742	FKBS0080*
9585	텨	C969	B743	FKBT0080*
9586	텨	C96A	B744	FKBU0080*
9587	텨	C96B	B745	FKBV0080*
9588	텨	C96C	B746	FKBW0080*
9589	텨	C96D	B747	FKBX0080*
9590	텨	C96E	B748	FKBY0080*
9591	텨	C96F	B749	FKBZ0080*
9592	텨	C970	B74A	FKC00080*
9593	텨	C971	B74B	FKC10080*
9594	텨	C973	B74C	FKC30080*
9595	텨	C974	B74D	FKC40080*
9596	텨	C975	B74E	FKC50080*
9597	텨	C976	C5E1	FKC60080
9598	텨	C977	B74F	FKC70080*
9599	텨	C978	B750	FKC80080*
9600	텨	C979	B751	FKC90080*
9601	텨	C97A	B752	FKCA0080*
9602	텨	C97B	B753	FKCB0080*
9603	텨	C97C	B754	FKCC0080*
9604	텨	C97D	B755	FKCD0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 3 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9605	테	C981	C5E2	FKCH0080
9606	텍	C982	B756	FKCI0080*
9607	텍	C983	B757	FKCJ0080*
9608	텍	C984	B758	FKCK0080*
9609	텐	C985	C5E3	FKCL0080
9610	텍	C986	B759	FKCM0080*
9611	텍	C987	B75A	FKCN0080*
9612	텐	C988	B761	FKCO0080*
9613	텔	C989	B762	FKCP0080*
9614	텍	C98A	B763	FKCQ0080*
9615	텔	C98B	B764	FKCR0080*
9616	텔	C98C	B765	FKCS0080*
9617	텍	C98D	B766	FKCT0080*
9618	텔	C98E	B767	FKCU0080*
9619	텔	C98F	B768	FKCV0080*
9620	텔	C990	B769	FKCW0080*
9621	템	C991	B76A	FKCX0080*
9622	템	C993	B76B	FKCZ0080*
9623	텍	C994	B76C	FKD00080*
9624	텍	C995	B76D	FKD10080*
9625	텍	C996	B76E	FKD20080*
9626	텅	C997	B76F	FKD30080*
9627	텍	C998	B770	FKD40080*
9628	텍	C999	B771	FKD50080*
9629	텍	C99A	B772	FKD60080*
9630	텔	C99B	B773	FKD70080*

Table 18 (Page 3 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9631	텅	C99C	B774	FKD80080*
9632	텅	C99D	B775	FKD90080*
9633	토	C9A1	C5E4	FKDD0080
9634	투	C9A2	C5E5	FKDE0080
9635	투	C9A3	B776	FKDF0080*
9636	투	C9A4	B777	FKDG0080*
9637	톤	C9A5	C5E6	FKDH0080
9638	투	C9A6	B778	FKDI0080*
9639	툽	C9A7	B779	FKDJ0080*
9640	툽	C9A8	B77A	FKDK0080*
9641	툽	C9A9	C5E7	FKDL0080
9642	툽	C9AA	B781	FKDM0080*
9643	툽	C9AB	B782	FKDN0080*
9644	툽	C9AC	B783	FKDO0080*
9645	툽	C9AD	B784	FKDP0080*
9646	툽	C9AE	B785	FKDQ0080*
9647	툽	C9AF	B786	FKDR0080*
9648	툽	C9B0	B787	FKDS0080*
9649	툽	C9B1	C5E8	FKDT0080
9650	툽	C9B3	C5E9	FKDV0080
9651	툽	C9B4	B788	FKDW0080*
9652	툽	C9B5	C5EA	FKDX0080
9653	툽	C9B6	B789	FKDY0080*
9654	툽	C9B7	C5EB	FKDZ0080
9655	툽	C9B8	B78A	FKE00080*
9656	툽	C9B9	B78B	FKE10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
9657	툑	C9BA	B78C	FKE20080*
9658	툒	C9BB	B78D	FKE30080*
9659	툓	C9BC	C5EC	FKE40080
9660	툔	C9BD	B78E	FKE50080*
9661	푢	C9C1	C5ED	FKE90080
9662	푣	C9C2	B78F	FKEA0080*
9663	푤	C9C3	B790	FKEB0080*
9664	푖	C9C4	B791	FKEC0080*
9665	푗	C9C5	C5EE	FKED0080
9666	푘	C9C6	B792	FKEE0080*
9667	푙	C9C7	B793	FKEF0080*
9668	푚	C9C8	B794	FKEG0080*
9669	푛	C9C9	B795	FKEH0080*
9670	푏	C9CA	B796	FKEI0080*
9671	푑	C9CB	B797	FKEJ0080*
9672	푒	C9CC	B798	FKEK0080*
9673	푓	C9CD	B799	FKEL0080*
9674	푔	C9CE	B79A	FKEM0080*
9675	푓	C9CF	B79B	FKEN0080*
9676	푖	C9D0	B79C	FKEO0080*
9677	푗	C9D1	B79D	FKEP0080*
9678	푚	C9D3	B79E	FKER0080*
9679	푛	C9D4	B79F	FKES0080*
9680	푖	C9D5	B7A0	FKET0080*
9681	푗	C9D6	B841	FKEU0080*
9682	푖	C9D7	B842	FKEV0080*

Line Number	Graphic	Host Code	PC Code	GCGID
9683	푖	C9D8	B843	FKEW0080*
9684	푖	C9D9	B844	FKEX0080*
9685	푖	C9DA	B845	FKEY0080*
9686	푖	C9DB	B846	FKEZ0080*
9687	푖	C9DC	B847	FKF00080*
9688	푖	C9DD	B848	FKF10080*
9689	푖	C9E1	C5EF	FKF50080
9690	푖	C9E2	B849	FKF60080*
9691	푖	C9E3	B84A	FKF70080*
9692	푖	C9E4	B84B	FKF80080*
9693	푖	C9E5	B84C	FKF90080*
9694	푖	C9E6	B84D	FKFA0080*
9695	푖	C9E7	B84E	FKFB0080*
9696	푖	C9E8	B84F	FKFC0080*
9697	푖	C9E9	B850	FKFD0080*
9698	푖	C9EA	B851	FKFE0080*
9699	푖	C9EB	B852	FKFF0080*
9700	푖	C9EC	B853	FKFG0080*
9701	푖	C9ED	B854	FKFH0080*
9702	푖	C9EE	B855	FKFI0080*
9703	푖	C9EF	B856	FKFJ0080*
9704	푖	C9F0	B857	FKFK0080*
9705	푖	C9F1	B858	FKFL0080*
9706	푖	C9F3	B859	FKFN0080*
9707	푖	C9F4	B85A	FKFO0080*
9708	푖	C9F5	B861	FKFP0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 5 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9709	뤼	C9F6	B862	FKFQ0080*
9710	뤾	C9F7	B863	FKFR0080*
9711	뤿	C9F8	B864	FKFS0080*
9712	뤻	C9F9	B865	FKFT0080*
9713	뤼	C9FA	B866	FKFU0080*
9714	뤽	C9FB	B867	FKFV0080*
9715	뤾	C9FC	B868	FKFW0080*
9716	뤿	C9FD	B869	FKFX0080*
9717	퇴	CA41	C5F0	FKG10080
9718	퇴	CA42	B86A	FKG20080*
9719	퇴	CA43	B86B	FKG30080*
9720	퇴	CA44	B86C	FKG40080*
9721	퇴	CA45	C5F1	FKG50080
9722	퇴	CA46	B86D	FKG60080*
9723	퇴	CA47	B86E	FKG70080*
9724	퇴	CA48	B86F	FKG80080*
9725	퇴	CA49	B870	FKG90080*
9726	퇴	CA4A	B871	FKGA0080*
9727	퇴	CA4B	B872	FKGB0080*
9728	퇴	CA4C	B873	FKGC0080*
9729	퇴	CA4D	B874	FKGD0080*
9730	퇴	CA4E	B875	FKGE0080*
9731	퇴	CA4F	B876	FKGF0080*
9732	퇴	CA50	B877	FKGG0080*
9733	퇴	CA51	B878	FKGH0080*
9734	퇴	CA53	B879	FKGJ0080*

Table 18 (Page 5 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9735	뤼	CA54	B87A	FKGK0080*
9736	뤿	CA55	C5F2	FKGL0080
9737	뤻	CA56	B881	FKGM0080*
9738	뤼	CA57	C5F3	FKGN0080
9739	뤽	CA58	B882	FKGO0080*
9740	뤾	CA59	B883	FKGP0080*
9741	뤿	CA5A	B884	FKGQ0080*
9742	뤻	CA5B	B885	FKGR0080*
9743	뤼	CA5C	B886	FKGS0080*
9744	뤽	CA5D	B887	FKGT0080*
9745	퇴	CA61	C5F4	FKGX0080
9746	퇴	CA62	B888	FKGY0080*
9747	퇴	CA63	B889	FKGZ0080*
9748	퇴	CA64	B88A	FKH00080*
9749	퇴	CA65	B88B	FKH10080*
9750	퇴	CA66	B88C	FKH20080*
9751	퇴	CA67	B88D	FKH30080*
9752	퇴	CA68	B88E	FKH40080*
9753	퇴	CA69	B88F	FKH50080*
9754	퇴	CA6A	B890	FKH60080*
9755	퇴	CA6B	B891	FKH70080*
9756	퇴	CA6C	B892	FKH80080*
9757	퇴	CA6D	B893	FKH90080*
9758	퇴	CA6E	B894	FKHA0080*
9759	퇴	CA6F	B895	FKHB0080*
9760	퇴	CA70	B896	FKHC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 6 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
9761	툼	CA71	B897	FKHD0080*
9762	툽	CA73	B898	FKHF0080*
9763	툾	CA74	B899	FKHG0080*
9764	툿	CA75	B89A	FKHH0080*
9765	퐀	CA76	B89B	FKHI0080*
9766	퐁	CA77	B89C	FKHJ0080*
9767	퐂	CA78	B89D	FKHK0080*
9768	퐃	CA79	B89E	FKHL0080*
9769	퐄	CA7A	B89F	FKHM0080*
9770	퐅	CA7B	B8A0	FKHN0080*
9771	퐆	CA7C	B941	FKHO0080*
9772	퐇	CA7D	B942	FKHP0080*
9773	투	CA81	C5F5	FKHT0080
9774	투	CA82	C5F6	FKHU0080
9775	투	CA83	B943	FKHV0080*
9776	투	CA84	B944	FKHW0080*
9777	툰	CA85	C5F7	FKHX0080
9778	툽	CA86	B945	FKHY0080*
9779	툾	CA87	B946	FKHZ0080*
9780	툿	CA88	B947	FKI00080*
9781	툼	CA89	C5F8	FKI10080
9782	툽	CA8A	B948	FKI20080*
9783	툾	CA8B	B949	FKI30080*
9784	툿	CA8C	B94A	FKI40080*
9785	툽	CA8D	B94B	FKI50080*
9786	툾	CA8E	B94C	FKI60080*

Table 18 (Page 6 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
9787	툿	CA8F	B94D	FKI70080*
9788	툽	CA90	B94E	FKI80080*
9789	툼	CA91	C5F9	FKI90080
9790	툽	CA93	C5FA	FKIB0080
9791	툾	CA94	B94F	FKIC0080*
9792	툿	CA95	C5FB	FKID0080
9793	툽	CA96	B950	FKIE0080*
9794	툽	CA97	C5FC	FKIF0080
9795	툿	CA98	B951	FKIG0080*
9796	툿	CA99	B952	FKIH0080*
9797	투	CA9A	B953	FKII0080*
9798	툼	CA9B	B954	FKIJ0080*
9799	툽	CA9C	B955	FKIK0080*
9800	툽	CA9D	B956	FKIL0080*
9801	튀	CAA1	C5FD	FKIP0080
9802	튀	CAA2	B957	FKIQ0080*
9803	튀	CAA3	B958	FKIR0080*
9804	튀	CAA4	B959	FKIS0080*
9805	튀	CAA5	B95A	FKIT0080*
9806	튀	CAA6	B961	FKIU0080*
9807	튀	CAA7	B962	FKIV0080*
9808	튀	CAA8	B963	FKIW0080*
9809	튀	CAA9	B964	FKIX0080*
9810	튀	CAA	B965	FKIY0080*
9811	튀	CAAB	B966	FKIZ0080*
9812	튀	CAAC	B967	FKJ00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
9813	궉	CAAD	B968	FKJ10080*
9814	궊	CAAE	B969	FKJ20080*
9815	궋	CAAF	B96A	FKJ30080*
9816	권	CAB0	B96B	FKJ40080*
9817	궍	CAB1	B96C	FKJ50080*
9818	궎	CAB3	B96D	FKJ70080*
9819	궏	CAB4	B96E	FKJ80080*
9820	궐	CAB5	B96F	FKJ90080*
9821	궑	CAB6	C5FE	FKJA0080
9822	궒	CAB7	B970	FKJB0080*
9823	궓	CAB8	B971	FKJC0080*
9824	궔	CAB9	B972	FKJD0080*
9825	궕	CABA	B973	FKJE0080*
9826	궖	CABB	B974	FKJF0080*
9827	궗	CABC	B975	FKJG0080*
9828	궘	CABD	B976	FKJH0080*
9829	궙	CAC1	C6A1	FKJL0080
9830	궚	CAC2	B977	FKJM0080*
9831	궛	CAC3	B978	FKJN0080*
9832	궜	CAC4	B979	FKJO0080*
9833	궝	CAC5	B97A	FKJP0080*
9834	궞	CAC6	B981	FKJQ0080*
9835	궟	CAC7	B982	FKJR0080*
9836	궠	CAC8	B983	FKJS0080*
9837	궡	CAC9	B984	FKJT0080*
9838	궢	CACA	B985	FKJU0080*

Line Number	Graphic	Host Code	PC Code	GCGID
9839	궣	CACB	B986	FKJV0080*
9840	궤	CACC	B987	FKJW0080*
9841	궥	CACD	B988	FKJX0080*
9842	궦	CACE	B989	FKJY0080*
9843	궧	CACF	B98A	FKJZ0080*
9844	궨	CAD0	B98B	FKK00080*
9845	궩	CAD1	B98C	FKK10080*
9846	궪	CAD3	B98D	FKK30080*
9847	궫	CAD4	B98E	FKK40080*
9848	궬	CAD5	B98F	FKK50080
9849	궭	CAD6	B990	FKK60080*
9850	궮	CAD7	B991	FKK70080*
9851	궯	CAD8	B992	FKK80080*
9852	궰	CAD9	B993	FKK90080*
9853	궱	CADA	B994	FKKA0080*
9854	궲	CADB	B995	FKKB0080*
9855	궳	CADC	B996	FKKC0080*
9856	궴	CADD	B997	FKKD0080*
9857	궵	CAE1	C6A2	FKKH0080
9858	궶	CAE2	C6A3	FKKI0080
9859	궷	CAE3	B998	FKKJ0080*
9860	궸	CAE4	B999	FKKK0080*
9861	궹	CAE5	C6A4	FKKL0080
9862	궺	CAE6	B99A	FKKM0080*
9863	궻	CAE7	B99B	FKKN0080*
9864	궼	CAE8	B99C	FKKO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 8 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
9865	틸	CAE9	C6A5	FKKP0080
9866	튀	CAEA	B99D	FKKQ0080*
9867	툼	CAEB	B99E	FKKR0080*
9868	툽	CAEC	B99F	FKKS0080*
9869	툸	CAED	B9A0	FKKT0080*
9870	툹	CAEE	BA41	FKKU0080*
9871	툺	CAEF	BA42	FKKV0080*
9872	툻	CAF0	BA43	FKKW0080*
9873	툼	CAF1	C6A6	FKKX0080
9874	툽	CAF3	C6A7	FKKZ0080
9875	툸	CAF4	BA44	FKL00080*
9876	툹	CAF5	BA45	FKL10080
9877	툺	CAF6	BA46	FKL20080*
9878	툻	CAF7	C6A8	FKL30080
9879	툼	CAF8	BA47	FKL40080*
9880	툽	CAF9	BA48	FKL50080*
9881	툸	CAFA	BA49	FKL60080*
9882	툹	CAFB	BA4A	FKL70080*
9883	툺	CAFC	BA4B	FKL80080*
9884	툻	CAFD	BA4C	FKL90080*
9885	튜	CB41	C6A9	FKLD0080
9886	툼	CB42	BA4D	FKLE0080*
9887	툽	CB43	BA4E	FKLF0080*
9888	툸	CB44	BA4F	FKLG0080*
9889	툹	CB45	C6AA	FKLH0080
9890	툺	CB46	BA50	FKLI0080*

Table 18 (Page 8 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
9891	툻	CB47	BA51	FKLJ0080*
9892	툼	CB48	BA52	FKLK0080*
9893	툽	CB49	C6AB	FKLL0080
9894	툸	CB4A	BA53	FKLM0080*
9895	툹	CB4B	BA54	FKLN0080*
9896	툺	CB4C	BA55	FKLO0080*
9897	툻	CB4D	BA56	FKLP0080*
9898	툼	CB4E	BA57	FKLQ0080*
9899	툽	CB4F	BA58	FKLR0080*
9900	툸	CB50	BA59	FKLS0080*
9901	툹	CB51	C6AC	FKLT0080
9902	툺	CB53	BA5A	FKLV0080*
9903	툻	CB54	BA61	FKLW0080*
9904	툼	CB55	BA62	FKLX0080*
9905	툽	CB56	BA63	FKLY0080*
9906	툸	CB57	C6AD	FKLZ0080
9907	툹	CB58	BA64	FKM00080*
9908	툺	CB59	BA65	FKM10080*
9909	툻	CB5A	BA66	FKM20080*
9910	툼	CB5B	BA67	FKM30080*
9911	툽	CB5C	BA68	FKM40080*
9912	툸	CB5D	BA69	FKM50080*
9913	트	CB61	C6AE	FKM90080
9914	툼	CB62	C6AF	FKMA0080
9915	툽	CB63	BA6A	FKMB0080*
9916	툸	CB64	BA6B	FKMC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 9 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9917	튼	CB65	C6B0	FKMD0080
9918	툄	CB66	BA6C	FKME0080*
9919	툅	CB67	BA6D	FKMF0080*
9920	툆	CB68	C6B1	FKMG0080
9921	툇	CB69	C6B2	FKMH0080
9922	툈	CB6A	BA6E	FKMI0080*
9923	툉	CB6B	C6B3	FKMJ0080
9924	툊	CB6C	BA6F	FKMK0080*
9925	툋	CB6D	BA70	FKML0080*
9926	툌	CB6E	BA71	FKMM0080*
9927	툍	CB6F	BA72	FKMN0080*
9928	툎	CB70	BA73	FKMO0080*
9929	툏	CB71	C6B4	FKMP0080
9930	툐	CB73	C6B5	FKMR0080
9931	툑	CB74	BA74	FKMS0080*
9932	툒	CB75	C6B6	FKMT0080
9933	툓	CB76	BA75	FKMU0080*
9934	툔	CB77	BA76	FKMV0080
9935	툕	CB78	BA77	FKMW0080*
9936	툖	CB79	BA78	FKMX0080*
9937	툗	CB7A	BA79	FKMY0080*
9938	툘	CB7B	BA7A	FKMZ0080*
9939	툙	CB7C	BA81	FKN00080*
9940	툚	CB7D	BA82	FKN10080*
9941	퓀	CB81	C6B7	FKN50080
9942	퓁	CB82	BA83	FKN60080*

Table 18 (Page 9 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
9943	퓂	CB83	BA84	FKN70080*
9944	퓃	CB84	BA85	FKN80080*
9945	퓄	CB85	C6B8	FKN90080
9946	퓅	CB86	BA86	FKNA0080*
9947	퓆	CB87	BA87	FKNB0080*
9948	퓇	CB88	BA88	FKNC0080*
9949	퓈	CB89	C6B9	FKND0080
9950	퓉	CB8A	BA89	FKNE0080*
9951	퓊	CB8B	BA8A	FKNF0080*
9952	퓋	CB8C	BA8B	FKNG0080*
9953	퓌	CB8D	BA8C	FKNH0080*
9954	퓍	CB8E	BA8D	FKNI0080*
9955	퓎	CB8F	BA8E	FKNJ0080*
9956	퓏	CB90	BA8F	FKNK0080*
9957	퓐	CB91	C6BA	FKNL0080
9958	퓑	CB93	C6BB	FKNN0080
9959	퓒	CB94	BA90	FKNO0080*
9960	퓓	CB95	BA91	FKNP0080
9961	퓔	CB96	BA92	FKNQ0080*
9962	퓕	CB97	BA93	FKNR0080*
9963	퓖	CB98	BA94	FKNS0080*
9964	퓗	CB99	BA95	FKNT0080*
9965	퓘	CB9A	BA96	FKNU0080*
9966	퓙	CB9B	BA97	FKNV0080*
9967	퓚	CB9C	BA98	FKNW0080*
9968	퓛	CB9D	BA99	FKNX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
9969	티	CBA1	C6BC	FKO10080
9970	텍	CBA2	C6BD	FKO20080
9971	튀	CBA3	BA9A	FKO30080*
9972	튀	CBA4	BA9B	FKO40080*
9973	틴	CBA5	C6BE	FKO50080
9974	틴	CBA6	BA9C	FKO60080*
9975	팅	CBA7	BA9D	FKO70080*
9976	틴	CBA8	BA9E	FKO80080*
9977	틸	CBA9	C6BF	FKO90080
9978	튀	CBAA	BA9F	FKOA0080*
9979	팁	CBAB	BAA0	FKOB0080*
9980	팁	CBAC	BB41	FKOC0080*
9981	팁	CBAD	BB42	FKOD0080*
9982	팅	CBAE	BB43	FKOE0080*
9983	팅	CBAF	BB44	FKOF0080*
9984	팅	CBB0	BB45	FKOG0080*
9985	팀	CBB1	C6C0	FKOH0080
9986	팀	CBB3	C6C1	FKOJ0080
9987	팀	CBB4	BB46	FKOK0080*
9988	팀	CBB5	C6C2	FKOL0080
9989	팀	CBB6	BB47	FKOM0080*
9990	팅	CBB7	C6C3	FKON0080
9991	팀	CBB8	BB48	FKOO0080*
9992	팀	CBB9	BB49	FKOP0080*
9993	튀	CBBA	BB4A	FKOQ0080*
9994	틸	CBBB	BB4B	FKOR0080*

Line Number	Graphic	Host Code	PC Code	GCGID
9995	틴	CBBC	BB4C	FKOS0080
9996	팅	CBBD	BB4D	FKOT0080*
9997	과	CC61	C6C4	FKRL0080
9998	과	CC62	C6C5	FKRM0080
9999	과	CC63	C6C6	FKRN0080
10000	과	CC64	BB4E	FKRO0080*
10001	관	CC65	C6C7	FKRP0080
10002	과	CC66	BB4F	FKRQ0080*
10003	과	CC67	BB50	FKRR0080*
10004	관	CC68	BB51	FKRS0080*
10005	과	CC69	C6C8	FKRT0080
10006	과	CC6A	BB52	FKRU0080*
10007	과	CC6B	C6C9	FKRV0080
10008	과	CC6C	BB53	FKRW0080*
10009	과	CC6D	BB54	FKRX0080*
10010	과	CC6E	BB55	FKRY0080*
10011	과	CC6F	BB56	FKRZ0080*
10012	과	CC70	BB57	FKS00080*
10013	과	CC71	C6CA	FKS10080
10014	과	CC73	C6CB	FKS30080
10015	과	CC74	BB58	FKS40080*
10016	과	CC75	C6CC	FKS50080
10017	과	CC76	C6CD	FKS60080
10018	과	CC77	C6CE	FKS70080
10019	과	CC78	BB59	FKS80080*
10020	과	CC79	BB5A	FKS90080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
10021	팍	CC7A	BB61	FKSA0080*
10022	팔	CC7B	C6CF	FKSB0080
10023	팍	CC7C	BB62	FKSC0080
10024	팍	CC7D	BB63	FKSD0080*
10025	패	CC81	C6D0	FKSH0080
10026	팍	CC82	C6D1	FKSI0080
10027	팍	CC83	BB64	FKSJ0080*
10028	팍	CC84	BB65	FKSK0080*
10029	판	CC85	C6D2	FKSL0080
10030	팍	CC86	BB66	FKSM0080*
10031	팍	CC87	BB67	FKSN0080*
10032	판	CC88	BB68	FKSO0080*
10033	팍	CC89	C6D3	FKSP0080
10034	팍	CC8A	BB69	FKSQ0080*
10035	팍	CC8B	BB6A	FKSR0080*
10036	팍	CC8C	BB6B	FKSS0080*
10037	팍	CC8D	BB6C	FKST0080*
10038	팍	CC8E	BB6D	FKSU0080*
10039	팍	CC8F	BB6E	FKSV0080*
10040	팍	CC90	BB6F	FKSW0080*
10041	팍	CC91	C6D4	FKSX0080
10042	팍	CC93	C6D5	FKSZ0080
10043	팍	CC94	BB70	FKT00080*
10044	팍	CC95	C6D6	FKT10080
10045	팍	CC96	C6D7	FKT20080
10046	팍	CC97	C6D8	FKT30080

Line Number	Graphic	Host Code	PC Code	GCGID
10047	팍	CC98	BB71	FKT40080*
10048	팍	CC99	BB72	FKT50080*
10049	팍	CC9A	BB73	FKT60080*
10050	팍	CC9B	BB74	FKT70080*
10051	팍	CC9C	BB75	FKT80080*
10052	팍	CC9D	BB76	FKT90080*
10053	파	CCA1	C6D9	FKTD0080
10054	팍	CCA2	C6DA	FKTE0080
10055	팍	CCA3	BB77	FKTF0080*
10056	팍	CCA4	BB78	FKTG0080*
10057	판	CCA5	BB79	FKTH0080*
10058	팍	CCA6	BB7A	FKTI0080*
10059	팍	CCA7	BB81	FKTJ0080*
10060	판	CCA8	BB82	FKTK0080*
10061	팍	CCA9	BB83	FKTL0080*
10062	팍	CCA	BB84	FKTM0080*
10063	팍	CCAB	BB85	FKTN0080*
10064	팍	CCAC	BB86	FKTO0080*
10065	팍	CCAD	BB87	FKTP0080*
10066	팍	CCAE	BB88	FKTQ0080*
10067	팍	CCAF	BB89	FKTR0080*
10068	팍	CCB0	BB8A	FKTS0080*
10069	팍	CCB1	BB8B	FKTT0080*
10070	팍	CCB3	BB8C	FKTV0080*
10071	팍	CCB4	BB8D	FKTW0080*
10072	팍	CCB5	BB8E	FKTX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
10073	꺾	CCB6	BB8F	FKTY0080*
10074	꺾	CCB7	BB90	FKTZ0080
10075	꺾	CCB8	BB91	FKU00080*
10076	꺾	CCB9	BB92	FKU10080*
10077	꺾	CCBA	BB93	FKU20080*
10078	꺾	CCBB	BB94	FKU30080*
10079	꺾	CCBC	BB95	FKU40080*
10080	꺾	CCBD	BB96	FKU50080*
10081	꺾	CCC1	BB97	FKU90080
10082	꺾	CCC2	BB98	FKUA0080*
10083	꺾	CCC3	BB99	FKUB0080*
10084	꺾	CCC4	BB9A	FKUC0080*
10085	꺾	CCC5	BB9B	FKUD0080*
10086	꺾	CCC6	BB9C	FKUE0080*
10087	꺾	CCC7	BB9D	FKUF0080*
10088	꺾	CCC8	BB9E	FKUG0080*
10089	꺾	CCC9	BB9F	FKUH0080*
10090	꺾	CCCA	BBA0	FKUI0080*
10091	꺾	CCCB	BC41	FKUJ0080*
10092	꺾	CCCC	BC42	FKUK0080*
10093	꺾	CCCD	BC43	FKUL0080*
10094	꺾	CCCE	BC44	FKUM0080*
10095	꺾	CCCF	BC45	FKUN0080*
10096	꺾	CCD0	BC46	FKUO0080*
10097	꺾	CCD1	BC47	FKUP0080*
10098	꺾	CCD3	BC48	FKUR0080*

Line Number	Graphic	Host Code	PC Code	GCGID
10099	꺾	CCD4	BC49	FKUS0080*
10100	꺾	CCD5	BC4A	FKUT0080*
10101	꺾	CCD6	BC4B	FKUU0080*
10102	꺾	CCD7	BC4C	FKUV0080*
10103	꺾	CCD8	BC4D	FKUW0080*
10104	꺾	CCD9	BC4E	FKUX0080*
10105	꺾	CCDA	BC4F	FKUY0080*
10106	꺾	CCDB	BC50	FKUZ0080*
10107	꺾	CCDC	BC51	FKV00080*
10108	꺾	CCDD	BC52	FKV10080*
10109	꺾	CCE1	C6DB	FKV50080
10110	꺾	CCE2	C6DC	FKV60080
10111	꺾	CCE3	BC53	FKV70080*
10112	꺾	CCE4	BC54	FKV80080*
10113	꺾	CCE5	C6DD	FKV90080
10114	꺾	CCE6	BC55	FKVA0080*
10115	꺾	CCE7	BC56	FKVB0080*
10116	꺾	CCE8	BC57	FKVC0080*
10117	꺾	CCE9	C6DE	FKVD0080
10118	꺾	CCEA	BC58	FKVE0080*
10119	꺾	CCEB	BC59	FKVF0080*
10120	꺾	CCEC	BC5A	FKVG0080*
10121	꺾	CCEd	BC61	FKVH0080*
10122	꺾	CCEE	BC62	FKVI0080*
10123	꺾	CCEF	BC63	FKVJ0080*
10124	꺾	CCF0	BC64	FKVK0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 13 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10125	핍	CCF1	C6DF	FKVL0080
10126	핑	CCF3	C6E0	FKVN0080
10127	핒	CCF4	BC65	FKVO0080*
10128	핓	CCF5	C6E1	FKVP0080
10129	핔	CCF6	C6E2	FKVQ0080
10130	핕	CCF7	C6E3	FKVR0080
10131	핖	CCF8	BC66	FKVS0080*
10132	핗	CCF9	BC67	FKVT0080*
10133	하	CCFA	BC68	FKVU0080*
10134	학	CCFB	BC69	FKVV0080*
10135	핚	CCFC	BC6A	FKVW0080*
10136	핛	CCFD	BC6B	FKVX0080*
10137	페	CD41	C6E4	FKW10080
10138	페	CD42	C6E5	FKW20080
10139	페	CD43	BC6C	FKW30080*
10140	페	CD44	BC6D	FKW40080*
10141	펜	CD45	C6E6	FKW50080
10142	펜	CD46	BC6E	FKW60080*
10143	펜	CD47	BC6F	FKW70080*
10144	펜	CD48	BC70	FKW80080*
10145	펠	CD49	C6E7	FKW90080
10146	펠	CD4A	BC71	FKWA0080*
10147	펠	CD4B	BC72	FKWB0080*
10148	펠	CD4C	BC73	FKWC0080*
10149	펠	CD4D	BC74	FKWD0080*
10150	펠	CD4E	BC75	FKWE0080*

Table 18 (Page 13 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10151	펠	CD4F	BC76	FKWF0080*
10152	펠	CD50	BC77	FKWG0080*
10153	펍	CD51	C6E8	FKWH0080
10154	펑	CD53	C6E9	FKWJ0080
10155	펒	CD54	BC78	FKWK0080*
10156	펓	CD55	C6EA	FKWL0080
10157	펔	CD56	BC79	FKWM0080*
10158	펕	CD57	C6EB	FKWN0080
10159	펖	CD58	BC7A	FKWO0080*
10160	펗	CD59	BC81	FKWP0080*
10161	페	CD5A	BC82	FKWQ0080*
10162	펙	CD5B	BC83	FKWR0080*
10163	펚	CD5C	BC84	FKWS0080
10164	펛	CD5D	BC85	FKWT0080*
10165	퍼	CD61	C6EC	FKWX0080
10166	퍼	CD62	BC86	FKWY0080
10167	퍼	CD63	BC87	FKWZ0080*
10168	펑	CD64	BC88	FKX00080*
10169	편	CD65	C6ED	FKX10080
10170	편	CD66	BC89	FKX20080*
10171	편	CD67	BC8A	FKX30080*
10172	편	CD68	BC8B	FKX40080*
10173	편	CD69	C6EE	FKX50080
10174	편	CD6A	BC8C	FKX60080*
10175	편	CD6B	BC8D	FKX70080*
10176	편	CD6C	BC8E	FKX80080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 14 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10177	꺾	CD6D	BC8F	FKX90080*
10178	꺾	CD6E	BC90	FKXA0080*
10179	꺾	CD6F	BC91	FKXB0080*
10180	꺾	CD70	BC92	FKXC0080*
10181	꺾	CD71	C6EF	FKXD0080
10182	꺾	CD73	C6F0	FKXF0080
10183	꺾	CD74	BC93	FKXG0080*
10184	꺾	CD75	BC94	FKXH0080
10185	꺾	CD76	C6F1	FKXI0080
10186	꺾	CD77	C6F2	FKXJ0080
10187	꺾	CD78	BC95	FKXK0080*
10188	꺾	CD79	BC96	FKXL0080*
10189	꺾	CD7A	BC97	FKXM0080*
10190	꺾	CD7B	BC98	FKXN0080*
10191	꺾	CD7C	BC99	FKXO0080*
10192	꺾	CD7D	BC9A	FKXP0080*
10193	꺾	CD81	C6F3	FKXT0080
10194	꺾	CD82	BC9B	FKXU0080*
10195	꺾	CD83	BC9C	FKXV0080*
10196	꺾	CD84	BC9D	FKXW0080*
10197	꺾	CD85	BC9E	FKXX0080*
10198	꺾	CD86	BC9F	FKXY0080*
10199	꺾	CD87	BCA0	FKXZ0080*
10200	꺾	CD88	BD41	FKY00080*
10201	꺾	CD89	C6F4	FKY10080
10202	꺾	CD8A	BD42	FKY20080*

Table 18 (Page 14 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10203	꺾	CD8B	BD43	FKY30080*
10204	꺾	CD8C	BD44	FKY40080*
10205	꺾	CD8D	BD45	FKY50080*
10206	꺾	CD8E	BD46	FKY60080*
10207	꺾	CD8F	BD47	FKY70080*
10208	꺾	CD90	BD48	FKY80080*
10209	꺾	CD91	BD49	FKY90080*
10210	꺾	CD93	C6F5	FKYB0080
10211	꺾	CD94	BD4A	FKYC0080*
10212	꺾	CD95	C6F6	FKYD0080
10213	꺾	CD96	BD4B	FKYE0080*
10214	꺾	CD97	BD4C	FKYF0080*
10215	꺾	CD98	BD4D	FKYG0080*
10216	꺾	CD99	BD4E	FKYH0080*
10217	꺾	CD9A	BD4F	FKYI0080*
10218	꺾	CD9B	BD50	FKYJ0080*
10219	꺾	CD9C	BD51	FKYK0080*
10220	꺾	CD9D	BD52	FKYL0080*
10221	꺾	CDA1	C6F7	FKYP0080
10222	꺾	CDA2	C6F8	FKYQ0080
10223	꺾	CDA3	BD53	FKYR0080*
10224	꺾	CDA4	BD54	FKYS0080*
10225	꺾	CDA5	C6F9	FKYT0080
10226	꺾	CDA6	BD55	FKYU0080*
10227	꺾	CDA7	BD56	FKYV0080*
10228	꺾	CDA8	BD57	FKYW0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 15 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10229	플	CDA9	C6FA	FKYX0080
10230	플	CDAA	BD58	FKYY0080*
10231	플	CDAB	BD59	FKYZ0080*
10232	플	CDAC	BD5A	FKZ00080*
10233	플	CDAD	BD61	FKZ10080*
10234	플	CDAE	BD62	FKZ20080*
10235	플	CDAF	BD63	FKZ30080*
10236	플	CDB0	BD64	FKZ40080*
10237	품	CDB1	C6FB	FKZ50080
10238	품	CDB3	C6FC	FKZ70080
10239	플	CDB4	BD65	FKZ80080*
10240	플	CDB5	C6FD	FKZ90080
10241	플	CDB6	BD66	FKZA0080*
10242	품	CDB7	C6FE	FKZB0080
10243	플	CDB8	BD67	FKZC0080*
10244	플	CDB9	BD68	FKZD0080*
10245	플	CDBA	BD69	FKZE0080*
10246	플	CDBB	BD6A	FKZF0080*
10247	플	CDBC	BD6B	FKZG0080*
10248	품	CDBD	BD6C	FKZH0080*
10249	과	CDC1	C7A1	FKZL0080
10250	과	CDC2	BD6D	FKZM0080*
10251	과	CDC3	BD6E	FKZN0080*
10252	과	CDC4	BD6F	FKZO0080*
10253	환	CDC5	BD70	FKZP0080*
10254	과	CDC6	BD71	FKZQ0080*

Table 18 (Page 15 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10255	환	CDC7	BD72	FKZR0080*
10256	환	CDC8	BD73	FKZS0080*
10257	환	CDC9	BD74	FKZT0080*
10258	과	CDCA	BD75	FKZU0080*
10259	환	CDCB	BD76	FKZV0080*
10260	환	CDCC	BD77	FKZW0080*
10261	과	CDCD	BD78	FKZX0080*
10262	환	CDCE	BD79	FKZY0080*
10263	환	CDCF	BD7A	FKZZ0080*
10264	환	CDD0	BD81	FL000080*
10265	환	CDD1	BD82	FL010080*
10266	환	CDD3	BD83	FL030080*
10267	과	CDD4	BD84	FL040080*
10268	과	CDD5	BD85	FL050080*
10269	과	CDD6	BD86	FL060080*
10270	환	CDD7	C7A2	FL070080
10271	과	CDD8	BD87	FL080080*
10272	과	CDD9	BD88	FL090080*
10273	과	CDDA	BD89	FL0A0080*
10274	환	Cddb	BD8A	FL0B0080*
10275	환	CDDC	BD8B	FL0C0080*
10276	환	CDDD	BD8C	FL0D0080*
10277	과	CDE1	BD8D	FL0H0080
10278	과	CDE2	BD8E	FL0I0080*
10279	과	CDE3	BD8F	FL0J0080*
10280	과	CDE4	BD90	FL0K0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 16 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10281	펜	CDE5	BD91	FL0L0080*
10282	펢	CDE6	BD92	FL0M0080*
10283	펣	CDE7	BD93	FL0N0080*
10284	펜	CDE8	BD94	FL0O0080*
10285	펥	CDE9	BD95	FL0P0080*
10286	펦	CDEA	BD96	FL0Q0080*
10287	펧	CDEB	BD97	FL0R0080*
10288	펨	CDEC	BD98	FL0S0080*
10289	펩	CDED	BD99	FL0T0080*
10290	펪	CDEE	BD9A	FL0U0080*
10291	펫	CDEF	BD9B	FL0V0080*
10292	펬	CDF0	BD9C	FL0W0080*
10293	펭	CDF1	BD9D	FL0X0080*
10294	펮	CDF3	BD9E	FL0Z0080*
10295	펯	CDF4	BD9F	FL100080*
10296	펰	CDF5	BDA0	FL110080*
10297	펱	CDF6	BE41	FL120080*
10298	펲	CDF7	BE42	FL130080*
10299	펳	CDF8	BE43	FL140080*
10300	펴	CDF9	BE44	FL150080*
10301	펵	CDFA	BE45	FL160080*
10302	펶	CDFB	BE46	FL170080*
10303	펷	CDFC	BE47	FL180080*
10304	편	CDFD	BE48	FL190080*
10305	피	CE41	C7A3	FL1D0080
10306	픽	CE42	BE49	FL1E0080*

Table 18 (Page 16 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10307	퓌	CE43	BE4A	FL1F0080*
10308	퓋	CE44	BE4B	FL1G0080*
10309	퓌	CE45	C7A4	FL1H0080
10310	퓍	CE46	BE4C	FL1I0080*
10311	퓎	CE47	BE4D	FL1J0080*
10312	퓏	CE48	BE4E	FL1K0080*
10313	퓐	CE49	BE4F	FL1L0080*
10314	퓑	CE4A	BE50	FL1M0080*
10315	퓒	CE4B	BE51	FL1N0080*
10316	퓓	CE4C	BE52	FL1O0080*
10317	퓔	CE4D	BE53	FL1P0080*
10318	퓕	CE4E	BE54	FL1Q0080*
10319	퓖	CE4F	BE55	FL1R0080*
10320	퓗	CE50	BE56	FL1S0080*
10321	퓘	CE51	BE57	FL1T0080*
10322	퓙	CE53	BE58	FL1V0080*
10323	퓚	CE54	BE59	FL1W0080*
10324	퓛	CE55	BE5A	FL1X0080*
10325	퓜	CE56	BE61	FL1Y0080*
10326	퓝	CE57	BE62	FL1Z0080*
10327	퓞	CE58	BE63	FL200080*
10328	퓟	CE59	BE64	FL210080*
10329	퓠	CE5A	BE65	FL220080*
10330	퓡	CE5B	BE66	FL230080*
10331	퓢	CE5C	BE67	FL240080*
10332	퓣	CE5D	BE68	FL250080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 17 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10333	ㅟ	CE61	C7A5	FL290080
10334	ㅠ	CE62	BE69	FL2A0080*
10335	ㅡ	CE63	BE6A	FL2B0080*
10336	ㅢ	CE64	BE6B	FL2C0080*
10337	ㅣ	CE65	C7A6	FL2D0080
10338	ㅤ	CE66	BE6C	FL2E0080*
10339	ㅥ	CE67	BE6D	FL2F0080*
10340	ㅦ	CE68	BE6E	FL2G0080*
10341	ㅧ	CE69	C7A7	FL2H0080
10342	ㅨ	CE6A	BE6F	FL2I0080*
10343	ㅩ	CE6B	BE70	FL2J0080*
10344	ㅪ	CE6C	BE71	FL2K0080*
10345	ㅫ	CE6D	BE72	FL2L0080*
10346	ㅬ	CE6E	BE73	FL2M0080*
10347	ㅭ	CE6F	BE74	FL2N0080*
10348	ㅮ	CE70	BE75	FL2O0080*
10349	ㅯ	CE71	BE76	FL2P0080*
10350	ㅰ	CE73	C7A8	FL2R0080
10351	ㅱ	CE74	BE77	FL2S0080*
10352	ㅲ	CE75	C7A9	FL2T0080
10353	ㅳ	CE76	BE78	FL2U0080*
10354	ㅴ	CE77	BE79	FL2V0080*
10355	ㅵ	CE78	BE7A	FL2W0080*
10356	ㅶ	CE79	BE81	FL2X0080*
10357	ㅷ	CE7A	BE82	FL2Y0080*
10358	ㅸ	CE7B	BE83	FL2Z0080*

Table 18 (Page 17 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10359	ㅹ	CE7C	BE84	FL300080*
10360	ㅺ	CE7D	BE85	FL310080*
10361	ㅻ	CE81	C7AA	FL350080
10362	ㅼ	CE82	C7AB	FL360080
10363	ㅽ	CE83	BE86	FL370080*
10364	ㅿ	CE84	BE87	FL380080*
10365	ㅾ	CE85	C7AC	FL390080
10366	ㅿ	CE86	BE88	FL3A0080*
10367	ㅿ	CE87	BE89	FL3B0080*
10368	ㅿ	CE88	C7AD	FL3C0080
10369	ㅿ	CE89	C7AE	FL3D0080
10370	ㅿ	CE8A	BE8A	FL3E0080*
10371	ㅿ	CE8B	C7AF	FL3F0080
10372	ㅿ	CE8C	BE8B	FL3G0080*
10373	ㅿ	CE8D	BE8C	FL3H0080*
10374	ㅿ	CE8E	BE8D	FL3I0080*
10375	ㅿ	CE8F	BE8E	FL3J0080*
10376	ㅿ	CE90	BE8F	FL3K0080*
10377	ㅿ	CE91	C7B0	FL3L0080
10378	ㅿ	CE93	C7B1	FL3N0080
10379	ㅿ	CE94	BE90	FL3O0080*
10380	ㅿ	CE95	C7B2	FL3P0080
10381	ㅿ	CE96	BE91	FL3Q0080*
10382	ㅿ	CE97	C7B3	FL3R0080
10383	ㅿ	CE98	BE92	FL3S0080*
10384	ㅿ	CE99	BE93	FL3T0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 18 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10385	푹	CE9A	BE94	FL3U0080*
10386	푷	CE9B	BE95	FL3V0080*
10387	푸	CE9C	BE96	FL3W0080*
10388	푹	CE9D	BE97	FL3X0080*
10389	꺀	CEA1	C7B4	FL410080
10390	꺁	CEA2	BE98	FL420080*
10391	꺂	CEA3	BE99	FL430080*
10392	꺃	CEA4	BE9A	FL440080*
10393	꺄	CEA5	BE9B	FL450080*
10394	꺅	CEA6	BE9C	FL460080*
10395	꺆	CEA7	BE9D	FL470080*
10396	꺇	CEA8	BE9E	FL480080*
10397	꺈	CEA9	BE9F	FL490080*
10398	꺉	CEAA	BEA0	FL4A0080*
10399	꺊	CEAB	BF41	FL4B0080*
10400	꺋	CEAC	BF42	FL4C0080*
10401	꺌	CEAD	BF43	FL4D0080*
10402	꺍	CEAE	BF44	FL4E0080*
10403	꺎	CEAF	BF45	FL4F0080*
10404	꺏	CEB0	BF46	FL4G0080*
10405	꺐	CEB1	BF47	FL4H0080*
10406	꺑	CEB3	BF48	FL4J0080*
10407	꺒	CEB4	BF49	FL4K0080*
10408	꺓	CEB5	BF4A	FL4L0080*
10409	꺔	CEB6	BF4B	FL4M0080*
10410	꺕	CEB7	C7B5	FL4N0080

Table 18 (Page 18 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10411	꺖	CEB8	BF4C	FL4O0080*
10412	꺗	CEB9	BF4D	FL4P0080*
10413	꺘	CEBA	BF4E	FL4Q0080*
10414	꺙	CEBB	BF4F	FL4R0080*
10415	꺚	CEBC	BF50	FL4S0080*
10416	꺛	CEBD	BF51	FL4T0080*
10417	꺜	CEC1	BF52	FL4X0080
10418	꺝	CEC2	BF53	FL4Y0080*
10419	꺞	CEC3	BF54	FL4Z0080*
10420	꺟	CEC4	BF55	FL500080*
10421	꺠	CEC5	BF56	FL510080*
10422	꺡	CEC6	BF57	FL520080*
10423	꺢	CEC7	BF58	FL530080*
10424	꺣	CEC8	BF59	FL540080*
10425	꺤	CEC9	BF5A	FL550080*
10426	꺥	CECA	BF61	FL560080*
10427	꺦	CECB	BF62	FL570080*
10428	꺧	CECC	BF63	FL580080*
10429	꺨	CECD	BF64	FL590080*
10430	꺩	CECE	BF65	FL5A0080*
10431	꺪	CECF	BF66	FL5B0080*
10432	꺫	CED0	BF67	FL5C0080*
10433	꺬	CED1	BF68	FL5D0080*
10434	꺭	CED3	BF69	FL5F0080*
10435	꺮	CED4	BF6A	FL5G0080*
10436	꺯	CED5	BF6B	FL5H0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 19 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10437	꺾	CED6	BF6C	FL5I0080*
10438	꺾	CED7	BF6D	FL5J0080*
10439	꺾	CED8	BF6E	FL5K0080*
10440	꺾	CED9	BF6F	FL5L0080*
10441	꺾	CEDA	BF70	FL5M0080*
10442	꺾	CEDB	BF71	FL5N0080*
10443	꺾	CEDC	BF72	FL5O0080*
10444	꺾	CEDD	BF73	FL5P0080*
10445	꺾	CEE1	C7B6	FL5T0080
10446	꺾	CEE2	BF74	FL5U0080*
10447	꺾	CEE3	BF75	FL5V0080*
10448	꺾	CEE4	BF76	FL5W0080*
10449	꺾	CEE5	C7B7	FL5X0080
10450	꺾	CEE6	BF77	FL5Y0080*
10451	꺾	CEE7	BF78	FL5Z0080*
10452	꺾	CEE8	BF79	FL600080*
10453	꺾	CEE9	C7B8	FL610080
10454	꺾	CEEA	BF7A	FL620080*
10455	꺾	CEEB	BF81	FL630080*
10456	꺾	CEEC	BF82	FL640080*
10457	꺾	CEED	BF83	FL650080*
10458	꺾	CEEE	BF84	FL660080*
10459	꺾	CEEF	BF85	FL670080*
10460	꺾	CEF0	BF86	FL680080*
10461	꺾	CEF1	C7B9	FL690080
10462	꺾	CEF3	BF87	FL6B0080*

Table 18 (Page 19 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10463	꺾	CEF4	BF88	FL6C0080*
10464	꺾	CEF5	C7BA	FL6D0080
10465	꺾	CEF6	BF89	FL6E0080*
10466	꺾	CEF7	BF8A	FL6F0080*
10467	꺾	CEF8	BF8B	FL6G0080*
10468	꺾	CEF9	BF8C	FL6H0080*
10469	꺾	CEFA	BF8D	FL6I0080*
10470	꺾	CEFB	BF8E	FL6J0080*
10471	꺾	CEFC	BF8F	FL6K0080*
10472	꺾	CEFD	BF90	FL6L0080*
10473	꺾	CF41	C7BB	FL6P0080
10474	꺾	CF42	BF91	FL6Q0080
10475	꺾	CF43	BF92	FL6R0080*
10476	꺾	CF44	BF93	FL6S0080*
10477	꺾	CF45	C7BC	FL6T0080
10478	꺾	CF46	BF94	FL6U0080*
10479	꺾	CF47	BF95	FL6V0080*
10480	꺾	CF48	BF96	FL6W0080*
10481	꺾	CF49	C7BD	FL6X0080
10482	꺾	CF4A	BF97	FL6Y0080*
10483	꺾	CF4B	BF98	FL6Z0080*
10484	꺾	CF4C	BF99	FL700080*
10485	꺾	CF4D	BF9A	FL710080*
10486	꺾	CF4E	BF9B	FL720080*
10487	꺾	CF4F	BF9C	FL730080*
10488	꺾	CF50	BF9D	FL740080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 20 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10489	ㅍ	CF51	C7BE	FL750080
10490	ㅑ	CF53	BF9E	FL770080*
10491	ㅓ	CF54	BF9F	FL780080*
10492	ㅕ	CF55	C7BF	FL790080
10493	ㅗ	CF56	BFA0	FL7A0080*
10494	ㅛ	CF57	C7C0	FL7B0080
10495	ㅜ	CF58	C041	FL7C0080*
10496	ㅠ	CF59	C042	FL7D0080*
10497	ㅡ	CF5A	C043	FL7E0080*
10498	ㅣ	CF5B	C044	FL7F0080*
10499	ㅚ	CF5C	C045	FL7G0080*
10500	ㅜ	CF5D	C046	FL7H0080*
10501	ㅝ	CF61	C7C1	FL7L0080
10502	ㅞ	CF62	C047	FL7M0080
10503	ㅟ	CF63	C048	FL7N0080*
10504	ㅠ	CF64	C049	FL7O0080*
10505	ㅡ	CF65	C7C2	FL7P0080
10506	ㅢ	CF66	C04A	FL7Q0080*
10507	ㅣ	CF67	C04B	FL7R0080*
10508	ㅤ	CF68	C04C	FL7S0080*
10509	ㅥ	CF69	C7C3	FL7T0080
10510	ㅦ	CF6A	C04D	FL7U0080*
10511	ㅧ	CF6B	C04E	FL7V0080*
10512	ㅨ	CF6C	C04F	FL7W0080*
10513	ㅩ	CF6D	C050	FL7X0080
10514	ㅪ	CF6E	C051	FL7Y0080*

Table 18 (Page 20 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10515	ㅫ	CF6F	C052	FL7Z0080*
10516	ㅬ	CF70	C053	FL800080*
10517	ㅭ	CF71	C7C4	FL810080
10518	ㅮ	CF73	C7C5	FL830080
10519	ㅯ	CF74	C054	FL840080*
10520	ㅰ	CF75	C7C6	FL850080
10521	ㅱ	CF76	C055	FL860080*
10522	ㅲ	CF77	C056	FL870080
10523	ㅳ	CF78	C057	FL880080*
10524	ㅴ	CF79	C058	FL890080*
10525	ㅵ	CF7A	C059	FL8A0080*
10526	ㅶ	CF7B	C05A	FL8B0080*
10527	ㅷ	CF7C	C061	FL8C0080*
10528	ㅸ	CF7D	C062	FL8D0080*
10529	ㅹ	CF81	C063	FL8H0080
10530	ㅺ	CF82	C064	FL8I0080*
10531	ㅻ	CF83	C065	FL8J0080*
10532	ㅼ	CF84	C066	FL8K0080*
10533	ㅽ	CF85	C067	FL8L0080
10534	ㅾ	CF86	C068	FL8M0080*
10535	ㅿ	CF87	C069	FL8N0080*
10536	ㅿ	CF88	C06A	FL8O0080*
10537	ㅿ	CF89	C06B	FL8P0080*
10538	ㅿ	CF8A	C06C	FL8Q0080*
10539	ㅿ	CF8B	C06D	FL8R0080*
10540	ㅿ	CF8C	C06E	FL8S0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
10541	꺾	CF8D	C06F	FL8T0080*
10542	꺾	CF8E	C070	FL8U0080*
10543	꺾	CF8F	C071	FL8V0080*
10544	꺾	CF90	C072	FL8W0080*
10545	꺾	CF91	C073	FL8X0080*
10546	꺾	CF93	C074	FL8Z0080*
10547	꺾	CF94	C075	FL900080*
10548	꺾	CF95	C076	FL910080*
10549	꺾	CF96	C077	FL920080*
10550	꺾	CF97	C078	FL930080*
10551	꺾	CF98	C079	FL940080*
10552	꺾	CF99	C07A	FL950080*
10553	꺾	CF9A	C081	FL960080*
10554	꺾	CF9B	C082	FL970080*
10555	꺾	CF9C	C083	FL980080*
10556	꺾	CF9D	C084	FL990080*
10557	꺾	CFA1	C7C7	FL9D0080
10558	꺾	CFA2	C7C8	FL9E0080
10559	꺾	CFA3	C085	FL9F0080*
10560	꺾	CFA4	C086	FL9G0080*
10561	꺾	CFA5	C7C9	FL9H0080
10562	꺾	CFA6	C087	FL9I0080*
10563	꺾	CFA7	C088	FL9J0080*
10564	꺾	CFA8	C089	FL9K0080*
10565	꺾	CFA9	C7CA	FL9L0080
10566	꺾	CFAA	C08A	FL9M0080*

Line Number	Graphic	Host Code	PC Code	GCGID
10567	꺾	CFAB	C08B	FL9N0080*
10568	꺾	CFAC	C08C	FL9O0080*
10569	꺾	CFAD	C08D	FL9P0080*
10570	꺾	CFAE	C08E	FL9Q0080*
10571	꺾	CFAF	C08F	FL9R0080*
10572	꺾	CFB0	C090	FL9S0080*
10573	꺾	CFB1	C7CB	FL9T0080
10574	꺾	CFB3	C7CC	FL9V0080
10575	꺾	CFB4	C091	FL9W0080*
10576	꺾	CFB5	C7CD	FL9X0080
10577	꺾	CFB6	C092	FL9Y0080*
10578	꺾	CFB7	C7CE	FL9Z0080
10579	꺾	CFB8	C093	FLA00080*
10580	꺾	CFB9	C094	FLA10080*
10581	꺾	CFBA	C095	FLA20080*
10582	꺾	CFBB	C096	FLA30080*
10583	꺾	CFBC	C097	FLA40080*
10584	꺾	CFBD	C098	FLA50080*
10585	하	D061	C7CF	FLCX0080
10586	학	D062	C7D0	FLCY0080
10587	학	D063	C099	FLCZ0080*
10588	학	D064	C09A	FLD00080*
10589	한	D065	C7D1	FLD10080
10590	학	D066	C09B	FLD20080*
10591	학	D067	C09C	FLD30080*
10592	한	D068	C09D	FLD40080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
10593	할	D069	C7D2	FLD50080
10594	합	D06A	C09E	FLD60080
10595	합	D06B	C09F	FLD70080*
10596	합	D06C	C0A0	FLD80080*
10597	합	D06D	C141	FLD90080*
10598	합	D06E	C7D3	FLDA0080
10599	합	D06F	C142	FLDB0080*
10600	합	D070	C143	FLDC0080*
10601	합	D071	C7D4	FLDD0080
10602	합	D073	C7D5	FLDF0080
10603	합	D074	C144	FLDG0080*
10604	합	D075	C7D6	FLDH0080
10605	합	D076	C145	FLDI0080
10606	합	D077	C7D7	FLDJ0080
10607	합	D078	C146	FLDK0080*
10608	합	D079	C147	FLDL0080*
10609	합	D07A	C148	FLDM0080*
10610	합	D07B	C149	FLDN0080
10611	합	D07C	C14A	FLDO0080*
10612	합	D07D	C14B	FLDP0080*
10613	해	D081	C7D8	FLDT0080
10614	해	D082	C7D9	FLDU0080
10615	해	D083	C14C	FLDV0080*
10616	해	D084	C14D	FLDW0080*
10617	현	D085	C7DA	FLDX0080
10618	현	D086	C14E	FLDY0080*

Line Number	Graphic	Host Code	PC Code	GCGID
10619	행	D087	C14F	FLDZ0080*
10620	행	D088	C150	FLE00080*
10621	행	D089	C7DB	FLE10080
10622	행	D08A	C151	FLE20080*
10623	행	D08B	C152	FLE30080*
10624	행	D08C	C153	FLE40080*
10625	행	D08D	C154	FLE50080*
10626	행	D08E	C155	FLE60080*
10627	행	D08F	C156	FLE70080*
10628	행	D090	C157	FLE80080*
10629	행	D091	C7DC	FLE90080
10630	행	D093	C7DD	FLEB0080
10631	행	D094	C158	FLEC0080*
10632	행	D095	C7DE	FLED0080
10633	행	D096	C7DF	FLEE0080
10634	행	D097	C7E0	FLEF0080
10635	행	D098	C159	FLEG0080*
10636	행	D099	C15A	FLEH0080*
10637	행	D09A	C161	FLEI0080*
10638	행	D09B	C162	FLEJ0080*
10639	행	D09C	C163	FLEK0080*
10640	행	D09D	C164	FLEL0080*
10641	하	D0A1	C7E1	FLEP0080
10642	하	D0A2	C165	FLEQ0080*
10643	하	D0A3	C166	FLE R0080*
10644	하	D0A4	C167	FLES0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 23 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10645	한	D0A5	C168	FLET0080*
10646	하	D0A6	C169	FLEU0080*
10647	함	D0A7	C16A	FLEV0080*
10648	한	D0A8	C16B	FLEW0080*
10649	할	D0A9	C16C	FLEX0080*
10650	합	D0AA	C16D	FLEY0080*
10651	함	D0AB	C16E	FLEZ0080*
10652	합	D0AC	C16F	FLF00080*
10653	하	D0AD	C170	FLF10080*
10654	함	D0AE	C171	FLF20080*
10655	함	D0AF	C172	FLF30080*
10656	함	D0B0	C173	FLF40080*
10657	함	D0B1	C174	FLF50080*
10658	합	D0B3	C175	FLF70080*
10659	함	D0B4	C176	FLF80080*
10660	하	D0B5	C177	FLF90080*
10661	하	D0B6	C178	FLFA0080*
10662	향	D0B7	C7E2	FLFB0080
10663	하	D0B8	C179	FLFC0080*
10664	하	D0B9	C17A	FLFD0080*
10665	하	D0BA	C181	FLFE0080*
10666	할	D0BB	C182	FLFF0080*
10667	함	D0BC	C183	FLFG0080*
10668	향	D0BD	C184	FLFH0080*
10669	해	D0C1	C185	FLFL0080
10670	해	D0C2	C186	FLFM0080*

Table 18 (Page 23 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10671	해	D0C3	C187	FLFN0080*
10672	해	D0C4	C188	FLFO0080*
10673	해	D0C5	C189	FLFP0080*
10674	해	D0C6	C18A	FLFQ0080*
10675	해	D0C7	C18B	FLFR0080*
10676	해	D0C8	C18C	FLFS0080*
10677	해	D0C9	C18D	FLFT0080*
10678	해	D0CA	C18E	FLFU0080*
10679	해	D0CB	C18F	FLFV0080*
10680	해	D0CC	C190	FLFW0080*
10681	해	D0CD	C191	FLFX0080*
10682	해	D0CE	C192	FLFY0080*
10683	해	D0CF	C193	FLFZ0080*
10684	해	D0D0	C194	FLG00080*
10685	해	D0D1	C195	FLG10080*
10686	해	D0D3	C196	FLG30080*
10687	해	D0D4	C197	FLG40080*
10688	해	D0D5	C198	FLG50080*
10689	해	D0D6	C199	FLG60080*
10690	해	D0D7	C19A	FLG70080*
10691	해	D0D8	C19B	FLG80080*
10692	해	D0D9	C19C	FLG90080*
10693	해	D0DA	C19D	FLGA0080*
10694	해	D0DB	C19E	FLGB0080*
10695	해	D0DC	C19F	FLGC0080*
10696	해	D0DD	C1A0	FLGD0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 24 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10697	허	D0E1	C7E3	FLGH0080
10698	혁	D0E2	C7E4	FLGI0080
10699	혁	D0E3	C241	FLGJ0080*
10700	헛	D0E4	C242	FLGK0080*
10701	현	D0E5	C7E5	FLGL0080
10702	헛	D0E6	C243	FLGM0080*
10703	헛	D0E7	C244	FLGN0080*
10704	현	D0E8	C245	FLGO0080
10705	현	D0E9	C7E6	FLGP0080
10706	혁	D0EA	C246	FLGQ0080*
10707	헛	D0EB	C7E7	FLGR0080
10708	헛	D0EC	C247	FLGS0080*
10709	헛	D0ED	C248	FLGT0080*
10710	헛	D0EE	C249	FLGU0080*
10711	현	D0EF	C24A	FLGV0080*
10712	헛	D0F0	C24B	FLGW0080*
10713	헛	D0F1	C7E8	FLGX0080
10714	헛	D0F3	C7E9	FLGZ0080
10715	헛	D0F4	C24C	FLH00080*
10716	헛	D0F5	C7EA	FLH10080
10717	헛	D0F6	C24D	FLH20080*
10718	헛	D0F7	C7EB	FLH30080
10719	헛	D0F8	C24E	FLH40080*
10720	헛	D0F9	C24F	FLH50080*
10721	혁	D0FA	C250	FLH60080*
10722	헛	D0FB	C251	FLH70080*

Table 18 (Page 24 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10723	헛	D0FC	C252	FLH80080*
10724	헛	D0FD	C253	FLH90080*
10725	헛	D141	C7EC	FLHD0080
10726	헛	D142	C7ED	FLHE0080
10727	헛	D143	C254	FLHF0080*
10728	헛	D144	C255	FLHG0080*
10729	현	D145	C7EE	FLHH0080
10730	헛	D146	C256	FLHI0080*
10731	헛	D147	C257	FLHJ0080*
10732	현	D148	C258	FLHK0080*
10733	헛	D149	C7EF	FLHL0080
10734	헛	D14A	C259	FLHM0080*
10735	헛	D14B	C25A	FLHN0080*
10736	헛	D14C	C261	FLHO0080*
10737	헛	D14D	C262	FLHP0080*
10738	헛	D14E	C263	FLHQ0080*
10739	헛	D14F	C264	FLHR0080*
10740	헛	D150	C265	FLHS0080*
10741	헛	D151	C7F0	FLHT0080
10742	헛	D153	C7F1	FLHV0080
10743	헛	D154	C266	FLHW0080*
10744	헛	D155	C7F2	FLHX0080
10745	헛	D156	C267	FLHY0080*
10746	헛	D157	C7F3	FLHZ0080
10747	헛	D158	C268	FLI00080*
10748	헛	D159	C269	FLI10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 25 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10749	헧	D15A	C26A	FLI20080*
10750	헨	D15B	C26B	FLI30080*
10751	헩	D15C	C26C	FLI40080*
10752	헪	D15D	C26D	FLI50080*
10753	헫	D161	C7F4	FLI90080
10754	헬	D162	C7F5	FLIA0080
10755	헭	D163	C26E	FLIB0080*
10756	헮	D164	C26F	FLIC0080*
10757	헯	D165	C7F6	FLID0080
10758	헰	D166	C270	FLIE0080*
10759	헱	D167	C271	FLIF0080*
10760	헲	D168	C272	FLIG0080*
10761	헳	D169	C7F7	FLIH0080
10762	헴	D16A	C273	FLII0080*
10763	헵	D16B	C274	FLIJ0080*
10764	헶	D16C	C275	FLIK0080*
10765	헷	D16D	C276	FLIL0080*
10766	헸	D16E	C277	FLIM0080*
10767	헹	D16F	C278	FLIN0080*
10768	헺	D170	C279	FLIO0080*
10769	헻	D171	C7F8	FLIP0080
10770	헼	D173	C7F9	FLIR0080
10771	헽	D174	C27A	FLIS0080*
10772	헾	D175	C7FA	FLIT0080
10773	헿	D176	C7FB	FLIU0080
10774	헿	D177	C7FC	FLIV0080

Table 18 (Page 25 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10775	헿	D178	C281	FLIW0080*
10776	헿	D179	C282	FLIX0080*
10777	헿	D17A	C283	FLIY0080*
10778	헿	D17B	C284	FLIZ0080*
10779	헿	D17C	C285	FLJ00080*
10780	헿	D17D	C286	FLJ10080*
10781	헿	D181	C7FD	FLJ50080
10782	헿	D182	C287	FLJ60080*
10783	헿	D183	C288	FLJ70080*
10784	헿	D184	C289	FLJ80080*
10785	헿	D185	C7FE	FLJ90080
10786	헿	D186	C28A	FLJA0080*
10787	헿	D187	C28B	FLJB0080*
10788	헿	D188	C28C	FLJC0080*
10789	헿	D189	C8A1	FLJD0080
10790	헿	D18A	C28D	FLJE0080*
10791	헿	D18B	C28E	FLJF0080*
10792	헿	D18C	C28F	FLJG0080*
10793	헿	D18D	C290	FLJH0080*
10794	헿	D18E	C291	FLJI0080*
10795	헿	D18F	C292	FLJJ0080*
10796	헿	D190	C293	FLJK0080*
10797	헿	D191	C294	FLJL0080
10798	헿	D193	C8A2	FLJN0080
10799	헿	D194	C295	FLJO0080*
10800	헿	D195	C296	FLJP0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 26 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10801	헧	D196	C297	FLJQ0080*
10802	헨	D197	C298	FLJR0080*
10803	헩	D198	C299	FLJS0080*
10804	헪	D199	C29A	FLJT0080*
10805	헫	D19A	C29B	FLJU0080*
10806	헬	D19B	C29C	FLJV0080*
10807	헭	D19C	C29D	FLJW0080*
10808	헮	D19D	C29E	FLJX0080*
10809	호	D1A1	C8A3	FLK10080
10810	후	D1A2	C8A4	FLK20080
10811	휴	D1A3	C29F	FLK30080*
10812	훤	D1A4	C2A0	FLK40080*
10813	훈	D1A5	C8A5	FLK50080
10814	훤	D1A6	C341	FLK60080*
10815	훞	D1A7	C342	FLK70080*
10816	훈	D1A8	C343	FLK80080*
10817	훽	D1A9	C8A6	FLK90080
10818	훾	D1AA	C344	FLKA0080*
10819	훿	D1AB	C345	FLKB0080*
10820	훽	D1AC	C346	FLKC0080*
10821	훿	D1AD	C347	FLKD0080*
10822	훽	D1AE	C8A7	FLKE0080
10823	훽	D1AF	C348	FLKF0080*
10824	훽	D1B0	C349	FLKG0080*
10825	흀	D1B1	C8A8	FLKH0080
10826	흁	D1B3	C8A9	FLKJ0080

Table 18 (Page 26 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10827	흂	D1B4	C34A	FLKK0080*
10828	흃	D1B5	C8AA	FLKL0080
10829	흄	D1B6	C34B	FLKM0080*
10830	흅	D1B7	C8AB	FLKN0080
10831	흆	D1B8	C34C	FLKO0080*
10832	흇	D1B9	C34D	FLKP0080*
10833	흈	D1BA	C34E	FLKQ0080*
10834	흉	D1BB	C8AC	FLKR0080
10835	흊	D1BC	C34F	FLKS0080*
10836	흋	D1BD	C350	FLKT0080*
10837	화	D1C1	C8AD	FLKX0080
10838	학	D1C2	C8AE	FLKY0080
10839	휘	D1C3	C351	FLKZ0080*
10840	훗	D1C4	C352	FLL00080*
10841	환	D1C5	C8AF	FLL10080
10842	훘	D1C6	C353	FLL20080*
10843	훙	D1C7	C354	FLL30080*
10844	환	D1C8	C355	FLL40080*
10845	훚	D1C9	C8B0	FLL50080
10846	훛	D1CA	C356	FLL60080*
10847	훜	D1CB	C357	FLL70080*
10848	훝	D1CC	C358	FLL80080*
10849	훞	D1CD	C359	FLL90080*
10850	훟	D1CE	C35A	FLLA0080*
10851	훠	D1CF	C361	FLLB0080*
10852	훡	D1D0	C362	FLLC0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 27 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10853	함	D1D1	C363	FLLD0080*
10854	함	D1D3	C364	FLLF0080*
10855	함	D1D4	C365	FLLG0080*
10856	함	D1D5	C8B1	FLLH0080
10857	함	D1D6	C366	FLLI0080*
10858	함	D1D7	C8B2	FLLJ0080
10859	함	D1D8	C367	FLLK0080*
10860	함	D1D9	C368	FLLL0080*
10861	함	D1DA	C369	FLLM0080*
10862	함	D1DB	C36A	FLLN0080*
10863	함	D1DC	C36B	FLLO0080*
10864	함	D1DD	C36C	FLLP0080*
10865	함	D1E1	C8B3	FLLT0080
10866	함	D1E2	C8B4	FLLU0080
10867	함	D1E3	C36D	FLLV0080*
10868	함	D1E4	C36E	FLLW0080*
10869	함	D1E5	C8B5	FLLX0080
10870	함	D1E6	C36F	FLLY0080*
10871	함	D1E7	C370	FLLZ0080*
10872	함	D1E8	C371	FLM00080*
10873	함	D1E9	C372	FLM10080*
10874	함	D1EA	C373	FLM20080*
10875	함	D1EB	C374	FLM30080*
10876	함	D1EC	C375	FLM40080*
10877	함	D1ED	C376	FLM50080*
10878	함	D1EE	C377	FLM60080*

Table 18 (Page 27 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10879	함	D1EF	C378	FLM70080*
10880	함	D1F0	C379	FLM80080*
10881	함	D1F1	C37A	FLM90080*
10882	함	D1F3	C381	FLMB0080*
10883	함	D1F4	C382	FLMC0080*
10884	함	D1F5	C8B6	FLMD0080
10885	함	D1F6	C383	FLME0080*
10886	함	D1F7	C8B7	FLMF0080
10887	함	D1F8	C384	FLMG0080*
10888	함	D1F9	C385	FLMH0080*
10889	함	D1FA	C386	FLMI0080*
10890	함	D1FB	C387	FLMJ0080*
10891	함	D1FC	C388	FLMK0080*
10892	함	D1FD	C389	FLML0080*
10893	함	D241	C8B8	FLMP0080
10894	함	D242	C8B9	FLMQ0080
10895	함	D243	C38A	FLMR0080*
10896	함	D244	C38B	FLMS0080*
10897	함	D245	C8BA	FLMT0080
10898	함	D246	C38C	FLMU0080*
10899	함	D247	C38D	FLMV0080*
10900	함	D248	C38E	FLMW0080*
10901	함	D249	C8BB	FLMX0080
10902	함	D24A	C38F	FLMY0080*
10903	함	D24B	C390	FLMZ0080*
10904	함	D24C	C391	FLN00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 28 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10905	궏	D24D	C392	FLN10080*
10906	궑	D24E	C393	FLN20080*
10907	궒	D24F	C394	FLN30080*
10908	궓	D250	C395	FLN40080*
10909	궔	D251	C396	FLN50080*
10910	궕	D253	C8BC	FLN70080
10911	궖	D254	C397	FLN80080*
10912	궗	D255	C8BD	FLN90080
10913	궘	D256	C398	FLNA0080*
10914	궙	D257	C8BE	FLNB0080
10915	궚	D258	C399	FLNC0080*
10916	궛	D259	C39A	FLND0080*
10917	궜	D25A	C39B	FLNE0080*
10918	궝	D25B	C39C	FLNF0080*
10919	궞	D25C	C39D	FLNG0080*
10920	궟	D25D	C39E	FLNH0080*
10921	궠	D261	C8BF	FLNL0080
10922	궡	D262	C39F	FLNM0080
10923	궢	D263	C3A0	FLNN0080*
10924	궣	D264	C441	FLNO0080*
10925	궤	D265	C8C0	FLNP0080
10926	궥	D266	C442	FLNQ0080*
10927	궦	D267	C443	FLNR0080*
10928	궧	D268	C444	FLNS0080*
10929	궨	D269	C8C1	FLNT0080
10930	궩	D26A	C445	FLNU0080*

Table 18 (Page 28 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
10931	궪	D26B	C446	FLNV0080*
10932	궫	D26C	C447	FLNW0080*
10933	궬	D26D	C448	FLNX0080*
10934	궭	D26E	C449	FLNY0080*
10935	궮	D26F	C44A	FLNZ0080*
10936	궯	D270	C44B	FLO00080*
10937	궰	D271	C44C	FLO10080
10938	궱	D273	C8C2	FLO30080
10939	궲	D274	C44D	FLO40080*
10940	궳	D275	C8C3	FLO50080
10941	궴	D276	C44E	FLO60080*
10942	궵	D277	C44F	FLO70080*
10943	궶	D278	C450	FLO80080*
10944	궷	D279	C451	FLO90080*
10945	궸	D27A	C452	FLOA0080*
10946	궹	D27B	C453	FLOB0080*
10947	궺	D27C	C454	FLOC0080*
10948	궻	D27D	C455	FLOD0080*
10949	궼	D281	C8C4	FLOH0080
10950	궽	D282	C8C5	FLOI0080
10951	궾	D283	C456	FLOJ0080*
10952	궿	D284	C457	FLOK0080*
10953	귀	D285	C8C6	FLOL0080
10954	귁	D286	C458	FLOM0080*
10955	귂	D287	C459	FLOO0080*
10956	귃	D288	C45A	FLOO0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 29 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10957	홀	D289	C8C7	FLOP0080
10958	흙	D28A	C461	FLOQ0080*
10959	흞	D28B	C462	FLOR0080*
10960	흟	D28C	C463	FLOS0080*
10961	흠	D28D	C464	FLOT0080*
10962	흡	D28E	C8C8	FLOU0080
10963	흢	D28F	C465	FLOV0080*
10964	흣	D290	C466	FLOW0080*
10965	흤	D291	C8C9	FLOX0080
10966	흦	D293	C467	FLOZ0080
10967	흧	D294	C468	FLP00080*
10968	흩	D295	C8CA	FLP10080
10969	흪	D296	C469	FLP20080*
10970	흫	D297	C8CB	FLP30080
10971	희	D298	C46A	FLP40080*
10972	흭	D299	C46B	FLP50080*
10973	흮	D29A	C46C	FLP60080*
10974	흯	D29B	C46D	FLP70080*
10975	흰	D29C	C46E	FLP80080*
10976	흱	D29D	C46F	FLP90080*
10977	흲	D2A1	C8CC	FLPD0080
10978	흳	D2A2	C470	FLPE0080*
10979	흴	D2A3	C471	FLPF0080*
10980	흵	D2A4	C472	FLPG0080*
10981	흶	D2A5	C8CD	FLPH0080
10982	흷	D2A6	C473	FLPI0080*

Table 18 (Page 29 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
10983	흸	D2A7	C474	FLPJ0080*
10984	흹	D2A8	C475	FLPK0080*
10985	흺	D2A9	C8CE	FLPL0080
10986	흽	D2AA	C476	FLPM0080*
10987	흾	D2AB	C477	FLPN0080*
10988	흿	D2AC	C478	FLPO0080*
10989	흠	D2AD	C479	FLPP0080*
10990	흡	D2AE	C47A	FLPQ0080*
10991	흢	D2AF	C481	FLPR0080*
10992	흣	D2B0	C482	FLPS0080*
10993	흤	D2B1	C8CF	FLPT0080
10994	흦	D2B3	C483	FLPV0080*
10995	흧	D2B4	C484	FLPW0080*
10996	흩	D2B5	C485	FLPX0080*
10997	흪	D2B6	C486	FLPY0080*
10998	흫	D2B7	C8D0	FLPZ0080
10999	희	D2B8	C487	FLQ00080*
11000	흭	D2B9	C488	FLQ10080*
11001	흮	D2BA	C489	FLQ20080*
11002	흯	D2BB	C48A	FLQ30080*
11003	흰	D2BC	C48B	FLQ40080*
11004	흱	D2BD	C48C	FLQ50080*
11005	흲	D2C1	C8D1	FLQ90080
11006	흳	D2C2	C8D2	FLQA0080
11007	흴	D2C3	C48D	FLQB0080*
11008	흵	D2C4	C48E	FLQC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 30 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
11009	퀵	D2C5	C8D3	FLQD0080
11010	퀶	D2C6	C48F	FLQE0080*
11011	퀷	D2C7	C490	FLQF0080*
11012	퀸	D2C8	C491	FLQG0080*
11013	퀹	D2C9	C8D4	FLQH0080
11014	퀺	D2CA	C492	FLQI0080*
11015	퀻	D2CB	C493	FLQJ0080*
11016	퀼	D2CC	C494	FLQK0080*
11017	퀽	D2CD	C495	FLQL0080*
11018	퀼	D2CE	C496	FLQM0080*
11019	퀾	D2CF	C497	FLQN0080*
11020	퀿	D2D0	C498	FLQO0080*
11021	퀸	D2D1	C499	FLQP0080
11022	퀹	D2D3	C49A	FLQR0080*
11023	퀺	D2D4	C49B	FLQS0080*
11024	퀻	D2D5	C49C	FLQT0080*
11025	퀼	D2D6	C49D	FLQU0080*
11026	퀽	D2D7	C8D5	FLQV0080
11027	퀼	D2D8	C49E	FLQW0080*
11028	퀼	D2D9	C49F	FLQX0080*
11029	퀼	D2DA	C4A0	FLQY0080*
11030	퀼	D2DB	C541	FLQZ0080*
11031	퀼	D2DC	C542	FLR00080*
11032	퀼	D2DD	C543	FLR10080*
11033	휘	D2E1	C8D6	FLR50080
11034	획	D2E2	C8D7	FLR60080

Table 18 (Page 30 of 33). Hangeul Set, DBCS-Host				
Line Number	Graphic	Host Code	PC Code	GCGID
11035	휘	D2E3	C544	FLR70080*
11036	획	D2E4	C545	FLR80080*
11037	퀼	D2E5	C8D8	FLR90080
11038	퀼	D2E6	C546	FLRA0080*
11039	퀼	D2E7	C547	FLRB0080*
11040	퀼	D2E8	C548	FLRC0080*
11041	퀼	D2E9	C8D9	FLRD0080
11042	퀼	D2EA	C549	FLRE0080*
11043	퀼	D2EB	C54A	FLRF0080*
11044	퀼	D2EC	C54B	FLRG0080*
11045	퀼	D2ED	C54C	FLRH0080*
11046	퀼	D2EE	C54D	FLRI0080*
11047	퀼	D2EF	C54E	FLRJ0080*
11048	퀼	D2F0	C54F	FLRK0080*
11049	퀼	D2F1	C8DA	FLRL0080
11050	퀼	D2F3	C8DB	FLRN0080
11051	퀼	D2F4	C550	FLRO0080*
11052	퀼	D2F5	C8DC	FLRP0080
11053	퀼	D2F6	C551	FLRQ0080*
11054	퀼	D2F7	C8DD	FLRR0080
11055	퀼	D2F8	C552	FLRS0080*
11056	퀼	D2F9	C553	FLRT0080*
11057	퀼	D2FA	C554	FLRU0080*
11058	퀼	D2FB	C555	FLRV0080*
11059	퀼	D2FC	C556	FLRW0080*
11060	퀼	D2FD	C557	FLRX0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 31 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
11061	휴	D341	C8DE	FLS10080
11062	후	D342	C8DF	FLS20080
11063	휴	D343	C558	FLS30080*
11064	후	D344	C559	FLS40080*
11065	훈	D345	C8E0	FLS50080
11066	후	D346	C55A	FLS60080*
11067	훈	D347	C561	FLS70080*
11068	훈	D348	C562	FLS80080*
11069	훈	D349	C8E1	FLS90080
11070	훈	D34A	C563	FLSA0080*
11071	훈	D34B	C564	FLSB0080*
11072	훈	D34C	C565	FLSC0080*
11073	훈	D34D	C566	FLSD0080*
11074	훈	D34E	C567	FLSE0080*
11075	훈	D34F	C568	FLSF0080*
11076	훈	D350	C569	FLSG0080*
11077	훈	D351	C8E2	FLSH0080
11078	훈	D353	C56A	FLSJ0080*
11079	훈	D354	C56B	FLSK0080*
11080	훈	D355	C8E3	FLSL0080
11081	훈	D356	C56C	FLSM0080*
11082	훈	D357	C8E4	FLSN0080
11083	훈	D358	C56D	FLSO0080*
11084	훈	D359	C56E	FLSP0080*
11085	훈	D35A	C56F	FLSQ0080*
11086	훈	D35B	C570	FLSR0080*

Table 18 (Page 31 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
11087	훈	D35C	C571	FLSS0080*
11088	훈	D35D	C572	FLST0080*
11089	훈	D361	C8E5	FLSX0080
11090	훈	D362	C8E6	FLSY0080
11091	훈	D363	C573	FLSZ0080*
11092	훈	D364	C574	FLT00080*
11093	훈	D365	C8E7	FLT10080
11094	훈	D366	C575	FLT20080*
11095	훈	D367	C8E8	FLT30080
11096	훈	D368	C8E9	FLT40080
11097	훈	D369	C8EA	FLT50080
11098	훈	D36A	C8EB	FLT60080
11099	훈	D36B	C576	FLT70080*
11100	훈	D36C	C577	FLT80080*
11101	훈	D36D	C578	FLT90080*
11102	훈	D36E	C579	FLTA0080*
11103	훈	D36F	C57A	FLTB0080*
11104	훈	D370	C581	FLTC0080*
11105	훈	D371	C8EC	FLTD0080
11106	훈	D373	C8ED	FLTF0080
11107	훈	D374	C582	FLTG0080*
11108	훈	D375	C8EE	FLTH0080
11109	훈	D376	C583	FLTI0080*
11110	훈	D377	C8EF	FLTJ0080
11111	훈	D378	C584	FLTK0080*
11112	훈	D379	C585	FLTL0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	Host Code	PC Code	GCGID
11113	흑	D37A	C586	FLTM0080*
11114	흙	D37B	C8F0	FLTN0080
11115	흙	D37C	C587	FLTO0080*
11116	흙	D37D	C588	FLTP0080*
11117	히	D381	C8F1	FLTT0080
11118	획	D382	C589	FLTU0080
11119	휘	D383	C58A	FLTV0080*
11120	훤	D384	C58B	FLTW0080*
11121	흰	D385	C8F2	FLTX0080
11122	훤	D386	C58C	FLTY0080*
11123	훤	D387	C58D	FLTZ0080*
11124	흰	D388	C58E	FLU00080*
11125	훤	D389	C8F3	FLU10080
11126	훤	D38A	C58F	FLU20080*
11127	훤	D38B	C590	FLU30080*
11128	훤	D38C	C591	FLU40080*
11129	훤	D38D	C592	FLU50080*
11130	훤	D38E	C593	FLU60080*
11131	훤	D38F	C594	FLU70080*
11132	훤	D390	C595	FLU80080*
11133	힘	D391	C8F4	FLU90080
11134	휩	D393	C8F5	FLUB0080
11135	휩	D394	C596	FLUC0080*
11136	휩	D395	C597	FLUD0080*
11137	휩	D396	C598	FLUE0080*
11138	휩	D397	C8F6	FLUF0080

Line Number	Graphic	Host Code	PC Code	GCGID
11139	휩	D398	C599	FLUG0080*
11140	휩	D399	C59A	FLUH0080*
11141	휩	D39A	C59B	FLUI0080*
11142	휩	D39B	C59C	FLUJ0080*
11143	휩	D39C	C59D	FLUK0080*
11144	휩	D39D	C59E	FLUL0080*
11145	히	D3A1	C8F7	FLUP0080
11146	힉	D3A2	C8F8	FLUQ0080
11147	휘	D3A3	C59F	FLUR0080*
11148	휩	D3A4	C5A0	FLUS0080*
11149	흰	D3A5	C8F9	FLUT0080
11150	휩	D3A6	C641	FLUU0080*
11151	휩	D3A7	C642	FLUV0080*
11152	흰	D3A8	C643	FLUW0080*
11153	휩	D3A9	C8FA	FLUX0080
11154	휩	D3AA	C644	FLUY0080*
11155	휩	D3AB	C645	FLUZ0080*
11156	휩	D3AC	C646	FLV00080*
11157	휩	D3AD	C647	FLV10080*
11158	휩	D3AE	C648	FLV20080*
11159	휩	D3AF	C649	FLV30080*
11160	휩	D3B0	C64A	FLV40080*
11161	힘	D3B1	C8FB	FLV50080
11162	휩	D3B3	C8FC	FLV70080
11163	휩	D3B4	C64B	FLV80080*
11164	휩	D3B5	C8FD	FLV90080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 18 (Page 33 of 33). Hangeul Set, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
11165	헛	D3B6	C64C	FLVA0080*
11166	헛	D3B7	C8FE	FLVB0080
11167	헛	D3B8	C64D	FLVC0080*
11168	헛	D3B9	C64E	FLVD0080*
11169	헛	D3BA	C64F	FLVE0080*
11170	헛	D3BB	C650	FLVF0080*
11171	헛	D3BC	C651	FLVG0080*
11172	헛	D3BD	C652	FLVH0080*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)


8.5 Hangeul Jamo

Table 19 (Page 1 of 2). Hangeul Jamo, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
1		8441	A4D4	SP490080
2	ㄱ	8444	A4A3	OG200080
3	ㄴ	8446	A4A5	ON150080
4	ㄷ	8447	A4A6	ON100080
5	ㄹ	844A	A4AA	OL200080
6	ㅁ	844B	A4AB	OL400080
7	ㅂ	844C	A4AC	OL100080
8	ㅅ	844D	A4AD	OL600080
9	ㅇ	844E	A4AE	OL700080
10	ㅈ	844F	A4AF	OL500080
11	ㅊ	8450	A4B0	OL300080
12	ㅋ	8454	A4B4	OB200080
13	ㅌ	8461	A4BF	OA000080
14	ㅍ	8481	A4C0	OA200080
15	ㅑ	84A1	A4C1	OY200080
16	ㅓ	84C1	A4C2	OY250080
17	ㅕ	84E1	A4C3	OE200080
18	ㅗ	8541	A4C4	OE000080
19	ㅛ	8561	A4C5	OY400080
20	ㅜ	8581	A4C6	OY300080
21	ㅠ	85A1	A4C7	OO000080
22	ㅡ	85C1	A4C8	OO100080
23	ㅝ	85E1	A4C9	OO200080
24	ㅞ	8641	A4CA	OO300080
25	ㅟ	8661	A4CB	OY500080

Table 19 (Page 1 of 2). Hangeul Jamo, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
26	ㅠ	8681	A4CC	OU000080
27	ㅡ	86A1	A4CD	OU300080
28	ㅢ	86C1	A4CE	OU200080
29	ㅣ	86E1	A4CF	OU400080
30	ㅤ	8741	A4D0	OY600080
31	ㅥ	8761	A4D1	OE300080
32	ㅦ	8781	A4D2	OE400080
33	ㅧ	87A1	A4D3	OI000080
34	ㅨ	8841	A4A1	OG000080
35	ㅩ	8C41	A4A2	OG100080
36	ㅪ	9041	A4A4	ON000080
37	ㅫ	9441	A4A7	OD000080
38	ㅬ	9841	A4A8	OD100080
39	ㅭ	9C41	A4A9	OL000080
40	ㅮ	A041	A4B1	OM000080
41	ㅯ	A441	A4B2	OB000080
42	ㅰ	A841	A4B3	OB100080
43	ㅱ	AC41	A4B5	OS000080
44	ㅲ	B041	A4B6	OS100080
45	ㅳ	B441	A4B7	ON200080
46	ㅴ	B841	A4B8	OJ000080
47	ㅵ	BC41	A4B9	OJ100080
48	ㅶ	C041	A4BA	OC200080
49	ㅷ	C441	A4BB	OK000080
50	ㅸ	C841	A4BC	OT000080
51	ㅹ	CC41	A4BD	OP000080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 19 (Page 2 of 2). Hangeul Jamo, DBCS-Host

Line Number	Graphic	Host Code	PC Code	GCGID
52	ㅜ	D041	A4BE	OH000080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

9. DBCS-PC Specification

9.1 Format of DBCS-PC Specification Tables

In this section, the specification of the Korean *DBCS-PC coded graphic character sets* are provided by tables. The tables list the *coded graphic character sets* in ascending order of the *PC code point* value. The tables are formatted almost the same as those of *DBCS-Host* shown in Table 7 on page 8 except that the column 3 'Host code' and column 4 'PC code' are reversed. Then Table 20 to Table 29 on page 653 have *PC code points* in column 3 and *Host code points* in column 4.

9.2 Non-Hangeul/Hanja Set

Line Number	Graphic	PC Code	Host Code	GCGID
1		A1A1	4040	SP010080
2	,	A1A2	4141	JQ730080
3	o	A1A3	4142	JQ700080
4	•	A1A4	4143	SD630080
5	••	A1A5	4144	SV430080
6	•••	A1A6	4145	SV440080
7	••	A1A7	4146	SD170080
8	”	A1A8	4147	SV090081
9	—	A1A9	4148	SP320080
10	—	A1AA	4149	SM120080
11		A1AB	414A	SA340080
12	∖	A1AC	414B	SM070080
13	~	A1AD	42A1	SA160080
14	‘	A1AE	414D	SP190080
15	’	A1AF	414E	SP200080
16	“	A1B0	414F	SP210080
17	”	A1B1	4150	SP220080

Line Number	Graphic	PC Code	Host Code	GCGID
18	[A1B2	4151	SP060081
19]	A1B3	4152	SP070081
20	<	A1B4	4153	SP060082
21	>	A1B5	4154	SP070082
22	◀	A1B6	4155	SP060083
23	▶	A1B7	4156	SP070083
24	┌	A1B8	4157	JQ710080
25	└	A1B9	4158	JQ720080
26	┐	A1BA	4159	JQ710081
27	┘	A1BB	415A	JQ720081
28	【	A1BC	415B	SP060084
29	】	A1BD	415C	SP070084
30	±	A1BE	415D	SA020080
31	×	A1BF	415E	SA070080
32	÷	A1C0	415F	SA060080
33	≠	A1C1	418D	F07H0080
34	≦	A1C2	418E	SA520080
35	≧	A1C3	418F	SA530080
36	∞	A1C4	4163	SA450080
37	∴	A1C5	4164	SA370080
38	°	A1C6	4165	SM190080
39	’	A1C7	4166	SM500080
40	”	A1C8	4167	SM510080
41	℃	A1C9	4168	SM440080
42	Å	A1CA	4190	SM220080
43	¢	A1CB	424A	SC040080
44	£	A1CC	416B	SC020080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 20 (Page 2 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
45	₩	A1CD	416C	SC050080
46	♂	A1CE	4191	SM280080
47	♀	A1CF	4192	SM290080
48	∠	A1D0	4193	SA350088
49	⊥	A1D1	4194	SA780080
50	⌒	A1D2	4195	SV420080
51	∅	A1D3	4196	SA490080
52	▽	A1D4	4197	SL030080
53	≡	A1D5	4198	SA480080
54	≐	A1D6	4199	SA700081
55	§	A1D7	4176	SM240080
56	※	A1D8	4177	SM040088
57	☆	A1D9	4178	SS570080
58	★	A1DA	4179	SS580080
59	○	A1DB	417A	SM750080
60	●	A1DC	417B	SM580080
61	◎	A1DD	417C	SM810080
62	◇	A1DE	417D	SA660080
63	◆	A1DF	417E	SM610080
64	□	A1E0	417F	SM450080
65	■	A1E1	4180	SM470080
66	△	A1E2	4181	SM730080
67	▲	A1E3	4182	SM600080
68	▽	A1E4	4183	SM740080
69	▼	A1E5	4184	SV040080
70	→	A1E6	4185	SM310080
71	←	A1E7	4186	SM300080

Table 20 (Page 2 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
72	↑	A1E8	4187	SM320080
73	↓	A1E9	4188	SM330080
74	↔	A1EA	4189	SM780080
75	≡	A1EB	418A	SS750080
76	⏪	A1EC	419A	SA730080
77	⏩	A1ED	419B	SA740080
78	√	A1EE	419C	SA800080
79	∞	A1EF	419D	SA830080
80	∞	A1F0	4941	SA470080
81	∴	A1F1	4942	SS540080
82	∫	A1F2	4943	SA510080
83	∫	A1F3	4944	SA840080
84	∈	A1F4	4945	SA670080
85	∋	A1F5	4946	SA310080
86	⊆	A1F6	4947	SA240080
87	⊇	A1F7	4948	SA270080
88	⊂	A1F8	4949	SA400080
89	⊃	A1F9	494A	SA410080
90	∪	A1FA	494B	SA390080
91	∩	A1FB	494C	SA380080
92	∧	A1FC	494D	SA330080
93	∨	A1FD	494E	SA320080
94	¬	A1FE	425F	SM660080
95	⇒	A2A1	494F	SM420080
96	⇔	A2A2	4950	SM410080
97	∇	A2A3	4951	SA210080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 20 (Page 3 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
98	☐	A2A4	4952	SA230080
99	'	A2A5	4953	SD110080
100	~	A2A6	4954	SD190080
101	∨	A2A7	4955	SD210080
102	∪	A2A8	4956	SD230080
103	”	A2A9	4957	SD250080
104	°	A2AA	4958	SD270080
105	•	A2AB	4959	SD290080
106	ㄱ	A2AC	495A	SD410080
107	ㄴ	A2AD	495B	SD430080
108	ㅣ	A2AE	495C	SP030080
109	ㄷ	A2AF	495D	SP160080
110	⚡	A2B0	495E	F1CU0080
111	₩	A2B1	495F	SA720080
112	Σ	A2B2	4960	SS400080
113	Π	A2B3	4961	SA810080
114	⊗	A2B4	4962	SC010080
115	ℱ	A2B5	4963	SM850080
116	‰	A2B6	4964	SM560080
117	△	A2B7	4965	F1D10080
118	▲	A2B8	4966	F1D20080
119	▽	A2B9	4967	F1D30080
120	▶	A2BA	4968	SM600081
121	♠	A2BB	4969	F1D50080
122	♣	A2BC	496A	SS050080
123	♥	A2BD	496B	F1D70080

Table 20 (Page 3 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
124	♥	A2BE	496C	SS020080
125	♣	A2BF	496D	F1D90080
126	♣	A2C0	496E	SS040080
127	⊙	A2C1	496F	F1DB0080
128	◇	A2C2	4970	F1DC0080
129	▣	A2C3	4971	F1DD0080
130	◐	A2C4	4972	F1DE0080
131	◑	A2C5	4973	F1DF0080
132	▤	A2C6	4974	F1DG0080
133	▥	A2C7	4975	F1DH0080
134	▧	A2C8	4976	F1DI0080
135	▨	A2C9	4977	F1DJ0080
136	▩	A2CA	4978	F1DK0080
137	▪	A2CB	4979	F1DL0080
138	▫	A2CC	497A	F1DM0080
139	☯	A2CD	497B	F1DN0080
140	☰	A2CE	497C	F1DO0080
141	☱	A2CF	497D	F1DP0080
142	☲	A2D0	497E	F1DQ0080
143	☳	A2D1	497F	F1DR0080
144	ㄱ	A2D2	4980	SM250080
145	+	A2D3	4981	F1DT0080
146	≠	A2D4	4982	F1DU0080
147	↕	A2D5	4983	SM760080
148	↗	A2D6	4984	SM950080
149	↘	A2D7	4985	F1DX0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
150	↖	A2D8	4986	F1DY0080
151	↘	A2D9	4987	SM990080
152	b	A2DA	4988	SM890080
153	♪	A2DB	4989	F1E10080
154	♫	A2DC	498A	SM930080
155	♬	A2DD	498B	SM910080
156	Ⓜ	A2DE	498C	F1E40080
157	Ⓝ	A2DF	498D	F1E50080
158	No.	A2E0	498E	F1E60080
159	Co.	A2E1	498F	F1E70080
160	TM	A2E2	4990	SM540080
161	am	A2E3	4991	F1E90080
162	pm	A2E4	4992	F1EA0080
163	TEL	A2E5	4993	SS710080
164	€	A2E6	4995	SC200080
165	®	A2E7	4996	SM530080
166	!	A3A1	425A	SP020080
167	"	A3A2	427F	SP040080
168	#	A3A3	427B	SM010080
169	\$	A3A4	425B	SC030080
170	%	A3A5	426C	SM020080
171	&	A3A6	4250	SM030080
172	'	A3A7	427D	SP050080
173	(A3A8	424D	SP060080
174)	A3A9	425D	SP070080
175	*	A3AA	425C	SM040080

Line Number	Graphic	PC Code	Host Code	GCGID
176	+	A3AB	424E	SA010080
177	,	A3AC	426B	SP080080
178	—	A3AD	4260	SP100080
179	.	A3AE	424B	SP110080
180	/	A3AF	4261	SP120080
181	0	A3B0	42F0	ND100080
182	1	A3B1	42F1	ND010080
183	2	A3B2	42F2	ND020080
184	3	A3B3	42F3	ND030080
185	4	A3B4	42F4	ND040080
186	5	A3B5	42F5	ND050080
187	6	A3B6	42F6	ND060080
188	7	A3B7	42F7	ND070080
189	8	A3B8	42F8	ND080080
190	9	A3B9	42F9	ND090080
191	:	A3BA	427A	SP130080
192	;	A3BB	425E	SP140080
193	<	A3BC	424C	SA030080
194	=	A3BD	427E	SA040080
195	>	A3BE	426E	SA050080
196	?	A3BF	426F	SP150080
197	@	A3C0	427C	SM050080
198	A	A3C1	42C1	LA020080
199	B	A3C2	42C2	LB020080
200	C	A3C3	42C3	LC020080
201	D	A3C4	42C4	LD020080
202	E	A3C5	42C5	LE020080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
203	F	A3C6	42C6	LF020080
204	G	A3C7	42C7	LG020080
205	H	A3C8	42C8	LH020080
206	I	A3C9	42C9	LI020080
207	J	A3CA	42D1	LJ020080
208	K	A3CB	42D2	LK020080
209	L	A3CC	42D3	LL020080
210	M	A3CD	42D4	LM020080
211	N	A3CE	42D5	LN020080
212	O	A3CF	42D6	LO020080
213	P	A3D0	42D7	LP020080
214	Q	A3D1	42D8	LQ020080
215	R	A3D2	42D9	LR020080
216	S	A3D3	42E2	LS020080
217	T	A3D4	42E3	LT020080
218	U	A3D5	42E4	LU020080
219	V	A3D6	42E5	LV020080
220	W	A3D7	42E6	LW020080
221	X	A3D8	42E7	LX020080
222	Y	A3D9	42E8	LY020080
223	Z	A3DA	42E9	LZ020080
224	[A3DB	418B	SM060080
225	₩	A3DC	42E0	SC140080
226]	A3DD	418C	SM080080
227	^	A3DE	416A	SD150080
228	—	A3DF	426D	SP090080
229	`	A3E0	4279	SD130080

Line Number	Graphic	PC Code	Host Code	GCGID
230	a	A3E1	4281	LA010080
231	b	A3E2	4282	LB010080
232	c	A3E3	4283	LC010080
233	d	A3E4	4284	LD010080
234	e	A3E5	4285	LE010080
235	f	A3E6	4286	LF010080
236	g	A3E7	4287	LG010080
237	h	A3E8	4288	LH010080
238	i	A3E9	4289	LI010080
239	j	A3EA	4291	LJ010080
240	k	A3EB	4292	LK010080
241	l	A3EC	4293	LL010080
242	m	A3ED	4294	LM010080
243	n	A3EE	4295	LN010080
244	o	A3EF	4296	LO010080
245	p	A3F0	4297	LP010080
246	q	A3F1	4298	LQ010080
247	r	A3F2	4299	LR010080
248	s	A3F3	42A2	LS010080
249	t	A3F4	42A3	LT010080
250	u	A3F5	42A4	LU010080
251	v	A3F6	42A5	LV010080
252	w	A3F7	42A6	LW010080
253	x	A3F8	42A7	LX010080
254	y	A3F9	42A8	LY010080
255	z	A3FA	42A9	LZ010080
256	{	A3FB	42C0	SM110080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 20 (Page 6 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
257		A3FC	424F	SM130080
258	}	A3FD	42D0	SM140080
259	—	A3FE	414C	SM150080
260	ㄱ	A4A1	8841	OG000080
261	ㄲ	A4A2	8C41	OG100080
262	ㄳ	A4A3	8444	OG200080
263	ㄴ	A4A4	9041	ON000080
264	ㄴ스	A4A5	8446	ON150080
265	ㄴㅎ	A4A6	8447	ON100080
266	ㄷ	A4A7	9441	OD000080
267	ㄷㄷ	A4A8	9841	OD100080
268	ㄷ	A4A9	9C41	OL000080
269	ㄷㄱ	A4AA	844A	OL200080
270	ㄷㅁ	A4AB	844B	OL400080
271	ㄷㅂ	A4AC	844C	OL100080
272	ㄷㅅ	A4AD	844D	OL600080
273	ㄷㅌ	A4AE	844E	OL700080
274	ㄷㅍ	A4AF	844F	OL500080
275	ㄷㅎ	A4B0	8450	OL300080
276	ㅁ	A4B1	A041	OM000080
277	ㅂ	A4B2	A441	OB000080
278	ㅂㅂ	A4B3	A841	OB100080
279	ㅂㅅ	A4B4	8454	OB200080
280	ㅂ	A4B5	AC41	OS000080
281	ㅂㅂ	A4B6	B041	OS100080
282	ㅇ	A4B7	B441	ON200080

Table 20 (Page 6 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
283	ㅅ	A4B8	B841	OJ000080
284	ㅅㅅ	A4B9	BC41	OJ100080
285	ㅅ	A4BA	C041	OC200080
286	ㅅ	A4BB	C441	OK000080
287	ㅅ	A4BC	C841	OT000080
288	ㅅ	A4BD	CC41	OP000080
289	ㅎ	A4BE	D041	OH000080
290	ㅌ	A4BF	8461	OA000080
291	ㅍ	A4C0	8481	OA200080
292	ㅍ	A4C1	84A1	OY200080
293	ㅍ	A4C2	84C1	OY250080
294	ㅍ	A4C3	84E1	OE200080
295	ㅍ	A4C4	8541	OE000080
296	ㅍ	A4C5	8561	OY400080
297	ㅍ	A4C6	8581	OY300080
298	ㅍ	A4C7	85A1	OO000080
299	ㅍ	A4C8	85C1	OO100080
300	ㅍ	A4C9	85E1	OO200080
301	ㅍ	A4CA	8641	OO300080
302	ㅍ	A4CB	8661	OY500080
303	ㅍ	A4CC	8681	OU000080
304	ㅍ	A4CD	86A1	OU300080
305	ㅍ	A4CE	86C1	OU200080
306	ㅍ	A4CF	86E1	OU400080
307	ㅍ	A4D0	8741	OY600080
308	ㅍ	A4D1	8761	OE300080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 20 (Page 7 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
309	ㄱ	A4D2	8781	OE400080
310	ㅣ	A4D3	87A1	OI000080
311		A4D4	8441	SP490080
312	ㄴ	A4D5	4341	F0G10080
313	ㄷ	A4D6	4342	F0G20080
314	ㄹ	A4D7	4343	F0G30080
315	ㅁ	A4D8	4344	F0G40080
316	ㅂ	A4D9	4345	F0G50080
317	ㅅ	A4DA	4346	F0G60080
318	ㅇ	A4DB	4347	F0G70080
319	ㅈ	A4DC	4348	F0G80080
320	ㅊ	A4DD	4349	F0G90080
321	ㅋ	A4DE	434A	F0GA0080
322	ㆁ	A4DF	434B	F0GB0080
323	ㆂ	A4E0	434C	F0GC0080
324	ㆃ	A4E1	434D	F0GD0080
325	ㆄ	A4E2	434E	F0GE0080
326	ㆅ	A4E3	434F	F0GF0080
327	ㆆ	A4E4	4350	F0GG0080
328	ㆇ	A4E5	4351	F0GH0080
329	ㆈ	A4E6	4352	F0GI0080
330	ㆉ	A4E7	4353	F0GJ0080
331	ㆊ	A4E8	4354	F0GK0080
332	ㆋ	A4E9	4355	F0GL0080
333	ㆌ	A4EA	4356	F0GM0080

Table 20 (Page 7 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
334	ㅍ	A4EB	4357	F0GN0080
335	ㅑ	A4EC	4358	F0GO0080
336	ㅓ	A4ED	4359	F0GP0080
337	ㅕ	A4EE	435A	F0GQ0080
338	ㅗ	A4EF	435B	F0GR0080
339	ㅛ	A4F0	435C	F0GS0080
340	ㅜ	A4F1	435D	F0GT0080
341	ㅠ	A4F2	435E	F0GU0080
342	ㅡ	A4F3	435F	F0GV0080
343	ㅝ	A4F4	4360	F0GW0080
344	ㅞ	A4F5	4361	F0GX0080
345	ㅟ	A4F6	4362	F0GY0080
346	ㅠ	A4F7	4363	F0GZ0080
347	ㅡ	A4F8	4364	F0H00080
348	ㅢ	A4F9	4365	F0H10080
349	ㅣ	A4FA	4366	F0H20080
350	ㅤ	A4FB	4367	F0H30080
351	ㅥ	A4FC	4368	F0H40080
352	·	A4FD	4369	F0H50080
353	·ㅣ	A4FE	436A	F0H60080
354	i	A5A1	4641	NR010080
355	ii	A5A2	4642	NR020080
356	iii	A5A3	4643	NR030080
357	iv	A5A4	4644	NR040080
358	v	A5A5	4645	NR050080
359	vi	A5A6	4646	NR060080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 20 (Page 8 of 19). Non-Hangeul/Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
360	vii	A5A7	4647	NR070080
361	viii	A5A8	4648	NR080080
362	ix	A5A9	4649	NR090080
363	x	A5AA	464A	NR100080
364	I	A5B0	4650	NR110080
365	II	A5B1	4651	NR120080
366	III	A5B2	4652	NR130080
367	IV	A5B3	4653	NR140080
368	V	A5B4	4654	NR150080
369	VI	A5B5	4655	NR160080
370	VII	A5B6	4656	NR170080
371	VIII	A5B7	4657	NR180080
372	IX	A5B8	4658	NR190080
373	X	A5B9	4659	NR200080
374	A	A5C1	4661	GA020080
375	B	A5C2	4662	GB020080
376	Γ	A5C3	4663	GG020080
377	Δ	A5C4	4664	GD020080
378	E	A5C5	4665	GE020080
379	Z	A5C6	4666	GZ020080
380	H	A5C7	4667	GE320080
381	Θ	A5C8	4668	GT620080
382	I	A5C9	4669	GI020080
383	K	A5CA	466A	GK020080
384	Λ	A5CB	466B	GL020080
385	M	A5CC	466C	GM020080

Table 20 (Page 8 of 19). Non-Hangeul/Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
386	N	A5CD	466D	GN020080
387	Ξ	A5CE	466E	GX020080
388	O	A5CF	466F	GO020080
389	Π	A5D0	4670	GP020080
390	P	A5D1	4671	GR020080
391	Σ	A5D2	4672	GS020080
392	T	A5D3	4673	GT020080
393	Υ	A5D4	4674	GU020080
394	Φ	A5D5	4675	GF020080
395	X	A5D6	4676	GH020080
396	Ψ	A5D7	4677	GP620080
397	Ω	A5D8	4678	GO320080
398	α	A5E1	4681	GA010080
399	β	A5E2	4682	GB010080
400	γ	A5E3	4683	GG010080
401	δ	A5E4	4684	GD010080
402	ε	A5E5	4685	GE010080
403	ξ	A5E6	4686	GZ010080
404	η	A5E7	4687	GE310080
405	θ	A5E8	4688	GT610082
406	ι	A5E9	4689	GI010080
407	κ	A5EA	468A	GK010080
408	λ	A5EB	468B	GL010080
409	μ	A5EC	468C	GM010080
410	ν	A5ED	468D	GN010080
411	ξ	A5EE	468E	GX010080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
412	ο	A5EF	468F	GO010080
413	π	A5F0	4690	GP010080
414	ρ	A5F1	4691	GR010080
415	σ	A5F2	4692	GS010080
416	τ	A5F3	4693	GT010080
417	υ	A5F4	4694	GU010080
418	φ	A5F5	4695	GF010080
419	χ	A5F6	4696	GH010080
420	ψ	A5F7	4697	GP610080
421	ω	A5F8	4698	GO310080
422	—	A6A1	4741	SF100080
423		A6A2	4742	SF110080
424	┌	A6A3	4743	SF010080
425	┐	A6A4	4744	SF030080
426	└	A6A5	4745	SF040080
427	┘	A6A6	4746	SF020080
428	┌	A6A7	4747	SF080080
429	┐	A6A8	4748	SF060080
430	└	A6A9	4749	SF090080
431	┘	A6AA	474A	SF070080
432	+	A6AB	474B	SF050080
433	—	A6AC	474C	SF100082
434		A6AD	474D	SF110082
435	┌	A6AE	474E	SF010082
436	┐	A6AF	474F	SF030082
437	└	A6B0	4750	SF040082

Line Number	Graphic	PC Code	Host Code	GCGID
438	┘	A6B1	4751	SF020082
439	┌	A6B2	4752	SF080082
440	┐	A6B3	4753	SF060082
441	└	A6B4	4754	SF090082
442	┘	A6B5	4755	SF070082
443	+	A6B6	4756	SF050082
444	┌	A6B7	4757	SF080083
445	┐	A6B8	4758	SF060083
446	└	A6B9	4759	SF090083
447	┘	A6BA	475A	SF070083
448	+	A6BB	475B	SF050083
449	┌	A6BC	475C	SF080084
450	┐	A6BD	475D	SF060084
451	└	A6BE	475E	SF090084
452	┘	A6BF	475F	SF070084
453	+	A6C0	4760	SF050084
454	┌	A6C1	4761	F1290080
455	┐	A6C2	4762	F12A0080
456	└	A6C3	4763	F12B0080
457	┘	A6C4	4764	F12C0080
458	┘	A6C5	4765	F12D0080
459	┘	A6C6	4766	F12E0080
460	┌	A6C7	4767	F12F0080
461	┐	A6C8	4768	F12G0080
462	└	A6C9	4769	F12H0080
463	┘	A6CA	476A	F12I0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
464	ㅏ	A6CB	476B	F12J0080
465	ㅑ	A6CC	476C	F12K0080
466	ㅓ	A6CD	476D	F12L0080
467	ㅕ	A6CE	476E	F12M0080
468	ㅗ	A6CF	476F	F12N0080
469	ㅛ	A6D0	4770	F12O0080
470	ㅜ	A6D1	4771	F12P0080
471	ㅠ	A6D2	4772	F12Q0080
472	ㅡ	A6D3	4773	F12R0080
473	ㅝ	A6D4	4774	F12S0080
474	ㅞ	A6D5	4775	F12T0080
475	ㅟ	A6D6	4776	F12U0080
476	ㅠ	A6D7	4777	F12V0080
477	ㅡ	A6D8	4778	F12W0080
478	ㅢ	A6D9	4779	F12X0080
479	ㅣ	A6DA	477A	F12Y0080
480	ㅤ	A6DB	477B	F12Z0080
481	ㅥ	A6DC	477C	F1300080
482	ㅦ	A6DD	477D	F1310080
483	ㅧ	A6DE	477E	F1320080
484	ㅨ	A6DF	477F	F1330080
485	ㅩ	A6E0	4780	F1340080
486	ㅪ	A6E1	4781	F1350080
487	ㅫ	A6E2	4782	F1360080
488	ㅬ	A6E3	4783	F1370080
489	ㅭ	A6E4	4784	F1380080

Line Number	Graphic	PC Code	Host Code	GCGID
490	ㅮ	A7A1	4841	F16P0080
491	ㅯ	A7A2	416D	F06L0080
492	ㅰ	A7A3	416E	F06M0080
493	ㅱ	A7A4	416F	SM160080
494	ㅲ	A7A5	4842	F16Q0080
495	ㅳ	A7A6	4170	SS870080
496	ㅴ	A7A7	4843	F16R0080
497	ㅵ	A7A8	4844	F16S0080
498	ㅶ	A7A9	4845	F16T0080
499	ㅷ	A7AA	4846	F16U0080
500	ㅸ	A7AB	4847	F16V0080
501	ㅹ	A7AC	4848	F16W0080
502	ㅺ	A7AD	4849	F16X0080
503	ㅻ	A7AE	4171	SS810080
504	ㅼ	A7AF	4172	SS820080
505	ㅽ	A7B0	4173	SS830080
506	ㅾ	A7B1	484A	F16Y0080
507	ㅿ	A7B2	484B	F16Z0080
508	ㅿ	A7B3	484C	SS840080
509	ㅿ	A7B4	484D	F1710080
510	ㅿ	A7B5	484E	F1720080
511	ㅿ	A7B6	484F	F1730080
512	ㅿ	A7B7	4174	SS850080
513	ㅿ	A7B8	4175	SS860080
514	ㅿ	A7B9	4850	F1740080
515	ㅿ	A7BA	4851	F1750080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
516	ka	A7BB	4852	F1760080
517	dB	A7BC	4853	F1770080
518	ks	A7BD	4854	F1780080
519	ks	A7BE	4855	F1790080
520	ps	A7BF	4856	F17A0080
521	ns	A7C0	4857	F17B0080
522	us	A7C1	4858	F17C0080
523	ms	A7C2	4859	F17D0080
524	pV	A7C3	485A	F17E0080
525	nV	A7C4	485B	F17F0080
526	uV	A7C5	485C	F17G0080
527	mV	A7C6	485D	F17H0080
528	kV	A7C7	485E	F17I0080
529	MV	A7C8	485F	F17J0080
530	PA	A7C9	4860	F17K0080
531	nA	A7CA	4861	F17L0080
532	uA	A7CB	4862	F17M0080
533	mA	A7CC	4863	F17N0080
534	KA	A7CD	4864	F17O0080
535	PW	A7CE	4865	F17P0080
536	nW	A7CF	4866	F17Q0080
537	uW	A7D0	4867	F17R0080
538	mW	A7D1	4868	F17S0080
539	kW	A7D2	4869	F17T0080
540	MW	A7D3	486A	F17U0080
541	Hz	A7D4	486B	F17V0080

Line Number	Graphic	PC Code	Host Code	GCGID
542	KHz	A7D5	486C	F17W0080
543	MHz	A7D6	486D	F17X0080
544	GHz	A7D7	486E	F17Y0080
545	THz	A7D8	486F	F17Z0080
546	Ω	A7D9	4870	SM180080
547	kΩ	A7DA	4871	F1810080
548	MΩ	A7DB	4872	F1820080
549	PF	A7DC	4873	F1830080
550	nF	A7DD	4874	F1840080
551	uF	A7DE	4875	F1850080
552	mol	A7DF	4876	F1860080
553	cd	A7E0	4877	F1870080
554	rad	A7E1	4878	F1880080
555	deg	A7E2	4879	F1890080
556	deg	A7E3	487A	F18A0080
557	sr	A7E4	487B	F18B0080
558	Pa	A7E5	487C	F18C0080
559	kPa	A7E6	487D	F18D0080
560	MPa	A7E7	487E	F18E0080
561	GPa	A7E8	487F	F18F0080
562	Wb	A7E9	4880	F18G0080
563	Im	A7EA	4881	F18H0080
564	lx	A7EB	4882	F18I0080
565	Bq	A7EC	4883	F18J0080
566	Gy	A7ED	4884	F18K0080
567	Sv	A7EE	4885	F18L0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 20 (Page 12 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
568	☐	A7EF	4886	F18M0080
569	Ⓐ	A8A1	4B41	LA520080
570	Ⓓ	A8A2	4B42	LD620080
571	Ⓐ	A8A3	4B43	SM210080
572	Ⓗ	A8A4	4B44	LH620080
573	Ⓘ	A8A6	4B46	LI520080
574	Ⓕ	A8A8	4B48	LL640080
575	Ⓖ	A8A9	4B49	LL620080
576	∅	A8AA	4B4A	LO620080
577	Ⓞ	A8AB	4B4B	LO520080
578	Ⓚ	A8AC	4B4C	SM200080
579	Ⓓ	A8AD	4B4D	LT640080
580	Ⓗ	A8AE	4B4E	LT620080
581	Ⓟ	A8AF	4B4F	LN620080
582	Ⓛ	A8B1	4B51	F1N50080
583	Ⓜ	A8B2	4B52	F1N60080
584	Ⓝ	A8B3	4B53	F1N70080
585	Ⓞ	A8B4	4B54	F1N80080
586	Ⓟ	A8B5	4B55	F1N90080
587	Ⓠ	A8B6	4B56	F1NA0080
588	Ⓡ	A8B7	4B57	F1NB0080
589	Ⓢ	A8B8	4B58	F1NC0080
590	Ⓣ	A8B9	4B59	F1ND0080
591	Ⓤ	A8BA	4B5A	F1NE0080
592	Ⓥ	A8BB	4B5B	F1NF0080
593	Ⓦ	A8BC	4B5C	F1NG0080

Table 20 (Page 12 of 19). Non-Hangeul/Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
594	Ⓧ	A8BD	4B5D	F1NH0080
595	Ⓨ	A8BE	4B5E	F1NI0080
596	Ⓩ	A8BF	4B5F	F1NJ0080
597	Ⓚ	A8C0	4B60	F1NK0080
598	Ⓛ	A8C1	4B61	F1NL0080
599	Ⓜ	A8C2	4B62	F1NM0080
600	Ⓝ	A8C3	4B63	F1NN0080
601	Ⓞ	A8C4	4B64	F1NO0080
602	Ⓟ	A8C5	4B65	F1NP0080
603	Ⓠ	A8C6	4B66	F1NQ0080
604	Ⓡ	A8C7	4B67	F1NR0080
605	Ⓢ	A8C8	4B68	F1NS0080
606	Ⓣ	A8C9	4B69	F1NT0080
607	Ⓤ	A8CA	4B6A	F1NU0080
608	Ⓥ	A8CB	4B6B	F1NV0080
609	Ⓦ	A8CC	4B6C	F1NW0080
610	Ⓧ	A8CD	4B6D	F1NX0080
611	Ⓨ	A8CE	4B6E	F1NY0080
612	Ⓩ	A8CF	4B6F	F1NZ0080
613	Ⓚ	A8D0	4B70	F1O00080
614	Ⓛ	A8D1	4B71	F1O10080
615	Ⓜ	A8D2	4B72	F1O20080
616	Ⓝ	A8D3	4B73	F1O30080
617	Ⓞ	A8D4	4B74	F1O40080
618	Ⓟ	A8D5	4B75	F1O50080
619	Ⓠ	A8D6	4B76	F1O60080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
620	㉞	A8D7	4B77	F1O70080
621	㉟	A8D8	4B78	F1O80080
622	㊱	A8D9	4B79	F1O90080
623	㊲	A8DA	4B7A	F1OA0080
624	㊳	A8DB	4B7B	F1OB0080
625	㊴	A8DC	4B7C	F1OC0080
626	㊵	A8DD	4B7D	F1OD0080
627	㊶	A8DE	4B7E	F1OE0080
628	㊷	A8DF	4B7F	F1OF0080
629	㊸	A8E0	4B80	F1OG0080
630	㊹	A8E1	4B81	F1OH0080
631	㊺	A8E2	4B82	F1OI0080
632	㊻	A8E3	4B83	F1OJ0080
633	㊼	A8E4	4B84	F1OK0080
634	㊽	A8E5	4B85	F1OL0080
635	㊾	A8E6	4B86	F1OM0080
636	㊿	A8E7	4B87	NO010080
637	①	A8E8	4B88	NO020080
638	②	A8E9	4B89	NO030080
639	③	A8EA	4B8A	NO040080
640	④	A8EB	4B8B	NO050080
641	⑤	A8EC	4B8C	NO060080
642	⑥	A8ED	4B8D	NO070080
643	⑦	A8EE	4B8E	NO080080
644	⑧	A8EF	4B8F	NO090080
645	⑨	A8F0	4B90	NO100080

Line Number	Graphic	PC Code	Host Code	GCGID
646	⑩	A8F1	4B91	F1OX0080
647	⑪	A8F2	4B92	F1OY0080
648	⑫	A8F3	4B93	F1OZ0080
649	⑬	A8F4	4B94	F1P00080
650	⑭	A8F5	4B95	F1P10080
651	1/2	A8F6	4B96	NF010080
652	1/3	A8F7	4B97	F1P30080
653	2/3	A8F8	4B98	F1P40080
654	1/4	A8F9	4B99	NF040080
655	3/4	A8FA	4B9A	NF050080
656	1/8	A8FB	4B9B	NF180080
657	3/8	A8FC	4B9C	NF190080
658	5/8	A8FD	4B9D	NF200080
659	7/8	A8FE	4B9E	NF210080
660	œ	A9A1	4BA0	LA510080
661	đ	A9A2	4BA1	LD610080
662	ø	A9A3	4BA2	LD630080
663	ħ	A9A4	4BA3	LH610080
664	ı	A9A5	4BA4	LI610080
665	ij	A9A6	4BA5	LI510080
666	κ	A9A7	4BA6	F1PI0080
667	ı·	A9A8	4BA7	LL630080
668	ı̇	A9A9	4BA8	LL610080
669	ø	A9AA	4BA9	LO610080
670	œ	A9AB	4BAA	LO510080
671	β	A9AC	4BAB	LS610080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
672	ㄷ	A9AD	4BAC	LT630080
673	ㅌ	A9AE	4BAD	LT610080
674	ㄱ	A9AF	4BAE	LN610080
675	ㄴ	A9B0	4BAF	F1PR0080
676	ㄷ	A9B1	4BB0	F1PS0080
677	ㄹ	A9B2	4BB1	F1PT0080
678	ㅌ	A9B3	4BB2	F1PU0080
679	ㄷ	A9B4	4BB3	F1PV0080
680	ㅌ	A9B5	4BB4	F1PW0080
681	ㅌ	A9B6	4BB5	F1PX0080
682	ㅌ	A9B7	4BB6	F1PY0080
683	ㅌ	A9B8	4BB7	F1PZ0080
684	ㅌ	A9B9	4BB8	F1Q00080
685	ㅌ	A9BA	4BB9	F1Q10080
686	ㅌ	A9BB	4BBA	F1Q20080
687	ㅌ	A9BC	4BBB	F1Q30080
688	ㅌ	A9BD	4BBC	F1Q40080
689	ㅌ	A9BE	4BBD	F1Q50080
690	ㅌ	A9BF	4BBE	F1Q60080
691	ㅌ	A9C0	4BBF	F1Q70080
692	ㅌ	A9C1	4BC0	F1Q80080
693	ㅌ	A9C2	4BC1	F1Q90080
694	ㅌ	A9C3	4BC2	F1QA0080
695	ㅌ	A9C4	4BC3	F1QB0080
696	ㅌ	A9C5	4BC4	F1QC0080
697	ㅌ	A9C6	4BC5	F1QD0080

Line Number	Graphic	PC Code	Host Code	GCGID
698	ㅌ	A9C7	4BC6	F1QE0080
699	ㅌ	A9C8	4BC7	F1QF0080
700	ㅌ	A9C9	4BC8	F1QG0080
701	ㅌ	A9CA	4BC9	F1QH0080
702	ㅌ	A9CB	4BCA	F1QI0080
703	ㅌ	A9CC	4BCB	F1QJ0080
704	ㅌ	A9CD	4BCC	F1QK0080
705	ㅌ	A9CE	4BCD	F1QL0080
706	ㅌ	A9CF	4BCE	F1QM0080
707	ㅌ	A9D0	4BCF	F1QN0080
708	ㅌ	A9D1	4BD0	F1QO0080
709	ㅌ	A9D2	4BD1	F1QP0080
710	ㅌ	A9D3	4BD2	F1QQ0080
711	ㅌ	A9D4	4BD3	F1QR0080
712	ㅌ	A9D5	4BD4	F1QS0080
713	ㅌ	A9D6	4BD5	F1QT0080
714	ㅌ	A9D7	4BD6	F1QU0080
715	ㅌ	A9D8	4BD7	F1QV0080
716	ㅌ	A9D9	4BD8	F1QW0080
717	ㅌ	A9DA	4BD9	F1QX0080
718	ㅌ	A9DB	4BDA	F1QY0080
719	ㅌ	A9DC	4BDB	F1QZ0080
720	ㅌ	A9DD	4BDC	F1R00080
721	ㅌ	A9DE	4BDD	F1R10080
722	ㅌ	A9DF	4BDE	F1R20080
723	ㅌ	A9E0	4BDF	F1R30080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
724	(U)	A9E1	4BE0	F1R40080
725	(V)	A9E2	4BE1	F1R50080
726	(W)	A9E3	4BE2	F1R60080
727	(X)	A9E4	4BE3	F1R70080
728	(Y)	A9E5	4BE4	F1R80080
729	(Z)	A9E6	4BE5	F1R90080
730	(1)	A9E7	4BE6	NO010081
731	(2)	A9E8	4BE7	NO020081
732	(3)	A9E9	4BE8	NO030081
733	(4)	A9EA	4BE9	NO040081
734	(5)	A9EB	4BEA	NO050081
735	(6)	A9EC	4BEB	NO060081
736	(7)	A9ED	4BEC	NO070081
737	(8)	A9EE	4BED	NO080081
738	(9)	A9EF	4BEE	NO090081
739	(10)	A9F0	4BEF	NO100081
740	(11)	A9F1	4BF0	F1RK0080
741	(12)	A9F2	4BF1	F1RL0080
742	(13)	A9F3	4BF2	F1RM0080
743	(14)	A9F4	4BF3	F1RN0080
744	(15)	A9F5	4BF4	F1RO0080
745	¹	A9F6	4BF5	ND011080
746	²	A9F7	4BF6	ND021080
747	³	A9F8	4BF7	ND031080
748	⁴	A9F9	4BF8	ND041080
749	ⁿ	A9FA	4BF9	LN011080

Line Number	Graphic	PC Code	Host Code	GCGID
750	₁	A9FB	4BFA	ND012080
751	₂	A9FC	4BFB	ND022080
752	₃	A9FD	4BFC	ND032080
753	₄	A9FE	4BFD	ND042080
754	あ	AAA1	4441	RA010080
755	ぁ	AAA2	4442	RA000080
756	い	AAA3	4443	RI010080
757	ぃ	AAA4	4444	RI000080
758	う	AAA5	4445	RU010080
759	ぅ	AAA6	4446	RU000080
760	え	AAA7	4447	RE010080
761	ぇ	AAA8	4448	RE000080
762	お	AAA9	4449	RO010080
763	ぉ	AAAA	444A	RO000080
764	か	AAAB	444B	RK100080
765	が	AAAC	444C	RG100080
766	き	AAAD	444D	RK200080
767	ぎ	AAAE	444E	RG200080
768	く	AAAF	444F	RK300080
769	ぐ	AAB0	4450	RG300080
770	け	AAB1	4451	RK400080
771	げ	AAB2	4452	RG400080
772	こ	AAB3	4453	RK500080
773	ご	AAB4	4454	RG500080
774	さ	AAB5	4455	RS100080
775	ざ	AAB6	4456	RZ100080
776	し	AAB7	4457	RS200080
777	じ	AAB8	4458	RZ200080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
778	す	AAB9	4459	RS300080
779	ず	AABA	445A	RZ300080
780	せ	AABB	445B	RS400080
781	ぜ	AABC	445C	RZ400080
782	そ	AABD	445D	RS500080
783	ぞ	AABE	445E	RZ500080
784	た	AABF	445F	RT100080
785	だ	AAC0	4460	RD100080
786	ち	AAC1	4461	RT200080
787	ぢ	AAC2	4462	RD200080
788	っ	AAC3	4463	RT310080
789	っ	AAC4	4464	RT300080
790	づ	AAC5	4465	RD300080
791	て	AAC6	4466	RT400080
792	で	AAC7	4467	RD400080
793	と	AAC8	4468	RT500080
794	ど	AAC9	4469	RD500080
795	な	AACA	446A	RN100080
796	に	AACB	446B	RN200080
797	ぬ	AACC	446C	RN300080
798	ね	AACD	446D	RN400080
799	の	AACE	446E	RN500080
800	は	AACF	446F	RH100080
801	ば	AAD0	4470	RB100080
802	ぱ	AAD1	4471	RP100080
803	ひ	AAD2	4472	RH200080
804	び	AAD3	4473	RB200080
805	ぴ	AAD4	4474	RP200080

Line Number	Graphic	PC Code	Host Code	GCGID
806	ふ	AAD5	4475	RH300080
807	ぶ	AAD6	4476	RB300080
808	ぷ	AAD7	4477	RP300080
809	へ	AAD8	4478	RH400080
810	べ	AAD9	4479	RB400080
811	ぺ	AADA	447A	RP400080
812	ほ	AADB	447B	RH500080
813	ぼ	AADC	447C	RB500080
814	ぽ	AADD	447D	RP500080
815	ま	AADE	447E	RM100080
816	み	AADF	447F	RM200080
817	む	AAE0	4480	RM300080
818	め	AAE1	4481	RM400080
819	も	AAE2	4482	RM500080
820	ゃ	AAE3	4483	RY110080
821	や	AAE4	4484	RY100080
822	ゅ	AAE5	4485	RY310080
823	ゆ	AAE6	4486	RY300080
824	よ	AAE7	4487	RY510080
825	よ	AAE8	4488	RY500080
826	ら	AAE9	4489	RR100080
827	り	AAEA	448A	RR200080
828	る	AAEB	448B	RR300080
829	れ	AAEC	448C	RR400080
830	ろ	AAED	448D	RR500080
831	わ	AAEE	448E	RW110080
832	わ	AAEF	448F	RW100080
833	ゐ	AAF0	4490	RW200080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
834	ゑ	AAF1	4491	RW400080
835	を	AAF2	4492	RW500080
836	ん	AAF3	4493	RN000080
837	ア	ABA1	4541	JA010080
838	ア	ABA2	4542	JA000080
839	イ	ABA3	4543	JI010080
840	イ	ABA4	4544	JI000080
841	ウ	ABA5	4545	JU010080
842	ウ	ABA6	4546	JU000080
843	エ	ABA7	4547	JE010080
844	エ	ABA8	4548	JE000080
845	オ	ABA9	4549	JO010080
846	オ	ABAA	454A	JO000080
847	カ	ABAB	454B	JK100080
848	ガ	ABAC	454C	JG100080
849	キ	ABAD	454D	JK200080
850	ギ	ABAE	454E	JG200080
851	ク	ABAF	454F	JK300080
852	グ	ABB0	4550	JG300080
853	ケ	ABB1	4551	JK400080
854	ゲ	ABB2	4552	JG400080
855	コ	ABB3	4553	JK500080
856	ゴ	ABB4	4554	JG500080
857	サ	ABB5	4555	JS100080
858	ザ	ABB6	4556	JZ100080
859	シ	ABB7	4557	JS200080

Line Number	Graphic	PC Code	Host Code	GCGID
860	ジ	ABB8	4558	JZ200080
861	ス	ABB9	4559	JS300080
862	ズ	ABBA	455A	JZ300080
863	セ	ABBB	455B	JS400080
864	ゼ	ABBC	455C	JZ400080
865	ソ	ABBD	455D	JS500080
866	ゾ	ABBE	455E	JZ500080
867	タ	ABBF	455F	JT100080
868	ダ	ABC0	4560	JD100080
869	チ	ABC1	4561	JT200080
870	ヂ	ABC2	4562	JD200080
871	ッ	ABC3	4563	JT310080
872	ツ	ABC4	4564	JT300080
873	ヅ	ABC5	4565	JD300080
874	テ	ABC6	4566	JT400080
875	デ	ABC7	4567	JD400080
876	ト	ABC8	4568	JT500080
877	ド	ABC9	4569	JD500080
878	ナ	ABCA	456A	JN100080
879	ニ	ABCB	456B	JN200080
880	ヌ	ABCC	456C	JN300080
881	ネ	ABCD	456D	JN400080
882	ノ	ABCE	456E	JN500080
883	ハ	ABCF	456F	JH100080
884	バ	ABD0	4570	JB100080
885	パ	ABD1	4571	JP100080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
886	ヒ	ABD2	4572	JH200080
887	ビ	ABD3	4573	JB200080
888	ピ	ABD4	4574	JP200080
889	フ	ABD5	4575	JH300080
890	ブ	ABD6	4576	JB300080
891	プ	ABD7	4577	JP300080
892	へ	ABD8	4578	JH400080
893	べ	ABD9	4579	JB400080
894	ペ	ABDA	457A	JP400080
895	ホ	ABDB	457B	JH500080
896	ボ	ABDC	457C	JB500080
897	ポ	ABDD	457D	JP500080
898	マ	ABDE	457E	JM100080
899	ミ	ABDF	457F	JM200080
900	ム	ABE0	4580	JM300080
901	メ	ABE1	4581	JM400080
902	モ	ABE2	4582	JM500080
903	ヤ	ABE3	4583	JY110080
904	ヤ	ABE4	4584	JY100080
905	ユ	ABE5	4585	JY310080
906	ユ	ABE6	4586	JY300080
907	ヨ	ABE7	4587	JY510080
908	ヨ	ABE8	4588	JY500080
909	ラ	ABE9	4589	JR100080
910	リ	ABEA	458A	JR200080
911	ル	ABEB	458B	JR300080

Line Number	Graphic	PC Code	Host Code	GCGID
912	レ	ABEC	458C	JR400080
913	ロ	ABED	458D	JR500080
914	ワ	ABEE	458E	JW110080
915	ワ	ABEF	458F	JW100080
916	キ	ABF0	4590	JW200080
917	キ	ABF1	4591	JW400080
918	ク	ABF2	4592	JW500080
919	ン	ABF3	4593	JN000080
920	ヴ	ABF4	4594	JV000080
921	カ	ABF5	4595	JK110080
922	ケ	ABF6	4596	JK410080
923	A	ACA1	4A41	KA020080
924	Б	ACA2	4A42	KB020080
925	B	ACA3	4A43	KV020080
926	Г	ACA4	4A44	KG020080
927	Д	ACA5	4A45	KD020080
928	E	ACA6	4A46	KE020080
929	È	ACA7	4A47	KE180080
930	Ж	ACA8	4A48	KZ220080
931	З	ACA9	4A49	KZ020080
932	И	ACAA	4A4A	KI020080
933	Й	ACAB	4A4B	KJ120080
934	K	ACAC	4A4C	KK020080
935	Л	ACAD	4A4D	KL020080
936	M	ACAE	4A4E	KM020080
937	H	ACAF	4A4F	KN020080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
938	О	ACB0	4A50	KO020080
939	П	ACB1	4A51	KP020080
940	Р	ACB2	4A52	KR020080
941	С	ACB3	4A53	KS020080
942	Т	ACB4	4A54	KT020080
943	У	ACB5	4A55	KU020080
944	Ф	ACB6	4A56	KF020080
945	Х	ACB7	4A57	KH020080
946	Ц	ACB8	4A58	KC020080
947	Ч	ACB9	4A59	KC220080
948	Ш	ACBA	4A5A	KS220080
949	Щ	ACBB	4A5B	KS160080
950	Ъ	ACBC	4A5C	KU220080
951	Ы	ACBD	4A5D	KY020080
952	Ь	ACBE	4A5E	KX120080
953	Э	ACBF	4A5F	KE140080
954	Ю	ACC0	4A60	KU160080
955	Я	ACC1	4A61	KA160080
956	а	ACD1	4A62	KA010080
957	б	ACD2	4A63	KB010080
958	в	ACD3	4A64	KV010080
959	г	ACD4	4A65	KG010080
960	д	ACD5	4A66	KD010080
961	е	ACD6	4A67	KE010080
962	ё	ACD7	4A68	KE170080
963	ж	ACD8	4A69	KZ210080

Line Number	Graphic	PC Code	Host Code	GCGID
964	э	ACD9	4A6A	KZ010080
965	и	ACDA	4A6B	KI010080
966	й	ACDB	4A6C	KJ110080
967	к	ACDC	4A6D	KK010080
968	л	ACDD	4A6E	KL010080
969	м	ACDE	4A6F	KM010080
970	н	ACDF	4A70	KN010080
971	о	ACE0	4A71	KO010080
972	п	ACE1	4A72	KP010080
973	р	ACE2	4A73	KR010080
974	с	ACE3	4A74	KS010080
975	т	ACE4	4A75	KT010080
976	у	ACE5	4A76	KU010080
977	ф	ACE6	4A77	KF010080
978	х	ACE7	4A78	KH010080
979	ц	ACE8	4A79	KC010080
980	ч	ACE9	4A7A	KC210080
981	ш	ACEA	4A7B	KS210080
982	щ	ACEB	4A7C	KS150080
983	ъ	ACEC	4A7D	KU210080
984	ы	ACED	4A7E	KY010080
985	ь	ACEE	4A7F	KX110080
986	э	ACEF	4A80	KE130080
987	ю	ACF0	4A81	KU150080
988	я	ACF1	4A82	KA150080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

9.3 Hangeul Set

Table 21 (Page 1 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1	꺀	8141	8863	FAOZ0080
2	꺁	8142	8864	FAP00080*
3	꺂	8143	8866	FAP20080*
4	꺃	8144	8867	FAP30080*
5	꺄	8145	886C	FAP80080
6	꺅	8146	886D	FAP90080*
7	꺆	8147	886E	FAPA0080*
8	꺇	8148	886F	FAPB0080*
9	꺈	8149	8870	FAPC0080*
10	꺉	814A	887A	FAPM0080*
11	꺊	814B	8883	FAPV0080*
12	꺋	814C	8884	FAPW0080*
13	꺌	814D	8886	FAPY0080*
14	꺍	814E	8887	FAPZ0080*
15	꺎	814F	8888	FAQ00080*
16	꺏	8150	888A	FAQ20080*
17	꺐	8151	888B	FAQ30080*
18	꺑	8152	888C	FAQ40080*
19	꺒	8153	888D	FAQ50080*
20	꺓	8154	888E	FAQ60080*
21	꺔	8155	888F	FAQ70080*
22	꺕	8156	8890	FAQ80080*
23	꺖	8157	8894	FAQC0080*
24	꺗	8158	8898	FAQG0080*
25	꺘	8159	8899	FAQH0080*

Table 21 (Page 1 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
26	꺙	815A	889A	FAQI0080*
27	꺚	8161	889B	FAQJ0080*
28	꺛	8162	889C	FAQK0080*
29	꺜	8163	889D	FAQL0080*
30	꺝	8164	88A3	FAQR0080*
31	꺞	8165	88A4	FAQS0080*
32	꺟	8166	88A6	FAQU0080*
33	꺠	8167	88A7	FAQV0080*
34	꺡	8168	88A8	FAQW0080*
35	꺢	8169	88AA	FAQY0080*
36	꺣	816A	88AB	FAQZ0080*
37	꺤	816B	88AC	FAR00080*
38	꺥	816C	88AD	FAR10080*
39	꺦	816D	88AE	FAR20080*
40	꺧	816E	88AF	FAR30080*
41	꺨	816F	88B0	FAR40080*
42	꺩	8170	88B1	FAR50080*
43	꺪	8171	88B3	FAR70080*
44	꺫	8172	88B4	FAR80080*
45	꺬	8173	88B6	FARA0080*
46	꺭	8174	88B8	FARC0080*
47	꺮	8175	88B9	FARD0080*
48	꺯	8176	88BA	FARE0080*
49	꺰	8177	88BB	FARF0080*
50	꺱	8178	88BC	FARG0080*
51	꺲	8179	88BD	FARH0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 2 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
52	꺀	817A	88C2	FARM0080*
53	꺁	8181	88C3	FARN0080*
54	꺂	8182	88C4	FARO0080*
55	꺃	8183	88C6	FARQ0080*
56	꺄	8184	88C7	FARR0080*
57	꺅	8185	88C8	FARS0080*
58	꺆	8186	88CA	FARU0080*
59	꺇	8187	88CB	FARV0080*
60	꺈	8188	88CC	FARW0080*
61	꺉	8189	88CD	FARX0080*
62	꺊	818A	88CE	FARY0080*
63	꺋	818B	88CF	FARZ0080*
64	꺌	818C	88D0	FAS00080*
65	꺍	818D	88D1	FAS10080*
66	꺎	818E	88D3	FAS30080*
67	꺏	818F	88D4	FAS40080*
68	꺐	8190	88D5	FAS50080*
69	꺑	8191	88D6	FAS60080*
70	꺒	8192	88D7	FAS70080*
71	꺓	8193	88D8	FAS80080*
72	꺔	8194	88D9	FAS90080*
73	꺕	8195	88DA	FASA0080*
74	꺖	8196	88DB	FASB0080*
75	꺗	8197	88DC	FASC0080*
76	꺘	8198	88DD	FASD0080*
77	꺙	8199	88E3	FASJ0080*

Table 21 (Page 2 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
78	꺚	819A	88E4	FASK0080*
79	꺛	819B	88E6	FASM0080*
80	꺜	819C	88E7	FASN0080*
81	꺝	819D	88EA	FASQ0080
82	꺞	819E	88EC	FASS0080*
83	꺟	819F	88ED	FAST0080*
84	꺠	81A0	88EE	FASU0080*
85	꺡	81A1	88EF	FASV0080*
86	꺢	81A2	88F0	FASW0080*
87	꺣	81A3	88F4	FAT00080*
88	꺤	81A4	88F9	FAT50080
89	꺥	81A5	88FA	FAT60080*
90	꺦	81A6	8942	FATE0080*
91	꺧	81A7	8943	FATF0080*
92	꺨	81A8	8944	FATG0080*
93	꺩	81A9	8946	FATI0080*
94	꺪	81AA	8947	FATJ0080*
95	꺫	81AB	8948	FATK0080
96	꺬	81AC	894A	FATM0080*
97	꺭	81AD	894B	FATN0080*
98	꺮	81AE	894C	FATO0080*
99	꺯	81AF	894D	FATP0080*
100	꺰	81B0	894E	FATQ0080*
101	꺱	81B1	894F	FATR0080*
102	꺲	81B2	8950	FATS0080*
103	꺳	81B3	8954	FATW0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
104	곶	81B4	8958	FAU00080*
105	곷	81B5	8959	FAU10080*
106	곸	81B6	895A	FAU20080*
107	곹	81B7	895B	FAU30080*
108	곺	81B8	895C	FAU40080*
109	곻	81B9	895D	FAU50080*
110	과	81BA	8964	FAUC0080*
111	곽	81BB	8966	FAUE0080*
112	곾	81BC	8967	FAUF0080*
113	곿	81BD	896A	FAUI0080*
114	관	81BE	896B	FAUJ0080*
115	괁	81BF	896C	FAUK0080*
116	괂	81C0	896D	FAUL0080*
117	괃	81C1	896E	FAUM0080*
118	괄	81C2	896F	FAUN0080*
119	괅	81C3	8970	FAUO0080*
120	괆	81C4	8974	FAUS0080*
121	괇	81C5	8978	FAUW0080*
122	괈	81C6	8979	FAUX0080*
123	괉	81C7	897A	FAUY0080*
124	괊	81C8	897C	FAV00080*
125	괋	81C9	897D	FAV10080*
126	괌	81CA	8982	FAV60080*
127	괍	81CB	8983	FAV70080*
128	괎	81CC	8984	FAV80080*
129	괏	81CD	8986	FAVA0080*

Table 21 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
130	괐	81CE	8987	FAVB0080*
131	광	81CF	8988	FAVC0080*
132	괒	81D0	898A	FAVE0080*
133	괓	81D1	898B	FAVF0080*
134	괔	81D2	898C	FAVG0080*
135	괕	81D3	898D	FAVH0080*
136	괖	81D4	898E	FAVI0080*
137	괗	81D5	898F	FAVJ0080*
138	괘	81D6	8990	FAVK0080*
139	괙	81D7	8991	FAVL0080*
140	괚	81D8	8994	FAVO0080*
141	괛	81D9	8996	FAVQ0080*
142	괜	81DA	8997	FAVR0080*
143	괝	81DB	8998	FAVS0080*
144	괞	81DC	8999	FAVT0080*
145	괟	81DD	899A	FAVU0080*
146	괠	81DE	899B	FAVV0080*
147	괡	81DF	899C	FAVW0080*
148	괢	81E0	899D	FAVX0080*
149	괣	81E1	89A3	FAW30080*
150	괤	81E2	89A4	FAW40080*
151	괥	81E3	89A6	FAW60080*
152	괦	81E4	89A7	FAW70080*
153	괧	81E5	89AA	FAWA0080
154	괨	81E6	89AC	FAWC0080*
155	괩	81E7	89AE	FAWE0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
156	골	81E8	89AF	FAWF0080*
157	꺠	81E9	89B4	FAWK0080*
158	꺡	81EA	89B6	FAWM0080*
159	꺢	81EB	89B9	FAWP0080*
160	꺣	81EC	89BA	FAWQ0080*
161	꺤	81ED	89BB	FAWR0080*
162	꺥	81EE	89BC	FAWS0080
163	꺦	81EF	89BD	FAWT0080*
164	꺧	81F0	89C3	FAWZ0080*
165	꺨	81F1	89C4	FAX00080*
166	꺩	81F2	89C6	FAX20080*
167	꺪	81F3	89C7	FAX30080*
168	꺫	81F4	89C8	FAX40080*
169	꺬	81F5	89CA	FAX60080*
170	꺭	81F6	89CC	FAX80080*
171	꺮	81F7	89CD	FAX90080*
172	꺯	81F8	89CE	FAXA0080*
173	꺰	81F9	89CF	FAXB0080*
174	꺱	81FA	89D0	FAXC0080*
175	꺲	81FB	89D4	FAXG0080*
176	꺳	81FC	89D6	FAXI0080*
177	꺴	81FD	89D8	FAXK0080*
178	꺵	81FE	89D9	FAXL0080*
179	꺶	8241	89DA	FAXM0080*
180	꺷	8242	89DB	FAXN0080*
181	꺸	8243	89DC	FAXO0080*

Table 21 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
182	꺹	8244	89DD	FAXP0080*
183	꺺	8245	89E2	FAXU0080
184	꺻	8246	89E3	FAXV0080*
185	꺼	8247	89E4	FAXW0080*
186	꺽	8248	89E6	FAXY0080*
187	꺾	8249	89E7	FAXZ0080*
188	꺿	824A	89E8	FAY00080*
189	꺾	824B	89EA	FAY20080*
190	꺿	824C	89EB	FAY30080*
191	꺾	824D	89EC	FAY40080*
192	꺿	824E	89ED	FAY50080*
193	꺿	824F	89EE	FAY60080*
194	꺿	8250	89EF	FAY70080*
195	꺿	8251	89F0	FAY80080*
196	꺾	8252	89F1	FAY90080
197	꺿	8253	89F4	FAYC0080*
198	꺾	8254	89F5	FAYD0080
199	꺾	8255	89F8	FAYG0080*
200	꺾	8256	89F9	FAYH0080*
201	꺾	8257	89FA	FAYI0080*
202	꺾	8258	89FB	FAYJ0080*
203	꺾	8259	89FC	FAYK0080*
204	꺾	825A	89FD	FAYL0080*
205	꺾	8261	8A43	FAYR0080*
206	꺾	8262	8A44	FAYS0080*
207	꺾	8263	8A46	FAYU0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
208	꺠	8264	8A47	FAYV0080*
209	꺡	8265	8A48	FAYW0080*
210	꺢	8266	8A4A	FAYY0080*
211	꺣	8267	8A4B	FAYZ0080*
212	꺤	8268	8A4C	FAZ00080*
213	꺥	8269	8A4D	FAZ10080*
214	꺦	826A	8A4E	FAZ20080*
215	꺧	826B	8A4F	FAZ30080*
216	꺨	826C	8A50	FAZ40080*
217	꺩	826D	8A54	FAZ80080*
218	꺪	826E	8A56	FAZA0080*
219	꺫	826F	8A58	FAZC0080*
220	꺬	8270	8A59	FAZD0080*
221	꺭	8271	8A5A	FAZE0080*
222	꺮	8272	8A5B	FAZF0080*
223	꺯	8273	8A5C	FAZG0080*
224	꺰	8274	8A5D	FAZH0080*
225	꺱	8275	8A62	FAZM0080*
226	꺲	8276	8A63	FAZN0080*
227	꺳	8277	8A64	FAZO0080*
228	꺴	8278	8A66	FAZQ0080*
229	꺵	8279	8A67	FAZR0080*
230	꺶	827A	8A68	FAZS0080*
231	꺷	8281	8A6A	FAZU0080*
232	꺸	8282	8A6B	FAZV0080*
233	꺹	8283	8A6C	FAZW0080*

Table 21 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
234	꺺	8284	8A6D	FAZX0080*
235	꺻	8285	8A6E	FAZY0080*
236	꺼	8286	8A6F	FAZZ0080*
237	꺽	8287	8A70	FB000080*
238	꺾	8288	8A71	FB010080*
239	꺿	8289	8A74	FB040080*
240	꺠	828A	8A76	FB060080*
241	꺡	828B	8A77	FB070080*
242	꺢	828C	8A78	FB080080*
243	꺣	828D	8A79	FB090080*
244	꺤	828E	8A7A	FB0A0080*
245	꺥	828F	8A7B	FB0B0080*
246	꺦	8290	8A7C	FB0C0080*
247	꺧	8291	8A7D	FB0D0080*
248	꺨	8292	8A83	FB0J0080*
249	꺩	8293	8A84	FB0K0080*
250	꺪	8294	8A86	FB0M0080*
251	꺫	8295	8A87	FB0N0080*
252	꺬	8296	8A8C	FB0S0080*
253	꺭	8297	8A8D	FB0T0080*
254	꺮	8298	8A8E	FB0U0080*
255	꺯	8299	8A8F	FB0V0080*
256	꺰	829A	8A94	FB100080*
257	꺱	829B	8A96	FB120080*
258	꺲	829C	8A99	FB150080*
259	꺳	829D	8A9A	FB160080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
260	굴	829E	8A9B	FB170080*
261	굵	829F	8A9C	FB180080*
262	궁	82A0	8A9D	FB190080*
263	귀	82A1	8AA3	FB1F0080*
264	꺠	82A2	8AA4	FB1G0080*
265	꺡	82A3	8AA6	FB1I0080*
266	꺢	82A4	8AA7	FB1J0080*
267	꺣	82A5	8AA8	FB1K0080*
268	꺤	82A6	8AAA	FB1M0080*
269	꺥	82A7	8AAB	FB1N0080*
270	꺦	82A8	8AAC	FB1O0080*
271	꺧	82A9	8AAD	FB1P0080*
272	꺨	82AA	8AAE	FB1Q0080*
273	꺩	82AB	8AAF	FB1R0080*
274	꺪	82AC	8AB0	FB1S0080*
275	꺫	82AD	8AB1	FB1T0080*
276	꺬	82AE	8AB3	FB1V0080*
277	꺭	82AF	8AB4	FB1W0080*
278	꺮	82B0	8AB5	FB1X0080
279	꺯	82B1	8AB8	FB200080*
280	꺰	82B2	8AB9	FB210080*
281	꺱	82B3	8ABA	FB220080*
282	꺲	82B4	8ABB	FB230080*
283	꺳	82B5	8ABC	FB240080*
284	꺴	82B6	8ABD	FB250080*
285	꺵	82B7	8AC2	FB2A0080*

Table 21 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
286	꺶	82B8	8AC3	FB2B0080*
287	꺷	82B9	8AC4	FB2C0080*
288	꺸	82BA	8AC5	FB2D0080*
289	꺹	82BB	8AC6	FB2E0080*
290	꺺	82BC	8AC7	FB2F0080*
291	꺻	82BD	8AC8	FB2G0080*
292	꺼	82BE	8AC9	FB2H0080*
293	꺽	82BF	8ACA	FB2I0080*
294	꺾	82C0	8ACB	FB2J0080*
295	꺿	82C1	8ACC	FB2K0080*
296	꺾	82C2	8ACD	FB2L0080*
297	꺿	82C3	8ACE	FB2M0080*
298	꺾	82C4	8ACF	FB2N0080*
299	꺾	82C5	8AD0	FB2O0080*
300	꺾	82C6	8AD1	FB2P0080*
301	꺾	82C7	8AD3	FB2R0080*
302	꺾	82C8	8AD4	FB2S0080*
303	꺾	82C9	8AD6	FB2U0080*
304	꺾	82CA	8AD7	FB2V0080*
305	꺾	82CB	8AD8	FB2W0080*
306	꺾	82CC	8AD9	FB2X0080*
307	꺾	82CD	8ADA	FB2Y0080*
308	꺾	82CE	8ADB	FB2Z0080*
309	꺾	82CF	8ADC	FB300080*
310	꺾	82D0	8ADD	FB310080*
311	꺾	82D1	8AE3	FB370080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
312	꺀	82D2	8AE4	FB380080*
313	꺁	82D3	8AE6	FB3A0080*
314	꺂	82D4	8AE7	FB3B0080*
315	꺃	82D5	8AE8	FB3C0080*
316	꺄	82D6	8AEA	FB3E0080*
317	꺅	82D7	8AEB	FB3F0080*
318	꺆	82D8	8AEC	FB3G0080*
319	꺇	82D9	8AED	FB3H0080*
320	꺈	82DA	8AEE	FB3I0080*
321	꺉	82DB	8AEF	FB3J0080*
322	꺊	82DC	8AF0	FB3K0080*
323	꺋	82DD	8AF4	FB3O0080*
324	꺌	82DE	8AF6	FB3Q0080*
325	꺍	82DF	8AF7	FB3R0080
326	꺎	82E0	8AF8	FB3S0080*
327	꺏	82E1	8AF9	FB3T0080*
328	꺐	82E2	8AFA	FB3U0080*
329	꺑	82E3	8AFB	FB3V0080*
330	꺒	82E4	8AFC	FB3W0080*
331	꺓	82E5	8AFD	FB3X0080*
332	꺔	82E6	8B42	FB420080*
333	꺕	82E7	8B43	FB430080*
334	꺖	82E8	8B44	FB440080*
335	꺗	82E9	8B46	FB460080*
336	꺘	82EA	8B47	FB470080*
337	꺙	82EB	8B48	FB480080*

Line Number	Graphic	PC Code	Host Code	GCGID
338	꺚	82EC	8B4A	FB4A0080*
339	꺛	82ED	8B4B	FB4B0080*
340	꺜	82EE	8B4C	FB4C0080*
341	꺝	82EF	8B4D	FB4D0080*
342	꺞	82F0	8B4E	FB4E0080*
343	꺟	82F1	8B4F	FB4F0080*
344	꺠	82F2	8B50	FB4G0080*
345	꺡	82F3	8B51	FB4H0080
346	꺢	82F4	8B53	FB4J0080*
347	꺣	82F5	8B54	FB4K0080*
348	꺤	82F6	8B55	FB4L0080*
349	꺥	82F7	8B56	FB4M0080*
350	꺦	82F8	8B57	FB4N0080*
351	꺧	82F9	8B58	FB4O0080*
352	꺨	82FA	8B59	FB4P0080*
353	꺩	82FB	8B5A	FB4Q0080*
354	꺪	82FC	8B5B	FB4R0080*
355	꺫	82FD	8B5C	FB4S0080*
356	꺬	82FE	8B5D	FB4T0080*
357	꺭	8341	8B63	FB4Z0080*
358	꺮	8342	8B64	FB500080*
359	꺯	8343	8B66	FB520080*
360	꺰	8344	8B67	FB530080*
361	꺱	8345	8B6B	FB570080
362	꺲	8346	8B6C	FB580080*
363	꺳	8347	8B6D	FB590080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
364	꺄	8348	8B6E	FB5A0080*
365	꺅	8349	8B6F	FB5B0080*
366	꺆	834A	8B70	FB5C0080*
367	꺇	834B	8B74	FB5G0080*
368	꺈	834C	8B76	FB5I0080*
369	꺉	834D	8B78	FB5K0080*
370	꺊	834E	8B79	FB5L0080
371	꺋	834F	8B7A	FB5M0080*
372	꺌	8350	8B7B	FB5N0080
373	꺍	8351	8B7C	FB5O0080*
374	꺎	8352	8B7D	FB5P0080*
375	꺏	8353	8B82	FB5U0080*
376	꺐	8354	8B83	FB5V0080*
377	꺑	8355	8B84	FB5W0080*
378	꺒	8356	8B85	FB5X0080*
379	꺓	8357	8B86	FB5Y0080*
380	꺔	8358	8B87	FB5Z0080*
381	꺕	8359	8B88	FB600080*
382	꺖	835A	8B89	FB610080*
383	꺗	8361	8B8A	FB620080*
384	꺘	8362	8B8B	FB630080*
385	꺙	8363	8B8C	FB640080*
386	꺚	8364	8B8D	FB650080*
387	꺛	8365	8B8E	FB660080*
388	꺜	8366	8B8F	FB670080*
389	꺝	8367	8B90	FB680080*

Table 21 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
390	꺞	8368	8B91	FB690080*
391	꺟	8369	8B93	FB6B0080*
392	꺠	836A	8B94	FB6C0080*
393	꺡	836B	8B95	FB6D0080
394	꺢	836C	8B96	FB6E0080*
395	꺣	836D	8B97	FB6F0080*
396	꺤	836E	8B98	FB6G0080*
397	꺥	836F	8B99	FB6H0080*
398	꺦	8370	8B9A	FB6I0080*
399	꺧	8371	8B9B	FB6J0080*
400	꺨	8372	8B9C	FB6K0080*
401	꺩	8373	8B9D	FB6L0080*
402	꺪	8374	8BA3	FB6R0080*
403	꺫	8375	8BA4	FB6S0080*
404	꺬	8376	8BA6	FB6U0080*
405	꺭	8377	8BA7	FB6V0080*
406	꺮	8378	8BAA	FB6Y0080*
407	꺯	8379	8BAC	FB700080*
408	꺰	837A	8BAD	FB710080
409	꺱	8381	8BAE	FB720080*
410	꺲	8382	8BAF	FB730080*
411	꺳	8383	8BB0	FB740080*
412	꺴	8384	8BB4	FB780080*
413	꺵	8385	8BB6	FB7A0080
414	꺶	8386	8BB9	FB7D0080*
415	꺷	8387	8BBA	FB7E0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
416	길	8388	8BBB	FB7F0080
417	굉	8389	8BBD	FB7H0080*
418	깁	838A	8C64	FBAC0080*
419	갇	838B	8C66	FBAE0080*
420	갉	838C	8C67	FBAF0080*
421	깁	838D	8C68	FBAG0080*
422	깁	838E	8C6A	FBAI0080*
423	깁	838F	8C6C	FBAK0080*
424	깁	8390	8C6D	FBAL0080*
425	깁	8391	8C6E	FBAM0080*
426	깁	8392	8C6F	FBAN0080*
427	깁	8393	8C70	FBAO0080*
428	깁	8394	8C74	FBAS0080*
429	깁	8395	8C78	FBAW0080
430	깁	8396	8C79	FBAX0080*
431	깁	8397	8C7A	FBAY0080*
432	깁	8398	8C7C	FBB00080*
433	깁	8399	8C7D	FBB10080*
434	깁	839A	8C83	FBB70080*
435	깁	839B	8C84	FBB80080*
436	깁	839C	8C86	FBBA0080*
437	깁	839D	8C87	FBBB0080*
438	깁	839E	8C88	FBBC0080*
439	깁	839F	8C8A	FBBE0080*
440	깁	83A0	8C8B	FBBF0080*
441	깁	83A1	8C8C	FBBG0080*

Table 21 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
442	깁	83A2	8C8D	FBBH0080*
443	깁	83A3	8C8E	FBBI0080*
444	깁	83A4	8C8F	FBBJ0080*
445	깁	83A5	8C90	FBBK0080*
446	깁	83A6	8C94	FBBO0080*
447	깁	83A7	8C98	FBBS0080*
448	깁	83A8	8C99	FBBT0080*
449	깁	83A9	8C9A	FBBU0080*
450	깁	83AA	8C9B	FBBV0080*
451	깁	83AB	8C9C	FBBW0080*
452	깁	83AC	8C9D	FBBX0080*
453	깁	83AD	8CA3	FBC30080*
454	깁	83AE	8CA4	FBC40080*
455	깁	83AF	8CA5	FBC50080*
456	깁	83B0	8CA6	FBC60080*
457	깁	83B1	8CA7	FBC70080*
458	깁	83B2	8CA8	FBC80080*
459	깁	83B3	8CAA	FBCA0080*
460	깁	83B4	8CAB	FBCB0080*
461	깁	83B5	8CAC	FBC0080*
462	깁	83B6	8CAD	FBCD0080*
463	깁	83B7	8CAE	FBCE0080*
464	깁	83B8	8CAF	FBCF0080*
465	깁	83B9	8CB0	FBCG0080*
466	깁	83BA	8CB1	FBCH0080*
467	깁	83BB	8CB3	FBCJ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 10 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
468	꺾	83BC	8CB4	FBCK0080*
469	꺿	83BD	8CB5	FBCL0080*
470	꺾	83BE	8CB6	FBCM0080*
471	꺾	83BF	8CB7	FBCN0080*
472	꺾	83C0	8CB8	FBCO0080*
473	꺾	83C1	8CB9	FBCP0080*
474	꺾	83C2	8CBA	FBCQ0080*
475	꺾	83C3	8CBB	FBCR0080*
476	꺾	83C4	8CBC	FBCS0080*
477	꺾	83C5	8CBD	FBCT0080*
478	꺾	83C6	8CC1	FBCX0080
479	꺾	83C7	8CC2	FBCY0080*
480	꺾	83C8	8CC3	FBCZ0080*
481	꺾	83C9	8CC4	FBD00080*
482	꺾	83CA	8CC5	FBD10080*
483	꺾	83CB	8CC6	FBD20080*
484	꺾	83CC	8CC7	FBD30080*
485	꺾	83CD	8CC8	FBD40080*
486	꺾	83CE	8CC9	FBD50080*
487	꺾	83CF	8CCA	FBD60080*
488	꺾	83D0	8CCB	FBD70080*
489	꺾	83D1	8CCC	FBD80080*
490	꺾	83D2	8CCD	FBD90080*
491	꺾	83D3	8CCE	FBDA0080*
492	꺾	83D4	8CCF	FBDB0080*
493	꺾	83D5	8CD0	FBDC0080*

Table 21 (Page 10 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
494	꺾	83D6	8CD1	FBDD0080*
495	꺾	83D7	8CD3	FBDG0080*
496	꺾	83D8	8CD4	FBDH0080*
497	꺾	83D9	8CD5	FBDI0080*
498	꺾	83DA	8CD6	FBDJ0080*
499	꺾	83DB	8CD7	FBDK0080*
500	꺾	83DC	8CD8	FBDL0080*
501	꺾	83DD	8CD9	FBDM0080*
502	꺾	83DE	8CDA	FBDN0080*
503	꺾	83DF	8CDB	FBD00080*
504	꺾	83E0	8CDC	FBD10080*
505	꺾	83E1	8CDD	FBD20080*
506	꺾	83E2	8CE4	FBD30080*
507	꺾	83E3	8CE6	FBD40080*
508	꺾	83E4	8CE7	FBD50080*
509	꺾	83E5	8CE8	FBD60080*
510	꺾	83E6	8CEA	FBD70080*
511	꺾	83E7	8CEB	FBD80080*
512	꺾	83E8	8CEC	FBD90080*
513	꺾	83E9	8CED	FBD00080*
514	꺾	83EA	8CEE	FBD10080*
515	꺾	83EB	8CEF	FBD20080*
516	꺾	83EC	8CF0	FBD30080*
517	꺾	83ED	8CF4	FBD40080*
518	꺾	83EE	8CF8	FBD50080*
519	꺾	83EF	8CF9	FBD60080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 11 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
520	꺅	83F0	8CFA	FBEI0080*
521	꺆	83F1	8CFB	FBEJ0080*
522	꺇	83F2	8CFC	FBEK0080*
523	꺈	83F3	8CFD	FBEL0080*
524	꺉	83F4	8D43	FBER0080*
525	꺊	83F5	8D44	FBES0080*
526	꺋	83F6	8D46	FBEU0080*
527	꺌	83F7	8D47	FBEV0080*
528	꺍	83F8	8D48	FBEW0080*
529	꺎	83F9	8D49	FBEX0080*
530	꺏	83FA	8D4A	FBEY0080*
531	꺐	83FB	8D4B	FBEZ0080*
532	꺑	83FC	8D4C	FBF00080*
533	꺒	83FD	8D4D	FBF10080*
534	꺓	83FE	8D4E	FBF20080*
535	꺔	8441	8D4F	FBF30080*
536	꺕	8442	8D50	FBF40080*
537	꺖	8443	8D53	FBF70080*
538	꺗	8444	8D54	FBF80080*
539	꺘	8445	8D56	FBFA0080*
540	꺙	8446	8D58	FBFC0080*
541	꺚	8447	8D59	FBFD0080*
542	꺛	8448	8D5A	FBFE0080*
543	꺜	8449	8D5B	FBFF0080*
544	꺝	844A	8D5C	FBFG0080*
545	꺞	844B	8D5D	FBFH0080*

Table 21 (Page 11 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
546	꺟	844C	8D62	FBFM0080*
547	꺠	844D	8D63	FBFN0080*
548	꺡	844E	8D64	FBFO0080*
549	꺢	844F	8D66	FBFQ0080*
550	꺣	8450	8D67	FBFR0080*
551	꺤	8451	8D68	FBFS0080*
552	꺥	8452	8D6A	FBFU0080*
553	꺦	8453	8D6B	FBFV0080*
554	꺧	8454	8D6C	FBFW0080*
555	꺨	8455	8D6D	FBFX0080*
556	꺩	8456	8D6E	FBFY0080*
557	꺪	8457	8D6F	FBFZ0080*
558	꺫	8458	8D70	FBG00080*
559	꺬	8459	8D71	FBG10080
560	꺭	845A	8D73	FBG30080*
561	꺮	8461	8D74	FBG40080*
562	꺯	8462	8D77	FBG70080*
563	꺰	8463	8D78	FBG80080*
564	꺱	8464	8D79	FBG90080*
565	꺲	8465	8D7A	FBGA0080*
566	꺳	8466	8D7C	FBGC0080*
567	꺴	8467	8D7D	FBGD0080*
568	꺵	8468	8D82	FBGI0080*
569	꺶	8469	8D83	FBGJ0080*
570	꺷	846A	8D84	FBGK0080*
571	꺸	846B	8D85	FBGL0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 12 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
572	꺄	846C	8D86	FBGM0080*
573	꺅	846D	8D87	FBGN0080*
574	꺆	846E	8D88	FBGO0080*
575	꺇	846F	8D89	FBGP0080*
576	꺈	8470	8D8A	FBGQ0080*
577	꺉	8471	8D8B	FBGR0080*
578	꺊	8472	8D8C	FBGS0080*
579	꺋	8473	8D8D	FBGT0080*
580	꺌	8474	8D8E	FBGU0080*
581	꺍	8475	8D8F	FBGV0080*
582	꺎	8476	8D90	FBGW0080*
583	꺏	8477	8D91	FBGX0080*
584	꺑	8478	8D93	FBGZ0080*
585	꺒	8479	8D94	FBH00080*
586	꺓	847A	8D95	FBH10080*
587	꺔	8481	8D96	FBH20080*
588	꺕	8482	8D97	FBH30080*
589	꺖	8483	8D98	FBH40080*
590	꺗	8484	8D99	FBH50080*
591	꺘	8485	8D9A	FBH60080*
592	꺙	8486	8D9B	FBH70080*
593	꺚	8487	8D9C	FBH80080*
594	꺛	8488	8D9D	FBH90080*
595	꺜	8489	8DA3	FBHF0080*
596	꺝	848A	8DA4	FBHG0080*
597	꺞	848B	8DA6	FBHI0080*

Table 21 (Page 12 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
598	꺟	848C	8DA8	FBHK0080
599	꺠	848D	8DAA	FBHM0080*
600	꺡	848E	8DAB	FBHN0080*
601	꺢	848F	8DAC	FBHO0080*
602	꺣	8490	8DAD	FBHP0080*
603	꺤	8491	8DAE	FBHQ0080*
604	꺥	8492	8DAF	FBHR0080*
605	꺦	8493	8DB0	FBHS0080*
606	꺧	8494	8DB4	FBHW0080*
607	꺨	8495	8DB6	FBHY0080*
608	꺩	8496	8DBA	FBI20080*
609	꺪	8497	8DBB	FBI30080*
610	꺫	8498	8DBC	FBI40080*
611	꺬	8499	8DBD	FBI50080*
612	꺭	849A	8DC3	FBIB0080*
613	꺮	849B	8DC4	FBIC0080*
614	꺯	849C	8DC5	FBID0080
615	꺰	849D	8DC6	FBIE0080*
616	꺱	849E	8DC7	FBIF0080*
617	꺲	849F	8DC8	FBIG0080*
618	꺳	84A0	8DCA	FBII0080*
619	꺴	84A1	8DCB	FBIJ0080*
620	꺵	84A2	8DCC	FBIK0080*
621	꺶	84A3	8DCD	FBIL0080*
622	꺷	84A4	8DCE	FBIM0080*
623	꺸	84A5	8DCF	FBIN0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 13 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
624	꺄	84A6	8DD0	FBIO0080*
625	꺅	84A7	8DD1	FBIP0080
626	꺆	84A8	8DD3	FBIR0080*
627	꺇	84A9	8DD4	FBIS0080*
628	꺈	84AA	8DD5	FBIT0080
629	꺉	84AB	8DD8	FBIW0080*
630	꺊	84AC	8DD9	FBIX0080*
631	꺋	84AD	8DDA	FBIY0080*
632	꺌	84AE	8DDB	FBIZ0080*
633	꺍	84AF	8DDC	FBJ00080*
634	꺎	84B0	8DDD	FBJ10080*
635	꺏	84B1	8DE3	FBJ70080*
636	꺐	84B2	8DE4	FBJ80080*
637	꺑	84B3	8DE5	FBJ90080
638	꺒	84B4	8DE6	FBJA0080*
639	꺓	84B5	8DE7	FBJB0080*
640	꺔	84B6	8DE8	FBJC0080*
641	꺕	84B7	8DE9	FBJD0080*
642	꺖	84B8	8DEA	FBJE0080*
643	꺗	84B9	8DEB	FBJF0080*
644	꺘	84BA	8DEC	FBJG0080*
645	꺙	84BB	8DED	FBJH0080*
646	꺚	84BC	8DEE	FBJI0080*
647	꺛	84BD	8DEF	FBJJ0080*
648	꺜	84BE	8DF0	FBJK0080*
649	꺝	84BF	8DF1	FBJL0080*

Table 21 (Page 13 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
650	꺞	84C0	8DF3	FBJN0080*
651	꺟	84C1	8DF4	FBJO0080*
652	꺠	84C2	8DF5	FBJP0080*
653	꺡	84C3	8DF6	FBJQ0080*
654	꺢	84C4	8DF8	FBJS0080*
655	꺣	84C5	8DF9	FBJT0080*
656	꺤	84C6	8DFA	FBJU0080*
657	꺥	84C7	8DFB	FBJV0080*
658	꺦	84C8	8DFC	FBJW0080*
659	꺧	84C9	8DFD	FBJX0080*
660	꺨	84CA	8E42	FBK20080*
661	꺩	84CB	8E43	FBK30080*
662	꺪	84CC	8E44	FBK40080*
663	꺫	84CD	8E46	FBK60080*
664	꺬	84CE	8E47	FBK70080*
665	꺭	84CF	8E48	FBK80080*
666	꺮	84D0	8E4A	FBKA0080*
667	꺯	84D1	8E4B	FBKB0080*
668	꺰	84D2	8E4C	FBKC0080*
669	꺱	84D3	8E4D	FBKD0080*
670	꺲	84D4	8E4E	FBKE0080*
671	꺳	84D5	8E4F	FBKF0080*
672	꺴	84D6	8E50	FBKG0080*
673	꺵	84D7	8E54	FBKK0080*
674	꺶	84D8	8E55	FBKL0080
675	꺷	84D9	8E56	FBKM0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
676	꺾	84DA	8E58	FBKO0080*
677	꺾	84DB	8E59	FBKP0080*
678	꺾	84DC	8E5A	FBKQ0080*
679	꺾	84DD	8E5B	FBKR0080*
680	꺾	84DE	8E5C	FBKS0080*
681	꺾	84DF	8E5D	FBKT0080*
682	꺾	84E0	8E62	FBKY0080*
683	꺾	84E1	8E63	FBKZ0080*
684	꺾	84E2	8E64	FBL00080*
685	꺾	84E3	8E65	FBL10080*
686	꺾	84E4	8E66	FBL20080*
687	꺾	84E5	8E67	FBL30080*
688	꺾	84E6	8E68	FBL40080*
689	꺾	84E7	8E69	FBL50080*
690	꺾	84E8	8E6A	FBL60080*
691	꺾	84E9	8E6B	FBL70080*
692	꺾	84EA	8E6C	FBL80080*
693	꺾	84EB	8E6D	FBL90080*
694	꺾	84EC	8E6E	FBLA0080*
695	꺾	84ED	8E6F	FBLB0080*
696	꺾	84EE	8E70	FBLC0080*
697	꺾	84EF	8E71	FBLD0080*
698	꺾	84F0	8E73	FBLF0080*
699	꺾	84F1	8E74	FBLG0080*
700	꺾	84F2	8E75	FBLH0080*
701	꺾	84F3	8E76	FBLI0080*

Table 21 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
702	꺾	84F4	8E77	FBLJ0080*
703	꺾	84F5	8E78	FBLK0080
704	꺾	84F6	8E79	FBLL0080*
705	꺾	84F7	8E7A	FBLM0080*
706	꺾	84F8	8E7B	FBLN0080*
707	꺾	84F9	8E7C	FBL00080*
708	꺾	84FA	8E7D	FBLP0080*
709	꺾	84FB	8E83	FBLV0080*
710	꺾	84FC	8E84	FBLW0080*
711	꺾	84FD	8E86	FBLY0080*
712	꺾	84FE	8E87	FBLZ0080*
713	꺾	8541	8E88	FBM00080
714	꺾	8542	8E8A	FBM20080*
715	꺾	8543	8E8B	FBM30080*
716	꺾	8544	8E8C	FBM40080*
717	꺾	8545	8E8D	FBM50080*
718	꺾	8546	8E8E	FBM60080*
719	꺾	8547	8E8F	FBM70080*
720	꺾	8548	8E94	FBMC0080*
721	꺾	8549	8E96	FBME0080*
722	꺾	854A	8E99	FBMH0080*
723	꺾	854B	8E9A	FBMI0080*
724	꺾	854C	8E9B	FBMJ0080*
725	꺾	854D	8E9C	FBMK0080*
726	꺾	854E	8E9D	FBML0080*
727	꺾	854F	8EA2	FBMQ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 15 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
728	꺾	8550	8EA3	FBMR0080*
729	꺾	8551	8EA4	FBMS0080*
730	꺾	8552	8EA5	FBMT0080
731	꺾	8553	8EA6	FBMU0080*
732	꺾	8554	8EA7	FBMV0080*
733	꺾	8555	8EA8	FBMW0080*
734	꺾	8556	8EAA	FBMY0080*
735	꺾	8557	8EAB	FBMZ0080*
736	꺾	8558	8EAC	FBN00080*
737	꺾	8559	8EAD	FBN10080*
738	꺾	855A	8EAE	FBN20080*
739	꺾	8561	8EAF	FBN30080*
740	꺾	8562	8EB0	FBN40080*
741	꺾	8563	8EB1	FBN50080*
742	꺾	8564	8EB3	FBN70080*
743	꺾	8565	8EB4	FBN80080*
744	꺾	8566	8EB5	FBN90080
745	꺾	8567	8EB8	FBNC0080*
746	꺾	8568	8EB9	FBND0080*
747	꺾	8569	8EBA	FBNE0080*
748	꺾	856A	8EBB	FBNF0080*
749	꺾	856B	8EBC	FBNG0080*
750	꺾	856C	8EBD	FBNH0080*
751	꺾	856D	8EC3	FBNN0080*
752	꺾	856E	8EC4	FBNO0080*
753	꺾	856F	8EC6	FBNQ0080*

Table 21 (Page 15 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
754	꺾	8570	8EC7	FBNR0080*
755	꺾	8571	8EC8	FBNS0080*
756	꺾	8572	8ECA	FBNU0080*
757	꺾	8573	8ECB	FBNV0080*
758	꺾	8574	8ECC	FBNW0080*
759	꺾	8575	8ECD	FBNX0080*
760	꺾	8576	8ECE	FBNY0080*
761	꺾	8577	8ECF	FBNZ0080*
762	꺾	8578	8ED0	FBO00080*
763	꺾	8579	8ED4	FBO40080*
764	꺾	857A	8ED5	FBO50080*
765	꺾	8581	8ED7	FBO70080*
766	꺾	8582	8ED8	FBO80080*
767	꺾	8583	8ED9	FBO90080*
768	꺾	8584	8EDA	FBOA0080*
769	꺾	8585	8EDB	FBOB0080*
770	꺾	8586	8EDC	FBOC0080*
771	꺾	8587	8EDD	FBOD0080*
772	꺾	8588	8EE2	FBOI0080
773	꺾	8589	8EE3	FBOJ0080*
774	꺾	858A	8EE4	FBOK0080*
775	꺾	858B	8EE6	FBOM0080*
776	꺾	858C	8EE7	FBN00080*
777	꺾	858D	8EE8	FBOO0080*
778	꺾	858E	8EEA	FBOQ0080*
779	꺾	858F	8EEB	FBOR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 16 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
780	꺾	8590	8EEC	FBOS0080*
781	꺾	8591	8EED	FBOT0080*
782	꺾	8592	8EEE	FBOU0080*
783	꺾	8593	8EEF	FBOV0080*
784	꺾	8594	8EF0	FBOW0080*
785	꺾	8595	8EF4	FBP00080*
786	꺾	8596	8EF5	FBP10080*
787	꺾	8597	8EF6	FBP20080*
788	꺾	8598	8EF7	FBP30080
789	꺾	8599	8EF8	FBP40080*
790	꺾	859A	8EF9	FBP50080*
791	꺾	859B	8EFA	FBP60080*
792	꺾	859C	8EFB	FBP70080*
793	꺾	859D	8EFC	FBP80080*
794	꺾	859E	8EFD	FBP90080*
795	꺾	859F	8F42	FBPE0080*
796	꺾	85A0	8F43	FBPF0080*
797	꺾	85A1	8F44	FBPG0080*
798	꺾	85A2	8F45	FBPH0080*
799	꺾	85A3	8F46	FBPI0080*
800	꺾	85A4	8F47	FBPJ0080*
801	꺾	85A5	8F48	FBPK0080*
802	꺾	85A6	8F49	FBPL0080*
803	꺾	85A7	8F4A	FBPM0080*
804	꺾	85A8	8F4B	FBPN0080*
805	꺾	85A9	8F4C	FBPO0080*

Table 21 (Page 16 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
806	꺾	85AA	8F4D	FBPP0080*
807	꺾	85AB	8F4E	FBPQ0080*
808	꺾	85AC	8F4F	FBPR0080*
809	꺾	85AD	8F50	FBPS0080*
810	꺾	85AE	8F51	FBPT0080*
811	꺾	85AF	8F53	FBPV0080*
812	꺾	85B0	8F54	FBPW0080*
813	꺾	85B1	8F55	FBPX0080*
814	꺾	85B2	8F56	FBPY0080*
815	꺾	85B3	8F57	FBPZ0080*
816	꺾	85B4	8F58	FBQ00080*
817	꺾	85B5	8F59	FBQ10080*
818	꺾	85B6	8F5A	FBQ20080*
819	꺾	85B7	8F5B	FBQ30080*
820	꺾	85B8	8F5C	FBQ40080*
821	꺾	85B9	8F5D	FBQ50080*
822	꺾	85BA	8F63	FBQB0080*
823	꺾	85BB	8F64	FBQC0080*
824	꺾	85BC	8F66	FBQE0080*
825	꺾	85BD	8F68	FBQG0080*
826	꺾	85BE	8F6A	FBQI0080*
827	꺾	85BF	8F6C	FBQK0080*
828	꺾	85C0	8F6D	FBQL0080*
829	꺾	85C1	8F6E	FBQM0080*
830	꺾	85C2	8F6F	FBQN0080*
831	꺾	85C3	8F74	FBQS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 17 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
832	꺄	85C4	8F76	FBQU0080*
833	꺅	85C5	8F78	FBQW0080*
834	꺆	85C6	8F79	FBQX0080*
835	꺇	85C7	8F7A	FBQY0080*
836	꺈	85C8	8F7C	FBR00080*
837	꺉	85C9	8F7D	FBR10080*
838	꺊	85CA	8F81	FBR50080
839	꺋	85CB	8F82	FBR60080*
840	꺌	85CC	8F83	FBR70080*
841	꺍	85CD	8F84	FBR80080*
842	꺎	85CE	8F85	FBR90080*
843	꺏	85CF	8F86	FBRA0080*
844	꺐	85D0	8F87	FBRB0080*
845	꺑	85D1	8F88	FBRC0080*
846	꺒	85D2	8F89	FBRD0080*
847	꺓	85D3	8F8A	FBRE0080*
848	꺔	85D4	8F8B	FBRF0080*
849	꺕	85D5	8F8C	FBRG0080*
850	꺖	85D6	8F8D	FBRH0080*
851	꺗	85D7	8F8E	FBRJ0080*
852	꺘	85D8	8F8F	FBRK0080*
853	꺙	85D9	8F90	FBR00080*
854	꺚	85DA	8F91	FBRL0080*
855	꺛	85DB	8F93	FBRN0080*
856	꺜	85DC	8F94	FBRO0080*
857	꺝	85DD	8F95	FBRP0080*

Table 21 (Page 17 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
858	꺞	85DE	8F96	FBRQ0080*
859	꺟	85DF	8F97	FBRR0080*
860	꺠	85E0	8F98	FBR00080*
861	꺡	85E1	8F99	FBR00080*
862	꺢	85E2	8F9A	FBRU0080*
863	꺣	85E3	8F9B	FBRV0080*
864	꺤	85E4	8F9C	FBRW0080*
865	꺥	85E5	8F9D	FBRX0080*
866	꺦	85E6	8FA3	FBS30080*
867	꺧	85E7	8FA4	FBS40080*
868	꺨	85E8	8FA6	FBS60080*
869	꺩	85E9	8FA7	FBS70080*
870	꺪	85EA	8FA8	FBS80080*
871	꺫	85EB	8FAA	FBSA0080*
872	꺬	85EC	8FAB	FBSB0080*
873	꺭	85ED	8FAC	FBSC0080*
874	꺮	85EE	8FAD	FBSD0080*
875	꺯	85EF	8FAE	FBSE0080*
876	꺰	85F0	8FAF	FBSF0080*
877	꺱	85F1	8FB0	FBSG0080*
878	꺲	85F2	8FB4	FBSK0080*
879	꺳	85F3	8FB6	FBSM0080
880	꺴	85F4	8FB8	FBSO0080*
881	꺵	85F5	8FB9	FBS0080*
882	꺶	85F6	8FBA	FBSQ0080*
883	꺷	85F7	8FBB	FBSR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 18 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
884	꺄	85F8	8FBC	FBSS0080*
885	꺅	85F9	8FBD	FBST0080*
886	꺆	85FA	9064	FBVO0080*
887	꺇	85FB	9066	FBVQ0080*
888	꺈	85FC	9067	FBVR0080*
889	꺉	85FD	906C	FBVW0080*
890	꺊	85FE	906D	FBVX0080*
891	꺋	8641	906E	FBVY0080*
892	꺌	8642	906F	FBVZ0080*
893	꺍	8643	9070	FBW00080*
894	꺎	8644	9074	FBW40080*
895	꺏	8645	907A	FBWA0080*
896	꺐	8646	907C	FBWC0080*
897	꺑	8647	9083	FBWJ0080*
898	꺒	8648	9084	FBWK0080*
899	꺓	8649	9086	FBWM0080*
900	꺔	864A	9087	FBWN0080*
901	꺕	864B	9088	FBWO0080
902	꺖	864C	908A	FBWQ0080*
903	꺗	864D	908B	FBWR0080*
904	꺘	864E	908C	FBWS0080*
905	꺙	864F	908D	FBWT0080*
906	꺚	8650	908E	FBWU0080*
907	꺛	8651	908F	FBWV0080*
908	꺜	8652	9090	FBWW0080*
909	꺝	8653	9094	FBX00080*

Table 21 (Page 18 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
910	꺞	8654	9098	FBX40080*
911	꺟	8655	9099	FBX50080*
912	꺠	8656	909A	FBX60080*
913	꺡	8657	909B	FBX70080*
914	꺢	8658	909C	FBX80080*
915	꺣	8659	909D	FBX90080*
916	꺤	865A	90A3	FBXF0080*
917	꺥	8661	90A4	FBXG0080*
918	꺦	8662	90A6	FBXI0080*
919	꺧	8663	90A7	FBXJ0080*
920	꺨	8664	90A8	FBXK0080*
921	꺩	8665	90AA	FBXM0080*
922	꺪	8666	90AB	FBXN0080*
923	꺫	8667	90AC	FBXO0080*
924	꺬	8668	90AD	FBXP0080*
925	꺭	8669	90AE	FBXQ0080*
926	꺮	866A	90AF	FBXR0080*
927	꺯	866B	90B0	FBXS0080*
928	꺰	866C	90B3	FBXV0080*
929	꺱	866D	90B4	FBXW0080*
930	꺲	866E	90B5	FBXX0080*
931	꺳	866F	90B6	FBXY0080*
932	꺴	8670	90B8	FBY00080*
933	꺵	8671	90B9	FBY10080*
934	꺶	8672	90BA	FBY20080*
935	꺷	8673	90BB	FBY30080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 19 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
936	낯	8674	90BC	FBY40080*
937	낱	8675	90BD	FBY50080*
938	내	8676	90C1	FBY90080
939	넉	8677	90C2	FBYA0080*
940	넒	8678	90C3	FBYB0080*
941	넓	8679	90C4	FBYC0080*
942	넔	867A	90C5	FBYD0080*
943	넕	8681	90C6	FBYE0080*
944	넖	8682	90C7	FBYF0080*
945	넗	8683	90C8	FBYG0080*
946	넘	8684	90C9	FBYH0080*
947	넙	8685	90CA	FBYI0080*
948	넚	8686	90CB	FBYJ0080*
949	넛	8687	90CC	FBYK0080*
950	넜	8688	90CD	FBYL0080*
951	넝	8689	90CE	FBYM0080*
952	넞	868A	90CF	FBYN0080*
953	넟	868B	90D0	FBYO0080*
954	넠	868C	90D1	FBYP0080*
955	넡	868D	90D3	FBYR0080*
956	넢	868E	90D4	FBYS0080*
957	넣	868F	90D5	FBYT0080*
958	네	8690	90D6	FBYU0080*
959	넦	8691	90D7	FBYV0080*
960	넧	8692	90D8	FBYW0080*
961	넨	8693	90D9	FBYX0080*

Table 21 (Page 19 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
962	넩	8694	90DA	FBYY0080*
963	넪	8695	90DB	FBYZ0080*
964	넫	8696	90DC	FBZ00080*
965	넬	8697	90DD	FBZ10080*
966	넭	8698	90E3	FBZ70080*
967	넮	8699	90E6	FBZA0080*
968	넯	869A	90E7	FBZB0080*
969	넰	869B	90E8	FBZC0080
970	넱	869C	90EA	FBZE0080*
971	넲	869D	90ED	FBZH0080*
972	넳	869E	90EE	FBZI0080*
973	넴	869F	90EF	FBZJ0080*
974	넵	86A0	90F0	FBZK0080*
975	넶	86A1	90F4	FBZO0080*
976	넷	86A2	90F8	FBZS0080
977	넸	86A3	90F9	FBZT0080*
978	넹	86A4	90FA	FBZU0080*
979	넺	86A5	90FB	FBZV0080*
980	넻	86A6	90FC	FBZW0080*
981	넼	86A7	9143	FC030080*
982	넽	86A8	9144	FC040080*
983	넾	86A9	9146	FC060080*
984	넿	86AA	9147	FC070080*
985	넺	86AB	9148	FC080080*
986	넻	86AC	914A	FC0A0080*
987	넼	86AD	914B	FC0B0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 20 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
988	넵	86AE	914C	FC0C0080*
989	넶	86AF	914D	FC0D0080*
990	넷	86B0	914E	FC0E0080*
991	넸	86B1	914F	FC0F0080*
992	넹	86B2	9150	FC0G0080*
993	넺	86B3	9154	FC0K0080*
994	넻	86B4	9158	FC0O0080*
995	넼	86B5	9159	FC0P0080*
996	넽	86B6	915A	FC0Q0080*
997	넾	86B7	915B	FC0R0080*
998	넿	86B8	915C	FC0S0080*
999	넺	86B9	915D	FC0T0080*
1000	넻	86BA	9163	FC0Z0080*
1001	넼	86BB	9164	FC100080*
1002	넽	86BC	9166	FC120080*
1003	넾	86BD	9167	FC130080*
1004	넿	86BE	9168	FC140080
1005	넺	86BF	916A	FC160080*
1006	넻	86C0	916B	FC170080*
1007	넼	86C1	916C	FC180080*
1008	넽	86C2	916D	FC190080*
1009	넾	86C3	916E	FC1A0080*
1010	넿	86C4	916F	FC1B0080*
1011	넺	86C5	9170	FC1C0080*
1012	넻	86C6	9174	FC1G0080*
1013	넼	86C7	9175	FC1H0080

Table 21 (Page 20 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1014	넽	86C8	9178	FC1K0080*
1015	넾	86C9	9179	FC1L0080*
1016	넿	86CA	917B	FC1N0080
1017	넺	86CB	917C	FC1O0080*
1018	넻	86CC	917D	FC1P0080*
1019	넼	86CD	9182	FC1U0080*
1020	넽	86CE	9183	FC1V0080*
1021	넾	86CF	9184	FC1W0080*
1022	넿	86D0	9186	FC1Y0080*
1023	넺	86D1	9187	FC1Z0080*
1024	넻	86D2	9188	FC200080*
1025	넼	86D3	9189	FC210080*
1026	넽	86D4	918A	FC220080*
1027	넾	86D5	918B	FC230080*
1028	넿	86D6	918C	FC240080*
1029	넺	86D7	918D	FC250080*
1030	넻	86D8	918E	FC260080*
1031	넼	86D9	918F	FC270080*
1032	넽	86DA	9190	FC280080*
1033	넾	86DB	9191	FC290080*
1034	넿	86DC	9193	FC2B0080*
1035	넺	86DD	9194	FC2C0080*
1036	넻	86DE	9195	FC2D0080
1037	넼	86DF	9196	FC2E0080*
1038	넽	86E0	9197	FC2F0080*
1039	넾	86E1	9198	FC2G0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 21 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1040	넋	86E2	9199	FC2H0080*
1041	넌	86E3	919A	FC2I0080*
1042	넘	86E4	919B	FC2J0080*
1043	넙	86E5	919C	FC2K0080*
1044	넚	86E6	919D	FC2L0080*
1045	늑	86E7	91A3	FC2R0080
1046	늑	86E8	91A4	FC2S0080*
1047	늑	86E9	91A6	FC2U0080*
1048	늑	86EA	91A7	FC2V0080*
1049	늑	86EB	91A8	FC2W0080*
1050	늑	86EC	91AA	FC2Y0080*
1051	늑	86ED	91AC	FC300080*
1052	늑	86EE	91AD	FC310080*
1053	늑	86EF	91AE	FC320080*
1054	늑	86F0	91AF	FC330080*
1055	늑	86F1	91B0	FC340080*
1056	늑	86F2	91B4	FC380080*
1057	늑	86F3	91B6	FC3A0080*
1058	늑	86F4	91B8	FC3C0080*
1059	늑	86F5	91B9	FC3D0080*
1060	늑	86F6	91BA	FC3E0080*
1061	늑	86F7	91BB	FC3F0080*
1062	늑	86F8	91C2	FC3M0080*
1063	늑	86F9	91C3	FC3N0080*
1064	늑	86FA	91C4	FC3O0080*
1065	늑	86FB	91C6	FC3Q0080*

Table 21 (Page 21 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1066	늑	86FC	91C7	FC3R0080*
1067	늑	86FD	91C8	FC3S0080*
1068	늑	86FE	91CA	FC3U0080*
1069	늑	8741	91CB	FC3V0080*
1070	늑	8742	91CC	FC3W0080*
1071	늑	8743	91CD	FC3X0080*
1072	늑	8744	91CE	FC3Y0080*
1073	늑	8745	91CF	FC3Z0080*
1074	늑	8746	91D0	FC400080*
1075	늑	8747	91D1	FC410080*
1076	늑	8748	91D3	FC430080*
1077	늑	8749	91D4	FC440080*
1078	늑	874A	91D5	FC450080
1079	늑	874B	91D7	FC470080*
1080	늑	874C	91D8	FC480080*
1081	늑	874D	91D9	FC490080*
1082	늑	874E	91DA	FC4A0080*
1083	늑	874F	91DB	FC4B0080*
1084	늑	8750	91DC	FC4C0080*
1085	늑	8751	91DD	FC4D0080*
1086	늑	8752	91E1	FC4H0080
1087	늑	8753	91E2	FC4I0080*
1088	늑	8754	91E3	FC4J0080*
1089	늑	8755	91E4	FC4K0080*
1090	늑	8756	91E5	FC4L0080*
1091	늑	8757	91E6	FC4M0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 22 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1092	꺄	8758	91E7	FC4N0080*
1093	꺅	8759	91E8	FC4O0080*
1094	꺆	875A	91E9	FC4P0080*
1095	꺇	8761	91EA	FC4Q0080*
1096	꺈	8762	91EB	FC4R0080*
1097	꺉	8763	91EC	FC4S0080*
1098	꺊	8764	91ED	FC4T0080*
1099	꺋	8765	91EE	FC4U0080*
1100	꺌	8766	91EF	FC4V0080*
1101	꺍	8767	91F0	FC4W0080*
1102	꺎	8768	91F1	FC4X0080*
1103	꺏	8769	91F3	FC4Z0080*
1104	꺐	876A	91F4	FC500080*
1105	꺑	876B	91F5	FC510080*
1106	꺒	876C	91F6	FC520080*
1107	꺓	876D	91F7	FC530080*
1108	꺔	876E	91F8	FC540080*
1109	꺕	876F	91F9	FC550080*
1110	꺖	8770	91FA	FC560080*
1111	꺗	8771	91FB	FC570080*
1112	꺘	8772	91FC	FC580080*
1113	꺙	8773	91FD	FC590080*
1114	꺚	8774	9242	FC5E0080*
1115	꺛	8775	9243	FC5F0080*
1116	꺜	8776	9244	FC5G0080*
1117	꺝	8777	9246	FC5I0080*

Table 21 (Page 22 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1118	꺞	8778	9247	FC5J0080*
1119	꺟	8779	9248	FC5K0080*
1120	꺠	877A	924A	FC5M0080*
1121	꺡	8781	924B	FC5N0080*
1122	꺢	8782	924C	FC5O0080*
1123	꺣	8783	924D	FC5P0080*
1124	꺤	8784	924E	FC5Q0080*
1125	꺥	8785	924F	FC5R0080*
1126	꺦	8786	9250	FC5S0080*
1127	꺧	8787	9254	FC5W0080*
1128	꺨	8788	9256	FC5Y0080*
1129	꺩	8789	9257	FC5Z0080*
1130	꺪	878A	9258	FC600080*
1131	꺫	878B	9259	FC610080*
1132	꺬	878C	925A	FC620080*
1133	꺭	878D	925B	FC630080*
1134	꺮	878E	925C	FC640080*
1135	꺯	878F	925D	FC650080*
1136	꺰	8790	9263	FC6B0080*
1137	꺱	8791	9264	FC6C0080*
1138	꺲	8792	9266	FC6E0080*
1139	꺳	8793	9267	FC6F0080*
1140	꺴	8794	9268	FC6G0080*
1141	꺵	8795	926A	FC6I0080*
1142	꺶	8796	926B	FC6J0080*
1143	꺷	8797	926C	FC6K0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 23 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1144	꺄	8798	926D	FC6L0080*
1145	꺅	8799	926E	FC6M0080*
1146	꺆	879A	926F	FC6N0080*
1147	꺇	879B	9270	FC6O0080*
1148	꺈	879C	9271	FC6P0080*
1149	꺉	879D	9274	FC6S0080*
1150	꺊	879E	9276	FC6U0080*
1151	꺋	879F	9278	FC6W0080*
1152	꺌	87A0	9279	FC6X0080*
1153	꺍	87A1	927A	FC6Y0080*
1154	꺎	87A2	927B	FC6Z0080*
1155	꺏	87A3	927C	FC700080*
1156	꺐	87A4	927D	FC710080*
1157	꺑	87A5	9283	FC770080*
1158	꺒	87A6	9284	FC780080*
1159	꺓	87A7	9286	FC7A0080*
1160	꺔	87A8	9287	FC7B0080*
1161	꺕	87A9	928A	FC7E0080*
1162	꺖	87AA	928B	FC7F0080*
1163	꺗	87AB	928C	FC7G0080*
1164	꺘	87AC	928D	FC7H0080*
1165	꺙	87AD	928E	FC7I0080*
1166	꺚	87AE	928F	FC7J0080*
1167	꺛	87AF	9290	FC7K0080*
1168	꺜	87B0	9294	FC7O0080*
1169	꺝	87B1	9296	FC7Q0080*

Table 21 (Page 23 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1170	꺞	87B2	9298	FC7S0080*
1171	꺟	87B3	9299	FC7T0080*
1172	꺠	87B4	929A	FC7U0080*
1173	꺡	87B5	929B	FC7V0080*
1174	꺢	87B6	929C	FC7W0080*
1175	꺣	87B7	929D	FC7X0080*
1176	꺤	87B8	92A2	FC820080*
1177	꺥	87B9	92A3	FC830080*
1178	꺦	87BA	92A4	FC840080*
1179	꺧	87BB	92A5	FC850080*
1180	꺨	87BC	92A6	FC860080*
1181	꺩	87BD	92A7	FC870080*
1182	꺪	87BE	92A8	FC880080*
1183	꺫	87BF	92A9	FC890080*
1184	꺬	87C0	92AA	FC8A0080*
1185	꺭	87C1	92AB	FC8B0080*
1186	꺮	87C2	92AC	FC8C0080*
1187	꺯	87C3	92AD	FC8D0080*
1188	꺰	87C4	92AE	FC8E0080*
1189	꺱	87C5	92AF	FC8F0080*
1190	꺲	87C6	92B0	FC8G0080*
1191	꺳	87C7	92B1	FC8H0080*
1192	꺴	87C8	92B3	FC8J0080*
1193	꺵	87C9	92B4	FC8K0080*
1194	꺶	87CA	92B5	FC8L0080
1195	꺷	87CB	92B7	FC8N0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1196	낫	87CC	92B8	FC8O0080*
1197	낫	87CD	92B9	FC8P0080*
1198	낫	87CE	92BA	FC8Q0080*
1199	낫	87CF	92BB	FC8R0080*
1200	낫	87D0	92BC	FC8S0080*
1201	낫	87D1	92BD	FC8T0080*
1202	낫	87D2	92C2	FC8Y0080*
1203	낫	87D3	92C3	FC8Z0080*
1204	낫	87D4	92C4	FC900080*
1205	낫	87D5	92C5	FC910080*
1206	낫	87D6	92C6	FC920080*
1207	낫	87D7	92C7	FC930080*
1208	낫	87D8	92C8	FC940080*
1209	낫	87D9	92C9	FC950080*
1210	낫	87DA	92CA	FC960080*
1211	낫	87DB	92CB	FC970080*
1212	낫	87DC	92CC	FC980080*
1213	낫	87DD	92CD	FC990080*
1214	낫	87DE	92CE	FC9A0080*
1215	낫	87DF	92CF	FC9B0080*
1216	낫	87E0	92D0	FC9C0080*
1217	낫	87E1	92D1	FC9D0080*
1218	낫	87E2	92D3	FC9F0080*
1219	낫	87E3	92D4	FC9G0080*
1220	낫	87E4	92D5	FC9H0080*
1221	낫	87E5	92D6	FC9I0080*

Line Number	Graphic	PC Code	Host Code	GCGID
1222	닝	87E6	92D7	FC9J0080*
1223	닝	87E7	92D8	FC9K0080*
1224	닝	87E8	92D9	FC9L0080*
1225	닝	87E9	92DA	FC9M0080*
1226	닝	87EA	92DB	FC9N0080*
1227	닝	87EB	92DC	FC9O0080*
1228	닝	87EC	92DD	FC9P0080*
1229	닝	87ED	92E2	FC9U0080*
1230	닝	87EE	92E3	FC9V0080*
1231	닝	87EF	92E4	FC9W0080*
1232	닝	87F0	92E6	FC9Y0080*
1233	닝	87F1	92E7	FC9Z0080*
1234	닝	87F2	92E8	FCA00080*
1235	닝	87F3	92EA	FCA20080*
1236	닝	87F4	92EB	FCA30080*
1237	닝	87F5	92EC	FCA40080*
1238	닝	87F6	92ED	FCA50080*
1239	닝	87F7	92EE	FCA60080*
1240	닝	87F8	92EF	FCA70080*
1241	닝	87F9	92F0	FCA80080*
1242	닝	87FA	92F4	FCAC0080*
1243	닝	87FB	92F5	FCAD0080*
1244	닝	87FC	92F6	FCAE0080*
1245	닝	87FD	92F7	FCAF0080*
1246	닝	87FE	92F8	FCAG0080*
1247	닝	8841	92F9	FCAH0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 25 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1248	늑	8842	92FA	FCAI0080*
1249	늑	8843	92FB	FCAJ0080*
1250	늑	8844	92FC	FCAK0080*
1251	늑	8845	92FD	FCAL0080*
1252	늑	8846	9343	FCAR0080*
1253	늑	8847	9344	FCAS0080*
1254	늑	8848	9345	FCAT0080*
1255	늑	8849	9346	FCAU0080*
1256	늑	884A	9347	FCAV0080*
1257	늑	884B	9348	FCAW0080*
1258	늑	884C	934A	FCAY0080*
1259	늑	884D	934B	FCAZ0080*
1260	늑	884E	934C	FCB00080*
1261	늑	884F	934D	FCB10080*
1262	늑	8850	934E	FCB20080*
1263	늑	8851	934F	FCB30080*
1264	늑	8852	9350	FCB40080*
1265	늑	8853	9354	FCB80080*
1266	늑	8854	9355	FCB90080*
1267	늑	8855	9356	FCBA0080*
1268	늑	8856	9358	FCBC0080*
1269	늑	8857	9359	FCBD0080*
1270	늑	8858	935A	FCBE0080*
1271	늑	8859	935B	FCBF0080*
1272	늑	885A	935C	FCBG0080*
1273	늑	8861	935D	FCBH0080*

Table 21 (Page 25 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1274	늑	8862	9363	FCBN0080*
1275	늑	8863	9364	FCBO0080*
1276	늑	8864	9366	FCBQ0080*
1277	늑	8865	9367	FCBR0080*
1278	늑	8866	9368	FCBS0080*
1279	늑	8867	936C	FCBW0080*
1280	늑	8868	936D	FCBX0080*
1281	늑	8869	936E	FCBY0080*
1282	늑	886A	936F	FCBZ0080*
1283	늑	886B	9370	FCC00080*
1284	늑	886C	9374	FCC40080*
1285	늑	886D	9376	FCC60080*
1286	늑	886E	9379	FCC90080
1287	늑	886F	937A	FCCA0080*
1288	늑	8870	937B	FCCB0080*
1289	늑	8871	937D	FCCD0080*
1290	늑	8872	9382	FCCI0080*
1291	늑	8873	9383	FCCJ0080*
1292	늑	8874	9384	FCCK0080*
1293	늑	8875	9386	FCCM0080*
1294	늑	8876	9387	FCCN0080*
1295	늑	8877	9388	FCCO0080*
1296	늑	8878	938A	FCCQ0080*
1297	늑	8879	938B	FCCR0080*
1298	늑	887A	938C	FCCS0080*
1299	늑	8881	938D	FCCT0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1300	꺄	8882	938E	FCCU0080*
1301	꺅	8883	938F	FCCV0080*
1302	꺆	8884	9390	FCCW0080*
1303	꺇	8885	9391	FCCX0080*
1304	꺈	8886	9393	FCCZ0080*
1305	꺉	8887	9394	FCD00080*
1306	꺊	8888	9395	FCD10080*
1307	꺋	8889	9396	FCD20080*
1308	꺌	888A	9397	FCD30080
1309	꺍	888B	9398	FCD40080*
1310	꺎	888C	9399	FCD50080*
1311	꺏	888D	939A	FCD60080*
1312	꺐	888E	939B	FCD70080*
1313	꺑	888F	939C	FCD80080*
1314	꺒	8890	939D	FCD90080*
1315	꺓	8891	93A3	FCDF0080*
1316	꺔	8892	93A4	FCDG0080*
1317	꺕	8893	93A6	FCDI0080*
1318	꺖	8894	93A7	FCDJ0080*
1319	꺗	8895	93A8	FCDK0080*
1320	꺘	8896	93AA	FCDM0080
1321	꺙	8897	93AC	FCDO0080*
1322	꺚	8898	93AD	FCDP0080*
1323	꺛	8899	93AE	FCDQ0080*
1324	꺜	889A	93AF	FCDR0080*
1325	꺝	889B	93B0	FCDS0080*

Table 21 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1326	꺞	889C	93B4	FCDW0080*
1327	꺟	889D	93B6	FCDY0080*
1328	꺠	889E	93B8	FCE00080*
1329	꺡	889F	93B9	FCE10080*
1330	꺢	88A0	93BA	FCE20080
1331	꺣	88A1	93BB	FCE30080*
1332	꺤	88A2	93BD	FCE50080*
1333	꺥	88A3	9464	FCH00080*
1334	꺦	88A4	9466	FCH20080*
1335	꺧	88A5	9467	FCH30080*
1336	꺨	88A6	946D	FCH90080*
1337	꺩	88A7	946E	FCHA0080*
1338	꺪	88A8	946F	FCHB0080*
1339	꺫	88A9	9474	FCHG0080*
1340	꺬	88AA	947A	FCHM0080*
1341	꺭	88AB	947B	FCHN0080*
1342	꺮	88AC	947C	FCHO0080*
1343	꺯	88AD	9483	FCHV0080*
1344	꺰	88AE	9484	FCHW0080*
1345	꺱	88AF	9486	FCHY0080*
1346	꺲	88B0	9487	FCHZ0080*
1347	꺳	88B1	9488	FCI00080*
1348	꺴	88B2	948A	FCI20080*
1349	꺵	88B3	948B	FCI30080*
1350	꺶	88B4	948C	FCI40080*
1351	꺷	88B5	948D	FCI50080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 27 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1352	뎡	88B6	948E	FCI60080*
1353	뎡	88B7	948F	FCI70080*
1354	뎡	88B8	9490	FCI80080*
1355	뎡	88B9	9494	FCIC0080*
1356	뎡	88BA	9498	FCIG0080*
1357	뎡	88BB	9499	FCIH0080*
1358	뎡	88BC	949A	FCII0080*
1359	뎡	88BD	949B	FCIJ0080*
1360	뎡	88BE	949C	FCIK0080*
1361	뎡	88BF	949D	FCIL0080*
1362	뎡	88C0	94A2	FCIQ0080*
1363	뎡	88C1	94A3	FCIR0080*
1364	뎡	88C2	94A4	FCIS0080*
1365	뎡	88C3	94A5	FCIT0080*
1366	뎡	88C4	94A6	FCIU0080*
1367	뎡	88C5	94A7	FCIV0080*
1368	뎡	88C6	94A8	FCIW0080*
1369	뎡	88C7	94A9	FCIX0080*
1370	뎡	88C8	94AA	FCIY0080*
1371	뎡	88C9	94AB	FCIZ0080*
1372	뎡	88CA	94AC	FCJ00080*
1373	뎡	88CB	94AD	FCJ10080*
1374	뎡	88CC	94AE	FCJ20080*
1375	뎡	88CD	94AF	FCJ30080*
1376	뎡	88CE	94B0	FCJ40080*
1377	뎡	88CF	94B1	FCJ50080*

Table 21 (Page 27 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1378	뎡	88D0	94B3	FCJ70080*
1379	뎡	88D1	94B4	FCJ80080*
1380	뎡	88D2	94B5	FCJ90080*
1381	뎡	88D3	94B6	FCJA0080*
1382	뎡	88D4	94B7	FCJB0080
1383	뎡	88D5	94B8	FCJC0080*
1384	뎡	88D6	94B9	FCJD0080*
1385	뎡	88D7	94BA	FCJE0080*
1386	뎡	88D8	94BB	FCJF0080*
1387	뎡	88D9	94BC	FCJG0080*
1388	뎡	88DA	94BD	FCJH0080*
1389	뎡	88DB	94C1	FCJL0080
1390	뎡	88DC	94C2	FCJM0080*
1391	뎡	88DD	94C3	FCJN0080*
1392	뎡	88DE	94C4	FCJO0080*
1393	뎡	88DF	94C5	FCJP0080*
1394	뎡	88E0	94C6	FCJQ0080*
1395	뎡	88E1	94C7	FCJR0080*
1396	뎡	88E2	94C8	FCJS0080*
1397	뎡	88E3	94C9	FCJT0080*
1398	뎡	88E4	94CA	FCJU0080*
1399	뎡	88E5	94CB	FCJV0080*
1400	뎡	88E6	94CC	FCJW0080*
1401	뎡	88E7	94CD	FCJX0080*
1402	뎡	88E8	94CE	FCJY0080*
1403	뎡	88E9	94CF	FCJZ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 28 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1404	땡	88EA	94D0	FCK00080*
1405	땢	88EB	94D1	FCK10080*
1406	땣	88EC	94D3	FCK30080*
1407	땤	88ED	94D4	FCK40080*
1408	땥	88EE	94D5	FCK50080*
1409	땦	88EF	94D6	FCK60080*
1410	땧	88F0	94D7	FCK70080*
1411	땨	88F1	94D8	FCK80080*
1412	땩	88F2	94D9	FCK90080*
1413	땪	88F3	94DA	FCKA0080*
1414	땫	88F4	94DB	FCKB0080*
1415	땬	88F5	94DC	FCKC0080*
1416	땭	88F6	94DD	FCKD0080*
1417	땮	88F7	94E4	FCKK0080*
1418	땯	88F8	94E6	FCKM0080*
1419	땰	88F9	94E7	FCKN0080*
1420	땱	88FA	94EA	FCKQ0080*
1421	땲	88FB	94ED	FCKT0080*
1422	땳	88FC	94EE	FCKU0080*
1423	땴	88FD	94EF	FCKV0080*
1424	땵	88FE	94F0	FCKW0080*
1425	땶	8941	94F4	FCL00080*
1426	땷	8942	94F6	FCL20080
1427	땸	8943	94F8	FCL40080
1428	땹	8944	94FA	FCL60080*
1429	땺	8945	94FB	FCL70080*

Table 21 (Page 28 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1430	땻	8946	94FD	FCL90080*
1431	땼	8947	9543	FCLF0080*
1432	땽	8948	9544	FCLG0080*
1433	땾	8949	9546	FCLI0080*
1434	땿	894A	9547	FCLJ0080*
1435	떀	894B	9548	FCLK0080*
1436	떁	894C	954A	FCLM0080*
1437	떂	894D	954B	FCLN0080*
1438	떃	894E	954C	FCL00080*
1439	떄	894F	954D	FCLP0080*
1440	떅	8950	954E	FCLQ0080*
1441	떆	8951	954F	FCLR0080*
1442	떇	8952	9550	FCLS0080*
1443	떈	8953	9554	FCLW0080*
1444	떉	8954	9558	FCM00080*
1445	떊	8955	9559	FCM10080*
1446	떋	8956	955A	FCM20080*
1447	떌	8957	955B	FCM30080*
1448	떍	8958	955C	FCM40080*
1449	떑	8959	955D	FCM50080*
1450	떒	895A	9562	FCMA0080*
1451	떓	8961	9563	FCMB0080*
1452	떔	8962	9564	FCMC0080*
1453	떕	8963	9566	FCME0080*
1454	떖	8964	9567	FCMF0080*
1455	떗	8965	9568	FCMG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 29 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1456	덩	8966	956A	FCMI0080*
1457	덩	8967	956B	FCMJ0080*
1458	덩	8968	956C	FCMK0080*
1459	덩	8969	956D	FCML0080*
1460	덩	896A	956E	FCMM0080*
1461	덩	896B	956F	FCMN0080*
1462	덩	896C	9570	FCMO0080*
1463	덩	896D	9571	FCMP0080
1464	덩	896E	9573	FCMR0080*
1465	덩	896F	9574	FCMS0080*
1466	덩	8970	9575	FCMT0080*
1467	덩	8971	9578	FCMW0080*
1468	덩	8972	9579	FCMX0080*
1469	덩	8973	957A	FCMY0080*
1470	덩	8974	957B	FCMZ0080*
1471	덩	8975	957C	FCN00080*
1472	덩	8976	957D	FCN10080*
1473	덩	8977	9582	FCN60080*
1474	덩	8978	9583	FCN70080*
1475	덩	8979	9584	FCN80080*
1476	덩	897A	9586	FCNA0080*
1477	덩	8981	9587	FCNB0080*
1478	덩	8982	9588	FCNC0080*
1479	덩	8983	9589	FCND0080*
1480	덩	8984	958A	FCNE0080*
1481	덩	8985	958B	FCNF0080*

Table 21 (Page 29 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1482	덩	8986	958C	FCNG0080*
1483	덩	8987	958D	FCNH0080*
1484	덩	8988	958E	FCNI0080*
1485	덩	8989	958F	FCNJ0080*
1486	덩	898A	9590	FCNK0080*
1487	덩	898B	9591	FCNL0080*
1488	덩	898C	9593	FCNN0080*
1489	덩	898D	9594	FCNO0080*
1490	덩	898E	9595	FCNP0080*
1491	덩	898F	9596	FCNQ0080*
1492	덩	8990	9597	FCNR0080*
1493	덩	8991	9598	FCNS0080*
1494	덩	8992	9599	FCNT0080*
1495	덩	8993	959A	FCNU0080*
1496	덩	8994	959B	FCNV0080*
1497	덩	8995	959C	FCNW0080*
1498	덩	8996	959D	FCNX0080*
1499	덩	8997	95A3	FCO30080*
1500	덩	8998	95A4	FCO40080*
1501	덩	8999	95A6	FCO60080*
1502	덩	899A	95A7	FCO70080*
1503	덩	899B	95AA	FCOA0080*
1504	덩	899C	95AC	FCOC0080*
1505	덩	899D	95AE	FCOE0080*
1506	덩	899E	95AF	FCOF0080*
1507	덩	899F	95B0	FCOG0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 30 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1508	ㄸ	89A0	95B4	FCOK0080*
1509	ㄹ	89A1	95B6	FCOM0080*
1510	ㄺ	89A2	95B8	FCOO0080*
1511	ㄻ	89A3	95BA	FCOQ0080*
1512	ㄼ	89A4	95BC	FCOS0080*
1513	ㄽ	89A5	95BD	FCOT0080*
1514	ㅍ	89A6	95C2	FCOY0080*
1515	ㅑ	89A7	95C3	FCOZ0080*
1516	ㅒ	89A8	95C4	FCP00080*
1517	ㅓ	89A9	95C6	FCP20080*
1518	ㅕ	89AA	95C7	FCP30080*
1519	ㅖ	89AB	95C8	FCP40080*
1520	ㅗ	89AC	95CA	FCP60080*
1521	ㅛ	89AD	95CB	FCP70080*
1522	ㅜ	89AE	95CC	FCP80080*
1523	ㅠ	89AF	95CD	FCP90080*
1524	ㅡ	89B0	95CE	FCPA0080*
1525	ㅣ	89B1	95CF	FCPB0080*
1526	ㅍ	89B2	95D0	FCPC0080*
1527	ㅑ	89B3	95D1	FCPD0080*
1528	ㅓ	89B4	95D3	FCPF0080*
1529	ㅕ	89B5	95D4	FCPG0080*
1530	ㅗ	89B6	95D5	FCPH0080*
1531	ㅛ	89B7	95D6	FCPI0080*
1532	ㅜ	89B8	95D7	FCPJ0080*
1533	ㅠ	89B9	95D8	FCPK0080*

Table 21 (Page 30 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1534	ㅓ	89BA	95D9	FCPL0080*
1535	ㅕ	89BB	95DA	FCPM0080*
1536	ㅗ	89BC	95DB	FCPN0080*
1537	ㅛ	89BD	95DC	FCPO0080*
1538	ㅜ	89BE	95DD	FCPP0080*
1539	ㅠ	89BF	95E2	FCPU0080*
1540	ㅡ	89C0	95E3	FCPV0080*
1541	ㅣ	89C1	95E4	FCPW0080*
1542	ㅍ	89C2	95E5	FCPX0080
1543	ㅑ	89C3	95E6	FCPY0080*
1544	ㅓ	89C4	95E7	FCPZ0080*
1545	ㅕ	89C5	95E8	FCQ00080*
1546	ㅗ	89C6	95E9	FCQ10080*
1547	ㅛ	89C7	95EA	FCQ20080*
1548	ㅜ	89C8	95EB	FCQ30080*
1549	ㅠ	89C9	95EC	FCQ40080*
1550	ㅡ	89CA	95ED	FCQ50080*
1551	ㅣ	89CB	95EE	FCQ60080*
1552	ㅍ	89CC	95EF	FCQ70080*
1553	ㅑ	89CD	95F0	FCQ80080*
1554	ㅓ	89CE	95F1	FCQ90080*
1555	ㅕ	89CF	95F3	FCQB0080*
1556	ㅗ	89D0	95F4	FCQC0080*
1557	ㅛ	89D1	95F5	FCQD0080
1558	ㅜ	89D2	95F7	FCQF0080*
1559	ㅠ	89D3	95F8	FCQG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1560	뵘	89D4	95F9	FCQH0080*
1561	뵙	89D5	95FA	FCQI0080*
1562	뵚	89D6	95FB	FCQJ0080*
1563	뵛	89D7	95FC	FCQK0080*
1564	뵜	89D8	95FD	FCQL0080*
1565	뵝	89D9	9642	FCQQ0080*
1566	뵞	89DA	9643	FCQR0080*
1567	뵟	89DB	9644	FCQS0080*
1568	뵠	89DC	9646	FCQU0080*
1569	뵡	89DD	9647	FCQV0080*
1570	뵢	89DE	9648	FCQW0080*
1571	뵣	89DF	964A	FCQY0080*
1572	뵤	89E0	964B	FCQZ0080*
1573	뵥	89E1	964C	FCR00080*
1574	뵦	89E2	964D	FCR10080*
1575	뵧	89E3	964E	FCR20080*
1576	뵨	89E4	964F	FCR30080*
1577	뵩	89E5	9650	FCR40080*
1578	뵪	89E6	9654	FCR80080*
1579	뵫	89E7	9656	FCRA0080
1580	뵬	89E8	9657	FCRB0080*
1581	뵭	89E9	9658	FCRC0080*
1582	뵮	89EA	9659	FCRD0080*
1583	뵯	89EB	965A	FCRE0080*
1584	뵰	89EC	965B	FCRF0080*
1585	뵱	89ED	965C	FCRG0080*

Line Number	Graphic	PC Code	Host Code	GCGID
1586	뵲	89EE	965D	FCRH0080*
1587	뵳	89EF	9662	FCRM0080*
1588	뵴	89F0	9663	FCRN0080*
1589	뵵	89F1	9664	FCRO0080*
1590	뵶	89F2	9665	FCRP0080*
1591	뵷	89F3	9666	FCRQ0080*
1592	뵸	89F4	9667	FCRR0080*
1593	뵹	89F5	9668	FCRS0080*
1594	뵺	89F6	9669	FCRT0080*
1595	뵻	89F7	966A	FCRU0080*
1596	뵼	89F8	966B	FCRV0080*
1597	뵽	89F9	966C	FCRW0080*
1598	뵾	89FA	966D	FCRX0080*
1599	뵿	89FB	966E	FCRY0080*
1600	뿀	89FC	966F	FCRZ0080*
1601	뿁	89FD	9670	FCS00080*
1602	뿂	89FE	9671	FCS10080*
1603	뿃	8A41	9673	FCS30080*
1604	뿄	8A42	9674	FCS40080*
1605	뿅	8A43	9675	FCS50080*
1606	뿆	8A44	9676	FCS60080*
1607	뿇	8A45	9677	FCS70080*
1608	뿈	8A46	9678	FCS80080*
1609	뿉	8A47	9679	FCS90080*
1610	뿊	8A48	967A	FCSA0080*
1611	뿋	8A49	967B	FCSB0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 32 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1612	똥	8A4A	967C	FCSC0080*
1613	똥	8A4B	967D	FCSD0080*
1614	똥	8A4C	9683	FCSJ0080*
1615	똥	8A4D	9684	FCSK0080*
1616	똥	8A4E	9686	FCSM0080*
1617	똥	8A4F	9687	FCSN0080*
1618	똥	8A50	9688	FCSO0080
1619	똥	8A51	968A	FCSQ0080*
1620	똥	8A52	968B	FCSR0080*
1621	똥	8A53	968C	FCSS0080*
1622	똥	8A54	968D	FCST0080*
1623	똥	8A55	968E	FCSU0080*
1624	똥	8A56	968F	FCSV0080*
1625	똥	8A57	9690	FCSW0080*
1626	똥	8A58	9694	FCT00080*
1627	똥	8A59	9696	FCT20080*
1628	똥	8A5A	9698	FCT40080*
1629	똥	8A61	9699	FCT50080*
1630	똥	8A62	969A	FCT60080*
1631	똥	8A63	969B	FCT70080*
1632	똥	8A64	969C	FCT80080*
1633	똥	8A65	969D	FCT90080*
1634	똥	8A66	96A2	FCTE0080*
1635	똥	8A67	96A3	FCTF0080*
1636	똥	8A68	96A4	FCTG0080*
1637	똥	8A69	96A5	FCTH0080*

Table 21 (Page 32 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1638	똥	8A6A	96A6	FCTI0080*
1639	똥	8A6B	96A7	FCTJ0080*
1640	똥	8A6C	96A8	FCTK0080*
1641	똥	8A6D	96A9	FCTL0080*
1642	똥	8A6E	96AA	FCTM0080*
1643	똥	8A6F	96AB	FCTN0080*
1644	똥	8A70	96AC	FCTO0080*
1645	똥	8A71	96AD	FCTP0080*
1646	똥	8A72	96AE	FCTQ0080*
1647	똥	8A73	96AF	FCTR0080*
1648	똥	8A74	96B0	FCTS0080*
1649	똥	8A75	96B1	FCTT0080*
1650	똥	8A76	96B3	FCTV0080*
1651	똥	8A77	96B4	FCTW0080*
1652	똥	8A78	96B5	FCTX0080
1653	똥	8A79	96B7	FCTZ0080*
1654	똥	8A7A	96B8	FCU00080*
1655	똥	8A81	96B9	FCU10080*
1656	똥	8A82	96BA	FCU20080*
1657	똥	8A83	96BB	FCU30080*
1658	똥	8A84	96BC	FCU40080*
1659	똥	8A85	96BD	FCU50080*
1660	똥	8A86	96C2	FCUA0080*
1661	똥	8A87	96C3	FCUB0080*
1662	똥	8A88	96C4	FCUC0080*
1663	똥	8A89	96C5	FCUD0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1664	뵐	8A8A	96C6	FCUE0080*
1665	뵎	8A8B	96C7	FCUF0080*
1666	뵏	8A8C	96C8	FCUG0080*
1667	뵑	8A8D	96C9	FCUH0080*
1668	뵒	8A8E	96CA	FCUI0080*
1669	뵓	8A8F	96CB	FCUJ0080*
1670	뵔	8A90	96CC	FCUK0080*
1671	뵕	8A91	96CD	FCUL0080*
1672	뵖	8A92	96CE	FCUM0080*
1673	뵗	8A93	96CF	FCUN0080*
1674	뵘	8A94	96D0	FCUO0080*
1675	뵙	8A95	96D1	FCUP0080*
1676	뵚	8A96	96D3	FCUR0080*
1677	뵛	8A97	96D4	FCUS0080*
1678	뵜	8A98	96D5	FCUT0080*
1679	뵝	8A99	96D6	FCUU0080*
1680	뵞	8A9A	96D8	FCUW0080*
1681	뵟	8A9B	96D9	FCUX0080*
1682	뵠	8A9C	96DA	FCUY0080*
1683	뵡	8A9D	96DB	FCUZ0080*
1684	뵢	8A9E	96DC	FCV00080*
1685	뵣	8A9F	96DD	FCV10080*
1686	뵤	8AA0	96E2	FCV60080*
1687	뵥	8AA1	96E3	FCV70080*
1688	뵦	8AA2	96E4	FCV80080*
1689	뵧	8AA3	96E6	FCVA0080*

Table 21 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1690	뵨	8AA4	96E7	FCVB0080*
1691	뵩	8AA5	96E8	FCVC0080*
1692	뵪	8AA6	96EA	FCVE0080*
1693	뵫	8AA7	96EB	FCVF0080*
1694	뵬	8AA8	96EC	FCVG0080*
1695	뵭	8AA9	96ED	FCVH0080*
1696	뵮	8AAA	96EE	FCVI0080*
1697	뵯	8AAB	96EF	FCVJ0080*
1698	뵰	8AAC	96F0	FCVK0080*
1699	뵱	8AAD	96F1	FCVL0080
1700	뵲	8AAE	96F4	FCVO0080*
1701	뵳	8AAF	96F6	FCVQ0080*
1702	뵴	8AB0	96F8	FCVS0080*
1703	뵵	8AB1	96F9	FCVT0080*
1704	뵶	8AB2	96FA	FCVU0080*
1705	뵷	8AB3	96FB	FCVV0080*
1706	뵸	8AB4	96FC	FCVW0080*
1707	뵹	8AB5	96FD	FCVX0080*
1708	뵺	8AB6	9742	FCW20080
1709	뵻	8AB7	9743	FCW30080*
1710	뵼	8AB8	9744	FCW40080*
1711	뵽	8AB9	9746	FCW60080*
1712	뵾	8ABA	9747	FCW70080*
1713	뵿	8ABB	9748	FCW80080*
1714	뿀	8ABC	974A	FCWA0080*
1715	뿁	8ABD	974B	FCWB0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1716	궁	8ABE	974C	FCWC0080*
1717	궂	8ABF	974D	FCWD0080*
1718	궃	8AC0	974E	FCWE0080*
1719	궄	8AC1	974F	FCWF0080*
1720	궅	8AC2	9750	FCWG0080*
1721	궆	8AC3	9753	FCWJ0080*
1722	궇	8AC4	9754	FCWK0080*
1723	궈	8AC5	9755	FCWL0080*
1724	궉	8AC6	9756	FCWM0080*
1725	궊	8AC7	9758	FCWO0080*
1726	궋	8AC8	9759	FCWP0080*
1727	권	8AC9	975A	FCWQ0080*
1728	궍	8ACA	975B	FCWR0080*
1729	궎	8ACB	975C	FCWS0080*
1730	궏	8ACC	975D	FCWT0080*
1731	궐	8ACD	9763	FCWZ0080*
1732	궑	8ACE	9764	FCX00080*
1733	궒	8ACF	9766	FCX20080*
1734	궓	8AD0	9767	FCX30080*
1735	궔	8AD1	976A	FCX60080*
1736	궕	8AD2	976C	FCX80080
1737	궖	8AD3	976D	FCX90080*
1738	궗	8AD4	976E	FCXA0080*
1739	궘	8AD5	976F	FCXB0080*
1740	궙	8AD6	9770	FCXC0080*
1741	궚	8AD7	9774	FCXG0080*

Line Number	Graphic	PC Code	Host Code	GCGID
1742	궛	8AD8	9776	FCXI0080*
1743	궜	8AD9	9778	FCXK0080*
1744	궝	8ADA	9779	FCXL0080*
1745	궞	8ADB	977A	FCXM0080*
1746	궟	8ADC	977B	FCXN0080*
1747	궠	8ADD	977C	FCXO0080*
1748	궡	8ADE	977D	FCXP0080*
1749	궢	8ADF	9782	FCXU0080*
1750	궣	8AE0	9783	FCXV0080*
1751	궤	8AE1	9784	FCXW0080*
1752	궥	8AE2	9785	FCXX0080*
1753	궦	8AE3	9786	FCXY0080*
1754	궧	8AE4	9787	FCXZ0080*
1755	궨	8AE5	9788	FCY00080*
1756	궩	8AE6	9789	FCY10080*
1757	궪	8AE7	978A	FCY20080*
1758	궫	8AE8	978B	FCY30080*
1759	궬	8AE9	978C	FCY40080*
1760	궭	8AEA	978D	FCY50080*
1761	궮	8AEB	978E	FCY60080*
1762	궯	8AEC	978F	FCY70080*
1763	궰	8AED	9790	FCY80080*
1764	궱	8AEE	9791	FCY90080*
1765	궲	8AEF	9793	FCYB0080*
1766	궳	8AF0	9794	FCYC0080*
1767	궴	8AF1	9795	FCYD0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1768	뵐	8AF2	9796	FCYE0080*
1769	뵎	8AF3	9797	FCYF0080*
1770	뵏	8AF4	9798	FCYG0080*
1771	뵑	8AF5	9799	FCYH0080*
1772	뵒	8AF6	979A	FCYI0080*
1773	뵓	8AF7	979B	FCYJ0080*
1774	뵔	8AF8	979C	FCYK0080*
1775	뵕	8AF9	979D	FCYL0080*
1776	뵖	8AFA	97A3	FCYR0080*
1777	뵗	8AFB	97A4	FCYS0080*
1778	뵘	8AFC	97A6	FCYU0080*
1779	뵙	8AFD	97A7	FCYV0080*
1780	뵚	8AFE	97AA	FCYY0080*
1781	뵛	8B41	97AB	FCYZ0080*
1782	뵜	8B42	97AC	FCZ00080*
1783	뵝	8B43	97AD	FCZ10080*
1784	뵞	8B44	97AE	FCZ20080*
1785	뵟	8B45	97AF	FCZ30080*
1786	뵠	8B46	97B0	FCZ40080*
1787	뵡	8B47	97B4	FCZ80080*
1788	뵢	8B48	97B9	FCZD0080*
1789	뵣	8B49	97BA	FCZE0080*
1790	뵤	8B4A	97BB	FCZF0080*
1791	뵥	8B4B	97BC	FCZG0080
1792	뵦	8B4C	97BD	FCZH0080*
1793	뵧	8B4D	9863	FD2B0080

Table 21 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1794	뵨	8B4E	9864	FD2C0080*
1795	뵩	8B4F	9866	FD2E0080*
1796	뵪	8B50	9867	FD2F0080*
1797	뵫	8B51	9868	FD2G0080
1798	뵬	8B52	986A	FD2I0080*
1799	뵭	8B53	986B	FD2J0080*
1800	뵮	8B54	986C	FD2K0080*
1801	뵯	8B55	986D	FD2L0080*
1802	뵰	8B56	986E	FD2M0080*
1803	뵱	8B57	986F	FD2N0080*
1804	뵲	8B58	9870	FD2O0080
1805	뵳	8B59	9874	FD2S0080*
1806	뵴	8B5A	9878	FD2W0080*
1807	뵵	8B61	9879	FD2X0080*
1808	뵶	8B62	987A	FD2Y0080*
1809	뵷	8B63	987B	FD2Z0080*
1810	뵸	8B64	987C	FD300080*
1811	뵹	8B65	9883	FD370080*
1812	뵺	8B66	9884	FD380080*
1813	뵻	8B67	9886	FD3A0080*
1814	뵼	8B68	9887	FD3B0080*
1815	뵽	8B69	9888	FD3C0080*
1816	뵾	8B6A	988A	FD3E0080*
1817	뵿	8B6B	988B	FD3F0080*
1818	뿀	8B6C	988C	FD3G0080*
1819	뿁	8B6D	988D	FD3H0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 36 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1820	꺄	8B6E	988E	FD3I0080*
1821	꺅	8B6F	988F	FD3J0080*
1822	꺆	8B70	9890	FD3K0080*
1823	꺇	8B71	9894	FD3O0080*
1824	꺈	8B72	9898	FD3S0080*
1825	꺉	8B73	9899	FD3T0080*
1826	꺊	8B74	989A	FD3U0080*
1827	꺋	8B75	989B	FD3V0080*
1828	꺌	8B76	989C	FD3W0080*
1829	꺍	8B77	989D	FD3X0080*
1830	꺎	8B78	98A1	FD410080
1831	꺏	8B79	98A2	FD420080*
1832	꺑	8B7A	98A3	FD430080*
1833	꺒	8B81	98A4	FD440080*
1834	꺓	8B82	98A5	FD450080*
1835	꺔	8B83	98A6	FD460080*
1836	꺕	8B84	98A7	FD470080*
1837	꺖	8B85	98A8	FD480080*
1838	꺗	8B86	98A9	FD490080*
1839	꺘	8B87	98AA	FD4A0080*
1840	꺙	8B88	98AB	FD4B0080*
1841	꺚	8B89	98AC	FD4C0080*
1842	꺛	8B8A	98AD	FD4D0080*
1843	꺜	8B8B	98AE	FD4E0080*
1844	꺝	8B8C	98AF	FD4F0080*
1845	꺞	8B8D	98B0	FD4G0080*

Table 21 (Page 36 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1846	꺟	8B8E	98B1	FD4H0080*
1847	꺠	8B8F	98B3	FD4J0080*
1848	꺡	8B90	98B4	FD4K0080*
1849	꺢	8B91	98B5	FD4L0080*
1850	꺣	8B92	98B6	FD4M0080*
1851	꺤	8B93	98B7	FD4N0080*
1852	꺥	8B94	98B8	FD4O0080*
1853	꺦	8B95	98B9	FD4P0080*
1854	꺧	8B96	98BA	FD4Q0080*
1855	꺨	8B97	98BB	FD4R0080*
1856	꺩	8B98	98BC	FD4S0080*
1857	꺪	8B99	98BD	FD4T0080*
1858	꺫	8B9A	98C1	FD4X0080
1859	꺬	8B9B	98C2	FD4Y0080*
1860	꺭	8B9C	98C3	FD4Z0080*
1861	꺮	8B9D	98C4	FD500080*
1862	꺯	8B9E	98C5	FD510080*
1863	꺰	8B9F	98C6	FD520080*
1864	꺱	8BA0	98C7	FD530080*
1865	꺲	8BA1	98C8	FD540080*
1866	꺳	8BA2	98C9	FD550080*
1867	꺴	8BA3	98CA	FD560080*
1868	꺵	8BA4	98CB	FD570080*
1869	꺶	8BA5	98CC	FD580080*
1870	꺷	8BA6	98CD	FD590080*
1871	꺸	8BA7	98CE	FD5A0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 21 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1872	땡	8BA8	98CF	FD5B0080*
1873	땢	8BA9	98D0	FD5C0080*
1874	땣	8BAA	98D1	FD5D0080*
1875	땤	8BAB	98D3	FD5F0080*
1876	땥	8BAC	98D4	FD5G0080*
1877	땦	8BAD	98D5	FD5H0080*
1878	땧	8BAE	98D6	FD5I0080*
1879	땨	8BAF	98D7	FD5J0080*
1880	땩	8BB0	98D8	FD5K0080*
1881	땪	8BB1	98D9	FD5L0080*
1882	땫	8BB2	98DA	FD5M0080*
1883	땬	8BB3	98DB	FD5N0080*
1884	땭	8BB4	98DC	FD5O0080*
1885	땮	8BB5	98DD	FD5P0080*
1886	땯	8BB6	98E3	FD5V0080*
1887	땰	8BB7	98E4	FD5W0080*
1888	땱	8BB8	98E6	FD5Y0080*
1889	땲	8BB9	98E7	FD5Z0080*
1890	땳	8BBA	98E8	FD600080*
1891	땴	8BBB	98EA	FD620080*
1892	땵	8BBC	98ED	FD650080*
1893	땶	8BBD	98EE	FD660080*
1894	땷	8BBE	98EF	FD670080*
1895	땸	8BBF	98F0	FD680080*
1896	땹	8BC0	98F4	FD6C0080*
1897	땺	8BC1	98F8	FD6G0080*

Table 21 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1898	땻	8BC2	98F9	FD6H0080*
1899	땼	8BC3	98FA	FD6I0080*
1900	땽	8BC4	98FB	FD6J0080*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 1 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1901	똥	8BC5	98FC	FD6K0080*
1902	똥	8BC6	9943	FD6R0080*
1903	똥	8BC7	9944	FD6S0080*
1904	똥	8BC8	9946	FD6U0080*
1905	똥	8BC9	9947	FD6V0080*
1906	똥	8BCA	9948	FD6W0080*
1907	똥	8BCB	994A	FD6Y0080*
1908	똥	8BCC	994B	FD6Z0080*
1909	똥	8BCD	994C	FD700080*
1910	똥	8BCE	994D	FD710080*
1911	똥	8BCF	994E	FD720080*
1912	똥	8BD0	994F	FD730080*
1913	똥	8BD1	9950	FD740080*
1914	똥	8BD2	9954	FD780080*
1915	똥	8BD3	9958	FD7C0080*
1916	똥	8BD4	9959	FD7D0080*
1917	똥	8BD5	995A	FD7E0080*
1918	똥	8BD6	995B	FD7F0080*
1919	똥	8BD7	995C	FD7G0080*
1920	똥	8BD8	995D	FD7H0080*
1921	똥	8BD9	9962	FD7M0080*
1922	똥	8BDA	9963	FD7N0080*
1923	똥	8BDB	9964	FD7O0080*
1924	똥	8BDC	9965	FD7P0080*
1925	똥	8BDD	9966	FD7Q0080*
1926	똥	8BDE	9967	FD7R0080*

Table 22 (Page 1 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1927	똥	8BDF	9968	FD7S0080*
1928	똥	8BE0	9969	FD7T0080*
1929	똥	8BE1	996A	FD7U0080*
1930	똥	8BE2	996B	FD7V0080*
1931	똥	8BE3	996C	FD7W0080*
1932	똥	8BE4	996D	FD7X0080*
1933	똥	8BE5	996E	FD7Y0080*
1934	똥	8BE6	996F	FD7Z0080*
1935	똥	8BE7	9970	FD800080*
1936	똥	8BE8	9971	FD810080*
1937	똥	8BE9	9973	FD830080*
1938	똥	8BEA	9974	FD840080*
1939	똥	8BEB	9975	FD850080*
1940	똥	8BEC	9977	FD870080*
1941	똥	8BED	9978	FD880080*
1942	똥	8BEE	9979	FD890080*
1943	똥	8BEF	997A	FD8A0080*
1944	똥	8BF0	997B	FD8B0080*
1945	똥	8BF1	997C	FD8C0080*
1946	똥	8BF2	997D	FD8D0080*
1947	똥	8BF3	9981	FD8H0080
1948	똥	8BF4	9982	FD8I0080*
1949	똥	8BF5	9983	FD8J0080*
1950	똥	8BF6	9984	FD8K0080*
1951	똥	8BF7	9985	FD8L0080*
1952	똥	8BF8	9986	FD8M0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 2 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1953	뽕	8BF9	9987	FD8N0080*
1954	뽕	8BFA	9988	FD8O0080*
1955	뽕	8BFB	9989	FD8P0080*
1956	뽕	8BFC	998A	FD8Q0080*
1957	뽕	8BFD	998B	FD8R0080*
1958	뽕	8BFE	998C	FD8S0080*
1959	뽕	8C41	998D	FD8T0080*
1960	뽕	8C42	998E	FD8U0080*
1961	뽕	8C43	998F	FD8V0080*
1962	뽕	8C44	9990	FD8W0080*
1963	뽕	8C45	9991	FD8X0080*
1964	뽕	8C46	9993	FD8Z0080*
1965	뽕	8C47	9994	FD900080*
1966	뽕	8C48	9995	FD910080*
1967	뽕	8C49	9996	FD920080*
1968	뽕	8C4A	9997	FD930080*
1969	뽕	8C4B	9998	FD940080*
1970	뽕	8C4C	9999	FD950080*
1971	뽕	8C4D	999A	FD960080*
1972	뽕	8C4E	999B	FD970080*
1973	뽕	8C4F	999C	FD980080*
1974	뽕	8C50	999D	FD990080*
1975	뽕	8C51	99A3	FD9F0080*
1976	뽕	8C52	99A4	FD9G0080*
1977	뽕	8C53	99A6	FD9I0080*
1978	뽕	8C54	99A7	FD9J0080*

Table 22 (Page 2 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1979	뽕	8C55	99A8	FD9K0080*
1980	뽕	8C56	99AA	FD9M0080*
1981	뽕	8C57	99AB	FD9N0080*
1982	뽕	8C58	99AC	FD9O0080*
1983	뽕	8C59	99AD	FD9P0080*
1984	뽕	8C5A	99AE	FD9Q0080*
1985	뽕	8C61	99AF	FD9R0080*
1986	뽕	8C62	99B0	FD9S0080*
1987	뽕	8C63	99B1	FD9T0080*
1988	뽕	8C64	99B3	FD9V0080*
1989	뽕	8C65	99B4	FD9W0080*
1990	뽕	8C66	99B5	FD9X0080*
1991	뽕	8C67	99B6	FD9Y0080*
1992	뽕	8C68	99B8	FDA00080*
1993	뽕	8C69	99B9	FDA10080*
1994	뽕	8C6A	99BA	FDA20080*
1995	뽕	8C6B	99BB	FDA30080*
1996	뽕	8C6C	99BC	FDA40080*
1997	뽕	8C6D	99BD	FDA50080*
1998	뽕	8C6E	99C2	FDAA0080*
1999	뽕	8C6F	99C3	FDAB0080*
2000	뽕	8C70	99C4	FDAC0080*
2001	뽕	8C71	99C5	FDAD0080*
2002	뽕	8C72	99C6	FDAE0080*
2003	뽕	8C73	99C7	FDAF0080*
2004	뽕	8C74	99C8	FDAG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2005	팍	8C75	99CA	FDAI0080*
2006	팍	8C76	99CB	FDAJ0080*
2007	팍	8C77	99CC	FDAK0080*
2008	팍	8C78	99CD	FDAL0080*
2009	팍	8C79	99CE	FDAM0080*
2010	팍	8C7A	99CF	FDAN0080*
2011	팍	8C81	99D0	FDAO0080*
2012	팍	8C82	99D1	FDAP0080*
2013	팍	8C83	99D3	FDAR0080*
2014	팍	8C84	99D4	FDAS0080*
2015	팍	8C85	99D5	FDAT0080*
2016	팍	8C86	99D6	FDAU0080*
2017	팍	8C87	99D7	FDAV0080*
2018	팍	8C88	99D8	FDAW0080*
2019	팍	8C89	99D9	FDAX0080*
2020	팍	8C8A	99DA	FDAY0080*
2021	팍	8C8B	99DB	FDAZ0080*
2022	팍	8C8C	99DC	FDB00080*
2023	팍	8C8D	99DD	FDB10080*
2024	팍	8C8E	99E2	FDB60080*
2025	팍	8C8F	99E3	FDB70080*
2026	팍	8C90	99E4	FDB80080*
2027	팍	8C91	99E5	FDB90080*
2028	팍	8C92	99E6	FDBA0080*
2029	팍	8C93	99E7	FDBB0080*
2030	팍	8C94	99E8	FDBC0080*

Table 22 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2031	팍	8C95	99E9	FDBD0080*
2032	팍	8C96	99EA	FDBE0080*
2033	팍	8C97	99EB	FDBF0080*
2034	팍	8C98	99EC	FDBG0080*
2035	팍	8C99	99ED	FDBH0080*
2036	팍	8C9A	99EE	FDBI0080*
2037	팍	8C9B	99EF	FDBJ0080*
2038	팍	8C9C	99F0	FDBK0080*
2039	팍	8C9D	99F1	FDBL0080*
2040	팍	8C9E	99F3	FDBN0080*
2041	팍	8C9F	99F4	FDBO0080*
2042	팍	8CA0	99F5	FDBP0080*
2043	팍	8CA1	99F6	FDBQ0080*
2044	팍	8CA2	99F7	FDBR0080*
2045	팍	8CA3	99F8	FDBS0080*
2046	팍	8CA4	99F9	FDBT0080*
2047	팍	8CA5	99FA	FDBU0080*
2048	팍	8CA6	99FB	FDBV0080*
2049	팍	8CA7	99FC	FDBW0080*
2050	팍	8CA8	99FD	FDBX0080*
2051	팍	8CA9	9A42	FDC20080*
2052	팍	8CAA	9A43	FDC30080*
2053	팍	8CAB	9A44	FDC40080*
2054	팍	8CAC	9A46	FDC60080*
2055	팍	8CAD	9A47	FDC70080*
2056	팍	8CAE	9A48	FDC80080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2057	펠	8CAF	9A49	FDC90080*
2058	펄	8CB0	9A4A	FDCA0080*
2059	펍	8CB1	9A4B	FDCB0080*
2060	펑	8CB2	9A4C	FDCC0080*
2061	펒	8CB3	9A4D	FDCD0080*
2062	펓	8CB4	9A4E	FDCE0080*
2063	펔	8CB5	9A4F	FDCF0080*
2064	펕	8CB6	9A50	FDCG0080*
2065	페	8CB7	9A51	FDCH0080*
2066	펙	8CB8	9A53	FDCJ0080*
2067	펚	8CB9	9A54	FDCK0080*
2068	펛	8CBA	9A55	FDCL0080*
2069	펜	8CBB	9A56	FDCM0080*
2070	펝	8CBC	9A57	FDCN0080*
2071	펞	8CBD	9A58	FDCO0080*
2072	펟	8CBE	9A59	FDCP0080*
2073	펠	8CBF	9A5A	FDCQ0080*
2074	펡	8CC0	9A5B	FDCR0080*
2075	펢	8CC1	9A5C	FDCS0080*
2076	펣	8CC2	9A5D	FDCT0080*
2077	표	8CC3	9A61	FDCX0080
2078	푑	8CC4	9A62	FDCY0080*
2079	푒	8CC5	9A63	FDCZ0080*
2080	푓	8CC6	9A64	FDD00080*
2081	푔	8CC7	9A65	FDD10080*
2082	푓	8CC8	9A66	FDD20080*

Table 22 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2083	푖	8CC9	9A67	FDD30080*
2084	푗	8CCA	9A68	FDD40080*
2085	푈	8CCB	9A69	FDD50080*
2086	푊	8CCC	9A6A	FDD60080*
2087	푋	8CCD	9A6B	FDD70080*
2088	푌	8CCE	9A6C	FDD80080*
2089	푚	8CCF	9A6D	FDD90080*
2090	푎	8CD0	9A6E	FDDA0080*
2091	푏	8CD1	9A6F	FDDB0080*
2092	푎	8CD2	9A70	FDDC0080*
2093	푏	8CD3	9A71	FDDD0080*
2094	푏	8CD4	9A73	FDDF0080*
2095	푎	8CD5	9A74	FDDG0080*
2096	푎	8CD6	9A75	FDDH0080*
2097	푎	8CD7	9A76	FDDI0080*
2098	푏	8CD8	9A77	FDDJ0080*
2099	푎	8CD9	9A78	FDDK0080*
2100	푎	8CDA	9A79	FDDL0080*
2101	푏	8CDB	9A7A	FDDM0080*
2102	푏	8CDC	9A7B	FDDN0080*
2103	푏	8CDD	9A7C	FDDO0080*
2104	푏	8CDE	9A7D	FDDP0080*
2105	푏	8CDF	9A83	FDDV0080*
2106	푎	8CE0	9A84	FDDW0080*
2107	푎	8CE1	9A86	FDDY0080*
2108	푎	8CE2	9A87	FDDZ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2109	뽇	8CE3	9A88	FDE00080*
2110	뽈	8CE4	9A8A	FDE20080*
2111	뽍	8CE5	9A8B	FDE30080*
2112	뽎	8CE6	9A8C	FDE40080*
2113	뽏	8CE7	9A8D	FDE50080*
2114	뽐	8CE8	9A8E	FDE60080*
2115	뽑	8CE9	9A8F	FDE70080*
2116	뽒	8CEA	9A93	FDEB0080*
2117	뽓	8CEB	9A94	FDEC0080*
2118	뽔	8CEC	9A95	FDED0080*
2119	뽕	8CED	9A96	FDEE0080*
2120	뽖	8CEE	9A98	FDEG0080*
2121	뽗	8CEF	9A99	FDEH0080*
2122	뽘	8CF0	9A9A	FDEI0080*
2123	뽙	8CF1	9A9B	FDEJ0080*
2124	뽚	8CF2	9A9C	FDEK0080*
2125	뽛	8CF3	9A9D	FDEL0080*
2126	뽜	8CF4	9AA1	FDEP0080
2127	뽝	8CF5	9AA2	FDEQ0080*
2128	뽞	8CF6	9AA3	FDER0080*
2129	뽟	8CF7	9AA4	FDES0080*
2130	뽠	8CF8	9AA5	FDET0080*
2131	뽡	8CF9	9AA6	FDEU0080*
2132	뽢	8CFA	9AA7	FDEV0080*
2133	뽣	8CFB	9AA8	FDEW0080*
2134	뽤	8CFC	9AA9	FDEX0080*

Table 22 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2135	뽦	8CFD	9AAA	FDEY0080*
2136	뽧	8CFE	9AAB	FDEZ0080*
2137	뽨	8D41	9AAC	FDF00080*
2138	뽩	8D42	9AAD	FDF10080*
2139	뽪	8D43	9AAE	FDF20080*
2140	뽫	8D44	9AAF	FDF30080*
2141	뽬	8D45	9AB0	FDF40080*
2142	뽭	8D46	9AB1	FDF50080*
2143	뽮	8D47	9AB3	FDF70080*
2144	뽯	8D48	9AB4	FDF80080*
2145	뽰	8D49	9AB5	FDF90080*
2146	뽱	8D4A	9AB6	FDDFA0080*
2147	뽲	8D4B	9AB7	FDFB0080*
2148	뽳	8D4C	9AB8	FDFC0080*
2149	뽴	8D4D	9AB9	FDFD0080*
2150	뽵	8D4E	9ABA	FDFE0080*
2151	뽶	8D4F	9ABB	FDFFF0080*
2152	뽷	8D50	9ABC	FDFG0080*
2153	뽸	8D51	9ABD	FDFH0080*
2154	뽹	8D52	9AC2	FDFM0080*
2155	뽺	8D53	9AC3	FDFN0080*
2156	뽻	8D54	9AC4	FDFO0080*
2157	뽼	8D55	9AC5	FDFP0080*
2158	뽽	8D56	9AC6	FDFQ0080*
2159	뽾	8D57	9AC7	FDFR0080*
2160	뽿	8D58	9AC8	FDFS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2161	펠	8D59	9AC9	FDFT0080*
2162	펄	8D5A	9ACA	FDFU0080*
2163	펄	8D61	9ACB	FDFV0080*
2164	펄	8D62	9ACC	FDFW0080*
2165	펄	8D63	9ACD	FDFX0080*
2166	펄	8D64	9ACE	FDFY0080*
2167	펄	8D65	9ACF	FDFZ0080*
2168	펄	8D66	9AD0	FDG00080*
2169	펄	8D67	9AD1	FDG10080*
2170	펄	8D68	9AD3	FDG30080*
2171	펄	8D69	9AD4	FDG40080*
2172	펄	8D6A	9AD5	FDG50080*
2173	펄	8D6B	9AD6	FDG60080*
2174	펄	8D6C	9AD7	FDG70080*
2175	펄	8D6D	9AD8	FDG80080*
2176	펄	8D6E	9AD9	FDG90080*
2177	펄	8D6F	9ADA	FDGA0080*
2178	펄	8D70	9ADB	FDGB0080*
2179	펄	8D71	9ADC	FDGC0080*
2180	펄	8D72	9ADD	FDGD0080*
2181	펄	8D73	9AE2	FDGI0080*
2182	펄	8D74	9AE3	FDGJ0080*
2183	펄	8D75	9AE4	FDGK0080*
2184	펄	8D76	9AE6	FDGM0080*
2185	펄	8D77	9AE7	FDGN0080*
2186	펄	8D78	9AE8	FDGO0080*

Table 22 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2187	펄	8D79	9AEA	FDGQ0080*
2188	펄	8D7A	9AEB	FDGR0080*
2189	펄	8D81	9AEC	FDGS0080*
2190	펄	8D82	9AED	FDGT0080*
2191	펄	8D83	9AEE	FDGU0080*
2192	펄	8D84	9AEF	FDGV0080*
2193	펄	8D85	9AF0	FDGW0080*
2194	펄	8D86	9AF4	FDH00080*
2195	펄	8D87	9AF5	FDH10080*
2196	펄	8D88	9AF6	FDH20080*
2197	펄	8D89	9AF8	FDH40080*
2198	펄	8D8A	9AF9	FDH50080*
2199	펄	8D8B	9AFA	FDH60080*
2200	펄	8D8C	9AFB	FDH70080*
2201	펄	8D8D	9AFC	FDH80080*
2202	펄	8D8E	9AFD	FDH90080*
2203	펄	8D8F	9B41	FDHD0080
2204	펄	8D90	9B42	FDHE0080*
2205	펄	8D91	9B43	FDHF0080*
2206	펄	8D92	9B44	FDHG0080*
2207	펄	8D93	9B45	FDHH0080*
2208	펄	8D94	9B46	FDHI0080*
2209	펄	8D95	9B47	FDHJ0080*
2210	펄	8D96	9B48	FDHK0080*
2211	펄	8D97	9B49	FDHL0080*
2212	펄	8D98	9B4A	FDHM0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2213	꺾	8D99	9B4B	FDHN0080*
2214	꺾	8D9A	9B4C	FDHO0080*
2215	꺾	8D9B	9B4D	FDHP0080*
2216	꺾	8D9C	9B4E	FDHQ0080*
2217	꺾	8D9D	9B4F	FDHR0080*
2218	꺾	8D9E	9B50	FDHS0080*
2219	꺾	8D9F	9B51	FDHT0080*
2220	꺾	8DA0	9B53	FDHV0080*
2221	꺾	8DA1	9B54	FDHW0080*
2222	꺾	8DA2	9B55	FDHX0080*
2223	꺾	8DA3	9B56	FDHY0080*
2224	꺾	8DA4	9B57	FDHZ0080*
2225	꺾	8DA5	9B58	FDI00080*
2226	꺾	8DA6	9B59	FDI10080*
2227	꺾	8DA7	9B5A	FDI20080*
2228	꺾	8DA8	9B5B	FDI30080*
2229	꺾	8DA9	9B5C	FDI40080*
2230	꺾	8DAA	9B5D	FDI50080*
2231	꺾	8DAB	9B63	FDIB0080*
2232	꺾	8DAC	9B64	FDIC0080*
2233	꺾	8DAD	9B66	FDIE0080*
2234	꺾	8DAE	9B67	FDIF0080*
2235	꺾	8DAF	9B6A	FDII0080*
2236	꺾	8DB0	9B6B	FDIJ0080*
2237	꺾	8DB1	9B6C	FDIK0080*
2238	꺾	8DB2	9B6D	FDIL0080*

Table 22 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2239	꺾	8DB3	9B6E	FDIM0080*
2240	꺾	8DB4	9B6F	FDIN0080*
2241	꺾	8DB5	9B70	FDIO0080*
2242	꺾	8DB6	9B74	FDIS0080*
2243	꺾	8DB7	9B76	FDIU0080*
2244	꺾	8DB8	9B77	FDIV0080*
2245	꺾	8DB9	9B78	FDIW0080*
2246	꺾	8DBA	9B79	FDIX0080*
2247	꺾	8DBB	9B7A	FDIY0080*
2248	꺾	8DBC	9B7B	FDIZ0080*
2249	꺾	8DBD	9B7C	FDJ00080*
2250	꺾	8DBE	9B7D	FDJ10080*
2251	꺾	8DBF	9B82	FDJ60080*
2252	꺾	8DC0	9B83	FDJ70080*
2253	꺾	8DC1	9B84	FDJ80080*
2254	꺾	8DC2	9B86	FDJA0080*
2255	꺾	8DC3	9B87	FDJB0080*
2256	꺾	8DC4	9B88	FDJC0080*
2257	꺾	8DC5	9B8A	FDJE0080*
2258	꺾	8DC6	9B8B	FDJF0080*
2259	꺾	8DC7	9B8C	FDJG0080*
2260	꺾	8DC8	9B8D	FDJH0080*
2261	꺾	8DC9	9B8E	FDJI0080*
2262	꺾	8DCA	9B8F	FDJJ0080*
2263	꺾	8DCB	9B90	FDJK0080*
2264	꺾	8DCC	9B94	FDJO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2265	뵈	8DCD	9B95	FDJP0080*
2266	뵉	8DCE	9B96	FDJQ0080*
2267	뵊	8DCF	9B97	FDJR0080*
2268	뵋	8DD0	9B98	FDJS0080*
2269	뵌	8DD1	9B99	FDJT0080*
2270	뵍	8DD2	9B9A	FDJU0080*
2271	뵑	8DD3	9B9B	FDJV0080*
2272	뵒	8DD4	9B9C	FDJW0080*
2273	뵓	8DD5	9B9D	FDJX0080*
2274	뵔	8DD6	9BA2	FDK20080*
2275	뵕	8DD7	9BA3	FDK30080*
2276	뵖	8DD8	9BA4	FDK40080*
2277	뵗	8DD9	9BA6	FDK60080*
2278	뵘	8DDA	9BA7	FDK70080*
2279	뵙	8DDB	9BA8	FDK80080*
2280	뵚	8DDC	9BAA	FDKA0080*
2281	뵛	8DDD	9BAB	FDKB0080*
2282	뵜	8DDE	9BAC	FDKC0080*
2283	뵝	8DDF	9BAD	FDKD0080*
2284	뵞	8DE0	9BAE	FDKE0080*
2285	뵟	8DE1	9BAF	FDKF0080*
2286	뵠	8DE2	9BB0	FDKG0080*
2287	뵡	8DE3	9BB4	FDKK0080*
2288	뵢	8DE4	9BB6	FDKM0080*
2289	뵣	8DE5	9BB8	FDKO0080*
2290	뵤	8DE6	9BB9	FDKP0080*

Table 22 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2291	뵦	8DE7	9BBA	FDKQ0080*
2292	뵧	8DE8	9BBB	FDKR0080*
2293	뵨	8DE9	9BBC	FDKS0080*
2294	뵩	8DEA	9BBD	FDKT0080*
2295	뵪	8DEB	9C63	FDNN0080*
2296	뵫	8DEC	9C64	FDNO0080*
2297	뵬	8DED	9C66	FDNQ0080*
2298	뵭	8DEE	9C67	FDNR0080*
2299	뵮	8DEF	9C68	FDNS0080*
2300	뵯	8DF0	9C6A	FDNU0080*
2301	뵰	8DF1	9C6B	FDNV0080*
2302	뵱	8DF2	9C6C	FDNW0080*
2303	뵲	8DF3	9C6D	FDNX0080*
2304	뵳	8DF4	9C6E	FDNY0080*
2305	뵴	8DF5	9C6F	FDNZ0080*
2306	뵵	8DF6	9C70	FDO00080*
2307	뵶	8DF7	9C74	FDO40080*
2308	뵷	8DF8	9C79	FDO90080*
2309	뵸	8DF9	9C7A	FDOA0080*
2310	뵹	8DFA	9C7B	FDOB0080*
2311	뵺	8DFB	9C83	FDOJ0080*
2312	뵻	8DFC	9C84	FDOK0080*
2313	뵼	8DFD	9C86	FDOM0080*
2314	뵽	8DFE	9C87	FDON0080*
2315	뵾	8E41	9C88	FDOO0080*
2316	뵿	8E42	9C8A	FDOQ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2317	꺾	8E43	9C8B	FDOR0080*
2318	꺾	8E44	9C8C	FDOS0080*
2319	꺾	8E45	9C8D	FDOT0080*
2320	꺾	8E46	9C8E	FDOU0080*
2321	꺾	8E47	9C8F	FDOV0080*
2322	꺾	8E48	9C90	FDOW0080*
2323	꺾	8E49	9C94	FDP00080*
2324	꺾	8E4A	9C98	FDP40080*
2325	꺾	8E4B	9C99	FDP50080*
2326	꺾	8E4C	9C9A	FDP60080*
2327	꺾	8E4D	9C9B	FDP70080*
2328	꺾	8E4E	9C9C	FDP80080*
2329	꺾	8E4F	9C9D	FDP90080*
2330	꺾	8E50	9CA3	FDPF0080*
2331	꺾	8E51	9CA4	FDPG0080*
2332	꺾	8E52	9CA6	FDPI0080*
2333	꺾	8E53	9CA7	FDPJ0080*
2334	꺾	8E54	9CA8	FDPK0080*
2335	꺾	8E55	9CA9	FDPL0080*
2336	꺾	8E56	9CAA	FDPM0080*
2337	꺾	8E57	9CAB	FDPN0080*
2338	꺾	8E58	9CAC	FDPO0080*
2339	꺾	8E59	9CAD	FDPP0080*
2340	꺾	8E5A	9CAE	FDPQ0080*
2341	꺾	8E61	9CAF	FDPR0080*
2342	꺾	8E62	9CB0	FDPS0080*

Table 22 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2343	꺾	8E63	9CB1	FDPT0080*
2344	꺾	8E64	9CB3	FDPV0080*
2345	꺾	8E65	9CB4	FDPW0080*
2346	꺾	8E66	9CB6	FDPY0080*
2347	꺾	8E67	9CB8	FDQ00080*
2348	꺾	8E68	9CB9	FDQ10080*
2349	꺾	8E69	9CBA	FDQ20080*
2350	꺾	8E6A	9CBB	FDQ30080*
2351	꺾	8E6B	9CBC	FDQ40080*
2352	꺾	8E6C	9CBD	FDQ50080*
2353	꺾	8E6D	9CC1	FDQ90080
2354	꺾	8E6E	9CC2	FDQA0080*
2355	꺾	8E6F	9CC3	FDQB0080*
2356	꺾	8E70	9CC4	FDQC0080*
2357	꺾	8E71	9CC5	FDQD0080*
2358	꺾	8E72	9CC6	FDQE0080*
2359	꺾	8E73	9CC7	FDQF0080*
2360	꺾	8E74	9CC8	FDQG0080*
2361	꺾	8E75	9CC9	FDQH0080*
2362	꺾	8E76	9CCA	FDQI0080*
2363	꺾	8E77	9CCB	FDQJ0080*
2364	꺾	8E78	9CCC	FDQK0080*
2365	꺾	8E79	9CCD	FDQL0080*
2366	꺾	8E7A	9CCE	FDQM0080*
2367	꺾	8E81	9CCF	FDQN0080*
2368	꺾	8E82	9CD0	FDQO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 10 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2369	램	8E83	9CD1	FDQP0080*
2370	랧	8E84	9CD3	FDQR0080*
2371	램	8E85	9CD4	FDQS0080*
2372	랧	8E86	9CD5	FDQT0080*
2373	램	8E87	9CD6	FDQU0080*
2374	랧	8E88	9CD7	FDQV0080*
2375	랧	8E89	9CD8	FDQW0080*
2376	랧	8E8A	9CD9	FDQX0080*
2377	랧	8E8B	9CDA	FDQY0080*
2378	랧	8E8C	9CDB	FDQZ0080*
2379	랧	8E8D	9CDC	FDR00080*
2380	랧	8E8E	9CDD	FDR10080*
2381	랧	8E8F	9CE3	FDR70080*
2382	랧	8E90	9CE4	FDR80080*
2383	랧	8E91	9CE6	FDRA0080*
2384	랧	8E92	9CE7	FDRB0080*
2385	랧	8E93	9CE8	FDRC0080*
2386	랧	8E94	9CEA	FDRE0080*
2387	랧	8E95	9CEB	FDRF0080*
2388	랧	8E96	9CEC	FDRG0080*
2389	랧	8E97	9CED	FDRH0080*
2390	랧	8E98	9CEE	FDRI0080*
2391	랧	8E99	9CEF	FDRJ0080*
2392	랧	8E9A	9CF0	FDRK0080*
2393	랧	8E9B	9CF4	FDRO0080*
2394	랧	8E9C	9CF8	FDRS0080*

Table 22 (Page 10 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2395	랧	8E9D	9CF9	FDRT0080*
2396	랧	8E9E	9CFA	FDRU0080*
2397	랧	8E9F	9CFB	FDRV0080*
2398	랧	8EA0	9CFC	FDRW0080*
2399	랧	8EA1	9D43	FDS30080*
2400	랧	8EA2	9D44	FDS40080*
2401	랧	8EA3	9D46	FDS60080*
2402	랧	8EA4	9D47	FDS70080*
2403	랧	8EA5	9D48	FDS80080
2404	랧	8EA6	9D4A	FDSA0080*
2405	랧	8EA7	9D4B	FDSB0080*
2406	랧	8EA8	9D4C	FDSC0080*
2407	랧	8EA9	9D4D	FDSD0080*
2408	랧	8EAA	9D4E	FDSE0080*
2409	랧	8EAB	9D4F	FDSF0080*
2410	랧	8EAC	9D50	FDSG0080*
2411	랧	8EAD	9D54	FDSK0080*
2412	랧	8EAE	9D56	FDSM0080*
2413	랧	8EAF	9D58	FDSO0080*
2414	랧	8EB0	9D59	FDSP0080*
2415	랧	8EB1	9D5A	FDSQ0080*
2416	랧	8EB2	9D5B	FDSR0080*
2417	랧	8EB3	9D5C	FDSS0080*
2418	랧	8EB4	9D5D	FDST0080*
2419	랧	8EB5	9D63	FDSZ0080*
2420	랧	8EB6	9D64	FDT00080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2421	렸	8EB7	9D66	FDT20080*
2422	렵	8EB8	9D67	FDT30080*
2423	련	8EB9	9D68	FDT40080*
2424	렵	8EBA	9D6A	FDT60080*
2425	렵	8EBB	9D6B	FDT70080*
2426	렵	8EBC	9D6C	FDT80080*
2427	렸	8EBD	9D6D	FDT90080*
2428	련	8EBE	9D6E	FDTA0080*
2429	렵	8EBF	9D6F	FDTB0080*
2430	렵	8EC0	9D70	FDTC0080*
2431	렸	8EC1	9D74	FDTG0080*
2432	렸	8EC2	9D78	FDTK0080*
2433	렸	8EC3	9D79	FDTL0080*
2434	렵	8EC4	9D7A	FDTM0080*
2435	렵	8EC5	9D7B	FDTN0080*
2436	련	8EC6	9D7C	FDTO0080*
2437	렵	8EC7	9D7D	FDTP0080*
2438	렉	8EC8	9D82	FDTU0080*
2439	렉	8EC9	9D83	FDTV0080*
2440	렉	8ECA	9D84	FDTW0080*
2441	렉	8ECB	9D86	FDTY0080*
2442	렉	8ECC	9D87	FDTZ0080*
2443	렐	8ECD	9D88	FDU00080*
2444	렐	8ECE	9D89	FDU10080*
2445	렉	8ECF	9D8A	FDU20080*
2446	렐	8ED0	9D8B	FDU30080*

Line Number	Graphic	PC Code	Host Code	GCGID
2447	렐	8ED1	9D8C	FDU40080*
2448	렐	8ED2	9D8D	FDU50080*
2449	렐	8ED3	9D8E	FDU60080*
2450	렐	8ED4	9D8F	FDU70080*
2451	렐	8ED5	9D90	FDU80080*
2452	렐	8ED6	9D91	FDU90080*
2453	렐	8ED7	9D94	FDUC0080*
2454	렐	8ED8	9D96	FDUE0080*
2455	렐	8ED9	9D97	FDUF0080*
2456	렐	8EDA	9D98	FDUG0080*
2457	렐	8EDB	9D99	FDUH0080*
2458	렐	8EDC	9D9A	FDUI0080*
2459	렐	8EDD	9D9B	FDUJ0080*
2460	렐	8EDE	9D9C	FDUK0080*
2461	렐	8EDF	9D9D	FDUL0080*
2462	류	8EE0	9DA3	FDUR0080*
2463	류	8EE1	9DA4	FDUS0080*
2464	류	8EE2	9DA6	FDUU0080*
2465	류	8EE3	9DA7	FDUV0080*
2466	류	8EE4	9DA8	FDUW0080*
2467	류	8EE5	9DAA	FDUY0080*
2468	류	8EE6	9DAB	FDUZ0080*
2469	류	8EE7	9DAC	FDV00080*
2470	류	8EE8	9DAD	FDV10080*
2471	류	8EE9	9DAE	FDV20080*
2472	류	8EEA	9DAF	FDV30080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2473	롱	8EEB	9DB0	FDV40080*
2474	룬	8EEC	9DB4	FDV80080*
2475	롱	8EED	9DB6	FDVA0080*
2476	롯	8EEE	9DB8	FDVC0080*
2477	רות	8EEF	9DB9	FDVD0080*
2478	록	8EF0	9DBA	FDVE0080*
2479	롤	8EF1	9DBB	FDVF0080*
2480	룬	8EF2	9DBC	FDVG0080*
2481	롱	8EF3	9DBD	FDVH0080*
2482	락	8EF4	9DC2	FDVM0080*
2483	뤼	8EF5	9DC3	FDVN0080*
2484	뤼	8EF6	9DC4	FDVO0080*
2485	뤼	8EF7	9DC6	FDVQ0080*
2486	뤼	8EF8	9DC7	FDVR0080*
2487	뤼	8EF9	9DC8	FDVS0080*
2488	뤼	8EFA	9DC9	FDVT0080*
2489	뤼	8EFB	9DCA	FDVU0080*
2490	뤼	8EFC	9DCB	FDVV0080*
2491	뤼	8EFD	9DCC	FDVW0080*
2492	뤼	8EFE	9DCD	FDVX0080*
2493	뤼	8F41	9DCE	FDVY0080*
2494	뤼	8F42	9DCF	FDVZ0080*
2495	뤼	8F43	9DD0	FDW00080*
2496	뤼	8F44	9DD1	FDW10080*
2497	뤼	8F45	9DD3	FDW30080*
2498	뤼	8F46	9DD4	FDW40080*

Line Number	Graphic	PC Code	Host Code	GCGID
2499	뤼	8F47	9DD5	FDW50080*
2500	뤼	8F48	9DD6	FDW60080*
2501	뤼	8F49	9DD8	FDW80080*
2502	뤼	8F4A	9DD9	FDW90080*
2503	뤼	8F4B	9DDA	FDWA0080*
2504	뤼	8F4C	9DDB	FDWB0080*
2505	뤼	8F4D	9DDC	FDWC0080*
2506	뤼	8F4E	9DDD	FDWD0080*
2507	뤼	8F4F	9DE1	FDWH0080
2508	뤼	8F50	9DE2	FDWI0080*
2509	뤼	8F51	9DE3	FDWJ0080*
2510	뤼	8F52	9DE4	FDWK0080*
2511	뤼	8F53	9DE5	FDWL0080*
2512	뤼	8F54	9DE6	FDWM0080*
2513	뤼	8F55	9DE7	FDWN0080*
2514	뤼	8F56	9DE8	FDWO0080*
2515	뤼	8F57	9DE9	FDWP0080*
2516	뤼	8F58	9DEA	FDWQ0080*
2517	뤼	8F59	9DEB	FDWR0080*
2518	뤼	8F5A	9DEC	FDWS0080*
2519	뤼	8F61	9DED	FDWT0080*
2520	뤼	8F62	9DEE	FDWU0080*
2521	뤼	8F63	9DEF	FDWV0080*
2522	뤼	8F64	9DF0	FDWW0080*
2523	뤼	8F65	9DF1	FDWX0080*
2524	뤼	8F66	9DF3	FDWZ0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 13 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2525	꺾	8F67	9DF4	FDX00080*
2526	꺾	8F68	9DF5	FDX10080*
2527	꺾	8F69	9DF7	FDX30080*
2528	꺾	8F6A	9DF8	FDX40080*
2529	꺾	8F6B	9DF9	FDX50080*
2530	꺾	8F6C	9DFA	FDX60080*
2531	꺾	8F6D	9DFB	FDX70080*
2532	꺾	8F6E	9DFC	FDX80080*
2533	꺾	8F6F	9DFD	FDX90080*
2534	꺾	8F70	9E42	FDXE0080*
2535	꺾	8F71	9E43	FDXF0080*
2536	꺾	8F72	9E44	FDXG0080*
2537	꺾	8F73	9E46	FDXI0080*
2538	꺾	8F74	9E47	FDXJ0080*
2539	꺾	8F75	9E48	FDXK0080*
2540	꺾	8F76	9E4A	FDXM0080*
2541	꺾	8F77	9E4B	FDXN0080*
2542	꺾	8F78	9E4C	FDXO0080*
2543	꺾	8F79	9E4D	FDXP0080*
2544	꺾	8F7A	9E4E	FDXQ0080*
2545	꺾	8F81	9E4F	FDXR0080*
2546	꺾	8F82	9E50	FDXS0080*
2547	꺾	8F83	9E54	FDXW0080*
2548	꺾	8F84	9E56	FDXY0080*
2549	꺾	8F85	9E58	FDY00080*
2550	꺾	8F86	9E59	FDY10080*

Table 22 (Page 13 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2551	꺾	8F87	9E5A	FDY20080*
2552	꺾	8F88	9E5B	FDY30080*
2553	꺾	8F89	9E5C	FDY40080*
2554	꺾	8F8A	9E5D	FDY50080*
2555	꺾	8F8B	9E62	FDYA0080*
2556	꺾	8F8C	9E63	FDYB0080*
2557	꺾	8F8D	9E64	FDYC0080*
2558	꺾	8F8E	9E66	FDYE0080*
2559	꺾	8F8F	9E67	FDYF0080*
2560	꺾	8F90	9E68	FDYG0080*
2561	꺾	8F91	9E6A	FDYI0080*
2562	꺾	8F92	9E6B	FDYJ0080*
2563	꺾	8F93	9E6C	FDYK0080*
2564	꺾	8F94	9E6D	FDYL0080*
2565	꺾	8F95	9E6E	FDYM0080*
2566	꺾	8F96	9E6F	FDYN0080*
2567	꺾	8F97	9E70	FDYO0080*
2568	꺾	8F98	9E71	FDYP0080
2569	꺾	8F99	9E74	FDYS0080*
2570	꺾	8F9A	9E76	FDYU0080*
2571	꺾	8F9B	9E78	FDYW0080*
2572	꺾	8F9C	9E79	FDYX0080*
2573	꺾	8F9D	9E7A	FDYY0080*
2574	꺾	8F9E	9E7B	FDYZ0080*
2575	꺾	8F9F	9E7C	FDZ00080*
2576	꺾	8FA0	9E7D	FDZ10080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2577	류	8FA1	9E83	FDZ70080*
2578	류	8FA2	9E84	FDZ80080*
2579	류	8FA3	9E86	FDZA0080*
2580	류	8FA4	9E87	FDZB0080*
2581	류	8FA5	9E88	FDZC0080*
2582	류	8FA6	9E8A	FDZE0080*
2583	류	8FA7	9E8B	FDZF0080*
2584	류	8FA8	9E8C	FDZG0080*
2585	류	8FA9	9E8D	FDZH0080*
2586	류	8FAA	9E8E	FDZI0080*
2587	류	8FAB	9E8F	FDZJ0080*
2588	류	8FAC	9E90	FDZK0080*
2589	류	8FAD	9E94	FDZO0080*
2590	류	8FAE	9E96	FDZQ0080*
2591	류	8FAF	9E98	FDZS0080*
2592	류	8FB0	9E99	FDZT0080*
2593	류	8FB1	9E9A	FDZU0080*
2594	류	8FB2	9E9B	FDZV0080*
2595	류	8FB3	9E9C	FDZW0080*
2596	류	8FB4	9E9D	FDZX0080*
2597	뤼	8FB5	9EA2	FE020080*
2598	뤼	8FB6	9EA3	FE030080*
2599	뤼	8FB7	9EA4	FE040080*
2600	뤼	8FB8	9EA5	FE050080*
2601	뤼	8FB9	9EA6	FE060080*
2602	뤼	8FBA	9EA7	FE070080*

Table 22 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2603	뤼	8FBB	9EA8	FE080080*
2604	뤼	8FBC	9EA9	FE090080*
2605	뤼	8FBD	9EAA	FE0A0080*
2606	뤼	8FBE	9EAB	FE0B0080*
2607	뤼	8FBF	9EAC	FE0C0080*
2608	뤼	8FC0	9EAD	FE0D0080*
2609	뤼	8FC1	9EAE	FE0E0080*
2610	뤼	8FC2	9EAF	FE0F0080*
2611	뤼	8FC3	9EB0	FE0G0080*
2612	뤼	8FC4	9EB1	FE0H0080*
2613	뤼	8FC5	9EB3	FE0J0080*
2614	뤼	8FC6	9EB4	FE0K0080*
2615	뤼	8FC7	9EB5	FE0L0080
2616	뤼	8FC8	9EB7	FE0N0080*
2617	뤼	8FC9	9EB8	FE0O0080*
2618	뤼	8FCA	9EB9	FE0P0080*
2619	뤼	8FCB	9EBA	FE0Q0080*
2620	뤼	8FCC	9EBB	FE0R0080*
2621	뤼	8FCD	9EBC	FE0S0080*
2622	뤼	8FCE	9EBD	FE0T0080*
2623	뤼	8FCF	9EC2	FE0Y0080*
2624	뤼	8FD0	9EC3	FE0Z0080*
2625	뤼	8FD1	9EC4	FE100080*
2626	뤼	8FD2	9EC5	FE110080*
2627	뤼	8FD3	9EC6	FE120080*
2628	뤼	8FD4	9EC7	FE130080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2629	웁	8FD5	9EC8	FE140080*
2630	웂	8FD6	9EC9	FE150080*
2631	웃	8FD7	9ECA	FE160080*
2632	웄	8FD8	9ECB	FE170080*
2633	웅	8FD9	9ECC	FE180080*
2634	웆	8FDA	9ECD	FE190080*
2635	웇	8FDB	9ECE	FE1A0080*
2636	웈	8FDC	9ECF	FE1B0080*
2637	웉	8FDD	9ED0	FE1C0080*
2638	웊	8FDE	9ED1	FE1D0080*
2639	웋	8FDF	9ED3	FE1F0080*
2640	워	8FE0	9ED4	FE1G0080*
2641	웍	8FE1	9ED5	FE1H0080*
2642	웎	8FE2	9ED6	FE1I0080*
2643	웏	8FE3	9ED7	FE1J0080*
2644	원	8FE4	9ED8	FE1K0080*
2645	웑	8FE5	9ED9	FE1L0080*
2646	웒	8FE6	9EDA	FE1M0080*
2647	웓	8FE7	9EDB	FE1N0080*
2648	월	8FE8	9EDC	FE1O0080*
2649	웕	8FE9	9EDD	FE1P0080*
2650	웖	8FEA	9EE3	FE1V0080*
2651	웗	8FEB	9EE4	FE1W0080*
2652	웘	8FEC	9EE6	FE1Y0080*
2653	웙	8FED	9EE7	FE1Z0080*
2654	웚	8FEE	9EE8	FE200080*

Line Number	Graphic	PC Code	Host Code	GCGID
2655	웛	8FEF	9EEA	FE220080*
2656	웜	8FF0	9EEB	FE230080*
2657	웝	8FF1	9EEC	FE240080*
2658	웞	8FF2	9EED	FE250080*
2659	웟	8FF3	9EEE	FE260080*
2660	웠	8FF4	9EEF	FE270080*
2661	웡	8FF5	9EF0	FE280080*
2662	웢	8FF6	9EF3	FE2B0080*
2663	웣	8FF7	9EF4	FE2C0080*
2664	웤	8FF8	9EF6	FE2E0080*
2665	웥	8FF9	9EF8	FE2G0080*
2666	웦	8FFA	9EF9	FE2H0080*
2667	웧	8FFB	9EFA	FE2I0080*
2668	웨	8FFC	9EFB	FE2J0080*
2669	웩	8FFD	9EFC	FE2K0080*
2670	웪	8FFE	9EFD	FE2L0080*
2671	웫	9041	9F43	FE2R0080*
2672	웬	9042	9F44	FE2S0080*
2673	웭	9043	9F46	FE2U0080*
2674	웮	9044	9F47	FE2V0080*
2675	웯	9045	9F48	FE2W0080*
2676	웰	9046	9F4A	FE2Y0080*
2677	웱	9047	9F4B	FE2Z0080*
2678	웲	9048	9F4C	FE300080*
2679	웳	9049	9F4D	FE310080*
2680	웴	904A	9F4E	FE320080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2681	를	904B	9F4F	FE330080*
2682	를	904C	9F50	FE340080*
2683	를	904D	9F54	FE380080*
2684	를	904E	9F56	FE3A0080*
2685	를	904F	9F58	FE3C0080*
2686	를	9050	9F59	FE3D0080*
2687	를	9051	9F5A	FE3E0080*
2688	를	9052	9F5B	FE3F0080*
2689	를	9053	9F5C	FE3G0080*
2690	를	9054	9F5D	FE3H0080*
2691	를	9055	9F63	FE3N0080*
2692	를	9056	9F64	FE3O0080*
2693	를	9057	9F66	FE3Q0080*
2694	를	9058	9F67	FE3R0080*
2695	를	9059	9F68	FE3S0080*
2696	를	905A	9F6A	FE3U0080*
2697	를	9061	9F6B	FE3V0080*
2698	를	9062	9F6C	FE3W0080*
2699	를	9063	9F6D	FE3X0080*
2700	를	9064	9F6E	FE3Y0080*
2701	를	9065	9F6F	FE3Z0080*
2702	를	9066	9F70	FE400080*
2703	를	9067	9F74	FE440080*
2704	를	9068	9F76	FE460080*
2705	를	9069	9F79	FE490080*
2706	를	906A	9F7A	FE4A0080*

Line Number	Graphic	PC Code	Host Code	GCGID
2707	를	906B	9F7D	FE4D0080*
2708	를	906C	9F81	FE4H0080
2709	를	906D	9F82	FE4I0080*
2710	를	906E	9F83	FE4J0080*
2711	를	906F	9F84	FE4K0080*
2712	를	9070	9F85	FE4L0080*
2713	를	9071	9F86	FE4M0080*
2714	를	9072	9F87	FE4N0080*
2715	를	9073	9F88	FE4O0080*
2716	를	9074	9F89	FE4P0080*
2717	를	9075	9F8A	FE4Q0080*
2718	를	9076	9F8B	FE4R0080*
2719	를	9077	9F8C	FE4S0080*
2720	를	9078	9F8D	FE4T0080*
2721	를	9079	9F8E	FE4U0080*
2722	를	907A	9F8F	FE4V0080*
2723	를	9081	9F90	FE4W0080*
2724	를	9082	9F91	FE4X0080*
2725	를	9083	9F93	FE4Z0080*
2726	를	9084	9F94	FE500080*
2727	를	9085	9F95	FE510080*
2728	를	9086	9F96	FE520080*
2729	를	9087	9F97	FE530080*
2730	를	9088	9F98	FE540080*
2731	를	9089	9F99	FE550080*
2732	를	908A	9F9A	FE560080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2733	뿔	908B	9F9B	FE570080*
2734	뿔	908C	9F9C	FE580080*
2735	뿔	908D	9F9D	FE590080*
2736	뤼	908E	9FA3	FE5F0080*
2737	뤼	908F	9FA4	FE5G0080*
2738	뤼	9090	9FA6	FE5I0080*
2739	뤼	9091	9FA7	FE5J0080*
2740	뤼	9092	9FA8	FE5K0080*
2741	뤼	9093	9FAA	FE5M0080*
2742	뤼	9094	9FAB	FE5N0080*
2743	뤼	9095	9FAC	FE5O0080*
2744	뤼	9096	9FAD	FE5P0080*
2745	뤼	9097	9FAE	FE5Q0080*
2746	뤼	9098	9FAF	FE5R0080*
2747	뤼	9099	9FB0	FE5S0080*
2748	뤼	909A	9FB4	FE5W0080*
2749	뤼	909B	9FB6	FE5Y0080*
2750	뤼	909C	9FB8	FE600080*
2751	뤼	909D	9FB9	FE610080*
2752	뤼	909E	9FBA	FE620080*
2753	뤼	909F	9FBB	FE630080*
2754	뤼	90A0	9FBC	FE640080*
2755	뤼	90A1	9FBD	FE650080*
2756	뫼	90A2	A063	FE8Z0080*
2757	뫼	90A3	A064	FE900080*
2758	뫼	90A4	A066	FE920080*

Line Number	Graphic	PC Code	Host Code	GCGID
2759	뫼	90A5	A06C	FE980080*
2760	뫼	90A6	A06D	FE990080*
2761	뫼	90A7	A06E	FE9A0080*
2762	뫼	90A8	A06F	FE9B0080*
2763	뫼	90A9	A070	FE9C0080*
2764	뫼	90AA	A074	FE9G0080*
2765	뫼	90AB	A076	FE9I0080*
2766	뫼	90AC	A079	FE9L0080
2767	뫼	90AD	A07A	FE9M0080*
2768	뫼	90AE	A07C	FE9O0080*
2769	뫼	90AF	A083	FE9V0080*
2770	뫼	90B0	A084	FE9W0080*
2771	뫼	90B1	A086	FE9Y0080*
2772	뫼	90B2	A087	FE9Z0080*
2773	뫼	90B3	A088	FEA00080*
2774	뫼	90B4	A08A	FEA20080*
2775	뫼	90B5	A08B	FEA30080*
2776	뫼	90B6	A08C	FEA40080*
2777	뫼	90B7	A08D	FEA50080*
2778	뫼	90B8	A08E	FEA60080*
2779	뫼	90B9	A08F	FEA70080*
2780	뫼	90BA	A090	FEA80080*
2781	뫼	90BB	A094	FEAC0080*
2782	뫼	90BC	A099	FEAH0080
2783	뫼	90BD	A09A	FEAI0080*
2784	뫼	90BE	A09B	FEAJ0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 18 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2785	뽁	90BF	A09C	FEAK0080*
2786	뽁	90C0	A09D	FEAL0080*
2787	뽁	90C1	A0A3	FEAR0080*
2788	뽁	90C2	A0A4	FEAS0080*
2789	뽁	90C3	A0A5	FEAT0080*
2790	뽁	90C4	A0A6	FEAU0080*
2791	뽁	90C5	A0A7	FEAV0080*
2792	뽁	90C6	A0A8	FEAW0080*
2793	뽁	90C7	A0AA	FEAY0080*
2794	뽁	90C8	A0AB	FEAZ0080*
2795	뽁	90C9	A0AC	FEB00080*
2796	뽁	90CA	A0AD	FEB10080*
2797	뽁	90CB	A0AE	FEB20080*
2798	뽁	90CC	A0AF	FEB30080*
2799	뽁	90CD	A0B0	FEB40080*
2800	뽁	90CE	A0B1	FEB50080*
2801	뽁	90CF	A0B3	FEB70080*
2802	뽁	90D0	A0B4	FEB80080*
2803	뽁	90D1	A0B5	FEB90080*
2804	뽁	90D2	A0B6	FEBA0080*
2805	뽁	90D3	A0B8	FEBC0080*
2806	뽁	90D4	A0B9	FEBD0080*
2807	뽁	90D5	A0BA	FEBE0080*
2808	뽁	90D6	A0BB	FEBF0080*
2809	뽁	90D7	A0BC	FEBG0080*
2810	뽁	90D8	A0BD	FEBH0080*

Table 22 (Page 18 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2811	매	90D9	A0C1	FEBL0080
2812	매	90DA	A0C2	FEBM0080*
2813	매	90DB	A0C3	FEBN0080*
2814	매	90DC	A0C4	FEBO0080*
2815	매	90DD	A0C5	FEBP0080*
2816	매	90DE	A0C6	FEBQ0080*
2817	매	90DF	A0C7	FEBR0080*
2818	매	90E0	A0C8	FEBS0080*
2819	매	90E1	A0C9	FEBT0080*
2820	매	90E2	A0CA	FEBU0080*
2821	매	90E3	A0CB	FEBV0080*
2822	매	90E4	A0CC	FEBW0080*
2823	매	90E5	A0CD	FEBX0080*
2824	매	90E6	A0CE	FEBY0080*
2825	매	90E7	A0CF	FEBZ0080*
2826	매	90E8	A0D0	FEC00080*
2827	매	90E9	A0D1	FEC10080*
2828	매	90EA	A0D3	FEC30080*
2829	매	90EB	A0D4	FEC40080*
2830	매	90EC	A0D5	FEC50080*
2831	매	90ED	A0D6	FEC60080*
2832	매	90EE	A0D7	FEC70080*
2833	매	90EF	A0D8	FEC80080*
2834	매	90F0	A0D9	FEC90080*
2835	매	90F1	A0DA	FECA0080*
2836	매	90F2	A0DB	FECB0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2837	랠	90F3	A0DC	FECC0080*
2838	랡	90F4	A0DD	FECD0080*
2839	랢	90F5	A0E3	FECJ0080*
2840	랣	90F6	A0E4	FECK0080*
2841	랤	90F7	A0E6	FECM0080*
2842	랦	90F8	A0E7	FECN0080*
2843	랧	90F9	A0E8	FECO0080*
2844	램	90FA	A0EA	FECQ0080*
2845	랩	90FB	A0EC	FECS0080*
2846	랪	90FC	A0ED	FECT0080*
2847	랫	90FD	A0EE	FECU0080*
2848	랬	90FE	A0EF	FECV0080*
2849	랭	9141	A0F0	FECW0080*
2850	랱	9142	A0F4	FED00080*
2851	랲	9143	A0F6	FED20080*
2852	랳	9144	A0F9	FED50080*
2853	랴	9145	A0FA	FED60080*
2854	략	9146	A0FB	FED70080*
2855	랶	9147	A0FC	FED80080*
2856	랷	9148	A143	FEDF0080*
2857	랸	9149	A144	FEDG0080*
2858	랹	914A	A146	FEDI0080*
2859	랺	914B	A147	FEDJ0080*
2860	랻	914C	A148	FEDK0080*
2861	랼	914D	A14A	FEDM0080*
2862	랽	914E	A14B	FEDN0080*

Table 22 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2863	랾	914F	A14C	FEDO0080*
2864	랿	9150	A14D	FEDP0080*
2865	랺	9151	A14E	FEDQ0080*
2866	랻	9152	A14F	FEDR0080*
2867	랼	9153	A150	FEDS0080*
2868	랽	9154	A154	FEDW0080*
2869	랾	9155	A158	FEE00080*
2870	랿	9156	A159	FEE10080
2871	랺	9157	A15A	FEE20080*
2872	랻	9158	A15B	FEE30080
2873	랼	9159	A15C	FEE40080*
2874	랽	915A	A15D	FEE50080*
2875	랿	9161	A163	FEEB0080*
2876	랺	9162	A164	FEEC0080*
2877	랻	9163	A166	FEEE0080*
2878	랼	9164	A167	FEEF0080*
2879	랽	9165	A168	FEEG0080*
2880	랿	9166	A16A	FEEI0080*
2881	랺	9167	A16B	FEEJ0080*
2882	랻	9168	A16C	FEEK0080*
2883	랼	9169	A16D	FEEL0080*
2884	랽	916A	A16E	FEEM0080*
2885	랿	916B	A16F	FEEN0080*
2886	랺	916C	A170	FEEO0080*
2887	랻	916D	A171	FEEP0080
2888	랼	916E	A173	FEER0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 20 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2889	몹	916F	A174	FEES0080*
2890	몹	9170	A178	FEEW0080*
2891	몹	9171	A17A	FEEY0080*
2892	몹	9172	A17B	FEEZ0080*
2893	몹	9173	A17C	FEF00080*
2894	몹	9174	A17D	FEF10080*
2895	몹	9175	A182	FEF60080*
2896	몹	9176	A183	FEF70080*
2897	몹	9177	A184	FEF80080*
2898	몹	9178	A185	FEF90080*
2899	몹	9179	A186	FEFA0080*
2900	몹	917A	A187	FEFB0080*
2901	몹	9181	A188	FEFC0080*
2902	몹	9182	A189	FEFD0080*
2903	몹	9183	A18A	FEFE0080*
2904	몹	9184	A18B	FEFF0080*
2905	몹	9185	A18C	FEFG0080*
2906	몹	9186	A18D	FEFH0080*
2907	몹	9187	A18E	FEFI0080*
2908	몹	9188	A18F	FEFJ0080*
2909	몹	9189	A190	FEFK0080*
2910	몹	918A	A191	FEFL0080*
2911	몹	918B	A193	FEFN0080*
2912	몹	918C	A194	FEFO0080*
2913	몹	918D	A195	FEFP0080*
2914	몹	918E	A196	FEFQ0080*

Table 22 (Page 20 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2915	몹	918F	A197	FEFR0080*
2916	몹	9190	A198	FEFS0080*
2917	몹	9191	A199	FEFT0080*
2918	몹	9192	A19A	FEFU0080*
2919	몹	9193	A19B	FEFV0080*
2920	몹	9194	A19C	FEFW0080*
2921	몹	9195	A19D	FEFX0080*
2922	몹	9196	A1A3	FEG30080*
2923	몹	9197	A1A6	FEG60080*
2924	몹	9198	A1A7	FEG70080*
2925	몹	9199	A1A8	FEG80080
2926	몹	919A	A1AA	FEGA0080*
2927	몹	919B	A1AC	FEGC0080*
2928	몹	919C	A1AD	FEGD0080*
2929	몹	919D	A1AE	FEGE0080*
2930	몹	919E	A1AF	FEGF0080*
2931	몹	919F	A1B0	FEGG0080*
2932	몹	91A0	A1B4	FEGK0080*
2933	몹	91A1	A1B6	FEGM0080*
2934	몹	91A2	A1B8	FEGO0080*
2935	몹	91A3	A1B9	FEGP0080*
2936	몹	91A4	A1BA	FEGQ0080*
2937	몹	91A5	A1BB	FEGR0080*
2938	몹	91A6	A1BC	FEGS0080*
2939	몹	91A7	A1BD	FEGT0080
2940	몹	91A8	A1C2	FEGY0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2941	꺄	91A9	A1C3	FEGZ0080*
2942	꺅	91AA	A1C4	FEH00080*
2943	꺆	91AB	A1C6	FEH20080*
2944	꺇	91AC	A1C7	FEH30080*
2945	꺈	91AD	A1C8	FEH40080*
2946	꺉	91AE	A1C9	FEH50080*
2947	꺊	91AF	A1CA	FEH60080*
2948	꺋	91B0	A1CB	FEH70080*
2949	꺌	91B1	A1CC	FEH80080*
2950	꺍	91B2	A1CD	FEH90080*
2951	꺎	91B3	A1CE	FEHA0080*
2952	꺏	91B4	A1CF	FEHB0080*
2953	꺐	91B5	A1D0	FEHC0080*
2954	꺑	91B6	A1D1	FEHD0080*
2955	꺒	91B7	A1D3	FEHF0080*
2956	꺓	91B8	A1D4	FEHG0080*
2957	꺔	91B9	A1D5	FEHH0080*
2958	꺕	91BA	A1D8	FEHK0080*
2959	꺖	91BB	A1D9	FEHL0080*
2960	꺗	91BC	A1DA	FEHM0080*
2961	꺘	91BD	A1DB	FEHN0080*
2962	꺙	91BE	A1DC	FEHO0080*
2963	꺚	91BF	A1DD	FEHP0080*
2964	꺛	91C0	A1E1	FEHT0080
2965	꺜	91C1	A1E2	FEHU0080*
2966	꺝	91C2	A1E3	FEHV0080*

Line Number	Graphic	PC Code	Host Code	GCGID
2967	꺞	91C3	A1E4	FEHW0080*
2968	꺟	91C4	A1E5	FEHX0080*
2969	꺠	91C5	A1E6	FEHY0080*
2970	꺡	91C6	A1E7	FEHZ0080*
2971	꺢	91C7	A1E8	FEI00080*
2972	꺣	91C8	A1E9	FEI10080*
2973	꺤	91C9	A1EA	FEI20080*
2974	꺥	91CA	A1EB	FEI30080*
2975	꺦	91CB	A1EC	FEI40080*
2976	꺧	91CC	A1ED	FEI50080*
2977	꺨	91CD	A1EE	FEI60080*
2978	꺩	91CE	A1EF	FEI70080*
2979	꺪	91CF	A1F0	FEI80080*
2980	꺫	91D0	A1F1	FEI90080*
2981	꺬	91D1	A1F3	FEIB0080*
2982	꺭	91D2	A1F4	FEIC0080*
2983	꺮	91D3	A1F5	FEID0080*
2984	꺯	91D4	A1F6	FEIE0080*
2985	꺰	91D5	A1F7	FEIF0080*
2986	꺱	91D6	A1F8	FEIG0080*
2987	꺲	91D7	A1F9	FEIH0080*
2988	꺳	91D8	A1FA	FEII0080*
2989	꺴	91D9	A1FB	FEIJ0080*
2990	꺵	91DA	A1FC	FEIK0080*
2991	꺶	91DB	A1FD	FEIL0080*
2992	꺷	91DC	A242	FEIQ0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 22 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2993	뵈	91DD	A243	FEIR0080*
2994	뵘	91DE	A244	FEIS0080*
2995	뵙	91DF	A246	FEIU0080*
2996	뵚	91E0	A247	FEIV0080*
2997	뵛	91E1	A248	FEIW0080*
2998	뵜	91E2	A24A	FEIY0080*
2999	뵝	91E3	A24B	FEIZ0080*
3000	뵞	91E4	A24C	FEJ00080*
3001	뵟	91E5	A24D	FEJ10080*
3002	뵠	91E6	A24E	FEJ20080*
3003	뵡	91E7	A24F	FEJ30080*
3004	뵢	91E8	A250	FEJ40080*
3005	뵣	91E9	A251	FEJ50080*
3006	뵤	91EA	A254	FEJ80080*
3007	뵥	91EB	A256	FEJA0080*
3008	뵦	91EC	A258	FEJC0080*
3009	뵧	91ED	A259	FEJD0080*
3010	뵨	91EE	A25A	FEJE0080*
3011	뵩	91EF	A25B	FEJF0080*
3012	뵪	91F0	A25C	FEJG0080*
3013	뵫	91F1	A25D	FEJH0080*
3014	뵬	91F2	A262	FEJM0080*
3015	뵭	91F3	A263	FEJN0080*
3016	뵮	91F4	A264	FEJO0080*
3017	뵯	91F5	A266	FEJQ0080*
3018	뵰	91F6	A267	FEJR0080*

Table 22 (Page 22 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3019	뵱	91F7	A268	FEJS0080*
3020	뵲	91F8	A26A	FEJU0080*
3021	뵳	91F9	A26B	FEJV0080*
3022	뵴	91FA	A26C	FEJW0080*
3023	뵵	91FB	A26D	FEJX0080*
3024	뵶	91FC	A26E	FEJY0080*
3025	뵷	91FD	A26F	FEJZ0080*
3026	뵸	91FE	A270	FEK00080*
3027	뵹	9241	A271	FEK10080*
3028	뵺	9242	A274	FEK40080*
3029	뵻	9243	A276	FEK60080*
3030	뵼	9244	A277	FEK70080*
3031	뵽	9245	A278	FEK80080*
3032	뵾	9246	A279	FEK90080*
3033	뵿	9247	A27A	FEKA0080*
3034	뵠	9248	A27B	FEKB0080*
3035	뵡	9249	A27C	FEKC0080*
3036	뵢	924A	A27D	FEKD0080*
3037	뵣	924B	A284	FEKK0080*
3038	뵤	924C	A286	FEKM0080*
3039	뵥	924D	A287	FEKN0080*
3040	뵦	924E	A28C	FEKS0080*
3041	뵧	924F	A28D	FEKT0080*
3042	뵨	9250	A28E	FEKU0080*
3043	뵩	9251	A28F	FEKV0080*
3044	뵪	9252	A290	FEKW0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3045	꺾	9253	A294	FEL00080*
3046	꺿	9254	A296	FEL20080*
3047	꺾	9255	A298	FEL40080*
3048	꺾	9256	A299	FEL50080*
3049	꺾	9257	A29A	FEL60080*
3050	꺾	9258	A29C	FEL80080*
3051	꺾	9259	A2A2	FELE0080*
3052	꺾	925A	A2A3	FELF0080*
3053	꺾	9261	A2A4	FELG0080*
3054	꺾	9262	A2A6	FELI0080*
3055	꺾	9263	A2A7	FELJ0080*
3056	꺾	9264	A2A8	FELK0080*
3057	꺾	9265	A2AA	FELM0080*
3058	꺾	9266	A2AB	FELN0080*
3059	꺾	9267	A2AC	FELO0080*
3060	꺾	9268	A2AD	FELP0080*
3061	꺾	9269	A2AE	FELQ0080*
3062	꺾	926A	A2AF	FELR0080*
3063	꺾	926B	A2B0	FELS0080*
3064	꺾	926C	A2B1	FELT0080*
3065	꺾	926D	A2B4	FELW0080*
3066	꺾	926E	A2B6	FELY0080*
3067	꺾	926F	A2B7	FELZ0080*
3068	꺾	9270	A2B8	FEM00080*
3069	꺾	9271	A2B9	FEM10080*
3070	꺾	9272	A2BA	FEM20080*

Line Number	Graphic	PC Code	Host Code	GCGID
3071	꺾	9273	A2BB	FEM30080*
3072	꺾	9274	A2BC	FEM40080*
3073	꺾	9275	A2BD	FEM50080*
3074	꺾	9276	A2C2	FEMA0080*
3075	꺾	9277	A2C3	FEMB0080*
3076	꺾	9278	A2C4	FEMC0080*
3077	꺾	9279	A2C5	FEMD0080*
3078	꺾	927A	A2C6	FEME0080*
3079	꺾	9281	A2C7	FEMF0080*
3080	꺾	9282	A2C8	FEMG0080*
3081	꺾	9283	A2C9	FEMH0080*
3082	꺾	9284	A2CA	FEMI0080*
3083	꺾	9285	A2CB	FEMJ0080*
3084	꺾	9286	A2CC	FEMK0080*
3085	꺾	9287	A2CD	FEML0080*
3086	꺾	9288	A2CE	FEMM0080*
3087	꺾	9289	A2CF	FEMN0080*
3088	꺾	928A	A2D0	FEMO0080*
3089	꺾	928B	A2D1	FEMP0080*
3090	꺾	928C	A2D3	FEMR0080*
3091	꺾	928D	A2D4	FEMS0080*
3092	꺾	928E	A2D5	FEMT0080*
3093	꺾	928F	A2D6	FEMU0080*
3094	꺾	9290	A2D7	FEMV0080*
3095	꺾	9291	A2D8	FEMW0080*
3096	꺾	9292	A2D9	FEMX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 24 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3097	펠	9293	A2DA	FEMY0080*
3098	펠	9294	A2DB	FEMZ0080*
3099	펠	9295	A2DC	FEN00080*
3100	펠	9296	A2DD	FEN10080*
3101	펍	9297	A2E2	FEN60080*
3102	펑	9298	A2E3	FEN70080*
3103	펑	9299	A2E4	FEN80080*
3104	펑	929A	A2E6	FENA0080*
3105	펑	929B	A2E7	FENB0080*
3106	펑	929C	A2E8	FENC0080*
3107	펑	929D	A2EA	FENE0080*
3108	펑	929E	A2EB	FENF0080*
3109	펑	929F	A2EC	FENG0080*
3110	펑	92A0	A2ED	FENH0080*
3111	펑	92A1	A2EE	FENI0080*
3112	펑	92A2	A2EF	FENJ0080*
3113	펑	92A3	A2F0	FENK0080*
3114	펑	92A4	A2F1	FENL0080*
3115	펑	92A5	A2F3	FENN0080*
3116	펑	92A6	A2F4	FENO0080*
3117	펑	92A7	A2F5	FENP0080*
3118	펑	92A8	A2F6	FENQ0080*
3119	펑	92A9	A2F7	FENR0080*
3120	펑	92AA	A2F8	FENS0080*
3121	펑	92AB	A2F9	FENT0080*
3122	펑	92AC	A2FA	FENU0080*

Table 22 (Page 24 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3123	펑	92AD	A2FB	FENV0080*
3124	펑	92AE	A2FC	FENW0080*
3125	펑	92AF	A2FD	FENX0080*
3126	푈	92B0	A342	FEO20080*
3127	푈	92B1	A343	FEO30080*
3128	푈	92B2	A344	FEO40080*
3129	푈	92B3	A346	FEO60080*
3130	푈	92B4	A347	FEO70080*
3131	푈	92B5	A348	FEO80080*
3132	푈	92B6	A34A	FEOA0080*
3133	푈	92B7	A34B	FEOB0080*
3134	푈	92B8	A34C	FEOC0080*
3135	푈	92B9	A34D	FEOD0080*
3136	푈	92BA	A34E	FEOE0080*
3137	푈	92BB	A34F	FEOF0080*
3138	푈	92BC	A350	FEOG0080*
3139	푈	92BD	A353	FEOJ0080*
3140	푈	92BE	A354	FEOK0080*
3141	푈	92BF	A356	FEOM0080*
3142	푈	92C0	A357	FEON0080*
3143	푈	92C1	A358	FEOO0080*
3144	푈	92C2	A359	FEOP0080*
3145	푈	92C3	A35A	FEOQ0080*
3146	푈	92C4	A35B	FEOR0080*
3147	푈	92C5	A35C	FEOS0080*
3148	푈	92C6	A35D	FEOT0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 25 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3149	ㅁ	92C7	A362	FEOY0080
3150	ㅁ	92C8	A363	FEOZ0080*
3151	ㅁ	92C9	A364	FEP00080*
3152	ㅁ	92CA	A366	FEP20080*
3153	ㅁ	92CB	A367	FEP30080*
3154	ㅁ	92CC	A368	FEP40080*
3155	ㅁ	92CD	A36A	FEP60080*
3156	ㅁ	92CE	A36B	FEP70080*
3157	ㅁ	92CF	A36C	FEP80080*
3158	ㅁ	92D0	A36D	FEP90080*
3159	ㅁ	92D1	A36E	FEPA0080*
3160	ㅁ	92D2	A36F	FEPB0080*
3161	ㅁ	92D3	A370	FEPD0080*
3162	ㅁ	92D4	A373	FEPF0080*
3163	ㅁ	92D5	A374	FEPG0080*
3164	ㅁ	92D6	A376	FEPI0080*
3165	ㅁ	92D7	A377	FEPJ0080
3166	ㅁ	92D8	A378	FEPK0080*
3167	ㅁ	92D9	A379	FEPL0080*
3168	ㅁ	92DA	A37A	FEPM0080*
3169	ㅁ	92DB	A37B	FEPN0080*
3170	ㅁ	92DC	A37C	FEPO0080*
3171	ㅁ	92DD	A37D	FEPQ0080*
3172	ㅁ	92DE	A381	FEPT0080
3173	ㅁ	92DF	A382	FEPV0080*
3174	ㅁ	92E0	A383	FEPV0080*

Table 22 (Page 25 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3175	ㅁ	92E1	A384	FEPW0080*
3176	ㅁ	92E2	A385	FEPX0080
3177	ㅁ	92E3	A386	FEPY0080*
3178	ㅁ	92E4	A387	FEPZ0080*
3179	ㅁ	92E5	A388	FEQ00080*
3180	ㅁ	92E6	A389	FEQ10080*
3181	ㅁ	92E7	A38A	FEQ20080*
3182	ㅁ	92E8	A38B	FEQ30080*
3183	ㅁ	92E9	A38C	FEQ40080*
3184	ㅁ	92EA	A38D	FEQ50080*
3185	ㅁ	92EB	A38E	FEQ60080*
3186	ㅁ	92EC	A38F	FEQ70080*
3187	ㅁ	92ED	A390	FEQ80080*
3188	ㅁ	92EE	A391	FEQ90080*
3189	ㅁ	92EF	A393	FEQB0080*
3190	ㅁ	92F0	A394	FEQC0080*
3191	ㅁ	92F1	A395	FEQD0080*
3192	ㅁ	92F2	A396	FEQE0080*
3193	ㅁ	92F3	A397	FEQF0080*
3194	ㅁ	92F4	A398	FEQG0080*
3195	ㅁ	92F5	A399	FEQH0080*
3196	ㅁ	92F6	A39A	FEQI0080*
3197	ㅁ	92F7	A39B	FEQJ0080*
3198	ㅁ	92F8	A39C	FEQK0080*
3199	ㅁ	92F9	A39D	FEQL0080*
3200	ㅁ	92FA	A3A3	FEQR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3201	뒹	92FB	A3A4	FEQS0080*
3202	뒹	92FC	A3A6	FEQU0080*
3203	뒹	92FD	A3A7	FEQV0080*
3204	뒹	92FE	A3AA	FEQY0080*
3205	뒹	9341	A3AC	FER00080*
3206	뒹	9342	A3AD	FER10080*
3207	뒹	9343	A3AE	FER20080*
3208	뒹	9344	A3AF	FER30080*
3209	뒹	9345	A3B0	FER40080*
3210	뒹	9346	A3B4	FER80080*
3211	뒹	9347	A3B8	FERC0080
3212	뒹	9348	A3BA	FERE0080*
3213	뒹	9349	A3BC	FERG0080*
3214	뒹	934A	A3BD	FERH0080*
3215	뒹	934B	A466	FEUE0080*
3216	뒹	934C	A467	FEUF0080*
3217	뒹	934D	A46D	FEUL0080*
3218	뒹	934E	A46E	FEUM0080*
3219	뒹	934F	A46F	FEUN0080*
3220	뒹	9350	A470	FEUO0080*
3221	뒹	9351	A474	FEUS0080*
3222	뒹	9352	A476	FEUU0080
3223	뒹	9353	A478	FEUW0080*
3224	뒹	9354	A479	FEUX0080*
3225	뒹	9355	A47A	FEUY0080*
3226	뒹	9356	A47C	FEV00080*

Table 22 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3227	뒹	9357	A47D	FEV10080*
3228	뒹	9358	A483	FEV70080*
3229	뒹	9359	A484	FEV80080*
3230	뒹	935A	A486	FEVA0080*
3231	뒹	9361	A487	FEVB0080*
3232	뒹	9362	A488	FEVC0080
3233	뒹	9363	A48A	FEVE0080*
3234	뒹	9364	A48B	FEVF0080*
3235	뒹	9365	A48C	FEVG0080*
3236	뒹	9366	A48D	FEVH0080*
3237	뒹	9367	A48E	FEVI0080*
3238	뒹	9368	A48F	FEVJ0080*
3239	뒹	9369	A490	FEVK0080*
3240	뒹	936A	A494	FEVO0080*
3241	뒹	936B	A498	FEVS0080*
3242	뒹	936C	A499	FEVT0080*
3243	뒹	936D	A49A	FEVU0080*
3244	뒹	936E	A49C	FEVW0080*
3245	뒹	936F	A49D	FEVX0080*
3246	뒹	9370	A4A3	FEW30080*
3247	뒹	9371	A4A4	FEW40080*
3248	뒹	9372	A4A6	FEW60080*
3249	뒹	9373	A4A7	FEW70080*
3250	뒹	9374	A4A8	FEW80080*
3251	뒹	9375	A4A9	FEW90080*
3252	뒹	9376	A4AA	FEWA0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3253	꺾	9377	A4AB	FEWB0080*
3254	꺾	9378	A4AC	FEWC0080*
3255	꺾	9379	A4AD	FEWD0080*
3256	꺾	937A	A4AE	FEWE0080*
3257	꺾	9381	A4AF	FEWF0080*
3258	꺾	9382	A4B0	FEWG0080*
3259	꺾	9383	A4B1	FEWH0080
3260	꺾	9384	A4B4	FEWK0080*
3261	꺾	9385	A4B5	FEWL0080*
3262	꺾	9386	A4B6	FEWM0080*
3263	꺾	9387	A4B7	FEWN0080*
3264	꺾	9388	A4B8	FEWO0080*
3265	꺾	9389	A4B9	FEWP0080*
3266	꺾	938A	A4BA	FEWQ0080*
3267	꺾	938B	A4BB	FEWR0080*
3268	꺾	938C	A4BC	FEWS0080*
3269	꺾	938D	A4BD	FEWT0080*
3270	꺾	938E	A4C1	FEWX0080
3271	꺾	938F	A4C2	FEWY0080*
3272	꺾	9390	A4C3	FEWZ0080*
3273	꺾	9391	A4C4	FEX00080*
3274	꺾	9392	A4C5	FEX10080*
3275	꺾	9393	A4C6	FEX20080*
3276	꺾	9394	A4C7	FEX30080*
3277	꺾	9395	A4C8	FEX40080*
3278	꺾	9396	A4C9	FEX50080*

Line Number	Graphic	PC Code	Host Code	GCGID
3279	꺾	9397	A4CA	FEX60080*
3280	꺾	9398	A4CB	FEX70080*
3281	꺾	9399	A4CC	FEX80080*
3282	꺾	939A	A4CD	FEX90080*
3283	꺾	939B	A4CE	FEXA0080*
3284	꺾	939C	A4CF	FEXB0080*
3285	꺾	939D	A4D0	FEXC0080*
3286	꺾	939E	A4D1	FEXD0080*
3287	꺾	939F	A4D3	FEXF0080*
3288	꺾	93A0	A4D4	FEXG0080*
3289	꺾	93A1	A4D5	FEXH0080*
3290	꺾	93A2	A4D6	FEXI0080*
3291	꺾	93A3	A4D7	FEXJ0080*
3292	꺾	93A4	A4D8	FEXK0080*
3293	꺾	93A5	A4D9	FEXL0080*
3294	꺾	93A6	A4DA	FEXM0080*
3295	꺾	93A7	A4DB	FEXN0080*
3296	꺾	93A8	A4DC	FEXO0080*
3297	꺾	93A9	A4DD	FEXP0080*
3298	꺾	93AA	A4E3	FEXV0080*
3299	꺾	93AB	A4E4	FEXW0080*
3300	꺾	93AC	A4E6	FEXY0080*
3301	꺾	93AD	A4E7	FEXZ0080*
3302	꺾	93AE	A4EA	FEY20080*
3303	꺾	93AF	A4EC	FEY40080*
3304	꺾	93B0	A4ED	FEY50080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3305	벌	93B1	A4EE	FEY60080*
3306	벌	93B2	A4EF	FEY70080*
3307	벌	93B3	A4F0	FEY80080*
3308	벌	93B4	A4F4	FEYC0080*
3309	벌	93B5	A4F6	FEYE0080
3310	벌	93B6	A4F9	FEYH0080*
3311	벌	93B7	A4FA	FEYI0080
3312	벌	93B8	A4FB	FEYJ0080*
3313	벌	93B9	A4FC	FEYK0080*
3314	벌	93BA	A4FD	FEYL0080*
3315	벌	93BB	A543	FEYR0080*
3316	벌	93BC	A544	FEYS0080*
3317	벌	93BD	A546	FEYU0080*
3318	벌	93BE	A547	FEYV0080*
3319	벌	93BF	A54A	FEYY0080*
3320	벌	93C0	A54B	FEYZ0080*
3321	벌	93C1	A54C	FEZ00080*
3322	벌	93C2	A54D	FEZ10080*
3323	벌	93C3	A54E	FEZ20080*
3324	벌	93C4	A54F	FEZ30080*
3325	벌	93C5	A550	FEZ40080*
3326	벌	93C6	A554	FEZ80080*
3327	벌	93C7	A558	FEZC0080*
3328	벌	93C8	A559	FEZD0080*
3329	벌	93C9	A55A	FEZE0080*
3330	벌	93CA	A55B	FEZF0080

Table 22 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3331	벌	93CB	A55C	FEZG0080*
3332	벌	93CC	A55D	FEZH0080*
3333	벌	93CD	A563	FEZN0080*
3334	벌	93CE	A564	FEZO0080*
3335	벌	93CF	A566	FEZQ0080*
3336	벌	93D0	A567	FEZR0080*
3337	벌	93D1	A568	FEZS0080*
3338	벌	93D2	A56A	FEZU0080*
3339	벌	93D3	A56B	FEZV0080*
3340	벌	93D4	A56C	FEZW0080*
3341	벌	93D5	A56D	FEZX0080*
3342	벌	93D6	A56E	FEZY0080*
3343	벌	93D7	A56F	FEZZ0080*
3344	벌	93D8	A570	FF000080*
3345	벌	93D9	A571	FF010080
3346	벌	93DA	A574	FF040080*
3347	벌	93DB	A578	FF080080
3348	벌	93DC	A579	FF090080
3349	벌	93DD	A57A	FF0A0080
3350	벌	93DE	A57C	FF0C0080*
3351	벌	93DF	A57D	FF0D0080*
3352	벌	93E0	A582	FF0I0080*
3353	벌	93E1	A583	FF0J0080*
3354	벌	93E2	A584	FF0K0080*
3355	벌	93E3	A586	FF0M0080*
3356	벌	93E4	A587	FF0N0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 29 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3357	벤	93E5	A588	FF0O0080*
3358	벨	93E6	A589	FF0P0080*
3359	벵	93E7	A58A	FF0Q0080*
3360	베	93E8	A58B	FF0R0080*
3361	베	93E9	A58C	FF0S0080*
3362	벵	93EA	A58D	FF0T0080*
3363	벨	93EB	A58E	FF0U0080*
3364	베	93EC	A58F	FF0V0080*
3365	벵	93ED	A590	FF0W0080*
3366	벵	93EE	A591	FF0X0080*
3367	벵	93EF	A593	FF0Z0080*
3368	벵	93F0	A594	FF100080*
3369	벵	93F1	A595	FF110080*
3370	벵	93F2	A596	FF120080*
3371	벵	93F3	A597	FF130080*
3372	벵	93F4	A598	FF140080*
3373	벵	93F5	A599	FF150080*
3374	벵	93F6	A59A	FF160080*
3375	벨	93F7	A59B	FF170080*
3376	베	93F8	A59C	FF180080*
3377	벵	93F9	A59D	FF190080*
3378	붓	93FA	A5A4	FF1G0080*
3379	붓	93FB	A5A6	FF1I0080*
3380	붓	93FC	A5A7	FF1J0080*
3381	본	93FD	A5A8	FF1K0080*
3382	붓	93FE	A5AA	FF1M0080*

Table 22 (Page 29 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3383	붓	9441	A5AB	FF1N0080*
3384	붓	9442	A5AC	FF1O0080*
3385	붓	9443	A5AD	FF1P0080*
3386	붓	9444	A5AE	FF1Q0080*
3387	붓	9445	A5AF	FF1R0080*
3388	붓	9446	A5B0	FF1S0080*
3389	붓	9447	A5B4	FF1W0080*
3390	붓	9448	A5B6	FF1Y0080*
3391	붓	9449	A5B8	FF200080*
3392	붓	944A	A5B9	FF210080*
3393	붓	944B	A5BA	FF220080*
3394	붓	944C	A5BB	FF230080*
3395	붓	944D	A5BC	FF240080*
3396	붓	944E	A5BD	FF250080*
3397	붓	944F	A5C2	FF2A0080*
3398	붓	9450	A5C3	FF2B0080*
3399	붓	9451	A5C4	FF2C0080*
3400	붓	9452	A5C6	FF2E0080*
3401	붓	9453	A5C7	FF2F0080*
3402	붓	9454	A5C8	FF2G0080*
3403	붓	9455	A5C9	FF2H0080*
3404	붓	9456	A5CA	FF2I0080*
3405	붓	9457	A5CB	FF2J0080*
3406	붓	9458	A5CC	FF2K0080*
3407	붓	9459	A5CD	FF2L0080*
3408	붓	945A	A5CE	FF2M0080*




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3409	뵠	9461	A5CF	FF2N0080*
3410	뵡	9462	A5D0	FF2O0080*
3411	뵣	9463	A5D1	FF2P0080*
3412	뵤	9464	A5D3	FF2R0080*
3413	뵦	9465	A5D4	FF2S0080*
3414	뵧	9466	A5D5	FF2T0080
3415	뵨	9467	A5D7	FF2V0080*
3416	뵩	9468	A5D8	FF2W0080*
3417	뵪	9469	A5D9	FF2X0080*
3418	뵫	946A	A5DA	FF2Y0080*
3419	뵬	946B	A5DB	FF2Z0080*
3420	뵭	946C	A5DC	FF300080*
3421	뵮	946D	A5DD	FF310080*
3422	뵯	946E	A5E2	FF360080*
3423	뵰	946F	A5E3	FF370080*
3424	뵱	9470	A5E4	FF380080*
3425	뵲	9471	A5E5	FF390080*
3426	뵳	9472	A5E6	FF3A0080*
3427	뵴	9473	A5E7	FF3B0080*
3428	뵵	9474	A5E8	FF3C0080*
3429	뵶	9475	A5E9	FF3D0080*
3430	뵷	9476	A5EA	FF3E0080*
3431	뵸	9477	A5EB	FF3F0080*
3432	뵹	9478	A5EC	FF3G0080*
3433	뵺	9479	A5ED	FF3H0080*
3434	뵻	947A	A5EE	FF3I0080*

Line Number	Graphic	PC Code	Host Code	GCGID
3435	뵼	9481	A5EF	FF3J0080*
3436	뵽	9482	A5F0	FF3K0080*
3437	뵾	9483	A5F1	FF3L0080*
3438	뵿	9484	A5F3	FF3N0080*
3439	부	9485	A5F4	FF3O0080*
3440	북	9486	A5F5	FF3P0080*
3441	붂	9487	A5F7	FF3R0080*
3442	붃	9488	A5F8	FF3S0080*
3443	분	9489	A5F9	FF3T0080*
3444	붅	948A	A5FA	FF3U0080*
3445	붆	948B	A5FB	FF3V0080*
3446	붇	948C	A5FC	FF3W0080*
3447	불	948D	A5FD	FF3X0080*
3448	붉	948E	A643	FF430080*
3449	붊	948F	A644	FF440080*
3450	붋	9490	A646	FF460080*
3451	붌	9491	A647	FF470080*
3452	붍	9492	A648	FF480080*
3453	붎	9493	A64A	FF4A0080*
3454	붏	9494	A64B	FF4B0080*
3455	붐	9495	A64C	FF4C0080*
3456	붑	9496	A64D	FF4D0080*
3457	붒	9497	A64E	FF4E0080*
3458	붓	9498	A64F	FF4F0080*
3459	붔	9499	A650	FF4G0080*
3460	붕	949A	A654	FF4K0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3461	빛	949B	A655	FF4L0080*
3462	빚	949C	A656	FF4M0080*
3463	빙	949D	A657	FF4N0080*
3464	빔	949E	A658	FF4O0080*
3465	빔	949F	A659	FF4P0080*
3466	빅	94A0	A65A	FF4Q0080*
3467	빌	94A1	A65B	FF4R0080*
3468	빔	94A2	A65C	FF4S0080*
3469	빙	94A3	A65D	FF4T0080*
3470	북	94A4	A662	FF4Y0080*
3471	뷰	94A5	A663	FF4Z0080*
3472	붓	94A6	A664	FF500080*
3473	붓	94A7	A666	FF520080*
3474	붓	94A8	A667	FF530080*
3475	븐	94A9	A668	FF540080*
3476	볼	94AA	A669	FF550080*
3477	복	94AB	A66A	FF560080*
3478	붓	94AC	A66B	FF570080*
3479	붓	94AD	A66C	FF580080*
3480	붓	94AE	A66D	FF590080*
3481	붓	94AF	A66E	FF5A0080*
3482	붓	94B0	A66F	FF5B0080*
3483	붓	94B1	A670	FF5C0080*
3484	붓	94B2	A671	FF5D0080*
3485	붓	94B3	A673	FF5F0080*
3486	붓	94B4	A674	FF5G0080*

Line Number	Graphic	PC Code	Host Code	GCGID
3487	붓	94B5	A675	FF5H0080*
3488	붓	94B6	A676	FF5I0080*
3489	붕	94B7	A677	FF5J0080*
3490	붓	94B8	A678	FF5K0080*
3491	붓	94B9	A679	FF5L0080*
3492	복	94BA	A67A	FF5M0080*
3493	볼	94BB	A67B	FF5N0080*
3494	붓	94BC	A67C	FF5O0080*
3495	붕	94BD	A67D	FF5P0080*
3496	부	94BE	A683	FF5V0080*
3497	붓	94BF	A684	FF5W0080*
3498	붓	94C0	A686	FF5Y0080*
3499	붓	94C1	A687	FF5Z0080*
3500	붓	94C2	A68C	FF640080*
3501	붓	94C3	A68D	FF650080*
3502	붓	94C4	A68E	FF660080*
3503	붓	94C5	A68F	FF670080*
3504	붓	94C6	A690	FF680080*
3505	붓	94C7	A694	FF6C0080*
3506	붓	94C8	A696	FF6E0080*
3507	붓	94C9	A698	FF6G0080*
3508	붓	94CA	A699	FF6H0080
3509	복	94CB	A69A	FF6I0080*
3510	붕	94CC	A69D	FF6L0080*
3511	복	94CD	A6A2	FF6Q0080*
3512	뷔	94CE	A6A3	FF6R0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 32 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3513	뵘	94CF	A6A4	FF6S0080*
3514	뵙	94D0	A6A5	FF6T0080*
3515	뵚	94D1	A6A6	FF6U0080*
3516	뵛	94D2	A6A7	FF6V0080*
3517	뵜	94D3	A6A8	FF6W0080*
3518	뵝	94D4	A6AA	FF6Y0080*
3519	뵞	94D5	A6AB	FF6Z0080*
3520	뵟	94D6	A6AC	FF700080*
3521	뵠	94D7	A6AD	FF710080*
3522	뵡	94D8	A6AE	FF720080*
3523	뵢	94D9	A6AF	FF730080*
3524	뵣	94DA	A6B0	FF740080*
3525	뵤	94DB	A6B1	FF750080*
3526	뵥	94DC	A6B3	FF770080*
3527	뵦	94DD	A6B4	FF780080*
3528	뵧	94DE	A6B5	FF790080*
3529	뵨	94DF	A6B7	FF7B0080*
3530	뵩	94E0	A6B8	FF7C0080*
3531	뵪	94E1	A6B9	FF7D0080*
3532	뵫	94E2	A6BA	FF7E0080
3533	뵬	94E3	A6BB	FF7F0080*
3534	뵭	94E4	A6BC	FF7G0080*
3535	뵮	94E5	A6BD	FF7H0080*
3536	뵯	94E6	A6C2	FF7M0080*
3537	뵰	94E7	A6C3	FF7N0080*
3538	뵱	94E8	A6C4	FF7O0080*

Table 22 (Page 32 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3539	뵲	94E9	A6C5	FF7P0080*
3540	뵳	94EA	A6C6	FF7Q0080*
3541	뵴	94EB	A6C7	FF7R0080*
3542	뵵	94EC	A6C8	FF7S0080*
3543	뵶	94ED	A6C9	FF7T0080*
3544	뵷	94EE	A6CA	FF7U0080*
3545	뵸	94EF	A6CB	FF7V0080*
3546	뵹	94F0	A6CC	FF7W0080*
3547	뵺	94F1	A6CD	FF7X0080*
3548	뵻	94F2	A6CE	FF7Y0080*
3549	뵼	94F3	A6CF	FF7Z0080*
3550	뵽	94F4	A6D0	FF800080*
3551	뵾	94F5	A6D1	FF810080*
3552	뵿	94F6	A6D3	FF830080*
3553	부	94F7	A6D4	FF840080*
3554	북	94F8	A6D5	FF850080*
3555	붂	94F9	A6D6	FF860080*
3556	붃	94FA	A6D7	FF870080*
3557	분	94FB	A6D8	FF880080*
3558	붅	94FC	A6D9	FF890080*
3559	붆	94FD	A6DA	FF8A0080*
3560	붇	94FE	A6DB	FF8B0080*
3561	불	9541	A6DC	FF8C0080*
3562	붉	9542	A6DD	FF8D0080*
3563	붊	9543	A6E3	FF8J0080*
3564	붋	9544	A6E4	FF8K0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3565	빚	9545	A6E6	FF8M0080*
3566	빔	9546	A6E7	FF8N0080*
3567	빔	9547	A6E8	FF8O0080*
3568	뵁	9548	A6EA	FF8Q0080*
3569	뵁	9549	A6EB	FF8R0080*
3570	뵁	954A	A6EC	FF8S0080*
3571	뵁	954B	A6ED	FF8T0080*
3572	뵁	954C	A6EE	FF8U0080*
3573	뵁	954D	A6EF	FF8V0080*
3574	뵁	954E	A6F0	FF8W0080*
3575	뵁	954F	A6F1	FF8X0080*
3576	뵁	9550	A6F3	FF8Z0080*
3577	뵁	9551	A6F4	FF900080*
3578	뵁	9552	A6F5	FF910080*
3579	뵁	9553	A6F6	FF920080*
3580	뵁	9554	A6F8	FF940080*
3581	뵁	9555	A6F9	FF950080*
3582	뵁	9556	A6FA	FF960080*
3583	뵁	9557	A6FB	FF970080*
3584	뵁	9558	A6FC	FF980080*
3585	뵁	9559	A6FD	FF990080*
3586	뵁	955A	A742	FF9E0080*
3587	뵁	9561	A743	FF9F0080*
3588	뵁	9562	A744	FF9G0080*
3589	뵁	9563	A746	FF9I0080*
3590	뵁	9564	A747	FF9J0080*

Table 22 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3591	뵁	9565	A748	FF9K0080*
3592	뵁	9566	A74A	FF9M0080*
3593	뵁	9567	A74B	FF9N0080*
3594	뵁	9568	A74C	FF9O0080*
3595	뵁	9569	A74D	FF9P0080*
3596	뵁	956A	A74E	FF9Q0080*
3597	뵁	956B	A74F	FF9R0080*
3598	뵁	956C	A750	FF9S0080*
3599	뵁	956D	A753	FF9V0080*
3600	뵁	956E	A754	FF9W0080*
3601	뵁	956F	A756	FF9Y0080*
3602	뵁	9570	A758	FFA00080*
3603	뵁	9571	A759	FFA10080*
3604	뵁	9572	A75A	FFA20080*
3605	뵁	9573	A75B	FFA30080*
3606	뵁	9574	A75C	FFA40080*
3607	뵁	9575	A75D	FFA50080*
3608	뵁	9576	A763	FFAB0080*
3609	뵁	9577	A764	FFAC0080*
3610	뵁	9578	A766	FFAE0080*
3611	뵁	9579	A767	FFAF0080*
3612	뵁	957A	A768	FFAG0080*
3613	뵁	9581	A76A	FFAI0080*
3614	뵁	9582	A76B	FFAJ0080*
3615	뵁	9583	A76C	FFAK0080*
3616	뵁	9584	A76D	FFAL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 34 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3617	분	9585	A76E	FFAM0080*
3618	분	9586	A76F	FFAN0080*
3619	분	9587	A770	FFAO0080*
3620	분	9588	A774	FFAS0080*
3621	분	9589	A776	FFAU0080*
3622	분	958A	A777	FFAV0080
3623	분	958B	A778	FFAW0080*
3624	분	958C	A779	FFAX0080*
3625	분	958D	A77A	FFAY0080*
3626	분	958E	A77B	FFAZ0080*
3627	분	958F	A77C	FFB00080*
3628	분	9590	A77D	FFB10080*
3629	비	9591	A781	FFB50080
3630	빅	9592	A782	FFB60080*
3631	빅	9593	A783	FFB70080*
3632	빅	9594	A784	FFB80080*
3633	빈	9595	A785	FFB90080*
3634	빅	9596	A786	FFBA0080*
3635	빅	9597	A787	FFBB0080*
3636	빈	9598	A788	FFBC0080*
3637	빅	9599	A789	FFBD0080*
3638	빅	959A	A78A	FFBE0080*
3639	빅	959B	A78B	FFBF0080*
3640	빅	959C	A78C	FFBG0080*
3641	빅	959D	A78D	FFBH0080*
3642	빅	959E	A78E	FFBI0080*

Table 22 (Page 34 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3643	빅	959F	A78F	FFBJ0080*
3644	빅	95A0	A790	FFBK0080*
3645	빅	95A1	A791	FFBL0080*
3646	빅	95A2	A793	FFBN0080*
3647	빅	95A3	A794	FFBO0080*
3648	빅	95A4	A795	FFBP0080*
3649	빅	95A5	A796	FFBQ0080*
3650	빅	95A6	A797	FFBR0080*
3651	빅	95A7	A798	FFBS0080*
3652	빅	95A8	A799	FFBT0080*
3653	빅	95A9	A79A	FFBU0080*
3654	빅	95AA	A79B	FFBV0080*
3655	빅	95AB	A79C	FFBW0080*
3656	빅	95AC	A79D	FFBX0080*
3657	빅	95AD	A7A3	FFC30080*
3658	빅	95AE	A7A4	FFC40080*
3659	빅	95AF	A7A6	FFC60080*
3660	빅	95B0	A7A7	FFC70080*
3661	빈	95B1	A7A8	FFC80080
3662	빅	95B2	A7AA	FFCA0080*
3663	빅	95B3	A7AC	FFCC0080*
3664	빅	95B4	A7AD	FFCD0080*
3665	빅	95B5	A7AE	FFCE0080*
3666	빅	95B6	A7AF	FFCF0080*
3667	빅	95B7	A7B0	FFCG0080*
3668	빅	95B8	A7B4	FFCK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3669	빚	95B9	A7B6	FFCM0080*
3670	빔	95BA	A7BA	FFCQ0080*
3671	빔	95BB	A7BB	FFCR0080*
3672	빔	95BC	A7BC	FFCS0080*
3673	빙	95BD	A7BD	FFCT0080*
3674	뺨	95BE	A863	FFFN0080*
3675	뺨	95BF	A864	FFFO0080*
3676	뺨	95C0	A866	FFFQ0080*
3677	뺨	95C1	A867	FFFR0080*
3678	뺨	95C2	A868	FFFS0080*
3679	뺨	95C3	A86A	FFFU0080*
3680	뺨	95C4	A86C	FFFW0080*
3681	뺨	95C5	A86D	FFFX0080*
3682	뺨	95C6	A86E	FFFY0080*
3683	뺨	95C7	A86F	FFFZ0080*
3684	뺨	95C8	A870	FFG00080*
3685	뺨	95C9	A874	FFG40080*
3686	뺨	95CA	A878	FFG80080*
3687	뺨	95CB	A879	FFG90080*
3688	뺨	95CC	A87A	FFGA0080*
3689	뺨	95CD	A87B	FFGB0080*
3690	뺨	95CE	A87C	FFGC0080*
3691	뺨	95CF	A883	FFGJ0080*
3692	뺨	95D0	A884	FFGK0080*
3693	뺨	95D1	A886	FFGM0080*
3694	뺨	95D2	A887	FFGN0080*

Table 22 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3695	뺨	95D3	A888	FFGO0080*
3696	뺨	95D4	A88A	FFGQ0080*
3697	뺨	95D5	A88B	FFGR0080*
3698	뺨	95D6	A88C	FFGS0080*
3699	뺨	95D7	A88D	FFGT0080*
3700	뺨	95D8	A88E	FFGU0080*
3701	뺨	95D9	A88F	FFGV0080*
3702	뺨	95DA	A890	FFGW0080*
3703	뺨	95DB	A894	FFH00080*
3704	뺨	95DC	A898	FFH40080*
3705	뺨	95DD	A899	FFH50080*
3706	뺨	95DE	A89A	FFH60080*
3707	뺨	95DF	A89B	FFH70080*
3708	뺨	95E0	A89C	FFH80080*
3709	뺨	95E1	A89D	FFH90080*
3710	뺨	95E2	A8A3	FFHF0080*
3711	뺨	95E3	A8A4	FFHG0080*
3712	뺨	95E4	A8A5	FFHH0080
3713	뺨	95E5	A8A6	FFHI0080*
3714	뺨	95E6	A8A7	FFHJ0080*
3715	뺨	95E7	A8A8	FFHK0080*
3716	뺨	95E8	A8A9	FFHL0080*
3717	뺨	95E9	A8AA	FFHM0080*
3718	뺨	95EA	A8AB	FFHN0080*
3719	뺨	95EB	A8AC	FFHO0080*
3720	뺨	95EC	A8AD	FFHP0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3721	꺄	95ED	A8AE	FFHQ0080*
3722	꺅	95EE	A8AF	FFHR0080*
3723	꺆	95EF	A8B0	FFHS0080*
3724	꺇	95F0	A8B3	FFHV0080*
3725	꺈	95F1	A8B4	FFHW0080*
3726	꺉	95F2	A8B5	FFHX0080*
3727	꺊	95F3	A8B6	FFHY0080*
3728	꺋	95F4	A8B7	FFHZ0080*
3729	꺌	95F5	A8B8	FFI00080*
3730	꺍	95F6	A8B9	FFI10080*
3731	꺎	95F7	A8BA	FFI20080*
3732	꺏	95F8	A8BB	FFI30080*
3733	꺐	95F9	A8BC	FFI40080*
3734	꺑	95FA	A8BD	FFI50080*
3735	꺒	95FB	A8C1	FFI90080
3736	꺓	95FC	A8C2	FFIA0080*
3737	꺔	95FD	A8C3	FFIB0080*
3738	꺕	95FE	A8C4	FFIC0080*
3739	꺖	9641	A8C5	FFID0080*
3740	꺗	9642	A8C6	FFIE0080*
3741	꺘	9643	A8C7	FFIF0080*
3742	꺙	9644	A8C8	FFIG0080*
3743	꺚	9645	A8C9	FFIH0080*
3744	꺛	9646	A8CA	FFII0080*
3745	꺜	9647	A8CB	FFIJ0080*
3746	꺝	9648	A8CC	FFIK0080*

Line Number	Graphic	PC Code	Host Code	GCGID
3747	꺞	9649	A8CD	FFIL0080*
3748	꺟	964A	A8CE	FFIM0080*
3749	꺠	964B	A8CF	FFIN0080*
3750	꺡	964C	A8D0	FFIO0080*
3751	꺢	964D	A8D1	FFIP0080*
3752	꺣	964E	A8D3	FFIR0080*
3753	꺤	964F	A8D4	FFIS0080*
3754	꺥	9650	A8D5	FFIT0080*
3755	꺦	9651	A8D6	FFIU0080*
3756	꺧	9652	A8D7	FFIV0080*
3757	꺨	9653	A8D8	FFIW0080*
3758	꺩	9654	A8D9	FFIX0080*
3759	꺪	9655	A8DA	FFIY0080*
3760	꺫	9656	A8DB	FFIZ0080*
3761	꺬	9657	A8DC	FFJ00080*
3762	꺭	9658	A8DD	FFJ10080*
3763	꺮	9659	A8E3	FFJ70080*
3764	꺯	965A	A8E4	FFJ80080*
3765	꺰	9661	A8E6	FFJA0080*
3766	꺱	9662	A8E7	FFJB0080*
3767	꺲	9663	A8EA	FFJE0080*
3768	꺳	9664	A8EB	FFJF0080*
3769	꺴	9665	A8EC	FFJG0080*
3770	꺵	9666	A8ED	FFJH0080*
3771	꺶	9667	A8EE	FFJI0080*
3772	꺷	9668	A8EF	FFJJ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 22 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3773	꺾	9669	A8F0	FFJK0080*
3774	꺾	966A	A8F3	FFJN0080*
3775	꺾	966B	A8F4	FFJO0080*
3776	꺾	966C	A8F8	FFJS0080*
3777	꺾	966D	A8F9	FFJT0080*
3778	꺾	966E	A8FA	FFJU0080*
3779	꺾	966F	A8FB	FFJV0080*
3780	꺾	9670	A8FC	FFJW0080*
3781	꺾	9671	A8FD	FFJX0080*
3782	꺾	9672	A942	FFK20080
3783	꺾	9673	A943	FFK30080*
3784	꺾	9674	A944	FFK40080*
3785	꺾	9675	A945	FFK50080
3786	꺾	9676	A946	FFK60080*
3787	꺾	9677	A947	FFK70080*
3788	꺾	9678	A948	FFK80080*
3789	꺾	9679	A949	FFK90080
3790	꺾	967A	A94A	FFKA0080*
3791	꺾	9681	A94B	FFKB0080*
3792	꺾	9682	A94C	FFKC0080*
3793	꺾	9683	A94D	FFKD0080*
3794	꺾	9684	A94E	FFKE0080*
3795	꺾	9685	A94F	FFKF0080*
3796	꺾	9686	A950	FFKG0080*
3797	꺾	9687	A951	FFKH0080*
3798	꺾	9688	A953	FFKJ0080*

Table 22 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3799	꺾	9689	A954	FFKK0080*
3800	꺾	968A	A955	FFKL0080

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3801	꺾	968B	A956	FFKM0080*
3802	꺾	968C	A958	FFKO0080*
3803	꺾	968D	A959	FFKP0080*
3804	꺾	968E	A95A	FFKQ0080*
3805	꺾	968F	A95B	FFKR0080*
3806	꺾	9690	A95C	FFKS0080*
3807	꺾	9691	A95D	FFKT0080*
3808	꺾	9692	A963	FFKZ0080*
3809	꺾	9693	A964	FFL00080*
3810	꺾	9694	A965	FFL10080*
3811	꺾	9695	A966	FFL20080*
3812	꺾	9696	A967	FFL30080*
3813	꺾	9697	A968	FFL40080*
3814	꺾	9698	A969	FFL50080*
3815	꺾	9699	A96A	FFL60080*
3816	꺾	969A	A96B	FFL70080*
3817	꺾	969B	A96C	FFL80080*
3818	꺾	969C	A96D	FFL90080*
3819	꺾	969D	A96E	FFLA0080*
3820	꺾	969E	A96F	FFLB0080*
3821	꺾	969F	A970	FFLC0080*
3822	꺾	96A0	A974	FFLG0080*
3823	꺾	96A1	A978	FFLK0080*
3824	꺾	96A2	A979	FFLL0080*
3825	꺾	96A3	A97A	FFLM0080*
3826	꺾	96A4	A97B	FFLN0080*

Line Number	Graphic	PC Code	Host Code	GCGID
3827	꺾	96A5	A97C	FFLO0080*
3828	꺾	96A6	A97D	FFLP0080*
3829	꺾	96A7	A981	FFLT0080
3830	꺾	96A8	A982	FFLU0080*
3831	꺾	96A9	A983	FFLV0080*
3832	꺾	96AA	A984	FFLW0080*
3833	꺾	96AB	A985	FFLX0080*
3834	꺾	96AC	A986	FFLY0080*
3835	꺾	96AD	A987	FFLZ0080*
3836	꺾	96AE	A988	FFM00080*
3837	꺾	96AF	A989	FFM10080*
3838	꺾	96B0	A98A	FFM20080*
3839	꺾	96B1	A98B	FFM30080*
3840	꺾	96B2	A98C	FFM40080*
3841	꺾	96B3	A98D	FFM50080*
3842	꺾	96B4	A98E	FFM60080*
3843	꺾	96B5	A98F	FFM70080*
3844	꺾	96B6	A990	FFM80080*
3845	꺾	96B7	A991	FFM90080*
3846	꺾	96B8	A993	FFMB0080*
3847	꺾	96B9	A994	FFMC0080*
3848	꺾	96BA	A995	FFMD0080*
3849	꺾	96BB	A996	FFME0080*
3850	꺾	96BC	A997	FFMF0080*
3851	꺾	96BD	A998	FFMG0080*
3852	꺾	96BE	A999	FFMH0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 2 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3853	꺾	96BF	A99A	FFMI0080*
3854	꺾	96C0	A99B	FFMJ0080*
3855	꺾	96C1	A99C	FFMK0080*
3856	꺾	96C2	A99D	FFML0080*
3857	꺾	96C3	A9A3	FFMR0080*
3858	꺾	96C4	A9A4	FFMS0080*
3859	꺾	96C5	A9A6	FFMU0080*
3860	꺾	96C6	A9A7	FFMV0080*
3861	꺾	96C7	A9A8	FFMW0080*
3862	꺾	96C8	A9AA	FFMY0080*
3863	꺾	96C9	A9AB	FFMZ0080*
3864	꺾	96CA	A9AC	FFN00080*
3865	꺾	96CB	A9AD	FFN10080*
3866	꺾	96CC	A9AE	FFN20080*
3867	꺾	96CD	A9AF	FFN30080*
3868	꺾	96CE	A9B0	FFN40080*
3869	꺾	96CF	A9B4	FFN80080*
3870	꺾	96D0	A9B5	FFN90080*
3871	꺾	96D1	A9B6	FFNA0080*
3872	꺾	96D2	A9B8	FFNC0080*
3873	꺾	96D3	A9B9	FFND0080*
3874	꺾	96D4	A9BA	FFNE0080*
3875	꺾	96D5	A9BB	FFNF0080*
3876	꺾	96D6	A9BC	FFNG0080*
3877	꺾	96D7	A9BD	FFNH0080*
3878	꺾	96D8	A9C1	FFNL0080

Table 23 (Page 2 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3879	꺾	96D9	A9C2	FFNM0080*
3880	꺾	96DA	A9C3	FFNN0080*
3881	꺾	96DB	A9C4	FFNO0080*
3882	꺾	96DC	A9C5	FFNP0080*
3883	꺾	96DD	A9C6	FFNQ0080*
3884	꺾	96DE	A9C7	FFNR0080*
3885	꺾	96DF	A9C8	FFNS0080*
3886	꺾	96E0	A9C9	FFNT0080*
3887	꺾	96E1	A9CA	FFNU0080*
3888	꺾	96E2	A9CB	FFNV0080*
3889	꺾	96E3	A9CC	FFNW0080*
3890	꺾	96E4	A9CD	FFNX0080*
3891	꺾	96E5	A9CE	FFNY0080*
3892	꺾	96E6	A9CF	FFNZ0080*
3893	꺾	96E7	A9D0	FFO00080*
3894	꺾	96E8	A9D1	FFO10080*
3895	꺾	96E9	A9D3	FFO30080*
3896	꺾	96EA	A9D4	FFO40080*
3897	꺾	96EB	A9D5	FFO50080*
3898	꺾	96EC	A9D6	FFO60080*
3899	꺾	96ED	A9D7	FFO70080*
3900	꺾	96EE	A9D8	FFO80080*
3901	꺾	96EF	A9D9	FFO90080*
3902	꺾	96F0	A9DA	FFOA0080*
3903	꺾	96F1	A9DB	FFOB0080*
3904	꺾	96F2	A9DC	FFOC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3905	꺄	96F3	A9DD	FFOD0080*
3906	꺅	96F4	A9E1	FFOH0080
3907	꺆	96F5	A9E2	FFOI0080*
3908	꺇	96F6	A9E3	FFOJ0080*
3909	꺈	96F7	A9E4	FFOK0080*
3910	꺉	96F8	A9E5	FFOL0080*
3911	꺊	96F9	A9E6	FFOM0080*
3912	꺋	96FA	A9E7	FFON0080*
3913	꺌	96FB	A9E8	FFOO0080*
3914	꺍	96FC	A9E9	FFOP0080*
3915	꺎	96FD	A9EA	FFOQ0080*
3916	꺏	96FE	A9EB	FFOR0080*
3917	꺑	9741	A9EC	FFOS0080*
3918	꺒	9742	A9ED	FFOT0080*
3919	꺓	9743	A9EE	FFOU0080*
3920	꺔	9744	A9EF	FFOV0080*
3921	꺕	9745	A9F0	FFOW0080*
3922	꺖	9746	A9F1	FFOX0080*
3923	꺗	9747	A9F3	FFOZ0080*
3924	꺘	9748	A9F4	FFP00080*
3925	꺙	9749	A9F5	FFP10080*
3926	꺚	974A	A9F6	FFP20080*
3927	꺛	974B	A9F7	FFP30080*
3928	꺜	974C	A9F8	FFP40080*
3929	꺝	974D	A9F9	FFP50080*
3930	꺞	974E	A9FA	FFP60080*

Table 23 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3931	꺟	974F	A9FB	FFP70080*
3932	꺠	9750	A9FC	FFP80080*
3933	꺡	9751	A9FD	FFP90080*
3934	꺢	9752	AA42	FFPE0080*
3935	꺣	9753	AA43	FFPF0080*
3936	꺤	9754	AA44	FFPG0080*
3937	꺥	9755	AA45	FFPH0080*
3938	꺦	9756	AA46	FFPI0080*
3939	꺧	9757	AA47	FFPJ0080*
3940	꺨	9758	AA48	FFPK0080*
3941	꺩	9759	AA49	FFPL0080*
3942	꺪	975A	AA4A	FFPM0080*
3943	꺫	9761	AA4B	FFPN0080*
3944	꺬	9762	AA4C	FFPO0080*
3945	꺭	9763	AA4D	FFPP0080*
3946	꺮	9764	AA4E	FFPQ0080*
3947	꺯	9765	AA4F	FFPR0080*
3948	꺰	9766	AA50	FFPS0080*
3949	꺱	9767	AA51	FFPT0080*
3950	꺲	9768	AA53	FFPV0080*
3951	꺳	9769	AA54	FFPW0080*
3952	꺴	976A	AA55	FFPX0080*
3953	꺵	976B	AA56	FFPY0080*
3954	꺶	976C	AA57	FFPZ0080*
3955	꺷	976D	AA58	FFQ00080*
3956	꺸	976E	AA59	FFQ10080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3957	꺃	976F	AA5A	FFQ20080*
3958	꺄	9770	AA5B	FFQ30080*
3959	꺅	9771	AA5C	FFQ40080*
3960	꺆	9772	AA5D	FFQ50080*
3961	꺇	9773	AA62	FFQA0080*
3962	꺈	9774	AA63	FFQB0080*
3963	꺉	9775	AA64	FFQC0080*
3964	꺊	9776	AA65	FFQD0080*
3965	꺋	9777	AA66	FFQE0080*
3966	꺌	9778	AA67	FFQF0080*
3967	꺍	9779	AA68	FFQG0080*
3968	꺎	977A	AA69	FFQH0080*
3969	꺏	9781	AA6A	FFQI0080*
3970	꺐	9782	AA6B	FFQJ0080*
3971	꺑	9783	AA6C	FFQK0080*
3972	꺒	9784	AA6D	FFQL0080*
3973	꺓	9785	AA6E	FFQM0080*
3974	꺔	9786	AA6F	FFQN0080*
3975	꺕	9787	AA70	FFQO0080*
3976	꺖	9788	AA71	FFQP0080
3977	꺗	9789	AA73	FFQR0080*
3978	꺘	978A	AA74	FFQS0080*
3979	꺙	978B	AA75	FFQT0080*
3980	꺚	978C	AA76	FFQU0080*
3981	꺛	978D	AA78	FFQW0080*
3982	꺜	978E	AA79	FFQX0080*

Table 23 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3983	꺝	978F	AA7A	FFQY0080*
3984	꺞	9790	AA7B	FFQZ0080*
3985	꺟	9791	AA7C	FFR00080*
3986	꺠	9792	AA7D	FFR10080*
3987	꺡	9793	AA83	FFR70080*
3988	꺢	9794	AA84	FFR80080*
3989	꺣	9795	AA86	FFRA0080*
3990	꺤	9796	AA87	FFRB0080*
3991	꺥	9797	AA88	FFRC0080*
3992	꺦	9798	AA8A	FFRE0080
3993	꺧	9799	AA8B	FFRF0080*
3994	꺨	979A	AA8C	FFRG0080*
3995	꺩	979B	AA8D	FFRH0080*
3996	꺪	979C	AA8E	FFRI0080*
3997	꺫	979D	AA8F	FFRJ0080*
3998	꺬	979E	AA90	FFRK0080*
3999	꺭	979F	AA93	FFRN0080
4000	꺮	97A0	AA94	FFRO0080*
4001	꺯	97A1	AA96	FFRQ0080*
4002	꺰	97A2	AA98	FFRS0080*
4003	꺱	97A3	AA99	FFRT0080*
4004	꺲	97A4	AA9A	FFRU0080*
4005	꺳	97A5	AA9B	FFRV0080*
4006	꺴	97A6	AA9C	FFRW0080*
4007	꺵	97A7	AA9D	FFRX0080*
4008	꺶	97A8	AAA1	FFS10080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4009	꺄	97A9	AAA2	FFS20080*
4010	꺅	97AA	AAA3	FFS30080*
4011	꺆	97AB	AAA4	FFS40080*
4012	꺇	97AC	AAA5	FFS50080*
4013	꺈	97AD	AAA6	FFS60080*
4014	꺉	97AE	AAA7	FFS70080*
4015	꺊	97AF	AAA8	FFS80080*
4016	꺋	97B0	AAA9	FFS90080*
4017	꺌	97B1	AAAA	FFSA0080*
4018	꺍	97B2	AAAB	FFSB0080*
4019	꺎	97B3	AAAC	FFSC0080*
4020	꺏	97B4	AAAD	FFSD0080*
4021	꺐	97B5	AAAE	FFSE0080*
4022	꺑	97B6	AAAF	FFSF0080*
4023	꺒	97B7	AAB0	FFSG0080*
4024	꺓	97B8	AAB1	FFSH0080*
4025	꺔	97B9	AAB3	FFSJ0080*
4026	꺕	97BA	AAB4	FFSK0080*
4027	꺖	97BB	AAB5	FFSL0080*
4028	꺗	97BC	AAB6	FFSM0080*
4029	꺘	97BD	AAB7	FFSN0080*
4030	꺙	97BE	AAB8	FFSO0080*
4031	꺚	97BF	AAB9	FFSP0080*
4032	꺛	97C0	AABA	FFSQ0080*
4033	꺜	97C1	AABB	FFSR0080*
4034	꺝	97C2	AABC	FFSS0080*

Table 23 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4035	꺞	97C3	AABD	FFST0080*
4036	꺟	97C4	AAC1	FFSX0080
4037	꺠	97C5	AAC2	FFSY0080*
4038	꺡	97C6	AAC3	FFSZ0080*
4039	꺢	97C7	AAC4	FFT00080*
4040	꺣	97C8	AAC5	FFT10080*
4041	꺤	97C9	AAC6	FFT20080*
4042	꺥	97CA	AAC7	FFT30080*
4043	꺦	97CB	AAC8	FFT40080*
4044	꺧	97CC	AAC9	FFT50080*
4045	꺨	97CD	AACA	FFT60080*
4046	꺩	97CE	AACB	FFT70080*
4047	꺪	97CF	AACC	FFT80080*
4048	꺫	97D0	AACD	FFT90080*
4049	꺬	97D1	AACE	FFTA0080*
4050	꺭	97D2	AACF	FFTB0080*
4051	꺮	97D3	AAD0	FFTC0080*
4052	꺯	97D4	AAD1	FFTD0080*
4053	꺰	97D5	AAD3	FFTF0080*
4054	꺱	97D6	AAD4	FFTG0080*
4055	꺲	97D7	AAD5	FFTH0080*
4056	꺳	97D8	AAD6	FFTI0080*
4057	꺴	97D9	AAD7	FFTJ0080*
4058	꺵	97DA	AAD8	FFTK0080*
4059	꺶	97DB	AAD9	FFTL0080*
4060	꺷	97DC	AADA	FFTM0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4061	펠	97DD	AADB	FFTN0080*
4062	펠	97DE	AADC	FFTO0080*
4063	펑	97DF	AADD	FFTP0080*
4064	뿌	97E0	AAE1	FFTT0080
4065	뿌	97E1	AAE2	FFTU0080*
4066	뿌	97E2	AAE3	FFTV0080*
4067	뿌	97E3	AAE4	FFTW0080*
4068	뿌	97E4	AAE5	FFTX0080*
4069	뿌	97E5	AAE6	FFTY0080*
4070	뿌	97E6	AAE7	FFTZ0080*
4071	뿌	97E7	AAE8	FFU00080*
4072	뿌	97E8	AAE9	FFU10080*
4073	뿌	97E9	AAEA	FFU20080*
4074	뿌	97EA	AAEB	FFU30080*
4075	뿌	97EB	AAEC	FFU40080*
4076	뿌	97EC	AAED	FFU50080*
4077	뿌	97ED	AAEE	FFU60080*
4078	뿌	97EE	AAEF	FFU70080*
4079	뿌	97EF	AAF0	FFU80080*
4080	뿌	97F0	AAF1	FFU90080*
4081	뿌	97F1	AAF3	FFUB0080*
4082	뿌	97F2	AAF4	FFUC0080*
4083	뿌	97F3	AAF5	FFUD0080*
4084	뿌	97F4	AAF6	FFUE0080*
4085	뿌	97F5	AAF7	FFUF0080*
4086	뿌	97F6	AAF8	FFUG0080*

Table 23 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4087	뿌	97F7	AAF9	FFUH0080*
4088	뿌	97F8	AAFA	FFUI0080*
4089	뿌	97F9	AAFB	FFUJ0080*
4090	뿌	97FA	AAFC	FFUK0080*
4091	뿌	97FB	AAFD	FFUL0080*
4092	뿌	97FC	AB42	FFUQ0080*
4093	뿌	97FD	AB43	FFUR0080*
4094	뿌	97FE	AB44	FFUS0080*
4095	뿌	9841	AB45	FFUT0080*
4096	뿌	9842	AB46	FFUU0080*
4097	뿌	9843	AB47	FFUV0080*
4098	뿌	9844	AB48	FFUW0080*
4099	뿌	9845	AB49	FFUX0080*
4100	뿌	9846	AB4A	FFUY0080*
4101	뿌	9847	AB4B	FFUZ0080*
4102	뿌	9848	AB4C	FFV00080*
4103	뿌	9849	AB4D	FFV10080*
4104	뿌	984A	AB4E	FFV20080*
4105	뿌	984B	AB4F	FFV30080*
4106	뿌	984C	AB50	FFV40080*
4107	뿌	984D	AB51	FFV50080*
4108	뿌	984E	AB53	FFV70080*
4109	뿌	984F	AB54	FFV80080*
4110	뿌	9850	AB55	FFV90080*
4111	뿌	9851	AB56	FFVA0080*
4112	뿌	9852	AB58	FFVC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4113	꺄	9853	AB59	FFVD0080*
4114	꺅	9854	AB5A	FFVE0080*
4115	꺆	9855	AB5B	FFVF0080*
4116	꺇	9856	AB5C	FFVG0080*
4117	꺈	9857	AB5D	FFVH0080*
4118	꺉	9858	AB62	FFVM0080
4119	꺊	9859	AB63	FFVN0080*
4120	꺋	985A	AB64	FFVO0080*
4121	꺌	9861	AB66	FFVQ0080*
4122	꺍	9862	AB67	FFVR0080*
4123	꺎	9863	AB68	FFVS0080*
4124	꺏	9864	AB6A	FFVU0080*
4125	꺐	9865	AB6B	FFVV0080*
4126	꺑	9866	AB6C	FFVW0080*
4127	꺒	9867	AB6D	FFVX0080*
4128	꺓	9868	AB6E	FFVY0080*
4129	꺔	9869	AB6F	FFVZ0080*
4130	꺕	986A	AB70	FFW00080*
4131	꺖	986B	AB74	FFW40080*
4132	꺗	986C	AB75	FFW50080*
4133	꺘	986D	AB76	FFW60080*
4134	꺙	986E	AB77	FFW70080*
4135	꺚	986F	AB78	FFW80080*
4136	꺛	9870	AB79	FFW90080*
4137	꺜	9871	AB7A	FFWA0080*
4138	꺝	9872	AB7B	FFWB0080*

Table 23 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4139	꺞	9873	AB7C	FFWC0080*
4140	꺟	9874	AB7D	FFWD0080*
4141	꺠	9875	AB81	FFWH0080
4142	꺡	9876	AB82	FFWI0080*
4143	꺢	9877	AB83	FFWJ0080*
4144	꺣	9878	AB84	FFWK0080*
4145	꺤	9879	AB85	FFWL0080*
4146	꺥	987A	AB86	FFWM0080*
4147	꺦	9881	AB87	FFWN0080*
4148	꺧	9882	AB88	FFWO0080*
4149	꺨	9883	AB89	FFWP0080*
4150	꺩	9884	AB8A	FFWQ0080*
4151	꺪	9885	AB8B	FFWR0080*
4152	꺫	9886	AB8C	FFWS0080*
4153	꺬	9887	AB8D	FFWT0080*
4154	꺭	9888	AB8E	FFWU0080*
4155	꺮	9889	AB8F	FFWV0080*
4156	꺯	988A	AB90	FFWW0080*
4157	꺰	988B	AB91	FFWX0080*
4158	꺱	988C	AB93	FFWZ0080*
4159	꺲	988D	AB94	FFX00080*
4160	꺳	988E	AB95	FFX10080*
4161	꺴	988F	AB96	FFX20080*
4162	꺵	9890	AB97	FFX30080*
4163	꺶	9891	AB98	FFX40080*
4164	꺷	9892	AB99	FFX50080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4165	꺄	9893	AB9A	FFX60080*
4166	꺅	9894	AB9B	FFX70080*
4167	꺆	9895	AB9C	FFX80080*
4168	꺇	9896	AB9D	FFX90080*
4169	꺈	9897	ABA3	FFXF0080*
4170	꺉	9898	ABA4	FFXG0080*
4171	꺊	9899	ABA6	FFXI0080*
4172	꺋	989A	ABA7	FFXJ0080*
4173	꺌	989B	ABA8	FFXK0080*
4174	꺍	989C	ABAA	FFXM0080*
4175	꺎	989D	ABAB	FFXN0080*
4176	꺏	989E	ABAC	FFXO0080*
4177	꺐	989F	ABAD	FFXP0080*
4178	꺑	98A0	ABAE	FFXQ0080*
4179	꺒	98A1	ABAF	FFXR0080*
4180	꺓	98A2	ABB0	FFXS0080*
4181	꺔	98A3	ABB4	FFXW0080*
4182	꺕	98A4	ABB6	FFXY0080*
4183	꺖	98A5	ABB8	FFY00080*
4184	꺗	98A6	ABB9	FFY10080*
4185	꺘	98A7	ABBA	FFY20080*
4186	꺙	98A8	ABBB	FFY30080*
4187	꺚	98A9	ABBC	FFY40080*
4188	꺛	98AA	ABBD	FFY50080*
4189	꺜	98AB	AC63	FG0Z0080
4190	꺝	98AC	AC66	FG120080*

Table 23 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4191	꺞	98AD	AC67	FG130080*
4192	꺟	98AE	AC6C	FG180080
4193	꺠	98AF	AC6D	FG190080*
4194	꺡	98B0	AC6E	FG1A0080*
4195	꺢	98B1	AC6F	FG1B0080*
4196	꺣	98B2	AC70	FG1C0080
4197	꺤	98B3	AC74	FG1G0080*
4198	꺥	98B4	AC78	FG1K0080*
4199	꺦	98B5	AC79	FG1L0080
4200	꺧	98B6	AC7A	FG1M0080*
4201	꺨	98B7	AC7C	FG1O0080*
4202	꺩	98B8	AC7D	FG1P0080
4203	꺪	98B9	AC83	FG1V0080*
4204	꺫	98BA	AC84	FG1W0080*
4205	꺬	98BB	AC86	FG1Y0080*
4206	꺭	98BC	AC87	FG1Z0080*
4207	꺮	98BD	AC88	FG200080
4208	꺯	98BE	AC8A	FG220080*
4209	꺰	98BF	AC8B	FG230080*
4210	꺱	98C0	AC8C	FG240080*
4211	꺲	98C1	AC8D	FG250080*
4212	꺳	98C2	AC8E	FG260080*
4213	꺴	98C3	AC8F	FG270080*
4214	꺵	98C4	AC90	FG280080*
4215	꺶	98C5	AC94	FG2C0080*
4216	꺷	98C6	AC98	FG2G0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4217	셋	98C7	AC99	FG2H0080*
4218	씩	98C8	AC9A	FG2I0080*
4219	셀	98C9	AC9B	FG2J0080*
4220	썩	98CA	AC9C	FG2K0080*
4221	생	98CB	AC9D	FG2L0080*
4222	쑈	98CC	ACA3	FG2R0080*
4223	샏	98CD	ACA4	FG2S0080*
4224	샑	98CE	ACA6	FG2U0080*
4225	샒	98CF	ACA7	FG2V0080*
4226	샓	98D0	ACA8	FG2W0080*
4227	샔	98D1	ACAA	FG2Y0080*
4228	샕	98D2	ACAB	FG2Z0080*
4229	샖	98D3	ACAC	FG300080*
4230	샗	98D4	ACAD	FG310080*
4231	샘	98D5	ACAE	FG320080*
4232	샙	98D6	ACAF	FG330080*
4233	샚	98D7	ACB0	FG340080*
4234	샛	98D8	ACB4	FG380080*
4235	샜	98D9	ACB6	FG3A0080*
4236	생	98DA	ACB8	FG3C0080*
4237	샞	98DB	ACB9	FG3D0080*
4238	샟	98DC	ACBA	FG3E0080*
4239	샠	98DD	ACBB	FG3F0080*
4240	샡	98DE	ACBC	FG3G0080*
4241	샢	98DF	ACBD	FG3H0080*
4242	샣	98E0	ACC2	FG3M0080*

Table 23 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4243	샤	98E1	ACC3	FG3N0080*
4244	샥	98E2	ACC4	FG3O0080*
4245	샦	98E3	ACC6	FG3Q0080*
4246	샧	98E4	ACC7	FG3R0080*
4247	샨	98E5	ACC8	FG3S0080*
4248	샩	98E6	ACCA	FG3U0080*
4249	샪	98E7	ACCB	FG3V0080*
4250	샫	98E8	ACCC	FG3W0080*
4251	샬	98E9	ACCD	FG3X0080*
4252	샭	98EA	ACCE	FG3Y0080*
4253	샭	98EB	ACCF	FG3Z0080*
4254	샮	98EC	ACD0	FG400080*
4255	샯	98ED	ACD3	FG430080*
4256	샰	98EE	ACD4	FG440080*
4257	샱	98EF	ACD5	FG450080*
4258	샲	98F0	ACD6	FG460080*
4259	샳	98F1	ACD8	FG480080*
4260	샴	98F2	ACD9	FG490080*
4261	샵	98F3	ACDA	FG4A0080*
4262	샶	98F4	ACDB	FG4B0080*
4263	샷	98F5	ACDC	FG4C0080*
4264	샸	98F6	ACDD	FG4D0080*
4265	샹	98F7	ACE6	FG4M0080*
4266	샺	98F8	ACE7	FG4N0080*
4267	샻	98F9	ACEA	FG4Q0080
4268	샼	98FA	ACED	FG4T0080*




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 10 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4269	설	98FB	ACEE	FG4U0080*
4270	설	98FC	ACEF	FG4V0080*
4271	설	98FD	ACF0	FG4W0080*
4272	섯	98FE	ACF4	FG500080*
4273	섯	9941	ACF8	FG540080*
4274	섯	9942	ACF9	FG550080*
4275	섯	9943	ACFA	FG560080*
4276	설	9944	ACFB	FG570080*
4277	성	9945	ACFD	FG590080*
4278	섞	9946	AD43	FG5F0080*
4279	셧	9947	AD44	FG5G0080*
4280	셧	9948	AD46	FG5I0080*
4281	셧	9949	AD47	FG5J0080*
4282	셨	994A	AD48	FG5K0080
4283	셩	994B	AD4A	FG5M0080*
4284	셪	994C	AD4B	FG5N0080*
4285	셫	994D	AD4C	FG5O0080*
4286	셬	994E	AD4D	FG5P0080*
4287	셭	994F	AD4E	FG5Q0080*
4288	셦	9950	AD4F	FG5R0080*
4289	셧	9951	AD50	FG5S0080*
4290	셨	9952	AD54	FG5W0080*
4291	셩	9953	AD58	FG600080*
4292	셪	9954	AD59	FG610080*
4293	셫	9955	AD5A	FG620080*
4294	셬	9956	AD5B	FG630080

Table 23 (Page 10 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4295	셭	9957	AD5C	FG640080*
4296	셦	9958	AD5D	FG650080*
4297	섞	9959	AD63	FG6B0080*
4298	셩	995A	AD64	FG6C0080
4299	셪	9961	AD66	FG6E0080*
4300	셫	9962	AD67	FG6F0080*
4301	셬	9963	AD68	FG6G0080*
4302	셭	9964	AD6A	FG6I0080*
4303	셦	9965	AD6B	FG6J0080*
4304	셧	9966	AD6C	FG6K0080*
4305	셨	9967	AD6D	FG6L0080*
4306	셩	9968	AD6E	FG6M0080*
4307	셪	9969	AD6F	FG6N0080*
4308	셫	996A	AD70	FG6O0080*
4309	셬	996B	AD74	FG6S0080*
4310	셭	996C	AD78	FG6W0080*
4311	셦	996D	AD79	FG6X0080*
4312	셩	996E	AD7A	FG6Y0080*
4313	셪	996F	AD7B	FG6Z0080*
4314	셫	9970	AD7C	FG700080*
4315	셬	9971	AD7D	FG710080*
4316	셭	9972	AD82	FG760080*
4317	셦	9973	AD83	FG770080*
4318	셩	9974	AD84	FG780080*
4319	셪	9975	AD86	FG7A0080*
4320	셫	9976	AD87	FG7B0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4321	셴	9977	AD88	FG7C0080*
4322	셶	9978	AD8A	FG7E0080*
4323	셷	9979	AD8B	FG7F0080*
4324	셸	997A	AD8C	FG7G0080*
4325	셸	9981	AD8D	FG7H0080*
4326	셸	9982	AD8E	FG7I0080*
4327	셸	9983	AD8F	FG7J0080*
4328	셸	9984	AD90	FG7K0080*
4329	셸	9985	AD91	FG7L0080*
4330	셸	9986	AD93	FG7N0080*
4331	셸	9987	AD94	FG7O0080*
4332	셸	9988	AD95	FG7P0080*
4333	셸	9989	AD96	FG7Q0080*
4334	셸	998A	AD98	FG7S0080*
4335	셸	998B	AD99	FG7T0080*
4336	셸	998C	AD9A	FG7U0080*
4337	셸	998D	AD9B	FG7V0080*
4338	셸	998E	AD9C	FG7W0080*
4339	셸	998F	AD9D	FG7X0080*
4340	슌	9990	ADA4	FG840080*
4341	슌	9991	ADA6	FG860080*
4342	슌	9992	ADA7	FG870080*
4343	슌	9993	ADA8	FG880080
4344	슌	9994	ADAA	FG8A0080*
4345	슌	9995	ADAC	FG8C0080*
4346	슌	9996	ADAD	FG8D0080*

Line Number	Graphic	PC Code	Host Code	GCGID
4347	슌	9997	ADAE	FG8E0080*
4348	슌	9998	ADAF	FG8F0080*
4349	슌	9999	ADB0	FG8G0080*
4350	슌	999A	ADB4	FG8K0080*
4351	슌	999B	ADB6	FG8M0080*
4352	슌	999C	ADB8	FG8O0080*
4353	슌	999D	ADB9	FG8P0080*
4354	슌	999E	ADBA	FG8Q0080*
4355	슌	999F	ADBC	FG8S0080*
4356	슌	99A0	ADB4	FG8T0080*
4357	슌	99A1	ADC3	FG8Z0080*
4358	슌	99A2	ADC4	FG900080*
4359	슌	99A3	ADC6	FG920080*
4360	슌	99A4	ADC7	FG930080*
4361	슌	99A5	ADC8	FG940080*
4362	슌	99A6	ADCA	FG960080*
4363	슌	99A7	ADCB	FG970080*
4364	슌	99A8	ADCC	FG980080*
4365	슌	99A9	ADCD	FG990080*
4366	슌	99AA	ADCE	FG9A0080*
4367	슌	99AB	ADCF	FG9B0080*
4368	슌	99AC	ADD0	FG9C0080*
4369	슌	99AD	ADD1	FG9D0080*
4370	슌	99AE	ADD3	FG9F0080*
4371	슌	99AF	ADD4	FG9G0080*
4372	슌	99B0	ADD5	FG9H0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4373	쌏	99B1	ADD6	FG9I0080*
4374	쌑	99B2	ADD8	FG9K0080*
4375	쌒	99B3	ADD9	FG9L0080*
4376	쌓	99B4	ADDA	FG9M0080*
4377	쌕	99B5	ADDB	FG9N0080*
4378	쌖	99B6	ADDC	FG9O0080*
4379	쌗	99B7	ADDD	FG9P0080*
4380	쌘	99B8	ADE2	FG9U0080*
4381	쌙	99B9	ADE3	FG9V0080*
4382	쌚	99BA	ADE4	FG9W0080*
4383	쌛	99BB	ADE6	FG9Y0080*
4384	쌜	99BC	ADE7	FG9Z0080*
4385	쌝	99BD	ADE8	FGA00080*
4386	쌞	99BE	ADEA	FGA20080*
4387	쌟	99BF	ADEB	FGA30080*
4388	쌠	99C0	ADEC	FGA40080*
4389	쌡	99C1	ADED	FGA50080*
4390	쌢	99C2	ADEE	FGA60080*
4391	쌣	99C3	ADEF	FGA70080*
4392	쌤	99C4	ADF0	FGA80080*
4393	쌦	99C5	ADF3	FGAB0080*
4394	쌧	99C6	ADF4	FGAC0080*
4395	쌨	99C7	ADF7	FGAF0080*
4396	쌩	99C8	ADF8	FGAG0080*
4397	쌪	99C9	ADF9	FGAH0080*
4398	쌫	99CA	ADFA	FGAI0080*

Line Number	Graphic	PC Code	Host Code	GCGID
4399	쌬	99CB	ADFB	FGAJ0080*
4400	쌭	99CC	ADFC	FGAK0080*
4401	쌮	99CD	ADFD	FGAL0080*
4402	쌯	99CE	AE42	FGAQ0080*
4403	쌰	99CF	AE43	FGAR0080*
4404	쌱	99D0	AE44	FGAS0080*
4405	쌲	99D1	AE46	FGAU0080*
4406	쌳	99D2	AE47	FGAV0080*
4407	쌴	99D3	AE48	FGAW0080*
4408	쌵	99D4	AE4A	FGAY0080*
4409	쌶	99D5	AE4B	FGAZ0080*
4410	쌷	99D6	AE4C	FGB00080*
4411	쌸	99D7	AE4D	FGB10080*
4412	쌹	99D8	AE4E	FGB20080*
4413	쌺	99D9	AE4F	FGB30080*
4414	쌻	99DA	AE50	FGB40080*
4415	쌼	99DB	AE54	FGB80080*
4416	쌽	99DC	AE56	FGBA0080*
4417	쌾	99DD	AE57	FGBB0080*
4418	쌿	99DE	AE58	FGBC0080*
4419	쌿	99DF	AE59	FGBD0080*
4420	쌿	99E0	AE5A	FGBE0080*
4421	쌿	99E1	AE5B	FGBF0080*
4422	쌿	99E2	AE5C	FGBG0080*
4423	쌿	99E3	AE5D	FGBH0080*
4424	쐇	99E4	AE63	FGBN0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4425	궉	99E5	AE64	FGBO0080*
4426	궉	99E6	AE66	FGBQ0080*
4427	궉	99E7	AE67	FGBR0080*
4428	궉	99E8	AE68	FGBS0080*
4429	궉	99E9	AE6A	FGBU0080*
4430	궉	99EA	AE6B	FGBV0080*
4431	궉	99EB	AE6C	FGBW0080*
4432	궉	99EC	AE6D	FGBX0080*
4433	궉	99ED	AE6E	FGBY0080*
4434	궉	99EE	AE6F	FGBZ0080*
4435	궉	99EF	AE70	FGC00080*
4436	궉	99F0	AE74	FGC40080*
4437	궉	99F1	AE76	FGC60080*
4438	궉	99F2	AE78	FGC80080*
4439	궉	99F3	AE79	FGC90080*
4440	궉	99F4	AE7A	FGCA0080*
4441	궉	99F5	AE7B	FGCB0080*
4442	궉	99F6	AE7C	FGCC0080*
4443	궉	99F7	AE7D	FGCD0080*
4444	궉	99F8	AE83	FGCJ0080*
4445	궉	99F9	AE84	FGCK0080*
4446	궉	99FA	AE86	FGCM0080*
4447	궉	99FB	AE87	FGCN0080*
4448	궉	99FC	AE8A	FGCQ0080*
4449	궉	99FD	AE8B	FGCR0080*
4450	궉	99FE	AE8C	FGCS0080*

Line Number	Graphic	PC Code	Host Code	GCGID
4451	궉	9A41	AE8D	FGCT0080*
4452	궉	9A42	AE8E	FGCU0080*
4453	궉	9A43	AE8F	FGCV0080*
4454	궉	9A44	AE90	FGCW0080*
4455	궉	9A45	AE94	FGD00080*
4456	궉	9A46	AE96	FGD20080*
4457	궉	9A47	AE98	FGD40080*
4458	궉	9A48	AE9A	FGD60080*
4459	궉	9A49	AE9D	FGD90080*
4460	궉	9A4A	AEA2	FGDE0080*
4461	궉	9A4B	AEA3	FGDF0080*
4462	궉	9A4C	AEA4	FGDG0080*
4463	궉	9A4D	AEA5	FGDH0080*
4464	궉	9A4E	AEA6	FGDI0080*
4465	궉	9A4F	AEA7	FGDJ0080*
4466	궉	9A50	AEA8	FGDK0080*
4467	궉	9A51	AEA9	FGDL0080*
4468	궉	9A52	AEAA	FGDM0080*
4469	궉	9A53	AEAB	FGDN0080*
4470	궉	9A54	AEAC	FGDO0080*
4471	궉	9A55	AEAD	FGDP0080*
4472	궉	9A56	AEAE	FGDQ0080*
4473	궉	9A57	AEAF	FGDR0080*
4474	궉	9A58	AEB0	FGDS0080*
4475	궉	9A59	AEB1	FGDT0080*
4476	궉	9A5A	AEB3	FGDV0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4477	꺾	9A61	AEB4	FGDW0080*
4478	꺾	9A62	AEB5	FGDX0080*
4479	꺾	9A63	AEB7	FGDZ0080*
4480	꺾	9A64	AEB8	FGE00080*
4481	꺾	9A65	AEB9	FGE10080*
4482	꺾	9A66	AEBA	FGE20080*
4483	꺾	9A67	AEBB	FGE30080*
4484	꺾	9A68	AEBC	FGE40080*
4485	꺾	9A69	AEBD	FGE50080*
4486	꺾	9A6A	AEC3	FGEB0080*
4487	꺾	9A6B	AEC4	FGEC0080*
4488	꺾	9A6C	AEC6	FGEE0080*
4489	꺾	9A6D	AEC7	FGEF0080*
4490	꺾	9A6E	AEC8	FGEG0080*
4491	꺾	9A6F	AECA	FGEI0080*
4492	꺾	9A70	AECB	FG EJ0080*
4493	꺾	9A71	AECC	FG EK0080*
4494	꺾	9A72	AECD	FG EL0080*
4495	꺾	9A73	AECE	FG EM0080*
4496	꺾	9A74	AECF	FG EN0080*
4497	꺾	9A75	AED0	FG EO0080*
4498	꺾	9A76	AED3	FG ER0080*
4499	꺾	9A77	AED4	FG ES0080*
4500	꺾	9A78	AED5	FG ET0080*
4501	꺾	9A79	AED6	FG EU0080*
4502	꺾	9A7A	AED8	FG EW0080*

Table 23 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4503	꺾	9A81	AED9	FG EX0080*
4504	꺾	9A82	AEDA	FG EY0080*
4505	꺾	9A83	AEDB	FG EZ0080*
4506	꺾	9A84	AEDC	FG F00080*
4507	꺾	9A85	AEDD	FG F10080*
4508	꺾	9A86	AEE3	FG F70080*
4509	꺾	9A87	AEE4	FG F80080*
4510	꺾	9A88	AEE6	FG FA0080*
4511	꺾	9A89	AEE7	FG FB0080*
4512	꺾	9A8A	AEE8	FG FC0080*
4513	꺾	9A8B	AEEA	FG FE0080*
4514	꺾	9A8C	AEEB	FG FF0080*
4515	꺾	9A8D	AEEC	FG FG0080*
4516	꺾	9A8E	AEE D	FG FH0080*
4517	꺾	9A8F	AEEE	FG FI0080*
4518	꺾	9A90	AEEF	FG FJ0080*
4519	꺾	9A91	AEF0	FG FK0080*
4520	꺾	9A92	AEF4	FG FO0080*
4521	꺾	9A93	AEF6	FG FQ0080*
4522	꺾	9A94	AEF8	FG FS0080*
4523	꺾	9A95	AEF9	FG FT0080*
4524	꺾	9A96	AEFA	FG FU0080*
4525	꺾	9A97	AEFB	FG FV0080*
4526	꺾	9A98	AEFC	FG FW0080*
4527	꺾	9A99	AEFD	FG FX0080*
4528	꺾	9A9A	AF43	FG G30080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 15 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4529	ㄱ	9A9B	AF44	FGG40080*
4530	ㄴ	9A9C	AF45	FGG50080
4531	ㄷ	9A9D	AF46	FGG60080*
4532	ㄹ	9A9E	AF47	FGG70080*
4533	ㅁ	9A9F	AF48	FGG80080*
4534	ㅂ	9AA0	AF4A	FGGA0080*
4535	ㅅ	9AA1	AF4B	FGGB0080*
4536	ㅇ	9AA2	AF4C	FGGC0080*
4537	ㅈ	9AA3	AF4D	FGGD0080*
4538	ㅊ	9AA4	AF4E	FGGE0080*
4539	ㅋ	9AA5	AF4F	FGGF0080*
4540	ㆁ	9AA6	AF50	FGGG0080*
4541	ㅅ	9AA7	AF53	FGGJ0080*
4542	ㅆ	9AA8	AF54	FGGK0080*
4543	ㅈ	9AA9	AF56	FGGM0080*
4544	ㅊ	9AAA	AF58	FGGO0080*
4545	ㅋ	9AAB	AF59	FGGP0080*
4546	ㅌ	9AAC	AF5A	FGGQ0080*
4547	ㅍ	9AAD	AF5B	FGGR0080*
4548	ㅎ	9AAE	AF5C	FGGS0080*
4549	ㅇ	9AAF	AF5D	FGGT0080*
4550	ㅅ	9AB0	AF63	FGGZ0080*
4551	ㅆ	9AB1	AF64	FGH00080*
4552	ㅈ	9AB2	AF66	FGH20080*
4553	ㅊ	9AB3	AF67	FGH30080*
4554	ㅋ	9AB4	AF68	FGH40080*

Table 23 (Page 15 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4555	ㅌ	9AB5	AF6B	FGH70080*
4556	ㅍ	9AB6	AF6C	FGH80080*
4557	ㅎ	9AB7	AF6D	FGH90080*
4558	ㆁ	9AB8	AF6E	FGHA0080*
4559	ㅅ	9AB9	AF6F	FGHB0080*
4560	ㅆ	9ABA	AF70	FGHC0080
4561	ㅈ	9ABB	AF74	FGHG0080*
4562	ㅊ	9ABC	AF76	FGHI0080*
4563	ㅋ	9ABD	AF78	FGHK0080*
4564	ㆁ	9ABE	AF79	FGHL0080*
4565	ㅅ	9ABF	AF7A	FGHM0080*
4566	ㅆ	9AC0	AF7B	FGHN0080*
4567	ㅈ	9AC1	AF7C	FGHO0080*
4568	ㅊ	9AC2	AF7D	FGHP0080*
4569	ㅋ	9AC3	AF81	FGHT0080
4570	ㆁ	9AC4	AF82	FGHU0080*
4571	ㅅ	9AC5	AF83	FGHV0080*
4572	ㅆ	9AC6	AF84	FGHW0080*
4573	ㅈ	9AC7	AF85	FGHX0080*
4574	ㅊ	9AC8	AF86	FGHY0080*
4575	ㅋ	9AC9	AF87	FGHZ0080*
4576	ㆁ	9ACA	AF88	FGI00080*
4577	ㅅ	9ACB	AF89	FGI10080*
4578	ㅆ	9ACC	AF8A	FGI20080*
4579	ㅈ	9ACD	AF8B	FGI30080*
4580	ㅊ	9ACE	AF8C	FGI40080*




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 16 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4581	꺾	9ACF	AF8D	FGI50080*
4582	꺾	9AD0	AF8E	FGI60080*
4583	꺾	9AD1	AF8F	FGI70080*
4584	꺾	9AD2	AF90	FGI80080*
4585	꺾	9AD3	AF91	FGI90080*
4586	꺾	9AD4	AF93	FGIB0080*
4587	꺾	9AD5	AF94	FGIC0080*
4588	꺾	9AD6	AF95	FGID0080*
4589	꺾	9AD7	AF96	FGIE0080*
4590	꺾	9AD8	AF97	FGIF0080*
4591	꺾	9AD9	AF98	FGIG0080*
4592	꺾	9ADA	AF99	FGIH0080*
4593	꺾	9ADB	AF9A	FGII0080*
4594	꺾	9ADC	AF9B	FGIJ0080*
4595	꺾	9ADD	AF9C	FGIK0080*
4596	꺾	9ADE	AF9D	FGIL0080*
4597	꺾	9ADF	AFA3	FGIR0080*
4598	꺾	9AE0	AFA4	FGIS0080*
4599	꺾	9AE1	AFA6	FGIU0080*
4600	꺾	9AE2	AFA7	FGIV0080*
4601	꺾	9AE3	AFAA	FGIY0080*
4602	꺾	9AE4	AFAB	FGIZ0080
4603	꺾	9AE5	AFAC	FGJ00080*
4604	꺾	9AE6	AFAD	FGJ10080*
4605	꺾	9AE7	AFAE	FGJ20080*
4606	꺾	9AE8	AFAF	FGJ30080*

Table 23 (Page 16 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4607	꺾	9AE9	AFB4	FGJ80080*
4608	꺾	9AEA	AFB6	FGJA0080*
4609	꺾	9AEB	AFB8	FGJC0080*
4610	꺾	9AEC	AFB9	FGJD0080*
4611	꺾	9AED	AFBA	FGJE0080*
4612	꺾	9AEE	AFBB	FGJF0080*
4613	꺾	9AEF	AFBD	FGJH0080*
4614	꺾	9AF0	B063	FGMB0080*
4615	꺾	9AF1	B066	FGME0080*
4616	꺾	9AF2	B067	FGMF0080*
4617	꺾	9AF3	B068	FGMG0080*
4618	꺾	9AF4	B06A	FGMI0080*
4619	꺾	9AF5	B06B	FGMJ0080
4620	꺾	9AF6	B06C	FGMK0080*
4621	꺾	9AF7	B06D	FGML0080*
4622	꺾	9AF8	B06E	FGMM0080*
4623	꺾	9AF9	B06F	FGMN0080*
4624	꺾	9AFA	B070	FGMO0080*
4625	꺾	9AFB	B074	FGMS0080*
4626	꺾	9AFC	B075	FGMT0080
4627	꺾	9AFD	B078	FGMW0080*
4628	꺾	9AFE	B079	FGMX0080*
4629	꺾	9B41	B07A	FGMY0080*
4630	꺾	9B42	B07B	FGMZ0080*
4631	꺾	9B43	B07C	FGN00080*
4632	꺾	9B44	B083	FGN70080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4633	쨈	9B45	B084	FGN80080*
4634	쨉	9B46	B086	FGNA0080*
4635	쨊	9B47	B087	FGNB0080*
4636	쨋	9B48	B088	FGNC0080*
4637	쨌	9B49	B08A	FGNE0080*
4638	쨍	9B4A	B08B	FGNF0080*
4639	쨎	9B4B	B08C	FGNG0080*
4640	쨏	9B4C	B08D	FGNH0080*
4641	쨐	9B4D	B08E	FGNI0080*
4642	쨑	9B4E	B08F	FGNJ0080*
4643	쨒	9B4F	B090	FGNK0080*
4644	쨓	9B50	B094	FGNO0080*
4645	쨔	9B51	B095	FGNP0080
4646	쨕	9B52	B098	FGNS0080*
4647	쨖	9B53	B099	FGNT0080*
4648	쨗	9B54	B09A	FGNU0080*
4649	쨘	9B55	B09B	FGNV0080*
4650	쨙	9B56	B09C	FGNW0080*
4651	쨚	9B57	B09D	FGNX0080*
4652	쨛	9B58	B0A1	FGO10080
4653	쨜	9B59	B0A2	FGO20080*
4654	쨝	9B5A	B0A3	FGO30080*
4655	쨞	9B61	B0A4	FGO40080*
4656	쨟	9B62	B0A5	FGO50080*
4657	쨠	9B63	B0A6	FGO60080*
4658	쨡	9B64	B0A7	FGO70080*

Line Number	Graphic	PC Code	Host Code	GCGID
4659	쨢	9B65	B0A8	FGO80080*
4660	쨣	9B66	B0A9	FGO90080*
4661	쨤	9B67	B0AA	FGOA0080*
4662	쨥	9B68	B0AB	FGOB0080*
4663	쨦	9B69	B0AC	FGOC0080*
4664	쨧	9B6A	B0AD	FGOD0080*
4665	쨨	9B6B	B0AE	FGOE0080*
4666	쨩	9B6C	B0AF	FGOF0080*
4667	쨪	9B6D	B0B0	FGOG0080*
4668	쨫	9B6E	B0B1	FGOH0080*
4669	쨬	9B6F	B0B3	FGOJ0080*
4670	쨭	9B70	B0B4	FGOK0080*
4671	쨮	9B71	B0B5	FGOL0080
4672	쨯	9B72	B0B6	FGOM0080*
4673	쨰	9B73	B0B8	FGOO0080*
4674	쨱	9B74	B0B9	FGOP0080*
4675	쨲	9B75	B0BA	FGOQ0080*
4676	쨳	9B76	B0BB	FGOR0080*
4677	쨴	9B77	B0BC	FGOS0080*
4678	쨵	9B78	B0BD	FGOT0080*
4679	쨶	9B79	B0C1	FGOX0080
4680	쨷	9B7A	B0C2	FGOY0080*
4681	쨸	9B81	B0C3	FGOZ0080*
4682	쨹	9B82	B0C4	FGP00080*
4683	쨺	9B83	B0C5	FGP10080*
4684	쨻	9B84	B0C6	FGP20080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 18 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4685	꺄	9B85	B0C7	FGP30080*
4686	꺅	9B86	B0C8	FGP40080*
4687	꺆	9B87	B0C9	FGP50080*
4688	꺇	9B88	B0CA	FGP60080*
4689	꺈	9B89	B0CB	FGP70080*
4690	꺉	9B8A	B0CC	FGP80080*
4691	꺊	9B8B	B0CD	FGP90080*
4692	꺋	9B8C	B0CE	FGPA0080*
4693	꺌	9B8D	B0CF	FGPB0080*
4694	꺍	9B8E	B0D0	FGPC0080*
4695	꺎	9B8F	B0D1	FGPD0080*
4696	꺏	9B90	B0D3	FGPF0080*
4697	꺐	9B91	B0D4	FGPG0080*
4698	꺑	9B92	B0D5	FGPH0080*
4699	꺒	9B93	B0D6	FGPI0080*
4700	꺓	9B94	B0D7	FGPJ0080*
4701	꺔	9B95	B0D8	FGPK0080*
4702	꺕	9B96	B0D9	FGPL0080*
4703	꺖	9B97	B0DA	FGPM0080*
4704	꺗	9B98	B0DB	FGPN0080*
4705	꺘	9B99	B0DC	FGPO0080*
4706	꺙	9B9A	B0DD	FGPP0080*
4707	꺚	9B9B	B0E3	FGPV0080*
4708	꺛	9B9C	B0E4	FGPW0080*
4709	꺜	9B9D	B0E6	FGPY0080*
4710	꺝	9B9E	B0E7	FGPZ0080*

Table 23 (Page 18 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4711	꺞	9B9F	B0E8	FGQ00080*
4712	꺟	9BA0	B0EA	FGQ20080*
4713	꺠	9BA1	B0EC	FGQ40080*
4714	꺡	9BA2	B0ED	FGQ50080*
4715	꺢	9BA3	B0EE	FGQ60080*
4716	꺣	9BA4	B0EF	FGQ70080*
4717	꺤	9BA5	B0F0	FGQ80080*
4718	꺥	9BA6	B0F4	FGQC0080*
4719	꺦	9BA7	B0F5	FGQD0080
4720	꺧	9BA8	B0F8	FGQG0080*
4721	꺨	9BA9	B0F9	FGQH0080*
4722	꺩	9BAA	B0FA	FGQI0080*
4723	꺪	9BAB	B0FB	FGQJ0080*
4724	꺫	9BAC	B0FC	FGQK0080*
4725	꺬	9BAD	B0FD	FGQL0080*
4726	꺭	9BAE	B142	FGQQ0080
4727	꺮	9BAF	B143	FGQR0080*
4728	꺯	9BB0	B144	FGQS0080*
4729	꺰	9BB1	B146	FGQU0080*
4730	꺱	9BB2	B147	FGQV0080*
4731	꺲	9BB3	B148	FGQW0080*
4732	꺳	9BB4	B14A	FGQY0080*
4733	꺴	9BB5	B14B	FGQZ0080*
4734	꺵	9BB6	B14C	FGR00080*
4735	꺶	9BB7	B14D	FGR10080*
4736	꺷	9BB8	B14E	FGR20080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4737	쨈	9BB9	B14F	FGR30080*
4738	쨉	9BBA	B150	FGR40080*
4739	쨊	9BBB	B151	FGR50080*
4740	쨋	9BBC	B153	FGR70080*
4741	쨌	9BBD	B154	FGR80080*
4742	쨍	9BBE	B155	FGR90080*
4743	쨎	9BBF	B156	FGRA0080*
4744	쨏	9BC0	B157	FGRB0080
4745	쨐	9BC1	B158	FGRC0080*
4746	쨑	9BC2	B159	FGRD0080*
4747	쨒	9BC3	B15A	FGRE0080*
4748	쨓	9BC4	B15B	FGRF0080*
4749	쨔	9BC5	B15C	FGRG0080*
4750	쨕	9BC6	B15D	FGRH0080*
4751	쨖	9BC7	B161	FGRL0080
4752	쨗	9BC8	B162	FGRM0080*
4753	쨘	9BC9	B163	FGRN0080*
4754	쨙	9BCA	B164	FGRO0080*
4755	쨚	9BCB	B165	FGRP0080*
4756	쨛	9BCC	B166	FGRQ0080*
4757	쨜	9BCD	B167	FGRR0080*
4758	쨝	9BCE	B168	FGRS0080*
4759	쨞	9BCF	B169	FGRT0080*
4760	쨟	9BD0	B16A	FGRU0080*
4761	쨠	9BD1	B16B	FGRV0080*
4762	쨡	9BD2	B16C	FGRW0080*

Table 23 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4763	쨢	9BD3	B16D	FGRX0080*
4764	쨣	9BD4	B16E	FGRY0080*
4765	쨤	9BD5	B16F	FGRZ0080*
4766	쨥	9BD6	B170	FGS00080*
4767	쨦	9BD7	B171	FGS10080*
4768	쨧	9BD8	B173	FGS30080*
4769	쨨	9BD9	B174	FGS40080*
4770	쨩	9BDA	B175	FGS50080*
4771	쨪	9BDB	B176	FGS60080*
4772	쨫	9BDC	B177	FGS70080*
4773	쨬	9BDD	B178	FGS80080*
4774	쨭	9BDE	B179	FGS90080*
4775	쨮	9BDF	B17A	FGSA0080*
4776	쨯	9BE0	B17B	FGSB0080*
4777	쨰	9BE1	B17C	FGSC0080*
4778	쨱	9BE2	B17D	FGSD0080*
4779	쨲	9BE3	B181	FGSH0080
4780	쨳	9BE4	B182	FGSI0080*
4781	쨴	9BE5	B183	FGSJ0080*
4782	쨵	9BE6	B184	FGSK0080*
4783	쨶	9BE7	B186	FGSM0080*
4784	쨷	9BE8	B187	FGSN0080*
4785	쨸	9BE9	B188	FGSO0080*
4786	쨹	9BEA	B189	FGSP0080*
4787	쨺	9BEB	B18A	FGSQ0080*
4788	쨻	9BEC	B18B	FGSR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4789	췠	9BED	B18C	FGSS0080*
4790	췡	9BEE	B18D	FGST0080*
4791	췢	9BEF	B18E	FGSU0080*
4792	췣	9BF0	B18F	FGSV0080*
4793	췤	9BF1	B190	FGSW0080*
4794	췥	9BF2	B191	FGSX0080*
4795	췦	9BF3	B193	FGSZ0080*
4796	췧	9BF4	B194	FGT00080*
4797	취	9BF5	B195	FGT10080*
4798	췩	9BF6	B196	FGT20080*
4799	췪	9BF7	B197	FGT30080*
4800	췫	9BF8	B198	FGT40080*
4801	췬	9BF9	B199	FGT50080*
4802	췭	9BFA	B19A	FGT60080*
4803	췮	9BFB	B19B	FGT70080*
4804	췯	9BFC	B19C	FGT80080*
4805	췰	9BFD	B19D	FGT90080*
4806	췱	9BFE	B1A3	FGTF0080*
4807	췲	9C41	B1A4	FGTG0080*
4808	췳	9C42	B1A6	FGTI0080*
4809	췴	9C43	B1A7	FGTJ0080*
4810	췵	9C44	B1AA	FGTM0080*
4811	췶	9C45	B1AC	FGTO0080*
4812	췷	9C46	B1AD	FGTP0080*
4813	췸	9C47	B1AE	FGTQ0080*
4814	췹	9C48	B1AF	FGTR0080*

Line Number	Graphic	PC Code	Host Code	GCGID
4815	췺	9C49	B1B0	FGTS0080*
4816	췻	9C4A	B1B4	FGTW0080*
4817	췼	9C4B	B1B5	FGTX0080*
4818	췽	9C4C	B1B6	FGTY0080*
4819	췾	9C4D	B1B8	FGU00080*
4820	췿	9C4E	B1B9	FGU10080*
4821	췰	9C4F	B1BA	FGU20080*
4822	췱	9C50	B1BB	FGU30080*
4823	췲	9C51	B1BC	FGU40080*
4824	췳	9C52	B1BD	FGU50080*
4825	췴	9C53	B1C3	FGUB0080*
4826	췵	9C54	B1C4	FGUC0080*
4827	췶	9C55	B1C6	FGUE0080*
4828	췷	9C56	B1C7	FGUF0080*
4829	췸	9C57	B1C8	FGUG0080*
4830	췹	9C58	B1C9	FGUH0080
4831	췺	9C59	B1CA	FGUI0080*
4832	췻	9C5A	B1CB	FGUJ0080*
4833	췼	9C61	B1CC	FGUK0080*
4834	췽	9C62	B1CD	FGUL0080*
4835	췾	9C63	B1CE	FGUM0080*
4836	췿	9C64	B1CF	FGUN0080*
4837	췰	9C65	B1D0	FGUO0080*
4838	췱	9C66	B1D1	FGUP0080*
4839	췲	9C67	B1D3	FGUR0080*
4840	췳	9C68	B1D4	FGUS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4841	쫏	9C69	B1D5	FGUT0080*
4842	쫑	9C6A	B1D7	FGUV0080*
4843	쫒	9C6B	B1D8	FGUW0080*
4844	쫓	9C6C	B1D9	FGUX0080*
4845	쫔	9C6D	B1DA	FGUY0080*
4846	쫕	9C6E	B1DB	FGUZ0080*
4847	쫖	9C6F	B1DC	FGV00080*
4848	쫗	9C70	B1DD	FGV10080*
4849	쫘	9C71	B1E2	FGV60080*
4850	쫙	9C72	B1E3	FGV70080*
4851	쫚	9C73	B1E4	FGV80080*
4852	쫛	9C74	B1E5	FGV90080*
4853	쫜	9C75	B1E6	FGVA0080*
4854	쫝	9C76	B1E7	FGVB0080*
4855	쫞	9C77	B1E8	FGVC0080*
4856	쫟	9C78	B1E9	FGVD0080*
4857	쫠	9C79	B1EA	FGVE0080*
4858	쫡	9C7A	B1EB	FGVF0080*
4859	쫢	9C81	B1EC	FGVG0080*
4860	쫣	9C82	B1ED	FGVH0080*
4861	쫤	9C83	B1EE	FGVI0080*
4862	쫥	9C84	B1EF	FGVJ0080*
4863	쫦	9C85	B1F0	FGVK0080*
4864	쫧	9C86	B1F1	FGVL0080*
4865	쫨	9C87	B1F3	FGVN0080*
4866	쫩	9C88	B1F4	FGVO0080*

Line Number	Graphic	PC Code	Host Code	GCGID
4867	쫪	9C89	B1F5	FGVP0080*
4868	쫫	9C8A	B1F7	FGVR0080*
4869	쫬	9C8B	B1F8	FGVS0080*
4870	쫭	9C8C	B1F9	FGVT0080*
4871	쫮	9C8D	B1FA	FGVU0080*
4872	쫯	9C8E	B1FB	FGVV0080*
4873	쫰	9C8F	B1FC	FGVW0080*
4874	쫱	9C90	B1FD	FGVX0080*
4875	쫲	9C91	B242	FGW20080*
4876	쫳	9C92	B243	FGW30080*
4877	쫵	9C93	B244	FGW40080*
4878	쫶	9C94	B246	FGW60080*
4879	쫷	9C95	B247	FGW70080*
4880	쫸	9C96	B248	FGW80080*
4881	쫹	9C97	B24A	FGWA0080*
4882	쫺	9C98	B24B	FGWB0080*
4883	쫻	9C99	B24C	FGWC0080*
4884	쫼	9C9A	B24D	FGWD0080*
4885	쫽	9C9B	B24E	FGWE0080*
4886	쫾	9C9C	B24F	FGWF0080*
4887	쫿	9C9D	B250	FGWG0080*
4888	쫠	9C9E	B254	FGWK0080*
4889	쫡	9C9F	B255	FGWL0080
4890	쫢	9CA0	B256	FGWM0080*
4891	쫣	9CA1	B257	FGWN0080*
4892	쫤	9CA2	B258	FGWO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 22 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4893	쨈	9CA3	B259	FGWP0080*
4894	쨉	9CA4	B25A	FGWQ0080*
4895	쨊	9CA5	B25B	FGWR0080*
4896	쨋	9CA6	B25C	FGWS0080*
4897	쨌	9CA7	B25D	FGWT0080*
4898	쨍	9CA8	B262	FGWY0080*
4899	쨎	9CA9	B263	FGWZ0080*
4900	쨏	9CAA	B264	FGX00080*
4901	쨐	9CAB	B265	FGX10080*
4902	쨑	9CAC	B266	FGX20080*
4903	쨒	9CAD	B267	FGX30080*
4904	쨓	9CAE	B268	FGX40080*
4905	쨔	9CAF	B269	FGX50080*
4906	쨕	9CB0	B26A	FGX60080*
4907	쨖	9CB1	B26B	FGX70080*
4908	쨗	9CB2	B26C	FGX80080*
4909	쨘	9CB3	B26D	FGX90080*
4910	쨙	9CB4	B26E	FGXA0080*
4911	쨚	9CB5	B26F	FGXB0080*
4912	쨛	9CB6	B270	FGXC0080*
4913	쨜	9CB7	B271	FGXD0080*
4914	쨝	9CB8	B273	FGXF0080*
4915	쨞	9CB9	B274	FGXG0080*
4916	쨟	9CBA	B275	FGXH0080*
4917	쨠	9CBB	B276	FGXI0080*
4918	쨡	9CBC	B277	FGXJ0080*

Table 23 (Page 22 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4919	쨢	9CBD	B278	FGXK0080*
4920	쨣	9CBE	B279	FGXL0080*
4921	쨤	9CBF	B27A	FGXM0080*
4922	쨥	9CC0	B27B	FGXN0080*
4923	쨦	9CC1	B27C	FGXO0080*
4924	쨧	9CC2	B27D	FGXP0080*
4925	쨨	9CC3	B283	FGXV0080*
4926	쨩	9CC4	B284	FGXW0080*
4927	쨪	9CC5	B286	FGXY0080*
4928	쨫	9CC6	B287	FGXZ0080*
4929	쨬	9CC7	B288	FGY00080*
4930	쨭	9CC8	B28A	FGY20080*
4931	쨮	9CC9	B28B	FGY30080*
4932	쨯	9CCA	B28C	FGY40080*
4933	쨰	9CCB	B28D	FGY50080*
4934	쨱	9CCC	B28E	FGY60080*
4935	쨲	9CCD	B28F	FGY70080*
4936	쨳	9CCE	B290	FGY80080*
4937	쨴	9CCF	B294	FGYC0080*
4938	쨵	9CD0	B295	FGYD0080
4939	쨶	9CD1	B296	FGYE0080*
4940	쨷	9CD2	B298	FGYG0080*
4941	쨸	9CD3	B299	FGYH0080*
4942	쨹	9CD4	B29A	FGYI0080*
4943	쨺	9CD5	B29B	FGYJ0080*
4944	쨻	9CD6	B29C	FGYK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 23 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4945	쑈	9CD7	B29D	FGYL0080*
4946	쑉	9CD8	B2A2	FGYQ0080*
4947	쑊	9CD9	B2A3	FGYR0080*
4948	쑋	9CDA	B2A4	FGYS0080*
4949	쑌	9CDB	B2A5	FGYT0080*
4950	쑍	9CDC	B2A6	FGYU0080*
4951	쑎	9CDD	B2A7	FGYV0080*
4952	쑏	9CDE	B2A8	FGYW0080*
4953	쑑	9CDF	B2A9	FGYX0080*
4954	쑒	9CE0	B2AA	FGYY0080*
4955	쑓	9CE1	B2AB	FGYZ0080*
4956	쑔	9CE2	B2AC	FGZ00080*
4957	쑕	9CE3	B2AD	FGZ10080*
4958	쑖	9CE4	B2AE	FGZ20080*
4959	쑗	9CE5	B2AF	FGZ30080*
4960	쑘	9CE6	B2B0	FGZ40080*
4961	쑙	9CE7	B2B1	FGZ50080*
4962	쑚	9CE8	B2B3	FGZ70080*
4963	쑛	9CE9	B2B4	FGZ80080*
4964	쑜	9CEA	B2B5	FGZ90080
4965	쑝	9CEB	B2B7	FGZB0080*
4966	쑞	9CEC	B2B8	FGZC0080*
4967	쑟	9CED	B2B9	FGZD0080*
4968	쑠	9CEE	B2BA	FGZE0080*
4969	쑡	9CEF	B2BB	FGZF0080*
4970	쑢	9CF0	B2BC	FGZG0080*

Table 23 (Page 23 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
4971	쑣	9CF1	B2BD	FGZH0080*
4972	쑤	9CF2	B2C2	FGZM0080*
4973	쑥	9CF3	B2C3	FGZN0080*
4974	쑦	9CF4	B2C4	FGZO0080*
4975	쑧	9CF5	B2C5	FGZP0080*
4976	쑨	9CF6	B2C6	FGZQ0080*
4977	쑩	9CF7	B2C7	FGZR0080*
4978	쑪	9CF8	B2C8	FGZS0080*
4979	쑫	9CF9	B2C9	FGZT0080*
4980	쑬	9CFA	B2CA	FGZU0080*
4981	쑭	9CFB	B2CB	FGZV0080*
4982	쑮	9CFC	B2CC	FGZW0080*
4983	쑯	9CFD	B2CD	FGZX0080*
4984	쑰	9CFE	B2CE	FGZY0080*
4985	쑱	9D41	B2CF	FGZZ0080*
4986	쑲	9D42	B2D0	FH000080*
4987	쑳	9D43	B2D1	FH010080*
4988	쑴	9D44	B2D3	FH030080*
4989	쑵	9D45	B2D4	FH040080*
4990	쑶	9D46	B2D5	FH050080*
4991	쑷	9D47	B2D6	FH060080*
4992	쑸	9D48	B2D7	FH070080*
4993	쑹	9D49	B2D8	FH080080*
4994	쑺	9D4A	B2D9	FH090080*
4995	쑻	9D4B	B2DA	FH0A0080*
4996	쑼	9D4C	B2DB	FH0B0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4997	췒	9D4D	B2DC	FH0C0080*
4998	췓	9D4E	B2DD	FH0D0080*
4999	췔	9D4F	B2E2	FH0I0080*
5000	췕	9D50	B2E3	FH0J0080*
5001	췖	9D51	B2E4	FH0K0080*
5002	췗	9D52	B2E6	FH0M0080*
5003	췘	9D53	B2E7	FH0N0080*
5004	췙	9D54	B2E8	FH0O0080*
5005	췚	9D55	B2E9	FH0P0080*
5006	췛	9D56	B2EA	FH0Q0080*
5007	췜	9D57	B2EB	FH0R0080*
5008	췝	9D58	B2EC	FH0S0080*
5009	췞	9D59	B2ED	FH0T0080*
5010	췟	9D5A	B2EE	FH0U0080*
5011	췠	9D61	B2EF	FH0V0080*
5012	췡	9D62	B2F0	FH0W0080*
5013	췢	9D63	B2F1	FH0X0080*
5014	췣	9D64	B2F3	FH0Z0080*
5015	췤	9D65	B2F4	FH100080*
5016	췥	9D66	B2F5	FH110080*
5017	췦	9D67	B2F6	FH120080*
5018	췧	9D68	B2F7	FH130080*
5019	취	9D69	B2F8	FH140080*
5020	췩	9D6A	B2F9	FH150080*
5021	췪	9D6B	B2FA	FH160080*
5022	췫	9D6C	B2FB	FH170080*

Line Number	Graphic	PC Code	Host Code	GCGID
5023	췬	9D6D	B2FC	FH180080*
5024	췭	9D6E	B2FD	FH190080
5025	췮	9D6F	B341	FH1D0080
5026	췯	9D70	B342	FH1E0080*
5027	췰	9D71	B343	FH1F0080*
5028	췱	9D72	B344	FH1G0080*
5029	췲	9D73	B345	FH1H0080*
5030	췳	9D74	B346	FH1I0080*
5031	췴	9D75	B347	FH1J0080*
5032	췵	9D76	B348	FH1K0080*
5033	췶	9D77	B349	FH1L0080*
5034	췷	9D78	B34A	FH1M0080*
5035	췸	9D79	B34B	FH1N0080*
5036	췹	9D7A	B34C	FH1O0080*
5037	췺	9D81	B34D	FH1P0080*
5038	췻	9D82	B34E	FH1Q0080*
5039	췼	9D83	B34F	FH1R0080*
5040	췽	9D84	B350	FH1S0080*
5041	췾	9D85	B351	FH1T0080*
5042	췿	9D86	B353	FH1V0080*
5043	췠	9D87	B354	FH1W0080*
5044	췡	9D88	B355	FH1X0080*
5045	췢	9D89	B356	FH1Y0080*
5046	췣	9D8A	B358	FH200080*
5047	췤	9D8B	B359	FH210080*
5048	췥	9D8C	B35A	FH220080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 25 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5049	쑈	9D8D	B35B	FH230080*
5050	쑉	9D8E	B35C	FH240080*
5051	쑊	9D8F	B35D	FH250080*
5052	쑋	9D90	B363	FH2B0080*
5053	쑌	9D91	B364	FH2C0080*
5054	쑍	9D92	B366	FH2E0080*
5055	쑎	9D93	B367	FH2F0080*
5056	쑏	9D94	B368	FH2G0080*
5057	쑐	9D95	B36A	FH2I0080*
5058	쑑	9D96	B36C	FH2K0080*
5059	쑒	9D97	B36D	FH2L0080*
5060	쑓	9D98	B36E	FH2M0080*
5061	쑔	9D99	B36F	FH2N0080*
5062	쑕	9D9A	B374	FH2S0080*
5063	쑖	9D9B	B375	FH2T0080*
5064	쑗	9D9C	B376	FH2U0080*
5065	쑘	9D9D	B377	FH2V0080*
5066	쑙	9D9E	B378	FH2W0080*
5067	쑚	9D9F	B379	FH2X0080*
5068	쑛	9DA0	B37A	FH2Y0080*
5069	쑜	9DA1	B37B	FH2Z0080*
5070	쑝	9DA2	B37C	FH300080*
5071	쑞	9DA3	B37D	FH310080*
5072	쑟	9DA4	B382	FH360080*
5073	쑠	9DA5	B383	FH370080*
5074	쑡	9DA6	B384	FH380080*

Table 23 (Page 25 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5075	쑣	9DA7	B386	FH3A0080*
5076	쑤	9DA8	B387	FH3B0080*
5077	쑥	9DA9	B388	FH3C0080*
5078	쑦	9DAA	B38A	FH3E0080*
5079	쑧	9DAB	B38B	FH3F0080*
5080	쑨	9DAC	B38C	FH3G0080*
5081	쑩	9DAD	B38D	FH3H0080*
5082	쑪	9DAE	B38E	FH3I0080*
5083	쑫	9DAF	B38F	FH3J0080*
5084	쑬	9DB0	B390	FH3K0080*
5085	쑭	9DB1	B393	FH3N0080*
5086	쑮	9DB2	B394	FH3O0080*
5087	쑯	9DB3	B395	FH3P0080*
5088	쑰	9DB4	B396	FH3Q0080*
5089	쑱	9DB5	B397	FH3R0080*
5090	쑲	9DB6	B398	FH3S0080*
5091	쑳	9DB7	B399	FH3T0080*
5092	쑴	9DB8	B39A	FH3U0080*
5093	쑵	9DB9	B39B	FH3V0080*
5094	쑶	9DBA	B39C	FH3W0080*
5095	쑷	9DBB	B39D	FH3X0080*
5096	쑸	9DBC	B3A3	FH430080*
5097	쑹	9DBD	B3A4	FH440080*
5098	쑺	9DBE	B3A6	FH460080*
5099	쑻	9DBF	B3A7	FH470080*
5100	쑼	9DC0	B3A8	FH480080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5101	썩	9DC1	B3AA	FH4A0080*
5102	썩	9DC2	B3AB	FH4B0080*
5103	썩	9DC3	B3AC	FH4C0080*
5104	썩	9DC4	B3AD	FH4D0080*
5105	썩	9DC5	B3AE	FH4E0080*
5106	썩	9DC6	B3AF	FH4F0080*
5107	썩	9DC7	B3B0	FH4G0080*
5108	썩	9DC8	B3B4	FH4K0080*
5109	썩	9DC9	B3B6	FH4M0080
5110	썩	9DCA	B3B8	FH4O0080*
5111	썩	9DCB	B3B9	FH4P0080
5112	썩	9DCC	B3BA	FH4Q0080*
5113	썩	9DCD	B3BB	FH4R0080*
5114	썩	9DCE	B3BC	FH4S0080*
5115	썩	9DCF	B3BD	FH4T0080*
5116	악	9DD0	B463	FH7N0080*
5117	악	9DD1	B464	FH7O0080*
5118	악	9DD2	B468	FH7S0080*
5119	악	9DD3	B46C	FH7W0080
5120	악	9DD4	B46D	FH7X0080*
5121	악	9DD5	B46E	FH7Y0080*
5122	악	9DD6	B46F	FH7Z0080*
5123	악	9DD7	B474	FH840080*
5124	악	9DD8	B478	FH880080*
5125	악	9DD9	B479	FH890080*
5126	악	9DDA	B47A	FH8A0080*

Table 23 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5127	앙	9DDB	B47D	FH8D0080
5128	앙	9DDC	B483	FH8J0080*
5129	앙	9DDD	B484	FH8K0080*
5130	앙	9DDE	B486	FH8M0080*
5131	앙	9DDF	B487	FH8N0080*
5132	앙	9DE0	B488	FH8O0080*
5133	앙	9DE1	B48A	FH8Q0080*
5134	앙	9DE2	B48B	FH8R0080*
5135	앙	9DE3	B48C	FH8S0080*
5136	앙	9DE4	B48D	FH8T0080*
5137	앙	9DE5	B48E	FH8U0080*
5138	앙	9DE6	B48F	FH8V0080*
5139	앙	9DE7	B490	FH8W0080*
5140	앙	9DE8	B494	FH900080*
5141	앙	9DE9	B498	FH940080*
5142	앙	9DEA	B499	FH950080*
5143	앙	9DEB	B49A	FH960080*
5144	앙	9DEC	B49B	FH970080*
5145	앙	9DED	B49C	FH980080*
5146	앙	9DEE	B49D	FH990080*
5147	앙	9DEF	B4A3	FH9F0080*
5148	앙	9DF0	B4A4	FH9G0080*
5149	앙	9DF1	B4A6	FH9I0080*
5150	앙	9DF2	B4A7	FH9J0080*
5151	앙	9DF3	B4A8	FH9K0080*
5152	앙	9DF4	B4AA	FH9M0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
5153	얏	9DF5	B4AB	FH9N0080*
5154	양	9DF6	B4AD	FH9P0080*
5155	얒	9DF7	B4AE	FH9Q0080*
5156	얓	9DF8	B4AF	FH9R0080*
5157	얔	9DF9	B4B0	FH9S0080*
5158	얕	9DFA	B4B4	FH9W0080*
5159	얖	9DFB	B4B6	FH9Y0080
5160	얗	9DFC	B4B8	FHA00080*
5161	얘	9DFD	B4B9	FHA10080*
5162	얙	9DFE	B4BA	FHA20080*
5163	얚	9E41	B4BC	FHA40080*
5164	얛	9E42	B4C2	FHAA0080*
5165	얜	9E43	B4C3	FHAB0080*
5166	얝	9E44	B4C4	FHAC0080*
5167	얞	9E45	B4C6	FHAE0080*
5168	얟	9E46	B4C7	FHAF0080*
5169	얠	9E47	B4C8	FHAG0080*
5170	얡	9E48	B4CA	FHAI0080*
5171	얢	9E49	B4CB	FHAJ0080*
5172	얣	9E4A	B4CC	FHAK0080*
5173	얤	9E4B	B4CD	FHAL0080*
5174	얦	9E4C	B4CE	FHAM0080*
5175	얧	9E4D	B4CF	FHAN0080*
5176	얨	9E4E	B4D0	FHAO0080*
5177	얩	9E4F	B4D1	FHAP0080*
5178	얪	9E50	B4D4	FHAS0080*

Line Number	Graphic	PC Code	Host Code	GCGID
5179	얫	9E51	B4D5	FHAT0080
5180	얬	9E52	B4D6	FHAU0080*
5181	얭	9E53	B4D7	FHAV0080*
5182	얮	9E54	B4D8	FHAW0080*
5183	얯	9E55	B4D9	FHAX0080*
5184	얰	9E56	B4DA	FHAY0080*
5185	얱	9E57	B4DB	FHAZ0080*
5186	얲	9E58	B4DC	FHB00080*
5187	얳	9E59	B4DD	FHB10080*
5188	어	9E5A	B4E3	FHB70080
5189	억	9E61	B4E4	FHB80080*
5190	얶	9E62	B4E7	FHBB0080*
5191	얷	9E63	B4EC	FHBG0080*
5192	언	9E64	B4ED	FHBH0080*
5193	얹	9E65	B4EE	FHBI0080*
5194	얺	9E66	B4EF	FHBK0080*
5195	얻	9E67	B4F0	FHBK0080*
5196	얼	9E68	B4F9	FHBT0080*
5197	얽	9E69	B4FB	FHBV0080*
5198	얾	9E6A	B4FD	FHBX0080*
5199	얿	9E6B	B543	FHC30080*
5200	얽	9E6C	B544	FHC40080*
5201	얾	9E6D	B546	FHC60080*
5202	얿	9E6E	B547	FHC70080*
5203	엔	9E6F	B548	FHC80080*
5204	엀	9E70	B54A	FHCA0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5205	엎	9E71	B54B	FHCB0080*
5206	엎	9E72	B54C	FHCC0080*
5207	엎	9E73	B54D	FHCD0080*
5208	엎	9E74	B54E	FHCE0080*
5209	엎	9E75	B54F	FHCF0080*
5210	엎	9E76	B550	FHCG0080*
5211	엎	9E77	B554	FHCK0080*
5212	엎	9E78	B556	FHCM0080*
5213	엎	9E79	B558	FHCO0080*
5214	엎	9E7A	B559	FHCP0080*
5215	엎	9E81	B55A	FHCQ0080*
5216	엎	9E82	B55B	FHCR0080*
5217	엎	9E83	B55C	FHCS0080*
5218	엎	9E84	B55D	FHCT0080*
5219	엎	9E85	B564	FHD00080*
5220	엎	9E86	B566	FHD20080
5221	엎	9E87	B567	FHD30080*
5222	엎	9E88	B568	FHD40080
5223	엎	9E89	B56A	FHD60080*
5224	엎	9E8A	B56D	FHD90080*
5225	엎	9E8B	B56E	FHDA0080*
5226	엎	9E8C	B56F	FHDB0080*
5227	엎	9E8D	B570	FHDC0080*
5228	엎	9E8E	B578	FHDK0080*
5229	엎	9E8F	B579	FHDL0080*
5230	엎	9E90	B57A	FHDM0080*

Table 23 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5231	엎	9E91	B582	FHDU0080*
5232	엎	9E92	B583	FHDV0080*
5233	엎	9E93	B584	FHDW0080*
5234	엎	9E94	B586	FHDY0080*
5235	엎	9E95	B587	FHDZ0080*
5236	엎	9E96	B588	FHE00080*
5237	엎	9E97	B58A	FHE20080*
5238	엎	9E98	B58B	FHE30080*
5239	엎	9E99	B58C	FHE40080*
5240	엎	9E9A	B58D	FHE50080*
5241	엎	9E9B	B58E	FHE60080*
5242	엎	9E9C	B58F	FHE70080*
5243	엎	9E9D	B590	FHE80080*
5244	엎	9E9E	B594	FHEC0080*
5245	엎	9E9F	B597	FHEF0080
5246	엎	9EA0	B598	FHEG0080*
5247	엎	9EA1	B599	FHEH0080*
5248	엎	9EA2	B59A	FHEI0080*
5249	엎	9EA3	B59B	FHEJ0080*
5250	엎	9EA4	B59C	FHEK0080*
5251	엎	9EA5	B59D	FHEL0080*
5252	엎	9EA6	B5A3	FHER0080*
5253	엎	9EA7	B5A4	FHES0080*
5254	엎	9EA8	B5A6	FHEU0080*
5255	엎	9EA9	B5A7	FHEV0080*
5256	엎	9EAA	B5A8	FHEW0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 29 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5257	웁	9EAB	B5AC	FHF00080*
5258	웑	9EAC	B5AE	FHF20080*
5259	웒	9EAD	B5AF	FHF30080*
5260	웓	9EAE	B5B4	FHF80080*
5261	월	9EAF	B5B6	FHFA0080*
5262	웕	9EB0	B5B8	FHFC0080
5263	웖	9EB1	B5BA	FHFE0080*
5264	웗	9EB2	B5BB	FHFF0080*
5265	웘	9EB3	B5BC	FHFG0080*
5266	웙	9EB4	B5BD	FHFH0080*
5267	웚	9EB5	B5C3	FHFN0080*
5268	웛	9EB6	B5C4	FHFO0080*
5269	웜	9EB7	B5C6	FHFQ0080*
5270	웝	9EB8	B5C7	FHFR0080*
5271	웞	9EB9	B5C8	FHFS0080*
5272	웟	9EBA	B5CA	FHFU0080*
5273	웠	9EBB	B5CB	FHFV0080*
5274	웡	9EBC	B5CC	FHFW0080*
5275	웢	9EBD	B5CD	FHFX0080*
5276	웣	9EBE	B5CE	FHFY0080*
5277	웤	9EBF	B5CF	FHFZ0080*
5278	웦	9EC0	B5D0	FHG00080*
5279	웧	9EC1	B5D4	FHG40080*
5280	웨	9EC2	B5D8	FHG80080*
5281	웩	9EC3	B5D9	FHG90080*
5282	웪	9EC4	B5DA	FHGA0080*

Table 23 (Page 29 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5283	웫	9EC5	B5DB	FHGB0080*
5284	웬	9EC6	B5DC	FHGC0080*
5285	웭	9EC7	B5DD	FHGD0080*
5286	웮	9EC8	B5E3	FHGJ0080*
5287	웯	9EC9	B5E4	FHGK0080*
5288	웰	9ECA	B5E6	FHGM0080*
5289	웱	9ECB	B5E7	FHGN0080*
5290	웲	9ECC	B5E8	FHGO0080*
5291	웳	9ECD	B5E9	FHGP0080*
5292	웴	9ECE	B5EA	FHGQ0080*
5293	웵	9ECF	B5EB	FHGR0080*
5294	웶	9ED0	B5EC	FHGS0080*
5295	웷	9ED1	B5ED	FHGT0080*
5296	웸	9ED2	B5EE	FHGU0080*
5297	웹	9ED3	B5EF	FHGV0080*
5298	웺	9ED4	B5F0	FHGW0080*
5299	웻	9ED5	B5F3	FHZ0080*
5300	웼	9ED6	B5F4	FHH00080*
5301	웽	9ED7	B5F6	FHH20080*
5302	웾	9ED8	B5F8	FHH40080*
5303	웿	9ED9	B5F9	FHH50080*
5304	웺	9EDA	B5FA	FHH60080*
5305	웻	9EDB	B5FB	FHH70080*
5306	웼	9EDC	B5FC	FHH80080*
5307	웽	9EDD	B5FD	FHH90080*
5308	웾	9EDE	B643	FHHF0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 30 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5309	윳	9EDF	B644	FHHG0080*
5310	윳	9EE0	B646	FHHI0080*
5311	윳	9EE1	B647	FHHJ0080*
5312	윳	9EE2	B648	FHHK0080*
5313	윳	9EE3	B64A	FHHM0080*
5314	윳	9EE4	B64B	FHHN0080*
5315	윳	9EE5	B64C	FHHO0080*
5316	윳	9EE6	B64D	FHHP0080*
5317	윳	9EE7	B64E	FHHQ0080*
5318	윳	9EE8	B64F	FHHR0080*
5319	윳	9EE9	B650	FHHS0080*
5320	윳	9EEA	B654	FHHW0080*
5321	윳	9EEB	B656	FHHY0080*
5322	윳	9EEC	B658	FHI00080*
5323	윳	9EED	B659	FHI10080*
5324	윳	9EEE	B65A	FHI20080*
5325	윳	9EEF	B65B	FHI30080*
5326	윳	9EF0	B65C	FHI40080*
5327	윳	9EF1	B65D	FHI50080*
5328	윳	9EF2	B663	FHIB0080*
5329	윳	9EF3	B664	FHIC0080*
5330	윳	9EF4	B666	FHIE0080*
5331	윳	9EF5	B667	FHIF0080*
5332	윳	9EF6	B668	FHIG0080*
5333	윳	9EF7	B66A	FHII0080*
5334	윳	9EF8	B66B	FHIJ0080*

Table 23 (Page 30 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5335	윳	9EF9	B66C	FHIK0080*
5336	윳	9EFA	B66D	FHIL0080*
5337	윳	9EFB	B66E	FHIM0080*
5338	윳	9EFC	B66F	FHIN0080*
5339	윳	9EFD	B670	FHIO0080*
5340	윳	9EFE	B674	FHIS0080*
5341	윳	9F41	B676	FHIU0080*
5342	윳	9F42	B678	FHIW0080*
5343	윳	9F43	B679	FHIX0080*
5344	윳	9F44	B67A	FHIY0080*
5345	윳	9F45	B67B	FHIZ0080*
5346	윳	9F46	B67C	FHJ00080*
5347	윳	9F47	B67D	FHJ10080*
5348	윳	9F48	B683	FHJ70080*
5349	윳	9F49	B684	FHJ80080*
5350	윳	9F4A	B686	FHJA0080*
5351	윳	9F4B	B687	FHJB0080*
5352	윳	9F4C	B688	FHJC0080
5353	윳	9F4D	B68C	FHJG0080*
5354	윳	9F4E	B68D	FHJH0080*
5355	윳	9F4F	B68E	FHJI0080*
5356	윳	9F50	B68F	FHJJ0080*
5357	윳	9F51	B690	FHJK0080*
5358	윳	9F52	B694	FHJO0080*
5359	윳	9F53	B696	FHJQ0080*
5360	윳	9F54	B698	FHJS0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 31 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5361	웃	9F55	B699	FHJT0080*
5362	읍	9F56	B69A	FHJU0080*
5363	을	9F57	B69B	FHJV0080*
5364	요	9F58	B69C	FHJW0080*
5365	옹	9F59	B69D	FHJX0080*
5366	워	9F5A	B6A3	FHK30080*
5367	윌	9F61	B6A4	FHK40080*
5368	윘	9F62	B6A6	FHK60080*
5369	윙	9F63	B6A7	FHK70080*
5370	윙	9F64	B6A8	FHK80080*
5371	워	9F65	B6AA	FHKA0080*
5372	윙	9F66	B6AB	FHKB0080*
5373	윙	9F67	B6AC	FHKC0080*
5374	윙	9F68	B6AD	FHKD0080*
5375	윙	9F69	B6AE	FHKE0080*
5376	윙	9F6A	B6AF	FHKF0080*
5377	윙	9F6B	B6B0	FHKG0080*
5378	윙	9F6C	B6B4	FHKK0080*
5379	윗	9F6D	B6B5	FHKL0080
5380	윗	9F6E	B6B8	FHKO0080*
5381	윗	9F6F	B6B9	FHKP0080*
5382	윗	9F70	B6BA	FHKQ0080*
5383	윗	9F71	B6BB	FHKR0080*
5384	윗	9F72	B6BC	FHKS0080*
5385	윗	9F73	B6BD	FHKT0080*
5386	워	9F74	B6C3	FHKZ0080*

Table 23 (Page 31 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5387	웁	9F75	B6C4	FHL00080*
5388	웁	9F76	B6C6	FHL20080*
5389	웁	9F77	B6C7	FHL30080*
5390	웁	9F78	B6C8	FHL40080*
5391	웁	9F79	B6CA	FHL60080*
5392	웁	9F7A	B6CB	FHL70080*
5393	웁	9F81	B6CC	FHL80080*
5394	웁	9F82	B6CD	FHL90080*
5395	웁	9F83	B6CE	FHLA0080*
5396	웁	9F84	B6CF	FHLB0080*
5397	웁	9F85	B6D0	FHLC0080*
5398	웁	9F86	B6D4	FHLG0080*
5399	웁	9F87	B6D5	FHLH0080*
5400	웁	9F88	B6D6	FHLI0080*
5401	웁	9F89	B6D8	FHLK0080*
5402	웁	9F8A	B6D9	FHLL0080*
5403	웁	9F8B	B6DA	FHLM0080*
5404	웁	9F8C	B6DB	FHLN0080*
5405	웁	9F8D	B6DC	FHLO0080*
5406	웁	9F8E	B6DD	FHLP0080*
5407	워	9F8F	B6E3	FHLV0080*
5408	윗	9F90	B6E4	FHLW0080*
5409	윗	9F91	B6E6	FHLY0080*
5410	윗	9F92	B6E7	FHLZ0080*
5411	윗	9F93	B6E8	FHM00080
5412	워	9F94	B6EA	FHM20080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 32 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5413	웁	9F95	B6EB	FHM30080*
5414	웑	9F96	B6EC	FHM40080*
5415	웒	9F97	B6ED	FHM50080*
5416	웓	9F98	B6EE	FHM60080*
5417	월	9F99	B6EF	FHM70080*
5418	웕	9F9A	B6F0	FHM80080*
5419	웖	9F9B	B6F4	FHMC0080*
5420	웗	9F9C	B6F6	FHME0080*
5421	웘	9F9D	B6F8	FHMG0080*
5422	웙	9F9E	B6F9	FHMH0080*
5423	웚	9F9F	B6FA	FHMI0080*
5424	웛	9FA0	B6FB	FHMJ0080*
5425	웜	9FA1	B6FC	FHMK0080*
5426	웝	9FA2	B6FD	FHML0080*
5427	윀	9FA3	B743	FHMR0080*
5428	윁	9FA4	B744	FHMS0080*
5429	윂	9FA5	B746	FHMU0080*
5430	윃	9FA6	B747	FHMV0080*
5431	위	9FA7	B748	FHMW0080*
5432	윅	9FA8	B74A	FHMY0080*
5433	윆	9FA9	B74B	FHMZ0080*
5434	윇	9FAA	B74C	FHN00080*
5435	윈	9FAB	B74D	FHN10080*
5436	윉	9FAC	B74E	FHN20080*
5437	윊	9FAD	B74F	FHN30080*
5438	윋	9FAE	B750	FHN40080*

Table 23 (Page 32 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5439	윌	9FAF	B754	FHN80080*
5440	윍	9FB0	B756	FHNA0080*
5441	윎	9FB1	B758	FHNC0080
5442	윏	9FB2	B75A	FHNE0080*
5443	윐	9FB3	B75B	FHNF0080*
5444	윑	9FB4	B75C	FHNG0080*
5445	윒	9FB5	B75D	FHNH0080*
5446	윓	9FB6	B763	FHNN0080*
5447	윔	9FB7	B764	FHNO0080*
5448	윕	9FB8	B766	FHNQ0080*
5449	윖	9FB9	B767	FHNR0080*
5450	윗	9FBA	B768	FHNS0080*
5451	윘	9FBB	B76A	FHNU0080*
5452	윙	9FBC	B76B	FHNV0080*
5453	윚	9FBD	B76C	FHNW0080*
5454	윛	9FBE	B76D	FHNX0080*
5455	윜	9FBF	B76E	FHNY0080*
5456	윝	9FC0	B770	FHO00080*
5457	윞	9FC1	B774	FHO40080*
5458	윟	9FC2	B776	FHO60080*
5459	유	9FC3	B782	FHOI0080*
5460	육	9FC4	B783	FHOJ0080*
5461	윢	9FC5	B784	FHOK0080*
5462	윣	9FC6	B786	FHOM0080*
5463	윤	9FC7	B787	FHON0080*
5464	윥	9FC8	B788	FHOO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5465	꺾	9FC9	B78A	FHOQ0080*
5466	꺾	9FCA	B78B	FHOR0080*
5467	꺾	9FCB	B78C	FHOS0080*
5468	꺾	9FCC	B78D	FHOT0080*
5469	꺾	9FCD	B78E	FHOU0080*
5470	꺾	9FCE	B78F	FHOV0080*
5471	꺾	9FCF	B790	FHOW0080*
5472	꺾	9FD0	B793	FHOZ0080*
5473	꺾	9FD1	B794	FHP00080*
5474	꺾	9FD2	B796	FHP20080*
5475	꺾	9FD3	B797	FHP30080*
5476	꺾	9FD4	B798	FHP40080*
5477	꺾	9FD5	B799	FHP50080*
5478	꺾	9FD6	B79A	FHP60080*
5479	꺾	9FD7	B79B	FHP70080*
5480	꺾	9FD8	B79C	FHP80080*
5481	꺾	9FD9	B79D	FHP90080*
5482	꺾	9FDA	B7A3	FHPF0080*
5483	꺾	9FDB	B7A4	FHPG0080*
5484	꺾	9FDC	B7A6	FHPI0080*
5485	꺾	9FDD	B7A7	FHPJ0080*
5486	꺾	9FDE	B7A8	FHPK0080
5487	꺾	9FDF	B7AC	FHPO0080*
5488	꺾	9FE0	B7AD	FHPP0080*
5489	꺾	9FE1	B7AE	FHPQ0080*
5490	꺾	9FE2	B7AF	FHPR0080*

Table 23 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5491	꺾	9FE3	B7B4	FHPW0080*
5492	꺾	9FE4	B7B9	FHQ10080*
5493	꺾	9FE5	B7BA	FHQ20080*
5494	꺾	9FE6	B7BB	FHQ30080*
5495	꺾	9FE7	B7BD	FHQ50080*
5496	꺾	9FE8	B863	FHSZ0080*
5497	꺾	9FE9	B864	FHT00080*
5498	꺾	9FEA	B866	FHT20080*
5499	꺾	9FEB	B86A	FHT60080*
5500	꺾	9FEC	B86C	FHT80080*
5501	꺾	9FED	B86D	FHT90080*
5502	꺾	9FEE	B86E	FHTA0080*
5503	꺾	9FEF	B86F	FHTB0080*
5504	꺾	9FF0	B870	FHTC0080*
5505	꺾	9FF1	B874	FHTG0080*
5506	꺾	9FF2	B879	FHTL0080
5507	꺾	9FF3	B87A	FHTM0080*
5508	꺾	9FF4	B87B	FHTN0080*
5509	꺾	9FF5	B87C	FHTO0080
5510	꺾	9FF6	B87D	FHTP0080*
5511	꺾	9FF7	B883	FHTV0080*
5512	꺾	9FF8	B884	FHTW0080*
5513	꺾	9FF9	B886	FHTY0080*
5514	꺾	9FFA	B887	FHTZ0080*
5515	꺾	9FFB	B888	FHU00080*
5516	꺾	9FFC	B88A	FHU20080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 34 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5517	꺄	9FFD	B88B	FHU30080*
5518	꺅	9FFE	B88C	FHU40080*
5519	꺆	A041	B88D	FHU50080*
5520	꺇	A042	B88E	FHU60080*
5521	꺈	A043	B88F	FHU70080*
5522	꺉	A044	B890	FHU80080*
5523	꺊	A045	B894	FHUC0080*
5524	꺋	A046	B898	FHUG0080*
5525	꺌	A047	B899	FHUH0080*
5526	꺍	A048	B89A	FHUI0080*
5527	꺎	A049	B89B	FHUJ0080*
5528	꺏	A04A	B89C	FHUK0080*
5529	꺐	A04B	B89D	FHUL0080*
5530	꺑	A04C	B8A3	FHUR0080*
5531	꺒	A04D	B8A4	FHUS0080*
5532	꺓	A04E	B8A6	FHUU0080*
5533	꺔	A04F	B8A8	FHUW0080*
5534	꺕	A050	B8AA	FHUY0080*
5535	꺖	A051	B8AB	FHUZ0080*
5536	꺗	A052	B8AC	FHV00080*
5537	꺘	A053	B8AD	FHV10080*
5538	꺙	A054	B8AE	FHV20080*
5539	꺚	A055	B8AF	FHV30080*
5540	꺛	A056	B8B0	FHV40080*
5541	꺜	A057	B8B3	FHV70080*
5542	꺝	A058	B8B4	FHV80080*

Table 23 (Page 34 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5543	꺞	A059	B8B5	FHV90080*
5544	꺟	A05A	B8B6	FHVA0080*
5545	꺠	A061	B8B8	FHVC0080*
5546	꺡	A062	B8B9	FHVD0080*
5547	꺢	A063	B8BA	FHVE0080*
5548	꺣	A064	B8BB	FHVF0080*
5549	꺤	A065	B8BC	FHVG0080*
5550	꺥	A066	B8BD	FHVH0080*
5551	꺦	A067	B8C2	FHVM0080*
5552	꺧	A068	B8C3	FHVN0080*
5553	꺨	A069	B8C4	FHVO0080*
5554	꺩	A06A	B8C6	FHVQ0080*
5555	꺪	A06B	B8C7	FHVR0080*
5556	꺫	A06C	B8C8	FHVS0080*
5557	꺬	A06D	B8CA	FHVV0080*
5558	꺭	A06E	B8CB	FHVW0080*
5559	꺮	A06F	B8CC	FHVX0080*
5560	꺯	A070	B8CD	FHVY0080*
5561	꺰	A071	B8CE	FHVZ0080*
5562	꺱	A072	B8CF	FHW00080*
5563	꺲	A073	B8D0	FHW00080*
5564	꺳	A074	B8D1	FHW10080*
5565	꺴	A075	B8D3	FHW30080*
5566	꺵	A076	B8D4	FHW40080*
5567	꺶	A077	B8D5	FHW50080*
5568	꺷	A078	B8D6	FHW60080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
5569	쟁	A079	B8D7	FHW70080*
5570	젯	A07A	B8D8	FHW80080*
5571	젯	A081	B8D9	FHW90080*
5572	젝	A082	B8DA	FHWA0080*
5573	젤	A083	B8DB	FHWB0080*
5574	젼	A084	B8DC	FHWC0080*
5575	쟁	A085	B8DD	FHWD0080*
5576	쥐	A086	B8E3	FHWJ0080*
5577	젼	A087	B8E4	FHWK0080*
5578	젼	A088	B8E6	FHWM0080*
5579	젼	A089	B8E7	FHWN0080*
5580	젼	A08A	B8E8	FHWO0080
5581	젼	A08B	B8EA	FHWQ0080*
5582	젼	A08C	B8EC	FHWS0080*
5583	젼	A08D	B8ED	FHWT0080*
5584	젼	A08E	B8EE	FHWU0080*
5585	젼	A08F	B8EF	FHWV0080*
5586	젼	A090	B8F0	FHWW0080*
5587	젼	A091	B8F4	FHX00080*
5588	젼	A092	B8F6	FHX20080
5589	젼	A093	B8F9	FHX50080*
5590	젼	A094	B8FA	FHX60080*
5591	젼	A095	B8FB	FHX70080*
5592	젼	A096	B8FC	FHX80080*
5593	쟁	A097	B8FD	FHX90080
5594	젼	A098	B943	FHXF0080*

Line Number	Graphic	PC Code	Host Code	GCGID
5595	젼	A099	B944	FHXG0080*
5596	젼	A09A	B946	FHXI0080*
5597	젼	A09B	B947	FHXJ0080*
5598	젼	A09C	B948	FHXK0080*
5599	젼	A09D	B94A	FHXM0080*
5600	젼	A09E	B94B	FHXN0080*
5601	젼	A09F	B94C	FHXO0080*
5602	젼	A0A0	B94D	FHXP0080*
5603	젼	A0A1	B94E	FHXQ0080*
5604	젼	A0A2	B94F	FHXR0080*
5605	쟁	A0A3	B950	FHXS0080*
5606	젼	A0A4	B954	FHXW0080*
5607	젼	A0A5	B956	FHXY0080*
5608	젼	A0A6	B958	FHY00080*
5609	젼	A0A7	B959	FHY10080*
5610	젝	A0A8	B95A	FHY20080*
5611	젤	A0A9	B95B	FHY30080*
5612	젼	A0AA	B95C	FHY40080*
5613	쟁	A0AB	B95D	FHY50080*
5614	적	A0AC	B962	FHYA0080
5615	쥐	A0AD	B963	FHYB0080*
5616	젼	A0AE	B964	FHYC0080*
5617	젼	A0AF	B966	FHYE0080*
5618	젼	A0B0	B967	FHYF0080*
5619	젼	A0B1	B968	FHYG0080*
5620	젼	A0B2	B96A	FHYI0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 36 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
5621	점	A0B3	B96B	FHYJ0080*
5622	점	A0B4	B96C	FHYK0080*
5623	점	A0B5	B96D	FHYL0080*
5624	점	A0B6	B96E	FHYM0080*
5625	점	A0B7	B96F	FHYN0080*
5626	점	A0B8	B970	FHYO0080*
5627	점	A0B9	B974	FHYS0080*
5628	젓	A0BA	B975	FHYT0080
5629	젓	A0BB	B978	FHYW0080*
5630	젓	A0BC	B979	FHYX0080*
5631	적	A0BD	B97A	FHY0080*
5632	절	A0BE	B97B	FHYZ0080*
5633	절	A0BF	B97C	FHZ00080*
5634	정	A0C0	B97D	FHZ10080*
5635	적	A0C1	B982	FHZ60080*
5636	적	A0C2	B983	FHZ70080*
5637	적	A0C3	B984	FHZ80080*
5638	적	A0C4	B985	FHZ90080*
5639	적	A0C5	B986	FHZA0080*
5640	적	A0C6	B987	FHZB0080*
5641	적	A0C7	B988	FHZC0080*
5642	적	A0C8	B989	FHZD0080*
5643	적	A0C9	B98A	FHZE0080*
5644	적	A0CA	B98B	FHZF0080*
5645	적	A0CB	B98C	FHZG0080*
5646	적	A0CC	B98D	FHZH0080*

Table 23 (Page 36 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
5647	적	A0CD	B98E	FHZI0080*
5648	적	A0CE	B98F	FHZJ0080*
5649	적	A0CF	B990	FHZK0080*
5650	적	A0D0	B991	FHZL0080*
5651	적	A0D1	B993	FHZN0080*
5652	적	A0D2	B994	FHZO0080*
5653	적	A0D3	B995	FHZP0080*
5654	적	A0D4	B996	FHZQ0080*
5655	적	A0D5	B997	FHZR0080*
5656	적	A0D6	B998	FHZS0080*
5657	적	A0D7	B999	FHZT0080*
5658	적	A0D8	B99A	FHZU0080*
5659	적	A0D9	B99B	FHZV0080*
5660	적	A0DA	B99C	FHZW0080*
5661	적	A0DB	B99D	FHZX0080*
5662	추	A0DC	B9A3	FI030080*
5663	추	A0DD	B9A4	FI040080*
5664	추	A0DE	B9A6	FI060080*
5665	추	A0DF	B9A7	FI070080*
5666	추	A0E0	B9A8	FI080080*
5667	추	A0E1	B9AA	FI0A0080*
5668	추	A0E2	B9AC	FI0C0080*
5669	추	A0E3	B9AD	FI0D0080*
5670	추	A0E4	B9AE	FI0E0080*
5671	추	A0E5	B9AF	FI0F0080*
5672	추	A0E6	B9B0	FI0G0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 23 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5673	쑤	A0E7	B9B4	FI0K0080*
5674	쑥	A0E8	B9B6	FI0M0080*
5675	쑦	A0E9	B9BA	FI0Q0080*
5676	쑧	A0EA	B9BB	FI0R0080*
5677	쑨	A0EB	B9BC	FI0S0080*
5678	쑩	A0EC	B9C3	FI0Z0080*
5679	쑪	A0ED	B9C4	FI100080*
5680	쑫	A0EE	B9C5	FI110080
5681	쑬	A0EF	B9C6	FI120080*
5682	쑭	A0F0	B9C7	FI130080*
5683	쑮	A0F1	B9C8	FI140080*
5684	쑯	A0F2	B9CA	FI160080*
5685	쑰	A0F3	B9CB	FI170080*
5686	쑱	A0F4	B9CC	FI180080*
5687	쑲	A0F5	B9CD	FI190080*
5688	쑳	A0F6	B9CE	FI1A0080*
5689	쑴	A0F7	B9CF	FI1B0080*
5690	쑵	A0F8	B9D0	FI1C0080*
5691	쑶	A0F9	B9D1	FI1D0080
5692	쑷	A0FA	B9D4	FI1G0080*
5693	쑸	A0FB	B9D6	FI1I0080
5694	쑹	A0FC	B9D8	FI1K0080*
5695	쑺	A0FD	B9D9	FI1L0080*
5696	쑻	A0FE	B9DA	FI1M0080*
5697	쑼	A141	B9DB	FI1N0080*
5698	쑽	A142	B9DC	FI1O0080*

Table 23 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5699	쑾	A143	B9DD	FI1P0080*
5700	쑿	A144	B9E2	FI1U0080*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 1 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5701	쨩	A145	B9E3	FI1V0080*
5702	쨪	A146	B9E4	FI1W0080*
5703	쨫	A147	B9E5	FI1X0080
5704	쨬	A148	B9E6	FI1Y0080*
5705	쨭	A149	B9E7	FI1Z0080*
5706	쨮	A14A	B9E8	FI200080*
5707	쨯	A14B	B9E9	FI210080
5708	쨰	A14C	B9EA	FI220080*
5709	쨱	A14D	B9EB	FI230080*
5710	쨲	A14E	B9EC	FI240080*
5711	쨳	A14F	B9ED	FI250080*
5712	쨴	A150	B9EE	FI260080*
5713	쨵	A151	B9EF	FI270080*
5714	쨶	A152	B9F0	FI280080*
5715	쨷	A153	B9F1	FI290080
5716	쨸	A154	B9F3	FI2B0080*
5717	쨹	A155	B9F4	FI2C0080*
5718	쨺	A156	B9F5	FI2D0080*
5719	쨻	A157	B9F8	FI2G0080*
5720	쨼	A158	B9F9	FI2H0080*
5721	쨽	A159	B9FA	FI2I0080*
5722	쨾	A15A	B9FB	FI2J0080*
5723	쨿	A161	B9FC	FI2K0080*
5724	쨻	A162	B9FD	FI2L0080*
5725	쨼	A163	BA42	FI2Q0080*
5726	쨽	A164	BA43	FI2R0080*

Table 24 (Page 1 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5727	쨾	A165	BA44	FI2S0080*
5728	쨿	A166	BA46	FI2U0080*
5729	쨻	A167	BA47	FI2V0080*
5730	쨼	A168	BA48	FI2W0080*
5731	쨽	A169	BA4A	FI2Y0080*
5732	쨾	A16A	BA4B	FI2Z0080*
5733	쨿	A16B	BA4C	FI300080*
5734	쨻	A16C	BA4D	FI310080*
5735	쨼	A16D	BA4E	FI320080*
5736	쨽	A16E	BA4F	FI330080*
5737	쨾	A16F	BA50	FI340080*
5738	쨿	A170	BA54	FI380080*
5739	쨻	A171	BA56	FI3A0080*
5740	쨼	A172	BA58	FI3C0080*
5741	쨽	A173	BA59	FI3D0080*
5742	쨾	A174	BA5A	FI3E0080*
5743	쨿	A175	BA5B	FI3F0080*
5744	쨻	A176	BA5C	FI3G0080*
5745	쨼	A177	BA5D	FI3H0080*
5746	쨽	A178	BA63	FI3N0080*
5747	쨾	A179	BA64	FI3O0080*
5748	쨿	A17A	BA66	FI3Q0080*
5749	쨻	A181	BA67	FI3R0080*
5750	쨼	A182	BA68	FI3S0080*
5751	쨽	A183	BA69	FI3T0080
5752	쨾	A184	BA6A	FI3U0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
5753	쑤	A185	BA6B	FI3V0080*
5754	쑥	A186	BA6C	FI3W0080*
5755	쑦	A187	BA6D	FI3X0080*
5756	쑧	A188	BA6E	FI3Y0080*
5757	쑨	A189	BA6F	FI3Z0080*
5758	쑩	A18A	BA70	FI400080*
5759	쑪	A18B	BA71	FI410080
5760	쑫	A18C	BA73	FI430080
5761	쑬	A18D	BA74	FI440080*
5762	쑭	A18E	BA75	FI450080*
5763	쑮	A18F	BA76	FI460080*
5764	쑯	A190	BA78	FI480080*
5765	쑰	A191	BA79	FI490080*
5766	쑱	A192	BA7A	FI4A0080*
5767	쑲	A193	BA7B	FI4B0080*
5768	쑳	A194	BA7C	FI4C0080*
5769	쑴	A195	BA7D	FI4D0080*
5770	쑵	A196	BA83	FI4J0080*
5771	쑶	A197	BA84	FI4K0080*
5772	쑷	A198	BA86	FI4M0080*
5773	쑸	A199	BA87	FI4N0080*
5774	쑹	A19A	BA88	FI4O0080*
5775	쑺	A19B	BA8C	FI4S0080*
5776	쑻	A19C	BA8D	FI4T0080*
5777	쑼	A19D	BA8E	FI4U0080*
5778	쑽	A19E	BA8F	FI4V0080*

Line Number	Graphic	PC Code	Host Code	GCGID
5779	쑾	A19F	BA90	FI4W0080*
5780	쑿	A1A0	BA94	FI500080*
5781	쑻	A241	BA96	FI520080*
5782	쑽	A242	BA98	FI540080*
5783	쑾	A243	BA99	FI550080*
5784	쑿	A244	BA9A	FI560080*
5785	쑼	A245	BA9B	FI570080*
5786	쑽	A246	BA9C	FI580080*
5787	쑾	A247	BA9D	FI590080*
5788	쑿	A248	BAA2	FI5E0080*
5789	쑻	A249	BAA3	FI5F0080*
5790	쑽	A24A	BAA4	FI5G0080*
5791	쑾	A24B	BAA5	FI5H0080*
5792	쑿	A24C	BAA6	FI5I0080*
5793	쑼	A24D	BAA7	FI5J0080*
5794	쑽	A24E	BAA8	FI5K0080*
5795	쑾	A24F	BAA9	FI5L0080*
5796	쑿	A250	BAAA	FI5M0080*
5797	쑻	A251	BAAB	FI5N0080*
5798	쑽	A252	BAAC	FI5O0080*
5799	쑾	A253	BAAD	FI5P0080*
5800	쑿	A254	BAAE	FI5Q0080*
5801	쑼	A255	BAAF	FI5R0080*
5802	쑽	A256	BAB0	FI5S0080*
5803	쑾	A257	BAB1	FI5T0080*
5804	쑿	A258	BAB3	FI5V0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5805	꺾	A259	BAB4	FI5W0080*
5806	꺾	A25A	BAB5	FI5X0080
5807	꺾	A261	BAB7	FI5Z0080*
5808	꺾	A262	BAB8	FI600080*
5809	꺾	A263	BAB9	FI610080*
5810	꺾	A264	BABA	FI620080*
5811	꺾	A265	BABB	FI630080*
5812	꺾	A266	BABC	FI640080*
5813	꺾	A267	BABD	FI650080*
5814	꺾	A268	BAC2	FI6A0080*
5815	꺾	A269	BAC3	FI6B0080*
5816	꺾	A26A	BAC4	FI6C0080*
5817	꺾	A26B	BAC5	FI6D0080*
5818	꺾	A26C	BAC6	FI6E0080*
5819	꺾	A26D	BAC7	FI6F0080*
5820	꺾	A26E	BAC8	FI6G0080*
5821	꺾	A26F	BAC9	FI6H0080*
5822	꺾	A270	BACA	FI6I0080*
5823	꺾	A271	BACB	FI6J0080*
5824	꺾	A272	BACC	FI6K0080*
5825	꺾	A273	BACD	FI6L0080*
5826	꺾	A274	BACE	FI6M0080*
5827	꺾	A275	BACF	FI6N0080*
5828	꺾	A276	BAD0	FI6O0080*
5829	꺾	A277	BAD1	FI6P0080*
5830	꺾	A278	BAD3	FI6R0080*

Table 24 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5831	꺾	A279	BAD4	FI6S0080*
5832	꺾	A27A	BAD5	FI6T0080*
5833	꺾	A281	BAD6	FI6U0080*
5834	꺾	A282	BAD7	FI6V0080*
5835	꺾	A283	BAD8	FI6W0080*
5836	꺾	A284	BAD9	FI6X0080*
5837	꺾	A285	BADA	FI6Y0080*
5838	꺾	A286	BADB	FI6Z0080*
5839	꺾	A287	BADC	FI700080*
5840	꺾	A288	BADD	FI710080*
5841	꺾	A289	BAE3	FI770080*
5842	꺾	A28A	BAE4	FI780080*
5843	꺾	A28B	BAE6	FI7A0080*
5844	꺾	A28C	BAE7	FI7B0080*
5845	꺾	A28D	BAE8	FI7C0080*
5846	꺾	A28E	BAEA	FI7E0080*
5847	꺾	A28F	BAEB	FI7F0080*
5848	꺾	A290	BAEC	FI7G0080*
5849	꺾	A291	BAED	FI7H0080*
5850	꺾	A292	BAEE	FI7I0080*
5851	꺾	A293	BAEF	FI7J0080*
5852	꺾	A294	BAF0	FI7K0080*
5853	꺾	A295	BAF4	FI7O0080*
5854	꺾	A296	BAF6	FI7Q0080*
5855	꺾	A297	BAF7	FI7R0080*
5856	꺾	A298	BAF8	FI7S0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5857	쫘	A299	BAF9	FI7T0080*
5858	쫙	A29A	BAFA	FI7U0080*
5859	쫚	A29B	BAFB	FI7V0080*
5860	쫛	A29C	BAFC	FI7W0080*
5861	쫜	A29D	BAFD	FI7X0080*
5862	쫝	A29E	BB42	FI820080
5863	쫞	A29F	BB43	FI830080*
5864	쫟	A2A0	BB44	FI840080*
5865	쫠	A341	BB46	FI860080*
5866	쫡	A342	BB47	FI870080*
5867	쫢	A343	BB48	FI880080*
5868	쫣	A344	BB4A	FI8A0080*
5869	쫤	A345	BB4B	FI8B0080*
5870	쫥	A346	BB4C	FI8C0080*
5871	쫦	A347	BB4D	FI8D0080*
5872	쫧	A348	BB4E	FI8E0080*
5873	쫨	A349	BB4F	FI8F0080*
5874	쫩	A34A	BB50	FI8G0080*
5875	쫪	A34B	BB53	FI8J0080*
5876	쫫	A34C	BB54	FI8K0080*
5877	쫬	A34D	BB55	FI8L0080*
5878	쫭	A34E	BB56	FI8M0080*
5879	쫮	A34F	BB57	FI8N0080*
5880	쫯	A350	BB58	FI8O0080*
5881	쫰	A351	BB59	FI8P0080*
5882	쫱	A352	BB5A	FI8Q0080*

Table 24 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5883	쫲	A353	BB5B	FI8R0080*
5884	쫳	A354	BB5C	FI8S0080*
5885	쫵	A355	BB5D	FI8T0080*
5886	쫶	A356	BB63	FI8Z0080*
5887	쫷	A357	BB64	FI900080*
5888	쫸	A358	BB66	FI920080*
5889	쫹	A359	BB67	FI930080*
5890	쫺	A35A	BB68	FI940080*
5891	쫻	A361	BB6A	FI960080*
5892	쫼	A362	BB6B	FI970080*
5893	쫽	A363	BB6C	FI980080*
5894	쫾	A364	BB6D	FI990080*
5895	쫿	A365	BB6E	FI9A0080*
5896	쫺	A366	BB6F	FI9B0080*
5897	쫻	A367	BB70	FI9C0080*
5898	쫼	A368	BB74	FI9G0080*
5899	쫽	A369	BB76	FI9I0080*
5900	쫾	A36A	BB78	FI9K0080*
5901	쫿	A36B	BB79	FI9L0080*
5902	쫺	A36C	BB7A	FI9M0080*
5903	쫻	A36D	BB7B	FI9N0080*
5904	쫼	A36E	BB7C	FI9O0080*
5905	쫽	A36F	BB7D	FI9P0080*
5906	쫾	A370	BB81	FI9T0080
5907	쫿	A371	BB82	FI9U0080*
5908	쫺	A372	BB83	FI9V0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5909	꺾	A373	BB84	FI9W0080*
5910	꺾	A374	BB85	FI9X0080*
5911	꺾	A375	BB86	FI9Y0080*
5912	꺾	A376	BB87	FI9Z0080*
5913	꺾	A377	BB88	FIA00080*
5914	꺾	A378	BB89	FIA10080*
5915	꺾	A379	BB8A	FIA20080*
5916	꺾	A37A	BB8B	FIA30080*
5917	꺾	A381	BB8C	FIA40080*
5918	꺾	A382	BB8D	FIA50080*
5919	꺾	A383	BB8E	FIA60080*
5920	꺾	A384	BB8F	FIA70080*
5921	꺾	A385	BB90	FIA80080*
5922	꺾	A386	BB91	FIA90080*
5923	꺾	A387	BB93	FIAB0080*
5924	꺾	A388	BB94	FIAC0080*
5925	꺾	A389	BB95	FIAD0080*
5926	꺾	A38A	BB96	FIAE0080*
5927	꺾	A38B	BB97	FIAF0080*
5928	꺾	A38C	BB98	FIAG0080*
5929	꺾	A38D	BB99	FIAH0080*
5930	꺾	A38E	BB9A	FIAI0080*
5931	꺾	A38F	BB9B	FIAJ0080*
5932	꺾	A390	BB9C	FIAK0080*
5933	꺾	A391	BB9D	FIAL0080*
5934	꺾	A392	BBA3	FIAR0080*

Table 24 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
5935	꺾	A393	BBA4	FIAS0080*
5936	꺾	A394	BBA6	FIAU0080*
5937	꺾	A395	BBA7	FIAV0080*
5938	꺾	A396	BBAA	FIAY0080*
5939	꺾	A397	BBAC	FIB00080*
5940	꺾	A398	BBAD	FIB10080*
5941	꺾	A399	BBAE	FIB20080*
5942	꺾	A39A	BBAF	FIB30080*
5943	꺾	A39B	BBB0	FIB40080*
5944	꺾	A39C	BBB4	FIB80080*
5945	꺾	A39D	BBB6	FIBA0080
5946	꺾	A39E	BBB9	FIBD0080*
5947	꺾	A39F	BBBA	FIBE0080*
5948	꺾	A3A0	BBBD	FIBH0080*
5949	꺾	A441	BC63	FIEB0080*
5950	꺾	A442	BC64	FIEC0080*
5951	꺾	A443	BC66	FIEE0080*
5952	꺾	A444	BC68	FIEG0080*
5953	꺾	A445	BC6A	FIEI0080*
5954	꺾	A446	BC6B	FIEJ0080*
5955	꺾	A447	BC6D	FIEL0080*
5956	꺾	A448	BC6E	FIEM0080*
5957	꺾	A449	BC6F	FIEN0080*
5958	꺾	A44A	BC70	FIEO0080*
5959	꺾	A44B	BC74	FIES0080*
5960	꺾	A44C	BC78	FIEW0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
5961	짹	A44D	BC79	FIEX0080*
5962	째	A44E	BC7A	FIEY0080*
5963	짹	A44F	BC7B	FIEZ0080*
5964	짺	A450	BC7C	FIF00080*
5965	짻	A451	BC7D	FIF10080*
5966	짼	A452	BC83	FIF70080*
5967	짽	A453	BC84	FIF80080*
5968	짼	A454	BC86	FIFA0080*
5969	짽	A455	BC87	FIFB0080*
5970	짿	A456	BC88	FIFC0080*
5971	짻	A457	BC8A	FIFE0080*
5972	짼	A458	BC8B	FIFF0080*
5973	짽	A459	BC8C	FIFG0080*
5974	짼	A45A	BC8D	FIFH0080*
5975	짽	A461	BC8E	FIFI0080*
5976	짼	A462	BC8F	FIFJ0080*
5977	짽	A463	BC90	FIFK0080*
5978	짼	A464	BC94	FIFO0080*
5979	짽	A465	BC98	FIFS0080*
5980	짽	A466	BC99	FIFT0080*
5981	짻	A467	BC9A	FIFU0080*
5982	짼	A468	BC9B	FIFV0080*
5983	짽	A469	BC9C	FIFW0080*
5984	짽	A46A	BC9D	FIFX0080*
5985	째	A46B	BCA2	FIG20080*
5986	째	A46C	BCA3	FIG30080*

Line Number	Graphic	PC Code	Host Code	GCGID
5987	째	A46D	BCA4	FIG40080*
5988	째	A46E	BCA6	FIG60080*
5989	째	A46F	BCA7	FIG70080*
5990	째	A470	BCA8	FIG80080*
5991	째	A471	BCA9	FIG90080*
5992	째	A472	BCAA	FIGA0080*
5993	째	A473	BCAB	FIGB0080*
5994	째	A474	BCAC	FIGC0080*
5995	째	A475	BCAD	FIGD0080*
5996	째	A476	BCAE	FIGE0080*
5997	째	A477	BCAF	FIGF0080*
5998	째	A478	BCB0	FIGG0080*
5999	째	A479	BCB1	FIGH0080*
6000	째	A47A	BCB3	FIGJ0080*
6001	째	A481	BCB4	FIGK0080*
6002	째	A482	BCB5	FIGL0080*
6003	째	A483	BCB6	FIGM0080*
6004	째	A484	BCB8	FIGO0080*
6005	째	A485	BCB9	FIGP0080*
6006	째	A486	BCBA	FIGQ0080*
6007	째	A487	BCBB	FIGR0080*
6008	째	A488	BCBC	FIGS0080*
6009	째	A489	BCBD	FIGT0080*
6010	짜	A48A	BCC1	FIGX0080
6011	짜	A48B	BCC2	FIGY0080*
6012	짜	A48C	BCC3	FIGZ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6013	꺾	A48D	BCC4	FIH00080*
6014	꺾	A48E	BCC5	FIH10080*
6015	꺾	A48F	BCC6	FIH20080*
6016	꺾	A490	BCC7	FIH30080*
6017	꺾	A491	BCC8	FIH40080*
6018	꺾	A492	BCC9	FIH50080*
6019	꺾	A493	BCCA	FIH60080*
6020	꺾	A494	BCCB	FIH70080*
6021	꺾	A495	BCCC	FIH80080*
6022	꺾	A496	BCCD	FIH90080*
6023	꺾	A497	BCCE	FIHA0080*
6024	꺾	A498	BCCF	FIHB0080*
6025	꺾	A499	BCD0	FIHC0080*
6026	꺾	A49A	BCD1	FIHD0080*
6027	꺾	A49B	BCD3	FIHF0080*
6028	꺾	A49C	BCD4	FIHG0080*
6029	꺾	A49D	BCD5	FIHH0080*
6030	꺾	A49E	BCD6	FIHI0080*
6031	꺾	A49F	BCD7	FIHJ0080*
6032	꺾	A4A0	BCD8	FIHK0080*
6033	꺾	A541	BCD9	FIHL0080*
6034	꺾	A542	BCDA	FIHM0080*
6035	꺾	A543	BCDB	FIHN0080*
6036	꺾	A544	BCDC	FIHO0080*
6037	꺾	A545	BCDD	FIHP0080*
6038	꺾	A546	BCE3	FIHV0080*

Table 24 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6039	꺾	A547	BCE4	FIHW0080*
6040	꺾	A548	BCE6	FIHY0080*
6041	꺾	A549	BCE7	FIHZ0080*
6042	꺾	A54A	BCE8	FII00080*
6043	꺾	A54B	BCEA	FII20080*
6044	꺾	A54C	BCEB	FII30080*
6045	꺾	A54D	BCEC	FII40080
6046	꺾	A54E	BCED	FII50080*
6047	꺾	A54F	BCEE	FII60080*
6048	꺾	A550	BCEF	FII70080*
6049	꺾	A551	BCF0	FII80080*
6050	꺾	A552	BCF4	FII C0080*
6051	꺾	A553	BCF8	FII G0080*
6052	꺾	A554	BCF9	FII H0080*
6053	꺾	A555	BCFA	FII I0080*
6054	꺾	A556	BCFB	FII J0080*
6055	꺾	A557	BCFC	FII K0080*
6056	꺾	A558	BCFD	FII L0080*
6057	꺾	A559	BD42	FII Q0080*
6058	꺾	A55A	BD43	FII R0080*
6059	꺾	A561	BD44	FII S0080*
6060	꺾	A562	BD45	FII T0080*
6061	꺾	A563	BD46	FII U0080*
6062	꺾	A564	BD47	FII V0080*
6063	꺾	A565	BD48	FII W0080*
6064	꺾	A566	BD49	FII X0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6065	꺾	A567	BD4A	FIY0080*
6066	꺾	A568	BD4B	FIZ0080*
6067	꺾	A569	BD4C	FIJ00080*
6068	꺾	A56A	BD4D	FIJ10080*
6069	꺾	A56B	BD4E	FIJ20080*
6070	꺾	A56C	BD4F	FIJ30080*
6071	꺾	A56D	BD50	FIJ40080*
6072	꺾	A56E	BD51	FIJ50080*
6073	꺾	A56F	BD53	FIJ70080*
6074	꺾	A570	BD54	FIJ80080*
6075	꺾	A571	BD55	FIJ90080*
6076	꺾	A572	BD56	FIJA0080*
6077	꺾	A573	BD58	FIJC0080*
6078	꺾	A574	BD59	FIJD0080*
6079	꺾	A575	BD5A	FIJE0080*
6080	꺾	A576	BD5B	FIJF0080*
6081	꺾	A577	BD5C	FIJG0080*
6082	꺾	A578	BD5D	FIJH0080*
6083	꺾	A579	BD62	FIJM0080*
6084	꺾	A57A	BD63	FIJN0080*
6085	꺾	A581	BD64	FIJO0080*
6086	꺾	A582	BD65	FIJP0080*
6087	꺾	A583	BD66	FIJQ0080*
6088	꺾	A584	BD67	FIJR0080*
6089	꺾	A585	BD68	FIJS0080*
6090	꺾	A586	BD69	FIJT0080*

Table 24 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6091	꺾	A587	BD6A	FIJU0080*
6092	꺾	A588	BD6B	FIJV0080*
6093	꺾	A589	BD6C	FIJW0080*
6094	꺾	A58A	BD6D	FIJX0080*
6095	꺾	A58B	BD6E	FIJY0080*
6096	꺾	A58C	BD6F	FIJZ0080*
6097	꺾	A58D	BD70	FIK00080*
6098	꺾	A58E	BD71	FIK10080*
6099	꺾	A58F	BD73	FIK30080*
6100	꺾	A590	BD74	FIK40080*
6101	꺾	A591	BD75	FIK50080
6102	꺾	A592	BD77	FIK70080*
6103	꺾	A593	BD78	FIK80080*
6104	꺾	A594	BD79	FIK90080*
6105	꺾	A595	BD7A	FIKA0080*
6106	꺾	A596	BD7B	FIKB0080*
6107	꺾	A597	BD7C	FIKC0080*
6108	꺾	A598	BD7D	FIKD0080*
6109	꺾	A599	BD81	FIKH0080
6110	꺾	A59A	BD82	FIKI0080*
6111	꺾	A59B	BD83	FIKJ0080*
6112	꺾	A59C	BD84	FIKK0080*
6113	꺾	A59D	BD85	FIKL0080*
6114	꺾	A59E	BD86	FIKM0080*
6115	꺾	A59F	BD87	FIKN0080*
6116	꺾	A5A0	BD88	FIKO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 9 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
6117	쩨	A641	BD89	FIKP0080*
6118	쩨	A642	BD8A	FIKQ0080*
6119	쩨	A643	BD8B	FIKR0080*
6120	쩨	A644	BD8C	FIKS0080*
6121	쩨	A645	BD8D	FIKT0080*
6122	쩨	A646	BD8E	FIKU0080*
6123	쩨	A647	BD8F	FIKV0080*
6124	쩨	A648	BD90	FIKW0080*
6125	쩨	A649	BD91	FIKX0080*
6126	쩨	A64A	BD93	FIKZ0080*
6127	쩨	A64B	BD94	FIL00080*
6128	쩨	A64C	BD95	FIL10080*
6129	쩨	A64D	BD96	FIL20080*
6130	쩨	A64E	BD97	FIL30080*
6131	쩨	A64F	BD98	FIL40080*
6132	쩨	A650	BD99	FIL50080*
6133	쩨	A651	BD9A	FIL60080*
6134	쩨	A652	BD9B	FIL70080*
6135	쩨	A653	BD9C	FIL80080*
6136	쩨	A654	BD9D	FIL90080*
6137	쫈	A655	BDA3	FILF0080*
6138	쫈	A656	BDA4	FILG0080*
6139	쫈	A657	BDA6	FILI0080*
6140	쫈	A658	BDA7	FILJ0080*
6141	쫈	A659	BDA8	FILK0080*
6142	쫈	A65A	BDA A	FILM0080*

Table 24 (Page 9 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
6143	쫈	A661	BDAB	FILN0080*
6144	쫈	A662	BDAC	FILO0080*
6145	쫈	A663	BDAD	FILP0080*
6146	쫈	A664	BDAE	FILQ0080*
6147	쫈	A665	BDAF	FILR0080*
6148	쫈	A666	BDB0	FILS0080*
6149	쫈	A667	BDB4	FILW0080*
6150	쫈	A668	BDB6	FILY0080*
6151	쫈	A669	BDB8	FIM00080
6152	쫈	A66A	BDBA	FIM20080*
6153	쫈	A66B	BDBB	FIM30080*
6154	쫈	A66C	BDBC	FIM40080*
6155	쫈	A66D	BDBD	FIM50080*
6156	쫈	A66E	BDC3	FIMB0080*
6157	쫈	A66F	BDC4	FIMC0080*
6158	쫈	A670	BDC5	FIMD0080*
6159	쫈	A671	BDC6	FIME0080*
6160	쫈	A672	BDC7	FIMF0080*
6161	쫈	A673	BDC8	FIMG0080*
6162	쫈	A674	BDC A	FIMI0080*
6163	쫈	A675	BDCB	FIMJ0080*
6164	쫈	A676	BDCC	FIMK0080*
6165	쫈	A677	BDCD	FIML0080*
6166	쫈	A678	BDCE	FIMM0080*
6167	쫈	A679	BDCF	FIMN0080*
6168	쫈	A67A	BDD0	FIMO0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6169	쨍	A681	BDD1	FIMP0080*
6170	쨎	A682	BDD3	FIMR0080*
6171	쨏	A683	BDD4	FIMS0080*
6172	쨐	A684	BDD5	FIMT0080*
6173	쨑	A685	BDD7	FIMV0080*
6174	쨒	A686	BDD8	FIMW0080*
6175	쨓	A687	BDD9	FIMX0080*
6176	쨔	A688	BDDA	FIMY0080*
6177	쨕	A689	BDDB	FIMZ0080*
6178	쨖	A68A	BDDC	FIN00080*
6179	쨗	A68B	BDDD	FIN10080*
6180	쨘	A68C	BDE2	FIN60080*
6181	쨙	A68D	BDE3	FIN70080*
6182	쨚	A68E	BDE4	FIN80080*
6183	쨛	A68F	BDE5	FIN90080*
6184	쨜	A690	BDE6	FINA0080*
6185	쨝	A691	BDE7	FINB0080*
6186	쨞	A692	BDE8	FINC0080*
6187	쨟	A693	BDE9	FIND0080*
6188	쨠	A694	BDEA	FINE0080*
6189	쨡	A695	BDEB	FINF0080*
6190	쨢	A696	BDEC	FING0080*
6191	쨣	A697	BDED	FINH0080*
6192	쨤	A698	BDEE	FINI0080*
6193	쨥	A699	BDEF	FINJ0080*
6194	쨦	A69A	BDF0	FINK0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6195	쨧	A69B	BDF1	FINL0080*
6196	쨨	A69C	BDF3	FINN0080*
6197	쨩	A69D	BDF4	FINO0080*
6198	쨪	A69E	BDF5	FINP0080*
6199	쨫	A69F	BDF7	FINR0080*
6200	쨬	A6A0	BDF8	FINS0080*
6201	쨭	A741	BDF9	FINT0080*
6202	쨮	A742	BDF A	FINU0080*
6203	쨯	A743	BDF B	FINV0080*
6204	쨰	A744	BDF C	FINW0080*
6205	쨱	A745	BDF D	FINX0080*
6206	쨲	A746	BE42	FIO20080*
6207	쨳	A747	BE43	FIO30080*
6208	쨴	A748	BE44	FIO40080*
6209	쨵	A749	BE46	FIO60080*
6210	쨶	A74A	BE47	FIO70080*
6211	쨷	A74B	BE48	FIO80080*
6212	쨸	A74C	BE4A	FIOA0080*
6213	쨹	A74D	BE4B	FIOB0080*
6214	캀	A74E	BE4C	FIOC0080*
6215	캁	A74F	BE4D	FIOD0080*
6216	캂	A750	BE4E	FIOE0080*
6217	캃	A751	BE4F	FIOF0080*
6218	캄	A752	BE50	FIOG0080*
6219	캅	A753	BE54	FIOK0080*
6220	캆	A754	BE55	FIOL0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 11 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
6221	꺾	A755	BE56	FIOM0080*
6222	꺾	A756	BE57	FION0080*
6223	꺾	A757	BE58	FIOO0080*
6224	꺾	A758	BE59	FIOP0080*
6225	꺾	A759	BE5A	FIOQ0080*
6226	꺾	A75A	BE5B	FIOR0080*
6227	꺾	A761	BE5C	FIOS0080*
6228	꺾	A762	BE5D	FIOT0080*
6229	꺾	A763	BE61	FIOX0080
6230	꺾	A764	BE62	FIOY0080*
6231	꺾	A765	BE63	FIOZ0080*
6232	꺾	A766	BE64	FIP00080*
6233	꺾	A767	BE65	FIP10080*
6234	꺾	A768	BE66	FIP20080*
6235	꺾	A769	BE67	FIP30080*
6236	꺾	A76A	BE68	FIP40080*
6237	꺾	A76B	BE69	FIP50080*
6238	꺾	A76C	BE6A	FIP60080*
6239	꺾	A76D	BE6B	FIP70080*
6240	꺾	A76E	BE6C	FIP80080*
6241	꺾	A76F	BE6D	FIP90080*
6242	꺾	A770	BE6E	FIPA0080*
6243	꺾	A771	BE6F	FIPB0080*
6244	꺾	A772	BE70	FIPC0080*
6245	꺾	A773	BE71	FIPD0080*
6246	꺾	A774	BE73	FIPF0080*

Table 24 (Page 11 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
6247	꺾	A775	BE74	FIPG0080*
6248	꺾	A776	BE75	FIPH0080*
6249	꺾	A777	BE76	FIPJ0080*
6250	꺾	A778	BE78	FIPK0080*
6251	꺾	A779	BE79	FIPL0080*
6252	꺾	A77A	BE7A	FIPM0080*
6253	꺾	A781	BE7B	FIPN0080*
6254	꺾	A782	BE7C	FIPO0080*
6255	꺾	A783	BE7D	FIPP0080*
6256	꺾	A784	BE83	FIPV0080*
6257	꺾	A785	BE84	FIPW0080*
6258	꺾	A786	BE86	FIPY0080*
6259	꺾	A787	BE87	FIPZ0080*
6260	꺾	A788	BE88	FIQ00080*
6261	꺾	A789	BE8A	FIQ20080*
6262	꺾	A78A	BE8B	FIQ30080*
6263	꺾	A78B	BE8C	FIQ40080*
6264	꺾	A78C	BE8D	FIQ50080*
6265	꺾	A78D	BE8E	FIQ60080*
6266	꺾	A78E	BE8F	FIQ70080*
6267	꺾	A78F	BE90	FIQ80080*
6268	꺾	A790	BE94	FIQC0080*
6269	꺾	A791	BE95	FIQD0080*
6270	꺾	A792	BE96	FIQE0080*
6271	꺾	A793	BE98	FIQG0080*
6272	꺾	A794	BE99	FIQH0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 12 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6273	쑈	A795	BE9A	FIQI0080*
6274	쑉	A796	BE9B	FIQJ0080*
6275	쑊	A797	BE9C	FIQK0080*
6276	쑋	A798	BE9D	FIQL0080*
6277	쑌	A799	BEA2	FIQQ0080*
6278	쑍	A79A	BEA3	FIQR0080*
6279	쑎	A79B	BEA4	FIQS0080*
6280	쑏	A79C	BEA5	FIQT0080*
6281	쑑	A79D	BEA6	FIQU0080*
6282	쑒	A79E	BEA7	FIQV0080*
6283	쑓	A79F	BEA8	FIQW0080*
6284	쑔	A7A0	BEA9	FIQX0080*
6285	쑕	A841	BEAA	FIQY0080*
6286	쑖	A842	BEAB	FIQZ0080*
6287	쑗	A843	BEAC	FIR00080*
6288	쑘	A844	BEAD	FIR10080*
6289	쑙	A845	BEAE	FIR20080*
6290	쑚	A846	BEAF	FIR30080*
6291	쑛	A847	BEB0	FIR40080*
6292	쑜	A848	BEB1	FIR50080*
6293	쑝	A849	BEB3	FIR70080*
6294	쑞	A84A	BEB4	FIR80080*
6295	쑟	A84B	BEB5	FIR90080*
6296	쑠	A84C	BEB8	FIRC0080*
6297	쑡	A84D	BEB9	FIRD0080*
6298	쑢	A84E	BEBA	FIRE0080*

Table 24 (Page 12 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6299	쑣	A84F	BEBB	FIRF0080*
6300	쑤	A850	BEBC	FIRG0080*
6301	쑥	A851	BEBD	FIRH0080*
6302	쑦	A852	BEC1	FIRL0080
6303	쑧	A853	BEC2	FIRM0080*
6304	쑨	A854	BEC3	FIRN0080*
6305	쑩	A855	BEC4	FIRO0080*
6306	쑪	A856	BEC5	FIRP0080*
6307	쑫	A857	BEC6	FIRQ0080*
6308	쑬	A858	BEC7	FIRR0080*
6309	쑭	A859	BEC8	FIRS0080*
6310	쑮	A85A	BEC9	FIRT0080*
6311	쑯	A861	BECA	FIRU0080*
6312	쑰	A862	BECB	FIRV0080*
6313	쑱	A863	BECC	FIRW0080*
6314	쑲	A864	BECD	FIRX0080*
6315	쑳	A865	BECE	FIRY0080*
6316	쑴	A866	BECF	FIRZ0080*
6317	쑵	A867	BED0	FIS00080*
6318	쑶	A868	BED1	FIS10080*
6319	쑷	A869	BED3	FIS30080*
6320	쑸	A86A	BED4	FIS40080*
6321	쑹	A86B	BED5	FIS50080*
6322	쑺	A86C	BED6	FIS60080*
6323	쑻	A86D	BED7	FIS70080*
6324	쑼	A86E	BED8	FIS80080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6325	꺾	A86F	BED9	FIS90080*
6326	꺾	A870	BEDA	FISA0080*
6327	꺾	A871	BEDB	FISB0080*
6328	꺾	A872	BEDC	FISC0080*
6329	꺾	A873	BEDD	FISD0080*
6330	꺾	A874	BEE2	FISI0080*
6331	꺾	A875	BEE3	FISJ0080*
6332	꺾	A876	BEE4	FISK0080*
6333	꺾	A877	BEE5	FISL0080*
6334	꺾	A878	BEE6	FISM0080*
6335	꺾	A879	BEE7	FISN0080*
6336	꺾	A87A	BEE8	FISO0080*
6337	꺾	A881	BEE9	FISP0080*
6338	꺾	A882	BEEA	FISQ0080*
6339	꺾	A883	BEEB	FISR0080*
6340	꺾	A884	BEEC	FISS0080*
6341	꺾	A885	BEED	FIST0080*
6342	꺾	A886	BEEE	FISU0080*
6343	꺾	A887	BEEF	FISV0080*
6344	꺾	A888	BEF0	FISW0080*
6345	꺾	A889	BEF1	FISX0080*
6346	꺾	A88A	BEF3	FISZ0080*
6347	꺾	A88B	BEF4	FIT00080*
6348	꺾	A88C	BEF5	FIT10080*
6349	꺾	A88D	BEF6	FIT20080*
6350	꺾	A88E	BEF7	FIT30080*

Line Number	Graphic	PC Code	Host Code	GCGID
6351	꺾	A88F	BEF8	FIT40080*
6352	꺾	A890	BEF9	FIT50080*
6353	꺾	A891	BEFA	FIT60080*
6354	꺾	A892	BEFB	FIT70080*
6355	꺾	A893	BEFC	FIT80080*
6356	꺾	A894	BEFD	FIT90080*
6357	꺾	A895	BF42	FITE0080*
6358	꺾	A896	BF43	FITF0080*
6359	꺾	A897	BF44	FITG0080*
6360	꺾	A898	BF45	FITH0080*
6361	꺾	A899	BF46	FITI0080*
6362	꺾	A89A	BF47	FITJ0080*
6363	꺾	A89B	BF48	FITK0080*
6364	꺾	A89C	BF49	FITL0080*
6365	꺾	A89D	BF4A	FITM0080*
6366	꺾	A89E	BF4B	FITN0080*
6367	꺾	A89F	BF4C	FITO0080*
6368	꺾	A8A0	BF4D	FITP0080*
6369	꺾	A941	BF4E	FITQ0080*
6370	꺾	A942	BF4F	FITR0080*
6371	꺾	A943	BF50	FITS0080*
6372	꺾	A944	BF51	FITT0080*
6373	꺾	A945	BF53	FITV0080*
6374	꺾	A946	BF54	FITW0080*
6375	꺾	A947	BF55	FITX0080*
6376	꺾	A948	BF56	FITY0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6377	쫁	A949	BF57	FITZ0080*
6378	쫂	A94A	BF58	FIU00080*
6379	쫃	A94B	BF59	FIU10080*
6380	쫄	A94C	BF5A	FIU20080*
6381	쫅	A94D	BF5B	FIU30080*
6382	쫆	A94E	BF5C	FIU40080*
6383	쫇	A94F	BF5D	FIU50080*
6384	쫈	A950	BF62	FIUA0080*
6385	쫉	A951	BF63	FIUB0080*
6386	쫊	A952	BF64	FIUC0080*
6387	쫋	A953	BF65	FIUD0080*
6388	쫌	A954	BF66	FIUE0080*
6389	쫍	A955	BF67	FIUF0080*
6390	쫎	A956	BF68	FIUG0080*
6391	쫏	A957	BF69	FIUH0080*
6392	쫑	A958	BF6A	FIUI0080*
6393	쫒	A959	BF6B	FIUJ0080*
6394	쫓	A95A	BF6C	FIUK0080*
6395	쫔	A961	BF6D	FIUL0080*
6396	쫕	A962	BF6E	FIUM0080*
6397	쫖	A963	BF6F	FIUN0080*
6398	쫗	A964	BF70	FIUO0080*
6399	쫘	A965	BF73	FIUR0080
6400	쫙	A966	BF74	FIUS0080*
6401	쫚	A967	BF76	FIUU0080*
6402	쫛	A968	BF78	FIUW0080*

Table 24 (Page 14 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6403	쫜	A969	BF79	FIUX0080*
6404	쫝	A96A	BF7A	FIUY0080*
6405	쫞	A96B	BF7B	FIUZ0080*
6406	쫟	A96C	BF7C	FIV00080*
6407	쫠	A96D	BF7D	FIV10080*
6408	쫡	A96E	BF81	FIV50080
6409	쫢	A96F	BF82	FIV60080*
6410	쫣	A970	BF83	FIV70080*
6411	쫤	A971	BF84	FIV80080*
6412	쫥	A972	BF85	FIV90080*
6413	쫦	A973	BF86	FIVA0080*
6414	쫧	A974	BF87	FIVB0080*
6415	쫨	A975	BF88	FIVC0080*
6416	쫩	A976	BF89	FIVD0080*
6417	쫪	A977	BF8A	FIVE0080*
6418	쫫	A978	BF8B	FIVF0080*
6419	쫬	A979	BF8C	FIVG0080*
6420	쫭	A97A	BF8D	FIVH0080*
6421	쫮	A981	BF8E	FIVI0080*
6422	쫯	A982	BF8F	FIVJ0080*
6423	쫰	A983	BF90	FIVK0080*
6424	쫱	A984	BF91	FIVL0080*
6425	쫲	A985	BF93	FIVN0080*
6426	쫳	A986	BF94	FIVO0080*
6427	쫵	A987	BF95	FIVP0080*
6428	쫶	A988	BF96	FIVQ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6429	평	A989	BF97	FIVR0080*
6430	평	A98A	BF98	FIVS0080*
6431	평	A98B	BF99	FIVT0080*
6432	평	A98C	BF9A	FIVU0080*
6433	평	A98D	BF9B	FIVV0080*
6434	평	A98E	BF9C	FIVW0080*
6435	평	A98F	BF9D	FIVX0080*
6436	평	A990	BFA3	FIW30080*
6437	평	A991	BFA4	FIW40080*
6438	평	A992	BFA6	FIW60080*
6439	평	A993	BFA7	FIW70080*
6440	평	A994	BFA8	FIW80080*
6441	평	A995	BFAA	FIWA0080*
6442	평	A996	BFAB	FIWB0080*
6443	평	A997	BFAC	FIWC0080*
6444	평	A998	BFAD	FIWD0080*
6445	평	A999	BFAE	FIWE0080*
6446	평	A99A	BFAF	FIWF0080*
6447	평	A99B	BFB0	FIWG0080*
6448	평	A99C	BFB4	FIWK0080*
6449	평	A99D	BFB5	FIWL0080
6450	평	A99E	BFB6	FIWM0080*
6451	평	A99F	BFB9	FIWP0080*
6452	평	A9A0	BFBA	FIWQ0080*
6453	평	AA41	BFBB	FIWR0080*
6454	평	AA42	BFBBC	FIWS0080

Line Number	Graphic	PC Code	Host Code	GCGID
6455	착	AA43	C063	FIZN0080*
6456	착	AA44	C064	FIZO0080*
6457	착	AA45	C066	FIZQ0080*
6458	착	AA46	C068	FIZS0080
6459	착	AA47	C06A	FIZU0080*
6460	착	AA48	C06B	FIZV0080*
6461	착	AA49	C06C	FIZW0080*
6462	착	AA4A	C06D	FIZX0080*
6463	착	AA4B	C06E	FIZY0080*
6464	착	AA4C	C06F	FIZZ0080*
6465	착	AA4D	C070	FJ000080*
6466	착	AA4E	C074	FJ040080*
6467	착	AA4F	C079	FJ090080
6468	착	AA50	C07A	FJ0A0080*
6469	착	AA51	C07B	FJ0B0080*
6470	착	AA52	C07C	FJ0C0080
6471	착	AA53	C07D	FJ0D0080*
6472	착	AA54	C083	FJ0J0080*
6473	착	AA55	C084	FJ0K0080*
6474	착	AA56	C086	FJ0M0080*
6475	착	AA57	C087	FJ0N0080*
6476	착	AA58	C088	FJ0O0080*
6477	착	AA59	C08A	FJ0Q0080*
6478	착	AA5A	C08B	FJ0R0080*
6479	착	AA61	C08C	FJ0S0080*
6480	착	AA62	C08D	FJ0T0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6481	꺾	AA63	C08E	FJ0U0080*
6482	꺾	AA64	C08F	FJ0V0080*
6483	꺾	AA65	C090	FJ0W0080*
6484	꺾	AA66	C094	FJ100080*
6485	꺾	AA67	C098	FJ140080*
6486	꺾	AA68	C099	FJ150080*
6487	꺾	AA69	C09A	FJ160080*
6488	꺾	AA6A	C09B	FJ170080*
6489	꺾	AA6B	C09C	FJ180080*
6490	꺾	AA6C	C09D	FJ190080*
6491	꺾	AA6D	C0A2	FJ1E0080*
6492	꺾	AA6E	C0A3	FJ1F0080*
6493	꺾	AA6F	C0A4	FJ1G0080*
6494	꺾	AA70	C0A6	FJ1I0080*
6495	꺾	AA71	C0A8	FJ1K0080*
6496	꺾	AA72	C0AA	FJ1M0080*
6497	꺾	AA73	C0AB	FJ1N0080*
6498	꺾	AA74	C0AC	FJ1O0080*
6499	꺾	AA75	C0AD	FJ1P0080*
6500	꺾	AA76	C0AE	FJ1Q0080*
6501	꺾	AA77	C0AF	FJ1R0080*
6502	꺾	AA78	C0B0	FJ1S0080*
6503	꺾	AA79	C0B3	FJ1V0080
6504	꺾	AA7A	C0B4	FJ1W0080*
6505	꺾	AA81	C0B5	FJ1X0080*
6506	꺾	AA82	C0B6	FJ1Y0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6507	꺾	AA83	C0B8	FJ200080*
6508	꺾	AA84	C0B9	FJ210080*
6509	꺾	AA85	C0BA	FJ220080*
6510	꺾	AA86	C0BB	FJ230080*
6511	꺾	AA87	C0BC	FJ240080*
6512	꺾	AA88	C0BD	FJ250080*
6513	꺾	AA89	C0C1	FJ290080
6514	꺾	AA8A	C0C2	FJ2A0080*
6515	꺾	AA8B	C0C3	FJ2B0080*
6516	꺾	AA8C	C0C4	FJ2C0080*
6517	꺾	AA8D	C0C5	FJ2D0080*
6518	꺾	AA8E	C0C6	FJ2E0080*
6519	꺾	AA8F	C0C7	FJ2F0080*
6520	꺾	AA90	C0C8	FJ2G0080*
6521	꺾	AA91	C0C9	FJ2H0080*
6522	꺾	AA92	C0CA	FJ2I0080*
6523	꺾	AA93	C0CB	FJ2J0080*
6524	꺾	AA94	C0CC	FJ2K0080*
6525	꺾	AA95	C0CD	FJ2L0080*
6526	꺾	AA96	C0CE	FJ2M0080*
6527	꺾	AA97	C0CF	FJ2N0080*
6528	꺾	AA98	C0D0	FJ2O0080*
6529	꺾	AA99	C0D1	FJ2P0080*
6530	꺾	AA9A	C0D3	FJ2R0080*
6531	꺾	AA9B	C0D4	FJ2S0080*
6532	꺾	AA9C	C0D5	FJ2T0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6533	쨀	AA9D	C0D6	FJ2U0080*
6534	쨁	AA9E	C0D7	FJ2V0080*
6535	쨂	AA9F	C0D8	FJ2W0080*
6536	쨃	AAA0	C0D9	FJ2X0080*
6537	쨄	AB41	C0DA	FJ2Y0080*
6538	쨅	AB42	C0DB	FJ2Z0080*
6539	쨆	AB43	C0DC	FJ300080*
6540	쨇	AB44	C0DD	FJ310080*
6541	쨈	AB45	C0E3	FJ370080*
6542	쨉	AB46	C0E4	FJ380080*
6543	쨊	AB47	C0E6	FJ3A0080*
6544	쨋	AB48	C0E7	FJ3B0080*
6545	쨌	AB49	C0E8	FJ3C0080*
6546	쨍	AB4A	C0EA	FJ3E0080*
6547	쨎	AB4B	C0EB	FJ3F0080*
6548	쨏	AB4C	C0EC	FJ3G0080*
6549	쨐	AB4D	C0ED	FJ3H0080*
6550	쨑	AB4E	C0EE	FJ3I0080*
6551	쨒	AB4F	C0EF	FJ3J0080*
6552	쨓	AB50	C0F0	FJ3K0080*
6553	쨔	AB51	C0F4	FJ3O0080*
6554	쨕	AB52	C0F8	FJ3S0080*
6555	쨖	AB53	C0F9	FJ3T0080*
6556	쨗	AB54	C0FA	FJ3U0080*
6557	쨘	AB55	C0FB	FJ3V0080*
6558	쨙	AB56	C0FC	FJ3W0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6559	쨚	AB57	C0FD	FJ3X0080*
6560	쨛	AB58	C143	FJ430080*
6561	쨜	AB59	C144	FJ440080*
6562	쨝	AB5A	C146	FJ460080*
6563	쨞	AB61	C147	FJ470080*
6564	쨟	AB62	C148	FJ480080*
6565	쨠	AB63	C14A	FJ4A0080*
6566	쨡	AB64	C14B	FJ4B0080*
6567	쨢	AB65	C14C	FJ4C0080*
6568	쨣	AB66	C14D	FJ4D0080*
6569	쨤	AB67	C14E	FJ4E0080*
6570	쨥	AB68	C14F	FJ4F0080*
6571	쨦	AB69	C150	FJ4G0080*
6572	쨧	AB6A	C154	FJ4K0080*
6573	쨨	AB6B	C156	FJ4M0080*
6574	쨩	AB6C	C158	FJ4O0080*
6575	쨪	AB6D	C159	FJ4P0080*
6576	쨫	AB6E	C15A	FJ4Q0080*
6577	쨬	AB6F	C15B	FJ4R0080*
6578	쨭	AB70	C15C	FJ4S0080*
6579	쨮	AB71	C15D	FJ4T0080*
6580	쨯	AB72	C162	FJ4Y0080*
6581	쨰	AB73	C163	FJ4Z0080*
6582	쨱	AB74	C164	FJ500080*
6583	쨲	AB75	C166	FJ520080*
6584	쨳	AB76	C167	FJ530080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6585	첸	AB77	C168	FJ540080*
6586	첼	AB78	C169	FJ550080*
6587	첻	AB79	C16A	FJ560080*
6588	첼	AB7A	C16B	FJ570080*
6589	첼	AB81	C16C	FJ580080*
6590	첼	AB82	C16D	FJ590080*
6591	첼	AB83	C16E	FJ5A0080*
6592	첼	AB84	C16F	FJ5B0080*
6593	첼	AB85	C170	FJ5C0080*
6594	첼	AB86	C171	FJ5D0080*
6595	첼	AB87	C173	FJ5F0080*
6596	첼	AB88	C174	FJ5G0080*
6597	첼	AB89	C175	FJ5H0080
6598	첼	AB8A	C177	FJ5J0080
6599	첼	AB8B	C178	FJ5K0080*
6600	첼	AB8C	C179	FJ5L0080*
6601	첼	AB8D	C17A	FJ5M0080*
6602	첼	AB8E	C17B	FJ5N0080*
6603	첼	AB8F	C17C	FJ5O0080*
6604	첼	AB90	C17D	FJ5P0080*
6605	첼	AB91	C182	FJ5U0080*
6606	첼	AB92	C183	FJ5V0080*
6607	첼	AB93	C184	FJ5W0080*
6608	첼	AB94	C186	FJ5Y0080*
6609	첼	AB95	C187	FJ5Z0080*
6610	첼	AB96	C188	FJ600080*

Line Number	Graphic	PC Code	Host Code	GCGID
6611	첼	AB97	C189	FJ610080*
6612	첼	AB98	C18A	FJ620080*
6613	첼	AB99	C18B	FJ630080*
6614	첼	AB9A	C18C	FJ640080*
6615	첼	AB9B	C18D	FJ650080*
6616	첼	AB9C	C18E	FJ660080*
6617	첼	AB9D	C18F	FJ670080*
6618	첼	AB9E	C190	FJ680080*
6619	첼	AB9F	C191	FJ690080*
6620	첼	ABA0	C193	FJ6B0080*
6621	첼	AC41	C194	FJ6C0080*
6622	첼	AC42	C195	FJ6D0080*
6623	첼	AC43	C196	FJ6E0080*
6624	첼	AC44	C198	FJ6G0080*
6625	첼	AC45	C199	FJ6H0080*
6626	첼	AC46	C19A	FJ6I0080*
6627	첼	AC47	C19B	FJ6J0080*
6628	첼	AC48	C19C	FJ6K0080*
6629	첼	AC49	C19D	FJ6L0080*
6630	츄	AC4A	C1A3	FJ6R0080*
6631	츄	AC4B	C1A4	FJ6S0080*
6632	츄	AC4C	C1A6	FJ6U0080*
6633	츄	AC4D	C1A7	FJ6V0080*
6634	츄	AC4E	C1A8	FJ6W0080*
6635	츄	AC4F	C1AA	FJ6Y0080*
6636	츄	AC50	C1AB	FJ6Z0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6637	궘	AC51	C1AC	FJ700080*
6638	궙	AC52	C1AD	FJ710080*
6639	궚	AC53	C1AE	FJ720080*
6640	궛	AC54	C1AF	FJ730080*
6641	궜	AC55	C1B0	FJ740080*
6642	궝	AC56	C1B4	FJ780080*
6643	궞	AC57	C1B6	FJ7A0080*
6644	궟	AC58	C1B8	FJ7C0080*
6645	궠	AC59	C1B9	FJ7D0080*
6646	궡	AC5A	C1BA	FJ7E0080*
6647	궢	AC61	C1BB	FJ7F0080*
6648	궣	AC62	C1BC	FJ7G0080*
6649	궤	AC63	C1BD	FJ7H0080*
6650	궥	AC64	C1C2	FJ7M0080*
6651	궦	AC65	C1C3	FJ7N0080*
6652	궧	AC66	C1C4	FJ7O0080*
6653	궨	AC67	C1C6	FJ7Q0080*
6654	궩	AC68	C1C7	FJ7R0080*
6655	궪	AC69	C1C8	FJ7S0080*
6656	궫	AC6A	C1CA	FJ7U0080*
6657	궬	AC6B	C1CB	FJ7V0080*
6658	궭	AC6C	C1CC	FJ7W0080*
6659	궮	AC6D	C1CD	FJ7X0080*
6660	궯	AC6E	C1CE	FJ7Y0080*
6661	궰	AC6F	C1CF	FJ7Z0080*
6662	궱	AC70	C1D0	FJ800080*

Table 24 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6663	궲	AC71	C1D1	FJ810080*
6664	궳	AC72	C1D3	FJ830080*
6665	궴	AC73	C1D4	FJ840080*
6666	궵	AC74	C1D5	FJ850080*
6667	궶	AC75	C1D6	FJ860080*
6668	궷	AC76	C1D8	FJ880080*
6669	궸	AC77	C1D9	FJ890080*
6670	궹	AC78	C1DA	FJ8A0080*
6671	궺	AC79	C1DB	FJ8B0080*
6672	궻	AC7A	C1DC	FJ8C0080*
6673	궼	AC81	C1DD	FJ8D0080*
6674	궽	AC82	C1E1	FJ8H0080
6675	궾	AC83	C1E2	FJ8I0080*
6676	궿	AC84	C1E3	FJ8J0080*
6677	귀	AC85	C1E4	FJ8K0080*
6678	귁	AC86	C1E5	FJ8L0080*
6679	귂	AC87	C1E6	FJ8M0080*
6680	귃	AC88	C1E7	FJ8N0080*
6681	귄	AC89	C1E8	FJ8O0080*
6682	귅	AC8A	C1E9	FJ8P0080*
6683	귆	AC8B	C1EA	FJ8Q0080*
6684	귇	AC8C	C1EB	FJ8R0080*
6685	귈	AC8D	C1EC	FJ8S0080*
6686	귉	AC8E	C1ED	FJ8T0080*
6687	귊	AC8F	C1EE	FJ8U0080*
6688	귋	AC90	C1EF	FJ8V0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6689	꺾	AC91	C1F0	FJ8W0080*
6690	꺾	AC92	C1F1	FJ8X0080*
6691	꺾	AC93	C1F3	FJ8Z0080*
6692	꺾	AC94	C1F4	FJ900080*
6693	꺾	AC95	C1F5	FJ910080*
6694	꺾	AC96	C1F6	FJ920080*
6695	꺾	AC97	C1F7	FJ930080*
6696	꺾	AC98	C1F8	FJ940080*
6697	꺾	AC99	C1F9	FJ950080*
6698	꺾	AC9A	C1FA	FJ960080*
6699	꺾	AC9B	C1FB	FJ970080*
6700	꺾	AC9C	C1FC	FJ980080*
6701	꺾	AC9D	C1FD	FJ990080*
6702	꺾	AC9E	C242	FJ9E0080*
6703	꺾	AC9F	C243	FJ9F0080*
6704	꺾	ACA0	C244	FJ9G0080*
6705	꺾	AD41	C246	FJ9I0080*
6706	꺾	AD42	C247	FJ9J0080*
6707	꺾	AD43	C248	FJ9K0080*
6708	꺾	AD44	C24A	FJ9M0080*
6709	꺾	AD45	C24B	FJ9N0080*
6710	꺾	AD46	C24C	FJ9O0080*
6711	꺾	AD47	C24D	FJ9P0080*
6712	꺾	AD48	C24E	FJ9Q0080*
6713	꺾	AD49	C24F	FJ9R0080*
6714	꺾	AD4A	C250	FJ9S0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6715	꺾	AD4B	C254	FJ9W0080*
6716	꺾	AD4C	C256	FJ9Y0080*
6717	꺾	AD4D	C258	FJA00080*
6718	꺾	AD4E	C259	FJA10080*
6719	꺾	AD4F	C25A	FJA20080*
6720	꺾	AD50	C25B	FJA30080*
6721	꺾	AD51	C25C	FJA40080*
6722	꺾	AD52	C25D	FJA50080*
6723	꺾	AD53	C262	FJAA0080*
6724	꺾	AD54	C263	FJAB0080*
6725	꺾	AD55	C264	FJAC0080*
6726	꺾	AD56	C265	FJAD0080*
6727	꺾	AD57	C266	FJAE0080*
6728	꺾	AD58	C267	FJAF0080*
6729	꺾	AD59	C268	FJAG0080*
6730	꺾	AD5A	C269	FJAH0080*
6731	꺾	AD61	C26A	FJAI0080*
6732	꺾	AD62	C26B	FJAJ0080*
6733	꺾	AD63	C26C	FJAK0080*
6734	꺾	AD64	C26D	FJAL0080*
6735	꺾	AD65	C26E	FJAM0080*
6736	꺾	AD66	C26F	FJAN0080*
6737	꺾	AD67	C270	FJAO0080*
6738	꺾	AD68	C273	FJAR0080*
6739	꺾	AD69	C274	FJAS0080*
6740	꺾	AD6A	C275	FJAT0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 21 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6741	쑈	AD6B	C276	FJAU0080*
6742	쑉	AD6C	C277	FJAV0080*
6743	쑊	AD6D	C278	FJAW0080*
6744	쑋	AD6E	C279	FJAX0080*
6745	쑌	AD6F	C27A	FJAY0080*
6746	쑍	AD70	C27B	FJAZ0080*
6747	쑎	AD71	C27C	FJB00080*
6748	쑏	AD72	C27D	FJB10080*
6749	쑑	AD73	C283	FJB70080*
6750	쑒	AD74	C284	FJB80080*
6751	쑓	AD75	C286	FJBA0080*
6752	쑔	AD76	C287	FJBB0080*
6753	쑕	AD77	C288	FJBC0080*
6754	쑖	AD78	C28A	FJBE0080*
6755	쑗	AD79	C28B	FJBF0080*
6756	쑘	AD7A	C28C	FJBG0080*
6757	쑙	AD81	C28D	FJBH0080*
6758	쑚	AD82	C28E	FJBI0080*
6759	쑛	AD83	C28F	FBJJ0080*
6760	쑜	AD84	C290	FJBK0080*
6761	쑝	AD85	C294	FJBO0080*
6762	쑞	AD86	C296	FJBQ0080*
6763	쑟	AD87	C298	FJBS0080*
6764	쑠	AD88	C299	FJBT0080*
6765	쑡	AD89	C29A	FJBU0080*
6766	쑢	AD8A	C29B	FJBV0080*

Table 24 (Page 21 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6767	쑣	AD8B	C29C	FJBW0080*
6768	쑤	AD8C	C29D	FJBX0080*
6769	쑥	AD8D	C2A2	FJC20080*
6770	쑦	AD8E	C2A3	FJC30080*
6771	쑧	AD8F	C2A4	FJC40080*
6772	쑨	AD90	C2A5	FJC50080*
6773	쑩	AD91	C2A6	FJC60080*
6774	쑪	AD92	C2A7	FJC70080*
6775	쑫	AD93	C2A8	FJC80080*
6776	쑬	AD94	C2A9	FJC90080*
6777	쑭	AD95	C2AA	FJCA0080*
6778	쑮	AD96	C2AB	FJCB0080*
6779	쑯	AD97	C2AC	FJCC0080*
6780	쑰	AD98	C2AD	FJCD0080*
6781	쑱	AD99	C2AE	FJCE0080*
6782	쑲	AD9A	C2AF	FJCF0080*
6783	쑳	AD9B	C2B0	FJCG0080*
6784	쑴	AD9C	C2B1	FJCH0080*
6785	쑵	AD9D	C2B3	FJCJ0080*
6786	쑶	AD9E	C2B4	FJCK0080*
6787	쑷	AD9F	C2B5	FJCL0080
6788	쑸	ADA0	C2B7	FJCN0080*
6789	쑹	AE41	C2B8	FJCO0080*
6790	쑺	AE42	C2B9	FJCP0080*
6791	쑻	AE43	C2BA	FJCQ0080*
6792	쑼	AE44	C2BB	FJCR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6793	쨈	AE45	C2BC	FJCS0080*
6794	쨉	AE46	C2BD	FJCT0080*
6795	쨊	AE47	C2C2	FJCY0080*
6796	쨋	AE48	C2C3	FJCZ0080*
6797	쨌	AE49	C2C4	FJD00080*
6798	쨍	AE4A	C2C6	FJD20080*
6799	쨎	AE4B	C2C7	FJD30080*
6800	쨏	AE4C	C2C8	FJD40080*
6801	쨐	AE4D	C2C9	FJD50080*
6802	쨑	AE4E	C2CA	FJD60080*
6803	쨒	AE4F	C2CB	FJD70080*
6804	쨓	AE50	C2CC	FJD80080*
6805	쨔	AE51	C2CD	FJD90080*
6806	쨕	AE52	C2CE	FJDA0080*
6807	쨖	AE53	C2CF	FJDB0080*
6808	쨗	AE54	C2D0	FJDC0080*
6809	쨘	AE55	C2D1	FJDD0080*
6810	쨙	AE56	C2D3	FJDF0080*
6811	쨚	AE57	C2D4	FJDG0080*
6812	쨛	AE58	C2D5	FJDH0080*
6813	쨜	AE59	C2D6	FJDI0080*
6814	쨝	AE5A	C2D7	FJDJ0080*
6815	쨞	AE61	C2D8	FJDK0080*
6816	쨟	AE62	C2D9	FJDL0080*
6817	쨠	AE63	C2DA	FJDM0080*
6818	쨡	AE64	C2DB	FJDN0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6819	쨢	AE65	C2DC	FJDO0080*
6820	쨣	AE66	C2DD	FJDP0080*
6821	쨤	AE67	C2E2	FJDU0080*
6822	쨥	AE68	C2E3	FJDV0080*
6823	쨦	AE69	C2E4	FJDW0080*
6824	쨧	AE6A	C2E6	FJDY0080*
6825	쨨	AE6B	C2E7	FJZ0080*
6826	쨩	AE6C	C2E8	FJE00080*
6827	쨪	AE6D	C2EA	FJE20080*
6828	쨫	AE6E	C2EB	FJE30080*
6829	쨬	AE6F	C2EC	FJE40080*
6830	쨭	AE70	C2ED	FJE50080*
6831	쨮	AE71	C2EE	FJE60080*
6832	쨯	AE72	C2EF	FJE70080*
6833	쨰	AE73	C2F0	FJE80080*
6834	쨱	AE74	C2F4	FJEC0080*
6835	쨲	AE75	C2F6	FJEE0080*
6836	쨳	AE76	C2F8	FJEG0080*
6837	쨴	AE77	C2F9	FJEH0080*
6838	쨵	AE78	C2FA	FJEI0080*
6839	쨶	AE79	C2FB	FJEJ0080*
6840	쨷	AE7A	C2FC	FJEK0080*
6841	쨸	AE81	C2FD	FJEL0080*
6842	쨹	AE82	C342	FJEQ0080*
6843	캀	AE83	C343	FJER0080*
6844	캁	AE84	C344	FJES0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6845	궘	AE85	C346	FJEU0080*
6846	궙	AE86	C347	FJEV0080*
6847	궚	AE87	C348	FJEW0080*
6848	궛	AE88	C34A	FJEY0080*
6849	궜	AE89	C34B	FJEZ0080*
6850	궝	AE8A	C34C	FJF00080*
6851	궞	AE8B	C34D	FJF10080*
6852	궟	AE8C	C34E	FJF20080*
6853	궠	AE8D	C34F	FJF30080*
6854	궡	AE8E	C350	FJF40080*
6855	궢	AE8F	C353	FJF70080*
6856	궣	AE90	C354	FJF80080*
6857	궤	AE91	C355	FJF90080*
6858	궥	AE92	C356	FJFA0080*
6859	궦	AE93	C358	FJFC0080*
6860	궧	AE94	C359	FJFD0080*
6861	궨	AE95	C35A	FJFE0080*
6862	궩	AE96	C35B	FJFF0080*
6863	궪	AE97	C35C	FJFG0080*
6864	궫	AE98	C35D	FJFH0080*
6865	궬	AE99	C363	FJFN0080*
6866	궭	AE9A	C364	FJFO0080*
6867	궮	AE9B	C366	FJFQ0080*
6868	궯	AE9C	C367	FJFR0080*
6869	궰	AE9D	C368	FJFS0080*
6870	궱	AE9E	C36A	FJFU0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6871	궲	AE9F	C36B	FJFV0080*
6872	궳	AEA0	C36C	FJFW0080*
6873	궴	AF41	C36D	FJFX0080*
6874	궵	AF42	C36E	FJFY0080*
6875	궶	AF43	C36F	FJFZ0080*
6876	궷	AF44	C370	FJG00080*
6877	궸	AF45	C374	FJG40080*
6878	궹	AF46	C376	FJG60080*
6879	궺	AF47	C378	FJG80080*
6880	궻	AF48	C379	FJG90080*
6881	궼	AF49	C37A	FJGA0080*
6882	궽	AF4A	C37B	FJGB0080*
6883	궾	AF4B	C37C	FJGC0080*
6884	궿	AF4C	C37D	FJGD0080*
6885	궽	AF4D	C381	FJGH0080
6886	궾	AF4E	C382	FJGI0080*
6887	궿	AF4F	C383	FJGJ0080*
6888	궽	AF50	C384	FJGK0080*
6889	궽	AF51	C385	FJGL0080*
6890	궽	AF52	C386	FJGM0080*
6891	궽	AF53	C387	FJGN0080*
6892	궽	AF54	C388	FJGO0080*
6893	궽	AF55	C389	FJGP0080*
6894	궽	AF56	C38A	FJGQ0080*
6895	궽	AF57	C38B	FJGR0080*
6896	궽	AF58	C38C	FJGS0080*



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 24 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6897	췁	AF59	C38D	FJGT0080*
6898	췁	AF5A	C38E	FJGU0080*
6899	췁	AF61	C38F	FJGV0080*
6900	췁	AF62	C390	FJGW0080*
6901	췁	AF63	C391	FJGX0080*
6902	췁	AF64	C393	FJGZ0080*
6903	췁	AF65	C394	FJH00080*
6904	췁	AF66	C395	FJH10080*
6905	췁	AF67	C396	FJH20080*
6906	췁	AF68	C397	FJH30080*
6907	췁	AF69	C398	FJH40080*
6908	췁	AF6A	C399	FJH50080*
6909	췁	AF6B	C39A	FJH60080*
6910	췁	AF6C	C39B	FJH70080*
6911	췁	AF6D	C39C	FJH80080*
6912	췁	AF6E	C39D	FJH90080*
6913	췁	AF6F	C3A3	FJHF0080*
6914	췁	AF70	C3A4	FJHG0080*
6915	췁	AF71	C3A6	FJHI0080*
6916	췁	AF72	C3A7	FJHJ0080*
6917	췁	AF73	C3AB	FJHN0080*
6918	췁	AF74	C3AC	FJHO0080*
6919	췁	AF75	C3AD	FJHP0080*
6920	췁	AF76	C3AE	FJHQ0080*
6921	췁	AF77	C3AF	FJHR0080*
6922	췁	AF78	C3B0	FJHS0080*

Table 24 (Page 24 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
6923	췁	AF79	C3B4	FJHW0080*
6924	췁	AF7A	C3B6	FJHY0080*
6925	췁	AF81	C3B8	FJI00080*
6926	췁	AF82	C3B9	FJI10080*
6927	췁	AF83	C3BA	FJI20080*
6928	췁	AF84	C3BB	FJI30080*
6929	췁	AF85	C3BC	FJI40080*
6930	췁	AF86	C3BD	FJI50080*
6931	췁	AF87	C463	FJKZ0080*
6932	췁	AF88	C464	FJL00080*
6933	췁	AF89	C466	FJL20080*
6934	췁	AF8A	C467	FJL30080*
6935	췁	AF8B	C468	FJL40080
6936	췁	AF8C	C46A	FJL60080*
6937	췁	AF8D	C46B	FJL70080*
6938	췁	AF8E	C46C	FJL80080*
6939	췁	AF8F	C46D	FJL90080*
6940	췁	AF90	C46E	FJLA0080*
6941	췁	AF91	C46F	FJLB0080*
6942	췁	AF92	C470	FJLC0080*
6943	췁	AF93	C474	FJLG0080*
6944	췁	AF94	C476	FJLI0080*
6945	췁	AF95	C478	FJLK0080*
6946	췁	AF96	C479	FJLL0080*
6947	췁	AF97	C47A	FJLM0080*
6948	췁	AF98	C47B	FJLN0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
6949	칸	AF99	C47C	FJLO0080*
6950	강	AF9A	C47D	FJLP0080*
6951	깨	AF9B	C483	FJLV0080*
6952	켄	AF9C	C484	FJLW0080*
6953	켄	AF9D	C486	FJLY0080*
6954	켄	AF9E	C487	FJLZ0080*
6955	켄	AF9F	C488	FJM00080
6956	깨	AFA0	C48A	FJM20080*
6957	켄	B041	C48B	FJM30080*
6958	켄	B042	C48C	FJM40080*
6959	켄	B043	C48D	FJM50080*
6960	켄	B044	C48E	FJM60080*
6961	켄	B045	C48F	FJM70080*
6962	켄	B046	C490	FJM80080*
6963	켄	B047	C494	FJMC0080*
6964	켓	B048	C498	FJMG0080*
6965	켓	B049	C499	FJMH0080*
6966	깨	B04A	C49A	FJMI0080*
6967	켄	B04B	C49B	FJMJ0080
6968	켄	B04C	C49C	FJMK0080*
6969	켄	B04D	C49D	FJML0080*
6970	꺠	B04E	C4A3	FJMR0080*
6971	꺠	B04F	C4A4	FJMS0080*
6972	칸	B050	C4A5	FJMT0080*
6973	꺠	B051	C4A6	FJMU0080*
6974	꺠	B052	C4A7	FJMV0080*

Line Number	Graphic	PC Code	Host Code	GCGID
6975	꺠	B053	C4A8	FJMW0080*
6976	꺠	B054	C4A9	FJMX0080*
6977	꺠	B055	C4AA	FJMY0080*
6978	꺠	B056	C4AB	FJMZ0080*
6979	꺠	B057	C4AC	FJN00080*
6980	꺠	B058	C4AD	FJN10080*
6981	꺠	B059	C4AE	FJN20080*
6982	꺠	B05A	C4AF	FJN30080*
6983	꺠	B061	C4B0	FJN40080*
6984	꺠	B062	C4B1	FJN50080*
6985	꺠	B063	C4B3	FJN70080*
6986	꺠	B064	C4B4	FJN80080*
6987	꺠	B065	C4B5	FJN90080*
6988	꺠	B066	C4B6	FJNA0080*
6989	꺠	B067	C4B8	FJNC0080*
6990	꺠	B068	C4B9	FJND0080*
6991	꺠	B069	C4BA	FJNE0080*
6992	꺠	B06A	C4BB	FJNF0080*
6993	꺠	B06B	C4BC	FJNG0080*
6994	꺠	B06C	C4BD	FJNH0080*
6995	꺠	B06D	C4C1	FJNL0080
6996	꺠	B06E	C4C2	FJNM0080*
6997	꺠	B06F	C4C3	FJNN0080*
6998	꺠	B070	C4C4	FJNO0080*
6999	꺠	B071	C4C5	FJNP0080*
7000	꺠	B072	C4C6	FJNQ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7001	꺄	B073	C4C7	FJNR0080*
7002	꺅	B074	C4C8	FJNS0080*
7003	꺆	B075	C4C9	FJNT0080*
7004	꺇	B076	C4CA	FJNU0080*
7005	꺈	B077	C4CB	FJNV0080*
7006	꺉	B078	C4CC	FJNW0080*
7007	꺊	B079	C4CD	FJNX0080*
7008	꺋	B07A	C4CE	FJNY0080*
7009	꺌	B081	C4CF	FJNZ0080*
7010	꺍	B082	C4D0	FJO00080*
7011	꺎	B083	C4D1	FJO10080*
7012	꺏	B084	C4D3	FJO30080*
7013	꺐	B085	C4D4	FJO40080*
7014	꺑	B086	C4D5	FJO50080*
7015	꺒	B087	C4D6	FJO60080*
7016	꺓	B088	C4D7	FJO70080*
7017	꺔	B089	C4D8	FJO80080*
7018	꺕	B08A	C4D9	FJO90080*
7019	꺖	B08B	C4DA	FJOA0080*
7020	꺗	B08C	C4DB	FJOB0080*
7021	꺘	B08D	C4DC	FJOC0080*
7022	꺙	B08E	C4DD	FJOD0080*
7023	꺚	B08F	C4E3	FJOJ0080*
7024	꺛	B090	C4E4	FJOK0080*
7025	꺜	B091	C4E6	FJOM0080*
7026	꺝	B092	C4E7	FJON0080*

Table 24 (Page 26 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7027	꺞	B093	C4EA	FJOQ0080*
7028	꺟	B094	C4EB	FJOR0080*
7029	꺠	B095	C4EC	FJOS0080*
7030	꺡	B096	C4ED	FJOT0080*
7031	꺢	B097	C4EE	FJOU0080*
7032	꺣	B098	C4EF	FJOV0080*
7033	꺤	B099	C4F0	FJOW0080*
7034	꺥	B09A	C4F4	FJP00080*
7035	꺦	B09B	C4F8	FJP40080*
7036	꺧	B09C	C4F9	FJP50080*
7037	꺨	B09D	C4FA	FJP60080*
7038	꺩	B09E	C4FB	FJP70080
7039	꺪	B09F	C4FC	FJP80080*
7040	꺫	B0A0	C4FD	FJP90080*
7041	가	B0A1	8861	FAOX0080
7042	각	B0A2	8862	FAOY0080
7043	간	B0A3	8865	FAP10080
7044	گان	B0A4	8868	FAP40080
7045	갈	B0A5	8869	FAP50080
7046	값	B0A6	886A	FAP60080
7047	감	B0A7	886B	FAP70080
7048	갸	B0A8	8871	FAPD0080
7049	갹	B0A9	8873	FAPF0080
7050	갺	B0AA	8874	FAPG0080
7051	갻	B0AB	8875	FAPH0080
7052	갼	B0AC	8876	FAPI0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
7053	강	B0AD	8877	FAPJ0080
7054	갇	B0AE	8878	FAPK0080
7055	갇	B0AF	8879	FAPL0080
7056	갈	B0B0	887B	FAPN0080
7057	갈	B0B1	887C	FAPO0080
7058	강	B0B2	887D	FAPP0080
7059	개	B0B3	8881	FAPT0080
7060	객	B0B4	8882	FAPU0080
7061	건	B0B5	8885	FAPX0080
7062	겉	B0B6	8889	FAQ10080
7063	갸	B0B7	8891	FAQ90080
7064	갸	B0B8	8893	FAQB0080
7065	갸	B0B9	8895	FAQD0080
7066	갸	B0BA	8896	FAQE0080
7067	갸	B0BB	8897	FAQF0080
7068	갸	B0BC	88A1	FAQP0080
7069	갸	B0BD	88A2	FAQQ0080
7070	갸	B0BE	88A5	FAQT0080
7071	갈	B0BF	88A9	FAQX0080
7072	갇	B0C0	88B5	FAR90080
7073	강	B0C1	88B7	FARB0080
7074	개	B0C2	88C1	FARL0080
7075	견	B0C3	88C5	FARP0080
7076	겉	B0C4	88C9	FART0080
7077	거	B0C5	88E1	FASH0080
7078	격	B0C6	88E2	FASI0080

Line Number	Graphic	PC Code	Host Code	GCGID
7079	건	B0C7	88E5	FASL0080
7080	겉	B0C8	88E8	FASO0080
7081	겉	B0C9	88E9	FASP0080
7082	겉	B0CA	88EB	FASR0080
7083	겉	B0CB	88F1	FASX0080
7084	겉	B0CC	88F3	FASZ0080
7085	것	B0CD	88F5	FAT10080
7086	것	B0CE	88F6	FAT20080
7087	경	B0CF	88F7	FAT30080
7088	겉	B0D0	88F8	FAT40080
7089	겉	B0D1	88FB	FAT70080
7090	겉	B0D2	88FC	FAT80080
7091	겉	B0D3	88FD	FAT90080
7092	계	B0D4	8941	FATD0080
7093	견	B0D5	8945	FATH0080
7094	겉	B0D6	8949	FATL0080
7095	겉	B0D7	8951	FATT0080
7096	겉	B0D8	8953	FATV0080
7097	갸	B0D9	8955	FATX0080
7098	갸	B0DA	8956	FATY0080
7099	갸	B0DB	8957	FATZ0080
7100	겨	B0DC	8961	FAU90080
7101	격	B0DD	8962	FAUA0080
7102	겨	B0DE	8963	FAUB0080
7103	견	B0DF	8965	FAUD0080
7104	겉	B0E0	8968	FAUG0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7105	결	B0E1	8969	FAUH0080
7106	겸	B0E2	8971	FAUP0080
7107	첩	B0E3	8973	FAUR0080
7108	껏	B0E4	8975	FAUT0080
7109	졌	B0E5	8976	FAUU0080
7110	경	B0E6	8977	FAUV0080
7111	결	B0E7	897B	FAUZ0080
7112	계	B0E8	8981	FAV50080
7113	겐	B0E9	8985	FAV90080
7114	겔	B0EA	8989	FAVD0080
7115	겍	B0EB	8993	FAVN0080
7116	겏	B0EC	8995	FAVP0080
7117	고	B0ED	89A1	FAW10080
7118	곡	B0EE	89A2	FAW20080
7119	곤	B0EF	89A5	FAW50080
7120	곰	B0F0	89A8	FAW80080
7121	곧	B0F1	89A9	FAW90080
7122	굶	B0F2	89AB	FAWB0080
7123	굶	B0F3	89AD	FAWD0080
7124	굶	B0F4	89B0	FAWG0080
7125	곰	B0F5	89B1	FAWH0080
7126	곶	B0F6	89B3	FAWJ0080
7127	곶	B0F7	89B5	FAWL0080
7128	공	B0F8	89B7	FAWN0080
7129	곶	B0F9	89B8	FAWO0080
7130	과	B0FA	89C1	FAWX0080

Table 24 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7131	과	B0FB	89C2	FAWY0080
7132	관	B0FC	89C5	FAX10080
7133	괄	B0FD	89C9	FAX50080
7134	괄	B0FE	89CB	FAX70080
7135	꺠	B141	C543	FJPF0080*
7136	꺡	B142	C544	FJPG0080*
7137	꺢	B143	C546	FJPI0080*
7138	꺣	B144	C547	FJPJ0080*
7139	꺤	B145	C548	FJPK0080*
7140	꺥	B146	C54A	FJPM0080*
7141	꺦	B147	C54B	FJPN0080*
7142	꺧	B148	C54C	FJPO0080*
7143	꺨	B149	C54D	FJPP0080*
7144	꺩	B14A	C54E	FJPQ0080*
7145	꺪	B14B	C54F	FJPR0080*
7146	꺫	B14C	C550	FJPS0080*
7147	꺬	B14D	C554	FJPW0080*
7148	꺭	B14E	C556	FJPY0080*
7149	꺮	B14F	C558	FJQ00080*
7150	꺯	B150	C559	FJQ10080*
7151	꺰	B151	C55A	FJQ20080*
7152	꺱	B152	C55B	FJQ30080
7153	꺲	B153	C55C	FJQ40080*
7154	꺳	B154	C55D	FJQ50080*
7155	꺴	B155	C562	FJQA0080*
7156	꺵	B156	C563	FJQB0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 29 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
7157	꺄	B157	C564	FJQC0080*
7158	꺅	B158	C566	FJQE0080*
7159	꺆	B159	C567	FJQF0080*
7160	꺇	B15A	C568	FJQG0080*
7161	꺈	B161	C56A	FJQI0080*
7162	꺉	B162	C56B	FJQJ0080*
7163	꺊	B163	C56C	FJQK0080*
7164	꺋	B164	C56D	FJQL0080*
7165	꺌	B165	C56E	FJQM0080*
7166	꺍	B166	C56F	FJQN0080*
7167	꺎	B167	C570	FJQO0080*
7168	꺏	B168	C574	FJQS0080*
7169	꺑	B169	C578	FJQW0080*
7170	꺒	B16A	C579	FJQX0080*
7171	꺓	B16B	C57A	FJQY0080*
7172	꺔	B16C	C57B	FJQZ0080*
7173	꺕	B16D	C57C	FJR00080*
7174	꺖	B16E	C57D	FJR10080*
7175	꺗	B16F	C582	FJR60080*
7176	꺘	B170	C583	FJR70080*
7177	꺙	B171	C584	FJR80080*
7178	꺚	B172	C585	FJR90080*
7179	꺛	B173	C586	FJRA0080*
7180	꺜	B174	C587	FJRB0080*
7181	꺝	B175	C588	FJRC0080*
7182	꺞	B176	C589	FJRD0080*

Table 24 (Page 29 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
7183	꺟	B177	C58A	FJRE0080*
7184	꺠	B178	C58B	FJRF0080*
7185	꺡	B179	C58C	FJRG0080*
7186	꺢	B17A	C58D	FJRH0080*
7187	꺣	B181	C58E	FJRI0080*
7188	꺤	B182	C58F	FJRJ0080*
7189	꺥	B183	C590	FJRK0080*
7190	꺦	B184	C591	FJRL0080*
7191	꺧	B185	C593	FJRN0080*
7192	꺨	B186	C594	FJRO0080*
7193	꺩	B187	C595	FJRP0080*
7194	꺪	B188	C596	FJRQ0080*
7195	꺫	B189	C597	FJRR0080*
7196	꺬	B18A	C598	FJRS0080*
7197	꺭	B18B	C599	FJRT0080*
7198	꺮	B18C	C59A	FJRU0080*
7199	꺯	B18D	C59B	FJRV0080*
7200	꺰	B18E	C59C	FJRW0080*
7201	꺱	B18F	C59D	FJRX0080*
7202	꺲	B190	C5A3	FJS30080*
7203	꺳	B191	C5A4	FJS40080*
7204	꺴	B192	C5A6	FJS60080*
7205	꺵	B193	C5A7	FJS70080*
7206	꺶	B194	C5A8	FJS80080*
7207	꺷	B195	C5AA	FJSA0080*
7208	꺸	B196	C5AB	FJSB0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 30 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7209	궘	B197	C5AC	FJSC0080*
7210	궙	B198	C5AD	FJSD0080*
7211	궚	B199	C5AE	FJSE0080*
7212	궛	B19A	C5AF	FJSF0080*
7213	궜	B19B	C5B0	FJSG0080*
7214	궝	B19C	C5B4	FJSK0080*
7215	궞	B19D	C5B6	FJSM0080*
7216	궟	B19E	C5B8	FJSO0080*
7217	궠	B19F	C5B9	FJSP0080*
7218	궡	B1A0	C5BA	FJSQ0080*
7219	궢	B1A1	89D1	FAXD0080
7220	궣	B1A2	89D3	FAXF0080
7221	궤	B1A3	89D5	FAXH0080
7222	궥	B1A4	89D7	FAXJ0080
7223	궦	B1A5	89E1	FAXT0080
7224	궧	B1A6	89E5	FAXX0080
7225	궨	B1A7	89E9	FAY10080
7226	궩	B1A8	89F3	FAYB0080
7227	궪	B1A9	89F6	FAYE0080
7228	궫	B1AA	89F7	FAYF0080
7229	궬	B1AB	8A41	FAYP0080
7230	궭	B1AC	8A42	FAYQ0080
7231	궮	B1AD	8A45	FAYT0080
7232	궯	B1AE	8A49	FAYX0080
7233	궰	B1AF	8A51	FAZ50080
7234	궱	B1B0	8A53	FAZ70080

Table 24 (Page 30 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7235	궲	B1B1	8A55	FAZ90080
7236	궳	B1B2	8A57	FAZB0080
7237	궴	B1B3	8A61	FAZL0080
7238	궵	B1B4	8A65	FAZP0080
7239	궶	B1B5	8A69	FAZT0080
7240	궷	B1B6	8A73	FB030080
7241	궸	B1B7	8A75	FB050080
7242	궹	B1B8	8A81	FB0H0080
7243	궺	B1B9	8A82	FB0I0080
7244	궻	B1BA	8A85	FB0L0080
7245	궼	B1BB	8A88	FB0O0080
7246	궽	B1BC	8A89	FB0P0080
7247	궾	B1BD	8A8A	FB0Q0080
7248	궿	B1BE	8A8B	FB0R0080
7249	귀	B1BF	8A90	FB0W0080
7250	귁	B1C0	8A91	FB0X0080
7251	귂	B1C1	8A93	FB0Z0080
7252	귃	B1C2	8A95	FB110080
7253	귄	B1C3	8A97	FB130080
7254	귅	B1C4	8A98	FB140080
7255	귆	B1C5	8AA1	FB1D0080
7256	귇	B1C6	8AA2	FB1E0080
7257	귈	B1C7	8AA5	FB1H0080
7258	귉	B1C8	8AA9	FB1L0080
7259	귊	B1C9	8AB6	FB1Y0080
7260	귋	B1CA	8AB7	FB1Z0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
7261	꺀	B1CB	8AC1	FB290080
7262	꺁	B1CC	8AD5	FB2T0080
7263	꺂	B1CD	8AE1	FB350080
7264	꺃	B1CE	8AE2	FB360080
7265	꺄	B1CF	8AE5	FB390080
7266	꺅	B1D0	8AE9	FB3D0080
7267	꺆	B1D1	8AF1	FB3L0080
7268	꺇	B1D2	8AF3	FB3N0080
7269	꺈	B1D3	8AF5	FB3P0080
7270	꺉	B1D4	8B41	FB410080
7271	꺊	B1D5	8B45	FB450080
7272	꺋	B1D6	8B49	FB490080
7273	꺌	B1D7	8B61	FB4X0080
7274	꺍	B1D8	8B62	FB4Y0080
7275	꺎	B1D9	8B65	FB510080
7276	꺏	B1DA	8B68	FB540080
7277	꺐	B1DB	8B69	FB550080
7278	꺑	B1DC	8B6A	FB560080
7279	꺒	B1DD	8B71	FB5D0080
7280	꺓	B1DE	8B73	FB5F0080
7281	꺔	B1DF	8B75	FB5H0080
7282	꺕	B1E0	8B77	FB5J0080
7283	꺖	B1E1	8B81	FB5T0080
7284	꺗	B1E2	8BA1	FB6P0080
7285	꺘	B1E3	8BA2	FB6Q0080
7286	꺙	B1E4	8BA5	FB6T0080

Line Number	Graphic	PC Code	Host Code	GCGID
7287	꺚	B1E5	8BA8	FB6W0080
7288	꺛	B1E6	8BA9	FB6X0080
7289	꺜	B1E7	8BAB	FB6Z0080
7290	꺝	B1E8	8BB1	FB750080
7291	꺞	B1E9	8BB3	FB770080
7292	꺟	B1EA	8BB5	FB790080
7293	꺠	B1EB	8BB7	FB7B0080
7294	꺡	B1EC	8BB8	FB7C0080
7295	꺢	B1ED	8BBC	FB7G0080
7296	꺣	B1EE	8C61	FBA90080
7297	꺤	B1EF	8C62	FBAA0080
7298	꺥	B1F0	8C63	FBAB0080
7299	꺦	B1F1	8C65	FBAD0080
7300	꺧	B1F2	8C69	FBAH0080
7301	꺨	B1F3	8C6B	FBAJ0080
7302	꺩	B1F4	8C71	FBAP0080
7303	꺪	B1F5	8C73	FBAR0080
7304	꺫	B1F6	8C75	FBAT0080
7305	꺬	B1F7	8C76	FBAU0080
7306	꺭	B1F8	8C77	FBAV0080
7307	꺮	B1F9	8C7B	FBAZ0080
7308	꺯	B1FA	8C81	FBB50080
7309	꺰	B1FB	8C82	FBB60080
7310	꺱	B1FC	8C85	FBB90080
7311	꺲	B1FD	8C89	FBBD0080
7312	꺳	B1FE	8C91	FBBL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
7313	콜	B241	C5BB	FJSR0080*
7314	쿨	B242	C5BC	FJSS0080*
7315	콩	B243	C5BD	FJST0080*
7316	콰	B244	C5C3	FJSZ0080*
7317	콰	B245	C5C4	FJT00080*
7318	콰	B246	C5C6	FJT20080*
7319	콰	B247	C5C7	FJT30080*
7320	콰	B248	C5C8	FJT40080*
7321	콰	B249	C5CA	FJT60080*
7322	콰	B24A	C5CB	FJT70080*
7323	콰	B24B	C5CC	FJT80080*
7324	콰	B24C	C5CD	FJT90080*
7325	콰	B24D	C5CE	FJTA0080*
7326	콰	B24E	C5CF	FJTB0080*
7327	콰	B24F	C5D0	FJTC0080*
7328	콰	B250	C5D3	FJTF0080*
7329	콰	B251	C5D4	FJTG0080*
7330	콰	B252	C5D5	FJTH0080*
7331	콰	B253	C5D6	FJTI0080*
7332	콰	B254	C5D8	FJTK0080*
7333	콰	B255	C5D9	FJTL0080*
7334	콰	B256	C5DA	FJTM0080*
7335	콰	B257	C5DB	FJTN0080*
7336	콰	B258	C5DC	FJTO0080*
7337	콰	B259	C5DD	FJTP0080*
7338	콰	B25A	C5E2	FJTU0080

Line Number	Graphic	PC Code	Host Code	GCGID
7339	콰	B261	C5E3	FJTV0080*
7340	콰	B262	C5E4	FJTW0080*
7341	콰	B263	C5E5	FJTX0080
7342	콰	B264	C5E6	FJTY0080*
7343	콰	B265	C5E7	FJTZ0080*
7344	콰	B266	C5E8	FJU00080*
7345	콰	B267	C5E9	FJU10080*
7346	콰	B268	C5EA	FJU20080*
7347	콰	B269	C5EB	FJU30080*
7348	콰	B26A	C5EC	FJU40080*
7349	콰	B26B	C5ED	FJU50080*
7350	콰	B26C	C5EE	FJU60080*
7351	콰	B26D	C5EF	FJU70080*
7352	콰	B26E	C5F0	FJU80080*
7353	콰	B26F	C5F1	FJU90080*
7354	콰	B270	C5F3	FJUB0080*
7355	콰	B271	C5F4	FJUC0080*
7356	콰	B272	C5F5	FJUD0080
7357	콰	B273	C5F6	FJUE0080*
7358	콰	B274	C5F8	FJUG0080*
7359	콰	B275	C5F9	FJUH0080*
7360	콰	B276	C5FA	FJUI0080*
7361	콰	B277	C5FB	FJUJ0080*
7362	콰	B278	C5FC	FJUK0080*
7363	콰	B279	C5FD	FJUL0080*
7364	콰	B27A	C642	FJUQ0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 33 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
7365	뤼	B281	C643	FJUR0080*
7366	뤽	B282	C644	FJUS0080*
7367	뤼	B283	C645	FJUT0080
7368	뤼	B284	C646	FJUU0080*
7369	뤼	B285	C647	FJUV0080*
7370	뤼	B286	C648	FJUW0080*
7371	뤼	B287	C64A	FJUY0080*
7372	뤼	B288	C64B	FJUZ0080*
7373	뤼	B289	C64C	FJV00080*
7374	뤼	B28A	C64D	FJV10080*
7375	뤼	B28B	C64E	FJV20080*
7376	뤼	B28C	C64F	FJV30080*
7377	뤼	B28D	C650	FJV40080*
7378	뤼	B28E	C651	FJV50080*
7379	뤼	B28F	C653	FJV70080*
7380	뤼	B290	C654	FJV80080*
7381	뤼	B291	C655	FJV90080*
7382	뤼	B292	C656	FJVA0080*
7383	뤼	B293	C657	FJVB0080
7384	뤼	B294	C658	FJVC0080*
7385	뤼	B295	C659	FJVD0080*
7386	뤼	B296	C65A	FJVE0080*
7387	뤼	B297	C65B	FJVF0080*
7388	뤼	B298	C65C	FJVG0080*
7389	뤼	B299	C65D	FJVH0080*
7390	뤼	B29A	C662	FJVM0080*

Table 24 (Page 33 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
7391	뤼	B29B	C663	FJVN0080*
7392	뤼	B29C	C664	FJVO0080*
7393	뤼	B29D	C665	FJVP0080*
7394	뤼	B29E	C666	FJVQ0080*
7395	뤼	B29F	C667	FJVR0080*
7396	뤼	B2A0	C668	FJVS0080*
7397	뤼	B2A1	8C93	FBBN0080
7398	뤼	B2A2	8C95	FBBP0080
7399	뤼	B2A3	8C96	FBBQ0080
7400	뤼	B2A4	8C97	FBBR0080
7401	뤼	B2A5	8CA1	FBC10080
7402	뤼	B2A6	8CA2	FBC20080
7403	뤼	B2A7	8CA9	FBC90080
7404	뤼	B2A8	8CE1	FBDT0080
7405	뤼	B2A9	8CE2	FBDU0080
7406	뤼	B2AA	8CE3	FBDV0080
7407	뤼	B2AB	8CE5	FBDX0080
7408	뤼	B2AC	8CE9	FBE10080
7409	뤼	B2AD	8CF1	FBE90080
7410	뤼	B2AE	8CF3	FBEB0080
7411	뤼	B2AF	8CF5	FBED0080
7412	뤼	B2B0	8CF6	FBEE0080
7413	뤼	B2B1	8CF7	FBEF0080
7414	뤼	B2B2	8D41	FBEP0080
7415	뤼	B2B3	8D42	FBEQ0080
7416	뤼	B2B4	8D45	FBET0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
7417	겪	B2B5	8D51	FBF50080
7418	겪	B2B6	8D55	FBF90080
7419	겪	B2B7	8D57	FBFB0080
7420	껴	B2B8	8D61	FBFL0080
7421	견	B2B9	8D65	FBFP0080
7422	결	B2BA	8D69	FBFT0080
7423	겪	B2BB	8D75	FBG50080
7424	겪	B2BC	8D76	FBG60080
7425	결	B2BD	8D7B	FBGB0080
7426	계	B2BE	8D81	FBGH0080
7427	꼬	B2BF	8DA1	FBHD0080
7428	꼭	B2C0	8DA2	FBHE0080
7429	꼰	B2C1	8DA5	FBHH0080
7430	꿍	B2C2	8DA7	FBHJ0080
7431	꼰	B2C3	8DA9	FBHL0080
7432	꿈	B2C4	8DB1	FBHT0080
7433	꿍	B2C5	8DB3	FBHV0080
7434	꽃	B2C6	8DB5	FBHX0080
7435	꿍	B2C7	8DB7	FBHZ0080
7436	꽃	B2C8	8DB8	FBI00080
7437	꽃	B2C9	8DB9	FBI10080
7438	파	B2CA	8DC1	FBI90080
7439	팍	B2CB	8DC2	FBIA0080
7440	팔	B2CC	8DC9	FBIH0080
7441	팠	B2CD	8DD6	FBIU0080
7442	팡	B2CE	8DD7	FBIV0080

Line Number	Graphic	PC Code	Host Code	GCGID
7443	꽤	B2CF	8DE1	FBJ50080
7444	꽤	B2D0	8DE2	FBJ60080
7445	꽤	B2D1	8DF7	FBJR0080
7446	피	B2D2	8E41	FBK10080
7447	핀	B2D3	8E45	FBK50080
7448	필	B2D4	8E49	FBK90080
7449	핍	B2D5	8E51	FBKH0080
7450	핍	B2D6	8E53	FBKJ0080
7451	핑	B2D7	8E57	FBKN0080
7452	표	B2D8	8E61	FBKX0080
7453	꾸	B2D9	8E81	FBLT0080
7454	죽	B2DA	8E82	FBLU0080
7455	꾼	B2DB	8E85	FBLX0080
7456	꿀	B2DC	8E89	FBM10080
7457	꿍	B2DD	8E90	FBM80080
7458	꿈	B2DE	8E91	FBM90080
7459	꿍	B2DF	8E93	FBMB0080
7460	꽃	B2E0	8E95	FBMD0080
7461	꿍	B2E1	8E97	FBMF0080
7462	꽃	B2E2	8E98	FBMG0080
7463	꿔	B2E3	8EA1	FBMP0080
7464	필	B2E4	8EA9	FBMX0080
7465	팠	B2E5	8EB6	FBNA0080
7466	핑	B2E6	8EB7	FBNB0080
7467	뀌	B2E7	8EC1	FBNL0080
7468	꽤	B2E8	8EC2	FBNM0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7469	퀀	B2E9	8EC5	FBNP0080
7470	퀆	B2EA	8EC9	FBNT0080
7471	퀇	B2EB	8ED1	FBO10080
7472	퀈	B2EC	8ED3	FBO30080
7473	퀉	B2ED	8ED6	FBO60080
7474	퀴	B2EE	8EE1	FBOH0080
7475	퀊	B2EF	8EE5	FBOL0080
7476	퀋	B2F0	8EE9	FBOP0080
7477	퀌	B2F1	8EF1	FBOX0080
7478	퀍	B2F2	8EF3	FBOZ0080
7479	큐	B2F3	8F41	FBPD0080
7480	쑀	B2F4	8F61	FBQ90080
7481	쑁	B2F5	8F62	FBQA0080
7482	쑂	B2F6	8F65	FBQD0080
7483	쑃	B2F7	8F67	FBQF0080
7484	쑄	B2F8	8F69	FBQH0080
7485	쑅	B2F9	8F6B	FBQJ0080
7486	쑆	B2FA	8F70	FBQO0080
7487	쑇	B2FB	8F71	FBQP0080
7488	쑈	B2FC	8F73	FBQR0080
7489	쑉	B2FD	8F75	FBQT0080
7490	쑊	B2FE	8F77	FBQV0080
7491	쑋	B341	C669	FJVT0080*
7492	쑌	B342	C66A	FJVU0080*
7493	쑍	B343	C66B	FJVV0080*
7494	쑎	B344	C66C	FJVW0080*

Table 24 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7495	쑏	B345	C66D	FJVX0080*
7496	쑐	B346	C66E	FJY0080*
7497	쑑	B347	C66F	FJVZ0080*
7498	쑒	B348	C670	FJW00080*
7499	쑓	B349	C671	FJW10080*
7500	쑔	B34A	C673	FJW30080*
7501	쑕	B34B	C674	FJW40080*
7502	쑖	B34C	C675	FJW50080*
7503	쑗	B34D	C676	FJW60080*
7504	쑘	B34E	C677	FJW70080*
7505	쑙	B34F	C678	FJW80080*
7506	쑚	B350	C679	FJW90080*
7507	쑛	B351	C67A	FJWA0080*
7508	쑜	B352	C67B	FJWB0080*
7509	쑝	B353	C67C	FJWC0080*
7510	쑞	B354	C67D	FJWD0080*
7511	쑟	B355	C683	FJWJ0080*
7512	쑠	B356	C684	FJWK0080*
7513	쑡	B357	C686	FJWM0080*
7514	쑢	B358	C687	FJWN0080*
7515	쑣	B359	C688	FJWO0080*
7516	쑤	B35A	C68A	FJWQ0080*
7517	쑥	B361	C68B	FJWR0080*
7518	쑦	B362	C68C	FJWS0080*
7519	쑧	B363	C68D	FJWT0080*
7520	쑨	B364	C68E	FJWU0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
7521	꺄	B365	C68F	FJWV0080*
7522	꺅	B366	C690	FJWW0080*
7523	꺆	B367	C694	FJX00080*
7524	꺇	B368	C696	FJX20080*
7525	꺈	B369	C698	FJX40080*
7526	꺉	B36A	C699	FJX50080*
7527	꺊	B36B	C69A	FJX60080*
7528	꺋	B36C	C69B	FJX70080*
7529	꺌	B36D	C69C	FJX80080*
7530	꺍	B36E	C69D	FJX90080*
7531	꺎	B36F	C6A2	FJXE0080*
7532	꺏	B370	C6A3	FJXF0080*
7533	꺑	B371	C6A4	FJXG0080*
7534	꺒	B372	C6A6	FJXI0080*
7535	꺓	B373	C6A7	FJXJ0080*
7536	꺔	B374	C6A8	FJXK0080*
7537	꺕	B375	C6AA	FJXM0080*
7538	꺖	B376	C6AB	FJXN0080*
7539	꺗	B377	C6AC	FJXO0080*
7540	꺘	B378	C6AD	FJXP0080*
7541	꺙	B379	C6AE	FJXQ0080*
7542	꺚	B37A	C6AF	FJXR0080*
7543	꺛	B381	C6B0	FJXS0080*
7544	꺜	B382	C6B1	FJXT0080*
7545	꺝	B383	C6B3	FJXV0080*
7546	꺞	B384	C6B4	FJXW0080*

Line Number	Graphic	PC Code	Host Code	GCGID
7547	꺟	B385	C6B5	FJXX0080*
7548	꺠	B386	C6B6	FJXY0080*
7549	꺡	B387	C6B8	FJY00080*
7550	꺢	B388	C6B9	FJY10080*
7551	꺣	B389	C6BA	FJY20080*
7552	꺤	B38A	C6BB	FJY30080*
7553	꺥	B38B	C6BC	FJY40080*
7554	꺦	B38C	C6BD	FJY50080*
7555	꺧	B38D	C6C2	FJYA0080*
7556	꺨	B38E	C6C3	FJYB0080*
7557	꺩	B38F	C6C4	FJYC0080*
7558	꺪	B390	C6C5	FJYD0080*
7559	꺫	B391	C6C6	FJYE0080*
7560	꺬	B392	C6C7	FJYF0080*
7561	꺭	B393	C6C8	FJYG0080*
7562	꺮	B394	C6C9	FJYH0080*
7563	꺯	B395	C6CA	FJYI0080*
7564	꺰	B396	C6CB	FJYJ0080*
7565	꺱	B397	C6CC	FJYK0080*
7566	꺲	B398	C6CD	FJYL0080*
7567	꺳	B399	C6CE	FJYM0080*
7568	꺴	B39A	C6CF	FJYN0080*
7569	꺵	B39B	C6D0	FJYO0080*
7570	꺶	B39C	C6D1	FJYP0080*
7571	꺷	B39D	C6D3	FJYR0080*
7572	꺸	B39E	C6D4	FJYS0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 24 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7573	켓	B39F	C6D5	FJYT0080*
7574	켰	B3A0	C6D6	FJYU0080*
7575	끝	B3A1	8F7B	FBQZ0080
7576	끼	B3A2	8FA1	FBS10080
7577	끼	B3A3	8FA2	FBS20080
7578	킨	B3A4	8FA5	FBS50080
7579	길	B3A5	8FA9	FBS90080
7580	김	B3A6	8FB1	FBSH0080
7581	깍	B3A7	8FB3	FBSJ0080
7582	깃	B3A8	8FB5	FBSL0080
7583	깅	B3A9	8FB7	FBSN0080
7584	나	B3AA	9061	FBVL0080
7585	낙	B3AB	9062	FBVM0080
7586	낙	B3AC	9063	FBVN0080
7587	난	B3AD	9065	FBVP0080
7588	날	B3AE	9068	FBVS0080
7589	날	B3AF	9069	FBVT0080
7590	남	B3B0	906A	FBVU0080
7591	남	B3B1	906B	FBVV0080
7592	남	B3B2	9071	FBW10080
7593	남	B3B3	9073	FBW30080
7594	낫	B3B4	9075	FBW50080
7595	낫	B3B5	9076	FBW60080
7596	냥	B3B6	9077	FBW70080
7597	낫	B3B7	9078	FBW80080
7598	낫	B3B8	9079	FBW90080

Table 24 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7599	날	B3B9	907B	FBWB0080
7600	냥	B3BA	907D	FBWD0080

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
7601	내	B3BB	9081	FBWH0080
7602	넉	B3BC	9082	FBWI0080
7603	넨	B3BD	9085	FBWL0080
7604	넺	B3BE	9089	FBWP0080
7605	넻	B3BF	9091	FBWX0080
7606	넼	B3C0	9093	FBWZ0080
7607	넽	B3C1	9095	FBX10080
7608	넾	B3C2	9096	FBX20080
7609	넿	B3C3	9097	FBX30080
7610	냐	B3C4	90A1	FBXD0080
7611	낙	B3C5	90A2	FBXE0080
7612	난	B3C6	90A5	FBXH0080
7613	날	B3C7	90A9	FBXL0080
7614	남	B3C8	90B1	FBXT0080
7615	냥	B3C9	90B7	FBXZ0080
7616	너	B3CA	90E1	FBZ50080
7617	넉	B3CB	90E2	FBZ60080
7618	넺	B3CC	90E4	FBZ80080
7619	넻	B3CD	90E5	FBZ90080
7620	넼	B3CE	90E9	FBZD0080
7621	넽	B3CF	90EB	FBZF0080
7622	넾	B3D0	90EC	FBZG0080
7623	넿	B3D1	90F1	FBZL0080
7624	냐	B3D2	90F3	FBZN0080
7625	낙	B3D3	90F5	FBZP0080
7626	난	B3D4	90F6	FBZQ0080

Line Number	Graphic	PC Code	Host Code	GCGID
7627	넱	B3D5	90F7	FBZR0080
7628	넺	B3D6	90FD	FBZX0080
7629	넻	B3D7	9141	FC010080
7630	넼	B3D8	9142	FC020080
7631	넽	B3D9	9145	FC050080
7632	넾	B3DA	9149	FC090080
7633	넿	B3DB	9151	FC0H0080
7634	냐	B3DC	9153	FC0J0080
7635	낙	B3DD	9155	FC0L0080
7636	난	B3DE	9156	FC0M0080
7637	날	B3DF	9157	FC0N0080
7638	남	B3E0	9161	FC0X0080
7639	냥	B3E1	9162	FC0Y0080
7640	너	B3E2	9165	FC110080
7641	넉	B3E3	9169	FC150080
7642	넺	B3E4	9171	FC1D0080
7643	넻	B3E5	9173	FC1F0080
7644	넼	B3E6	9176	FC1I0080
7645	넽	B3E7	9177	FC1J0080
7646	넾	B3E8	917A	FC1M0080
7647	넿	B3E9	9181	FC1T0080
7648	냐	B3EA	9185	FC1X0080
7649	낙	B3EB	91A1	FC2P0080
7650	난	B3EC	91A2	FC2Q0080
7651	날	B3ED	91A5	FC2T0080
7652	남	B3EE	91A9	FC2X0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 2 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7653	늪	B3EF	91AB	FC2Z0080
7654	늬	B3F0	91B1	FC350080
7655	늭	B3F1	91B3	FC370080
7656	늮	B3F2	91B5	FC390080
7657	늯	B3F3	91B7	FC3B0080
7658	늱	B3F4	91BC	FC3G0080
7659	늲	B3F5	91BD	FC3H0080
7660	늳	B3F6	91C1	FC3L0080
7661	늴	B3F7	91C5	FC3P0080
7662	늵	B3F8	91C9	FC3T0080
7663	늶	B3F9	91D6	FC460080
7664	늷	B3FA	9241	FC5D0080
7665	늸	B3FB	9245	FC5H0080
7666	늹	B3FC	9249	FC5L0080
7667	늺	B3FD	9251	FC5T0080
7668	늻	B3FE	9253	FC5V0080
7669	퀀	B441	C6D8	FJYW0080*
7670	퀁	B442	C6D9	FJYX0080*
7671	퀂	B443	C6DA	FJYY0080*
7672	퀃	B444	C6DB	FJYZ0080*
7673	퀄	B445	C6DC	FJZ00080*
7674	퀅	B446	C6DD	FJZ10080*
7675	퀆	B447	C6E3	FJZ70080*
7676	퀇	B448	C6E4	FJZ80080*
7677	퀈	B449	C6E6	FJZA0080*
7678	퀉	B44A	C6E7	FJZB0080*

Table 25 (Page 2 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7679	퀊	B44B	C6E8	FJZC0080*
7680	퀋	B44C	C6EA	FJZE0080*
7681	퀌	B44D	C6EB	FJZF0080*
7682	퀍	B44E	C6EC	FJZG0080*
7683	퀎	B44F	C6ED	FJZH0080*
7684	퀏	B450	C6EE	FJZI0080*
7685	퀐	B451	C6EF	FJZJ0080*
7686	퀑	B452	C6F0	FJZK0080*
7687	퀒	B453	C6F4	FJZO0080*
7688	퀓	B454	C6F6	FJZQ0080*
7689	퀔	B455	C6F8	FJZS0080*
7690	퀕	B456	C6F9	FJZT0080*
7691	퀖	B457	C6FA	FJZU0080*
7692	퀗	B458	C6FB	FJZV0080*
7693	퀘	B459	C6FC	FJZW0080*
7694	퀙	B45A	C6FD	FJZX0080*
7695	쿠	B461	C742	FK020080*
7696	큐	B462	C743	FK030080*
7697	쿠	B463	C744	FK040080*
7698	쿄	B464	C746	FK060080*
7699	쿅	B465	C747	FK070080*
7700	쿆	B466	C748	FK080080*
7701	쿇	B467	C74A	FK0A0080*
7702	쿈	B468	C74B	FK0B0080*
7703	쿉	B469	C74C	FK0C0080*
7704	쿊	B46A	C74D	FK0D0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7705	꺄	B46B	C74E	FK0E0080*
7706	꺅	B46C	C74F	FK0F0080*
7707	꺆	B46D	C750	FK0G0080*
7708	꺇	B46E	C753	FK0J0080*
7709	꺈	B46F	C754	FK0K0080*
7710	꺉	B470	C755	FK0L0080*
7711	꺊	B471	C756	FK0M0080*
7712	꺋	B472	C757	FK0N0080*
7713	꺌	B473	C758	FK0O0080*
7714	꺍	B474	C759	FK0P0080*
7715	꺎	B475	C75A	FK0Q0080*
7716	꺏	B476	C75B	FK0R0080*
7717	꺑	B477	C75C	FK0S0080*
7718	꺒	B478	C75D	FK0T0080*
7719	꺓	B479	C763	FK0Z0080*
7720	꺔	B47A	C764	FK100080*
7721	꺕	B481	C766	FK120080*
7722	꺖	B482	C767	FK130080*
7723	꺗	B483	C768	FK140080*
7724	꺘	B484	C76A	FK160080*
7725	꺙	B485	C76B	FK170080*
7726	꺚	B486	C76C	FK180080*
7727	꺛	B487	C76D	FK190080*
7728	꺜	B488	C76E	FK1A0080*
7729	꺝	B489	C76F	FK1B0080*
7730	꺞	B48A	C770	FK1C0080*

Table 25 (Page 3 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7731	꺟	B48B	C774	FK1G0080*
7732	꺠	B48C	C775	FK1H0080*
7733	꺡	B48D	C776	FK1I0080*
7734	꺢	B48E	C778	FK1K0080*
7735	꺣	B48F	C779	FK1L0080*
7736	꺤	B490	C77A	FK1M0080*
7737	꺥	B491	C77B	FK1N0080*
7738	꺦	B492	C77C	FK1O0080*
7739	꺧	B493	C77D	FK1P0080*
7740	꺨	B494	C781	FK1T0080
7741	꺩	B495	C782	FK1U0080*
7742	꺪	B496	C783	FK1V0080*
7743	꺫	B497	C784	FK1W0080*
7744	꺬	B498	C785	FK1X0080*
7745	꺭	B499	C786	FK1Y0080*
7746	꺮	B49A	C787	FK1Z0080*
7747	꺯	B49B	C788	FK200080*
7748	꺰	B49C	C789	FK210080*
7749	꺱	B49D	C78A	FK220080*
7750	꺲	B49E	C78B	FK230080*
7751	꺳	B49F	C78C	FK240080*
7752	꺴	B4A0	C78D	FK250080*
7753	꺵	B4A1	9255	FC5X0080
7754	꺶	B4A2	9261	FC690080
7755	꺷	B4A3	9262	FC6A0080
7756	꺸	B4A4	9265	FC6D0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7757	놀	B4A5	9269	FC6H0080
7758	놉	B4A6	9273	FC6R0080
7759	놏	B4A7	9275	FC6T0080
7760	놑	B4A8	9277	FC6V0080
7761	누	B4A9	9281	FC750080
7762	늑	B4AA	9282	FC760080
7763	눈	B4AB	9285	FC790080
7764	늘	B4AC	9288	FC7C0080
7765	늘	B4AD	9289	FC7D0080
7766	눔	B4AE	9291	FC7L0080
7767	늑	B4AF	9293	FC7N0080
7768	늑	B4B0	9295	FC7P0080
7769	눔	B4B1	9297	FC7R0080
7770	늑	B4B2	92A1	FC810080
7771	늑	B4B3	92B6	FC8M0080
7772	늑	B4B4	92C1	FC8X0080
7773	늑	B4B5	92E1	FC9T0080
7774	늑	B4B6	92E5	FC9X0080
7775	닐	B4B7	92E9	FCA10080
7776	늑	B4B8	92F1	FCA90080
7777	늑	B4B9	92F3	FCAB0080
7778	뉴	B4BA	9341	FCAP0080
7779	늑	B4BB	9342	FCAQ0080
7780	늘	B4BC	9349	FCAX0080
7781	눔	B4BD	9351	FCB50080
7782	눔	B4BE	9353	FCB70080

Table 25 (Page 4 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7783	냥	B4BF	9357	FCBB0080
7784	느	B4C0	9361	FCBL0080
7785	늑	B4C1	9362	FCBM0080
7786	느	B4C2	9365	FCBP0080
7787	늘	B4C3	9369	FCBT0080
7788	늑	B4C4	936A	FCBU0080
7789	늑	B4C5	936B	FCBV0080
7790	늑	B4C6	9371	FCC10080
7791	늑	B4C7	9373	FCC30080
7792	늑	B4C8	9375	FCC50080
7793	냥	B4C9	9377	FCC70080
7794	늑	B4CA	9378	FCC80080
7795	늑	B4CB	937C	FCCC0080
7796	늑	B4CC	9381	FCCH0080
7797	늑	B4CD	9385	FCCL0080
7798	닐	B4CE	9389	FCCP0080
7799	니	B4CF	93A1	FCDD0080
7800	늑	B4D0	93A2	FCDE0080
7801	늑	B4D1	93A5	FCDH0080
7802	닐	B4D2	93A9	FCDL0080
7803	늑	B4D3	93AB	FCDN0080
7804	늑	B4D4	93B1	FCDT0080
7805	늑	B4D5	93B3	FCDV0080
7806	늑	B4D6	93B5	FCDX0080
7807	닝	B4D7	93B7	FCDZ0080
7808	늑	B4D8	93BC	FCE40080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7809	다	B4D9	9461	FCGX0080
7810	닥	B4DA	9462	FCGY0080
7811	닭	B4DB	9463	FCGZ0080
7812	단	B4DC	9465	FCH10080
7813	달	B4DD	9468	FCH40080
7814	달	B4DE	9469	FCH50080
7815	닭	B4DF	946A	FCH60080
7816	닭	B4E0	946B	FCH70080
7817	닭	B4E1	946C	FCH80080
7818	닭	B4E2	9470	FCHC0080
7819	담	B4E3	9471	FCHD0080
7820	답	B4E4	9473	FCHF0080
7821	닷	B4E5	9475	FCHH0080
7822	닷	B4E6	9476	FCHI0080
7823	당	B4E7	9477	FCHJ0080
7824	닷	B4E8	9478	FCHK0080
7825	닷	B4E9	9479	FCHL0080
7826	당	B4EA	947D	FCHP0080
7827	대	B4EB	9481	FCHT0080
7828	दै	B4EC	9482	FCHU0080
7829	댄	B4ED	9485	FCHX0080
7830	दै	B4EE	9489	FCI10080
7831	दै	B4EF	9491	FCI90080
7832	दै	B4F0	9493	FCIB0080
7833	दै	B4F1	9495	FCID0080
7834	दै	B4F2	9496	FCIE0080

Table 25 (Page 5 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7835	दै	B4F3	9497	FCIF0080
7836	दै	B4F4	94A1	FCIP0080
7837	दै	B4F5	94E1	FCKH0080
7838	दै	B4F6	94E2	FCKI0080
7839	दै	B4F7	94E3	FCKJ0080
7840	दै	B4F8	94E5	FCKL0080
7841	दै	B4F9	94E8	FCKO0080
7842	दै	B4FA	94E9	FCKP0080
7843	दै	B4FB	94EB	FCKR0080
7844	दै	B4FC	94EC	FCKS0080
7845	दै	B4FD	94F1	FCKX0080
7846	दै	B4FE	94F3	FCKZ0080
7847	꺠	B541	C78E	FK260080*
7848	꺠	B542	C78F	FK270080*
7849	꺠	B543	C790	FK280080*
7850	꺠	B544	C791	FK290080*
7851	꺠	B545	C793	FK2B0080*
7852	꺠	B546	C794	FK2C0080*
7853	꺠	B547	C795	FK2D0080*
7854	꺠	B548	C796	FK2E0080*
7855	꺠	B549	C797	FK2F0080*
7856	꺠	B54A	C798	FK2G0080*
7857	꺠	B54B	C799	FK2H0080*
7858	꺠	B54C	C79A	FK2I0080*
7859	꺠	B54D	C79B	FK2J0080*
7860	꺠	B54E	C79C	FK2K0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7861	퀑	B54F	C79D	FK2L0080*
7862	퀴	B550	C7A3	FK2R0080*
7863	퀘	B551	C7A4	FK2S0080*
7864	퀙	B552	C7A6	FK2U0080*
7865	퀚	B553	C7A7	FK2V0080*
7866	퀛	B554	C7A8	FK2W0080*
7867	퀜	B555	C7AA	FK2Y0080*
7868	퀝	B556	C7AB	FK2Z0080*
7869	퀞	B557	C7AC	FK300080*
7870	퀟	B558	C7AD	FK310080*
7871	퀠	B559	C7AE	FK320080*
7872	퀡	B55A	C7AF	FK330080*
7873	퀢	B561	C7B0	FK340080*
7874	퀣	B562	C7B4	FK380080*
7875	퀤	B563	C7B6	FK3A0080*
7876	퀥	B564	C7B8	FK3C0080*
7877	퀦	B565	C7B9	FK3D0080*
7878	퀧	B566	C7BA	FK3E0080*
7879	퀨	B567	C7BB	FK3F0080*
7880	퀩	B568	C7BC	FK3G0080*
7881	퀪	B569	C7BD	FK3H0080*
7882	퓐	B56A	C863	FK6B0080*
7883	퓑	B56B	C864	FK6C0080*
7884	퓒	B56C	C866	FK6E0080*
7885	퓓	B56D	C867	FK6F0080*
7886	퓔	B56E	C868	FK6G0080*

Table 25 (Page 6 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7887	퓕	B56F	C86B	FK6J0080*
7888	퓖	B570	C86C	FK6K0080*
7889	퓗	B571	C86D	FK6L0080*
7890	퓘	B572	C86E	FK6M0080*
7891	퓙	B573	C86F	FK6N0080*
7892	퓚	B574	C870	FK6O0080*
7893	퓛	B575	C874	FK6S0080*
7894	퓜	B576	C878	FK6W0080*
7895	퓝	B577	C879	FK6X0080*
7896	퓞	B578	C87A	FK6Y0080*
7897	퓟	B579	C87B	FK6Z0080*
7898	퓠	B57A	C87C	FK700080*
7899	퓡	B581	C87D	FK710080*
7900	퓢	B582	C883	FK770080*
7901	퓣	B583	C884	FK780080*
7902	퓤	B584	C886	FK7A0080*
7903	퓥	B585	C887	FK7B0080*
7904	퓦	B586	C888	FK7C0080*
7905	퓧	B587	C88A	FK7E0080*
7906	퓨	B588	C88B	FK7F0080*
7907	퓩	B589	C88C	FK7G0080*
7908	퓪	B58A	C88D	FK7H0080*
7909	퓫	B58B	C88E	FK7I0080*
7910	퓬	B58C	C88F	FK7J0080*
7911	퓭	B58D	C890	FK7K0080*
7912	퓸	B58E	C894	FK7O0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7913	랏	B58F	C898	FK7S0080*
7914	랑	B590	C899	FK7T0080*
7915	랒	B591	C89A	FK7U0080*
7916	랓	B592	C89B	FK7V0080*
7917	랔	B593	C89C	FK7W0080*
7918	랕	B594	C89D	FK7X0080*
7919	랖	B595	C8A2	FK820080*
7920	랗	B596	C8A3	FK830080*
7921	래	B597	C8A4	FK840080*
7922	랙	B598	C8A5	FK850080*
7923	랚	B599	C8A6	FK860080*
7924	랛	B59A	C8A7	FK870080*
7925	랜	B59B	C8A8	FK880080*
7926	랝	B59C	C8A9	FK890080*
7927	랞	B59D	C8AA	FK8A0080*
7928	랟	B59E	C8AB	FK8B0080*
7929	랠	B59F	C8AC	FK8C0080*
7930	랡	B5A0	C8AD	FK8D0080*
7931	뎃	B5A1	94F5	FCL10080
7932	뎅	B5A2	94F7	FCL30080
7933	뎇	B5A3	94F9	FCL50080
7934	뎉	B5A4	94FC	FCL80080
7935	뎋	B5A5	9541	FCLD0080
7936	뎌	B5A6	9542	FCLE0080
7937	뎎	B5A7	9545	FCLH0080
7938	뎏	B5A8	9549	FCLL0080

Table 25 (Page 7 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7939	뎐	B5A9	9551	FCLT0080
7940	뎑	B5AA	9553	FCLV0080
7941	뎒	B5AB	9555	FCLX0080
7942	뎓	B5AC	9556	FCLY0080
7943	뎔	B5AD	9557	FCLZ0080
7944	뎕	B5AE	9561	FCM90080
7945	뎖	B5AF	9565	FCMD0080
7946	뎗	B5B0	9569	FCMH0080
7947	뎘	B5B1	9576	FCMU0080
7948	뎙	B5B2	9577	FCMV0080
7949	뎚	B5B3	9581	FCN50080
7950	뎛	B5B4	9585	FCN90080
7951	도	B5B5	95A1	FCO10080
7952	독	B5B6	95A2	FCO20080
7953	돈	B5B7	95A5	FCO50080
7954	돋	B5B8	95A8	FCO80080
7955	돌	B5B9	95A9	FCO90080
7956	둠	B5BA	95AB	FCOB0080
7957	둑	B5BB	95AD	FCOD0080
7958	둒	B5BC	95B1	FCOH0080
7959	둓	B5BD	95B3	FCOJ0080
7960	둔	B5BE	95B5	FCOL0080
7961	둥	B5BF	95B7	FCON0080
7962	둑	B5C0	95B9	FCOP0080
7963	돌	B5C1	95BB	FCOR0080
7964	뒀	B5C2	95C1	FCOX0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7965	판	B5C3	95C5	FCP10080
7966	팔	B5C4	95C9	FCP50080
7967	패	B5C5	95E1	FCPT0080
7968	팻	B5C6	95F6	FCQE0080
7969	피	B5C7	9641	FCQP0080
7970	핀	B5C8	9645	FCQT0080
7971	필	B5C9	9649	FCQX0080
7972	핍	B5CA	9651	FQR50080
7973	핇	B5CB	9653	FQR70080
7974	핏	B5CC	9655	FQR90080
7975	표	B5CD	9661	FCRL0080
7976	두	B5CE	9681	FCSH0080
7977	득	B5CF	9682	FCSI0080
7978	둔	B5D0	9685	FCSL0080
7979	둘	B5D1	9689	FCSP0080
7980	듬	B5D2	9691	FCSX0080
7981	듬	B5D3	9693	FCSZ0080
7982	듯	B5D4	9695	FCT10080
7983	등	B5D5	9697	FCT30080
7984	뒤	B5D6	96A1	FCTD0080
7985	뤼	B5D7	96B6	FCTY0080
7986	뤼	B5D8	96C1	FCU90080
7987	뤼	B5D9	96D7	FCUV0080
7988	뒤	B5DA	96E1	FCV50080
7989	뒸	B5DB	96E5	FCV90080
7990	뒸	B5DC	96E9	FCVD0080

Table 25 (Page 8 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
7991	뒸	B5DD	96F3	FCVN0080
7992	뤼	B5DE	96F5	FCVP0080
7993	뒸	B5DF	96F7	FCVR0080
7994	듀	B5E0	9741	FCW10080
7995	둔	B5E1	9745	FCW50080
7996	둘	B5E2	9749	FCW90080
7997	듬	B5E3	9751	FCWH0080
7998	등	B5E4	9757	FCWN0080
7999	드	B5E5	9761	FCWX0080
8000	득	B5E6	9762	FCWY0080
8001	든	B5E7	9765	FCX10080
8002	들	B5E8	9768	FCX40080
8003	들	B5E9	9769	FCX50080
8004	듬	B5EA	976B	FCX70080
8005	듬	B5EB	9771	FCXD0080
8006	듬	B5EC	9773	FCXF0080
8007	듯	B5ED	9775	FCXH0080
8008	등	B5EE	9777	FCXJ0080
8009	뒤	B5EF	9781	FCXT0080
8010	디	B5F0	97A1	FCYP0080
8011	덕	B5F1	97A2	FCYQ0080
8012	딘	B5F2	97A5	FCYT0080
8013	딘	B5F3	97A8	FCYW0080
8014	딜	B5F4	97A9	FCYX0080
8015	딤	B5F5	97B1	FCZ50080
8016	딤	B5F6	97B3	FCZ70080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8017	딛	B5F7	97B5	FCZ90080
8018	뒛	B5F8	97B6	FCZA0080
8019	딩	B5F9	97B7	FCZB0080
8020	딛	B5FA	97B8	FCZC0080
8021	따	B5FB	9861	FD290080
8022	딱	B5FC	9862	FD2A0080
8023	판	B5FD	9865	FD2D0080
8024	말	B5FE	9869	FD2H0080
8025	탈	B641	C8AE	FK8E0080*
8026	달	B642	C8AF	FK8F0080*
8027	랠	B643	C8B0	FK8G0080*
8028	탐	B644	C8B1	FK8H0080*
8029	답	B645	C8B3	FK8J0080*
8030	랠	B646	C8B4	FK8K0080*
8031	랠	B647	C8B5	FK8L0080*
8032	랠	B648	C8B6	FK8M0080*
8033	랠	B649	C8B8	FK8O0080*
8034	랠	B64A	C8B9	FK8P0080*
8035	랠	B64B	C8BA	FK8Q0080*
8036	랠	B64C	C8BB	FK8R0080*
8037	랠	B64D	C8BC	FK8S0080*
8038	랠	B64E	C8BD	FK8T0080*
8039	태	B64F	C8C1	FK8X0080
8040	택	B650	C8C2	FK8Y0080*
8041	택	B651	C8C3	FK8Z0080*
8042	택	B652	C8C4	FK900080*

Table 25 (Page 9 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8043	텐	B653	C8C5	FK910080*
8044	텐	B654	C8C6	FK920080*
8045	텐	B655	C8C7	FK930080*
8046	텐	B656	C8C8	FK940080*
8047	텐	B657	C8C9	FK950080*
8048	텐	B658	C8CA	FK960080*
8049	텐	B659	C8CB	FK970080*
8050	텐	B65A	C8CC	FK980080*
8051	텐	B661	C8CD	FK990080*
8052	텐	B662	C8CE	FK9A0080*
8053	텐	B663	C8CF	FK9B0080*
8054	텐	B664	C8D0	FK9C0080*
8055	텐	B665	C8D1	FK9D0080*
8056	텐	B666	C8D3	FK9F0080*
8057	텐	B667	C8D4	FK9G0080*
8058	텐	B668	C8D5	FK9H0080*
8059	텐	B669	C8D6	FK9I0080*
8060	텐	B66A	C8D7	FK9J0080*
8061	텐	B66B	C8D8	FK9K0080*
8062	텐	B66C	C8D9	FK9L0080*
8063	텐	B66D	C8DA	FK9M0080*
8064	텐	B66E	C8DB	FK9N0080*
8065	텐	B66F	C8DC	FK9O0080*
8066	텐	B670	C8DD	FK9P0080*
8067	텐	B671	C8E3	FK9V0080*
8068	텐	B672	C8E4	FK9W0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 10 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
8069	텃	B673	C8E6	FK9Y0080*
8070	텄	B674	C8E7	FK9Z0080*
8071	텅	B675	C8E8	FKA00080*
8072	텆	B676	C8EA	FKA20080*
8073	텇	B677	C8EC	FKA40080*
8074	텈	B678	C8ED	FKA50080*
8075	텉	B679	C8EE	FKA60080*
8076	텊	B67A	C8EF	FKA70080*
8077	텋	B681	C8F0	FKA80080*
8078	테	B682	C8F4	FKAC0080*
8079	텍	B683	C8F8	FKAG0080*
8080	텎	B684	C8F9	FKAH0080*
8081	텏	B685	C8FA	FKAI0080*
8082	텐	B686	C8FB	FKAJ0080*
8083	텑	B687	C8FC	FKAK0080*
8084	텒	B688	C8FD	FKAL0080*
8085	텓	B689	C943	FKAR0080*
8086	텔	B68A	C944	FKAS0080*
8087	텕	B68B	C946	FKAU0080*
8088	텖	B68C	C947	FKAV0080*
8089	텗	B68D	C948	FKAW0080*
8090	텘	B68E	C94A	FKAY0080*
8091	텙	B68F	C94B	FKAZ0080*
8092	텚	B690	C94C	FKB00080*
8093	텛	B691	C94D	FKB10080*
8094	템	B692	C94E	FKB20080*

Table 25 (Page 10 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
8095	텝	B693	C94F	FKB30080*
8096	텟	B694	C950	FKB40080*
8097	텠	B695	C954	FKB80080*
8098	텡	B696	C956	FKBA0080
8099	텢	B697	C958	FKBC0080*
8100	텣	B698	C959	FKBD0080*
8101	텤	B699	C95A	FKBE0080*
8102	텥	B69A	C95B	FKBF0080*
8103	텦	B69B	C95C	FKBG0080*
8104	텧	B69C	C95D	FKBH0080*
8105	텨	B69D	C962	FKBM0080
8106	텩	B69E	C963	FKBN0080*
8107	텪	B69F	C964	FKBO0080*
8108	텫	B6A0	C966	FKBQ0080*
8109	멤	B6A1	9871	FD2P0080
8110	맵	B6A2	9873	FD2R0080
8111	맛	B6A3	9875	FD2T0080
8112	맛	B6A4	9876	FD2U0080
8113	땅	B6A5	9877	FD2V0080
8114	땅	B6A6	987D	FD310080
8115	때	B6A7	9881	FD350080
8116	맥	B6A8	9882	FD360080
8117	맨	B6A9	9885	FD390080
8118	멜	B6AA	9889	FD3D0080
8119	멤	B6AB	9891	FD3L0080
8120	맵	B6AC	9893	FD3N0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8121	땃	B6AD	9895	FD3P0080
8122	땄	B6AE	9896	FD3Q0080
8123	땅	B6AF	9897	FD3R0080
8124	땆	B6B0	98E1	FD5T0080
8125	땇	B6B1	98E2	FD5U0080
8126	땈	B6B2	98E5	FD5X0080
8127	땉	B6B3	98E9	FD610080
8128	땊	B6B4	98EB	FD630080
8129	땋	B6B5	98EC	FD640080
8130	때	B6B6	98F1	FD690080
8131	땍	B6B7	98F3	FD6B0080
8132	땎	B6B8	98F5	FD6D0080
8133	땏	B6B9	98F6	FD6E0080
8134	땑	B6BA	98F7	FD6F0080
8135	땒	B6BB	98FD	FD6L0080
8136	땓	B6BC	9941	FD6P0080
8137	땔	B6BD	9942	FD6Q0080
8138	땕	B6BE	9945	FD6T0080
8139	땖	B6BF	9949	FD6X0080
8140	땗	B6C0	9951	FD750080
8141	땘	B6C1	9953	FD770080
8142	땙	B6C2	9955	FD790080
8143	땚	B6C3	9956	FD7A0080
8144	땛	B6C4	9957	FD7B0080
8145	땜	B6C5	9961	FD7L0080
8146	땝	B6C6	9976	FD860080

Line Number	Graphic	PC Code	Host Code	GCGID
8147	땞	B6C7	99A1	FD9D0080
8148	땟	B6C8	99A2	FD9E0080
8149	땠	B6C9	99A5	FD9H0080
8150	땡	B6CA	99A9	FD9L0080
8151	땢	B6CB	99B7	FD9Z0080
8152	땣	B6CC	99C1	FDA90080
8153	땤	B6CD	99C9	FDAH0080
8154	땥	B6CE	99E1	FDB50080
8155	땦	B6CF	9A41	FDC10080
8156	땧	B6D0	9A45	FDC50080
8157	땨	B6D1	9A81	FDDT0080
8158	땩	B6D2	9A82	FDDU0080
8159	땪	B6D3	9A85	FDDX0080
8160	땫	B6D4	9A89	FDE10080
8161	땬	B6D5	9A90	FDE80080
8162	땭	B6D6	9A91	FDE90080
8163	땮	B6D7	9A97	FDEF0080
8164	땯	B6D8	9AC1	FDFL0080
8165	땰	B6D9	9AE1	FDGH0080
8166	땱	B6DA	9AE5	FDGL0080
8167	땲	B6DB	9AE9	FDGP0080
8168	땳	B6DC	9AF1	FDGX0080
8169	땴	B6DD	9AF3	FDGZ0080
8170	땵	B6DE	9AF7	FDH30080
8171	땶	B6DF	9B61	FDI90080
8172	땷	B6E0	9B62	FDIA0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 12 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8173	쁜	B6E1	9B65	FDID0080
8174	뜰	B6E2	9B68	FDIG0080
8175	뜰	B6E3	9B69	FDIH0080
8176	뚸	B6E4	9B71	FDIP0080
8177	뚸	B6E5	9B73	FDIR0080
8178	뚸	B6E6	9B75	FDIT0080
8179	띠	B6E7	9B81	FDJ50080
8180	뒸	B6E8	9B85	FDJ90080
8181	뒸	B6E9	9B89	FDJD0080
8182	뽨	B6EA	9B91	FDJL0080
8183	뽨	B6EB	9B93	FDJN0080
8184	띠	B6EC	9BA1	FDK10080
8185	뒸	B6ED	9BA5	FDK50080
8186	뒸	B6EE	9BA9	FDK90080
8187	뽨	B6EF	9BB1	FDKH0080
8188	뽨	B6F0	9BB3	FDKJ0080
8189	뽨	B6F1	9BB5	FDKL0080
8190	뽨	B6F2	9BB7	FDKN0080
8191	라	B6F3	9C61	FDNL0080
8192	락	B6F4	9C62	FDNM0080
8193	란	B6F5	9C65	FDNP0080
8194	랄	B6F6	9C69	FDNT0080
8195	람	B6F7	9C71	FDO10080
8196	랍	B6F8	9C73	FDO30080
8197	랏	B6F9	9C75	FDO50080
8198	랏	B6FA	9C76	FDO60080

Table 25 (Page 12 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8199	랑	B6FB	9C77	FDO70080
8200	랏	B6FC	9C78	FDO80080
8201	랏	B6FD	9C7C	FDOC0080
8202	랑	B6FE	9C7D	FDOD0080
8203	랏	B741	C967	FKBR0080*
8204	랏	B742	C968	FKBS0080*
8205	랏	B743	C969	FKBT0080*
8206	랏	B744	C96A	FKBU0080*
8207	랏	B745	C96B	FKBV0080*
8208	랏	B746	C96C	FKBW0080*
8209	랏	B747	C96D	FKBX0080*
8210	랏	B748	C96E	FKBY0080*
8211	랏	B749	C96F	FKBZ0080*
8212	랏	B74A	C970	FKC00080*
8213	랏	B74B	C971	FKC10080*
8214	랏	B74C	C973	FKC30080*
8215	랏	B74D	C974	FKC40080*
8216	랏	B74E	C975	FKC50080*
8217	랑	B74F	C977	FKC70080*
8218	랏	B750	C978	FKC80080*
8219	랏	B751	C979	FKC90080*
8220	랏	B752	C97A	FKCA0080*
8221	랏	B753	C97B	FKCB0080*
8222	랏	B754	C97C	FKCC0080*
8223	랑	B755	C97D	FKCD0080*
8224	랏	B756	C982	FKCI0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 13 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8225	텍	B757	C983	FKCJ0080*
8226	텍	B758	C984	FKCK0080*
8227	텍	B759	C986	FKCM0080*
8228	텍	B75A	C987	FKCN0080*
8229	텐	B761	C988	FKCO0080*
8230	텔	B762	C989	FKCP0080*
8231	텍	B763	C98A	FKCQ0080*
8232	텔	B764	C98B	FKCR0080*
8233	텔	B765	C98C	FKCS0080*
8234	텍	B766	C98D	FKCT0080*
8235	텔	B767	C98E	FKCU0080*
8236	텔	B768	C98F	FKCV0080*
8237	텔	B769	C990	FKCW0080*
8238	템	B76A	C991	FKCX0080*
8239	템	B76B	C993	FKCZ0080*
8240	텍	B76C	C994	FKD00080*
8241	텍	B76D	C995	FKD10080*
8242	텍	B76E	C996	FKD20080*
8243	텅	B76F	C997	FKD30080*
8244	텍	B770	C998	FKD40080*
8245	텍	B771	C999	FKD50080*
8246	텍	B772	C99A	FKD60080*
8247	텔	B773	C99B	FKD70080*
8248	텔	B774	C99C	FKD80080*
8249	텅	B775	C99D	FKD90080*
8250	투	B776	C9A3	FKDF0080*

Table 25 (Page 13 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8251	투	B777	C9A4	FKDG0080*
8252	투	B778	C9A6	FKDI0080*
8253	투	B779	C9A7	FKDJ0080*
8254	톤	B77A	C9A8	FKDK0080*
8255	투	B781	C9AA	FKDM0080*
8256	투	B782	C9AB	FKDN0080*
8257	투	B783	C9AC	FKDO0080*
8258	투	B784	C9AD	FKDP0080*
8259	투	B785	C9AE	FKDQ0080*
8260	투	B786	C9AF	FKDR0080*
8261	투	B787	C9B0	FKDS0080*
8262	투	B788	C9B4	FKDW0080*
8263	투	B789	C9B6	FKDY0080*
8264	투	B78A	C9B8	FKE00080*
8265	투	B78B	C9B9	FKE10080*
8266	투	B78C	C9BA	FKE20080*
8267	투	B78D	C9BB	FKE30080*
8268	투	B78E	C9BD	FKE50080*
8269	투	B78F	C9C2	FKEA0080*
8270	투	B790	C9C3	FKEB0080*
8271	투	B791	C9C4	FKEC0080*
8272	투	B792	C9C6	FKEE0080*
8273	투	B793	C9C7	FKEF0080*
8274	투	B794	C9C8	FKEG0080*
8275	투	B795	C9C9	FKEH0080*
8276	투	B796	C9CA	FKEI0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8277	궘	B797	C9CB	FKEJ0080*
8278	궙	B798	C9CC	FKEK0080*
8279	궚	B799	C9CD	FKEL0080*
8280	궛	B79A	C9CE	FKEM0080*
8281	궜	B79B	C9CF	FKEN0080*
8282	궝	B79C	C9D0	FKEO0080*
8283	궞	B79D	C9D1	FKEP0080*
8284	궟	B79E	C9D3	FKER0080*
8285	궠	B79F	C9D4	FKES0080*
8286	궡	B7A0	C9D5	FKET0080*
8287	래	B7A1	9C81	FDOH0080
8288	렉	B7A2	9C82	FDOI0080
8289	랜	B7A3	9C85	FDOL0080
8290	렐	B7A4	9C89	FDOP0080
8291	램	B7A5	9C91	FDOX0080
8292	랩	B7A6	9C93	FDOZ0080
8293	랏	B7A7	9C95	FDP10080
8294	래	B7A8	9C96	FDP20080
8295	랭	B7A9	9C97	FDP30080
8296	랠	B7AA	9CA1	FDPD0080
8297	랡	B7AB	9CA2	FDPE0080
8298	랢	B7AC	9CA5	FDPH0080
8299	랣	B7AD	9CB5	FDPX0080
8300	랤	B7AE	9CB7	FDPZ0080
8301	러	B7AF	9CE1	FDR50080
8302	력	B7B0	9CE2	FDR60080

Line Number	Graphic	PC Code	Host Code	GCGID
8303	런	B7B1	9CE5	FDR90080
8304	렐	B7B2	9CE9	FDRD0080
8305	렘	B7B3	9CF1	FDRL0080
8306	렏	B7B4	9CF3	FDRN0080
8307	럇	B7B5	9CF5	FDRP0080
8308	럘	B7B6	9CF6	FDRQ0080
8309	렑	B7B7	9CF7	FDRR0080
8310	렒	B7B8	9CFD	FDRX0080
8311	레	B7B9	9D41	FDS10080
8312	렉	B7BA	9D42	FDS20080
8313	렌	B7BB	9D45	FDS50080
8314	렐	B7BC	9D49	FDS90080
8315	렘	B7BD	9D51	FDSH0080
8316	렏	B7BE	9D53	FDSJ0080
8317	럇	B7BF	9D55	FDSL0080
8318	렑	B7C0	9D57	FDSN0080
8319	러	B7C1	9D61	FDSX0080
8320	력	B7C2	9D62	FDSY0080
8321	런	B7C3	9D65	FDT10080
8322	렐	B7C4	9D69	FDT50080
8323	렘	B7C5	9D71	FDTD0080
8324	렏	B7C6	9D73	FDTF0080
8325	럇	B7C7	9D75	FDTH0080
8326	럘	B7C8	9D76	FDTI0080
8327	렑	B7C9	9D77	FDTJ0080
8328	레	B7CA	9D81	FDTT0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 15 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8329	렌	B7CB	9D85	FDTX0080
8330	렘	B7CC	9D93	FDUB0080
8331	렏	B7CD	9D95	FDUD0080
8332	로	B7CE	9DA1	FDUP0080
8333	록	B7CF	9DA2	FDUQ0080
8334	론	B7D0	9DA5	FDUT0080
8335	롤	B7D1	9DA9	FDUX0080
8336	름	B7D2	9DB1	FDV50080
8337	릅	B7D3	9DB3	FDV70080
8338	룣	B7D4	9DB5	FDV90080
8339	릉	B7D5	9DB7	FDVB0080
8340	라	B7D6	9DC1	FDVL0080
8341	란	B7D7	9DC5	FDVP0080
8342	랑	B7D8	9DD7	FDW70080
8343	랴	B7D9	9DF6	FDX20080
8344	뢰	B7DA	9E41	FDXD0080
8345	뢴	B7DB	9E45	FDXH0080
8346	릴	B7DC	9E49	FDXL0080
8347	림	B7DD	9E51	FDXT0080
8348	림	B7DE	9E53	FDXV0080
8349	릿	B7DF	9E55	FDXX0080
8350	링	B7E0	9E57	FDXZ0080
8351	료	B7E1	9E61	FDY90080
8352	롸	B7E2	9E65	FDYD0080
8353	롤	B7E3	9E69	FDYH0080
8354	름	B7E4	9E73	FDYR0080

Table 25 (Page 15 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8355	룣	B7E5	9E75	FDYT0080
8356	릉	B7E6	9E77	FDYV0080
8357	루	B7E7	9E81	FDZ50080
8358	룩	B7E8	9E82	FDZ60080
8359	룬	B7E9	9E85	FDZ90080
8360	를	B7EA	9E89	FDZD0080
8361	름	B7EB	9E91	FDZL0080
8362	름	B7EC	9E93	FDZN0080
8363	룣	B7ED	9E95	FDZP0080
8364	룽	B7EE	9E97	FDZR0080
8365	뤼	B7EF	9EA1	FE010080
8366	뤼	B7F0	9EB6	FE0M0080
8367	뤼	B7F1	9EC1	FE0X0080
8368	뤼	B7F2	9EE1	FE1T0080
8369	뤼	B7F3	9EE2	FE1U0080
8370	뤼	B7F4	9EE5	FE1X0080
8371	뤼	B7F5	9EE9	FE210080
8372	뤼	B7F6	9EF1	FE290080
8373	뤼	B7F7	9EF5	FE2D0080
8374	뤼	B7F8	9EF7	FE2F0080
8375	류	B7F9	9F41	FE2P0080
8376	룩	B7FA	9F42	FE2Q0080
8377	룬	B7FB	9F45	FE2T0080
8378	를	B7FC	9F49	FE2X0080
8379	름	B7FD	9F51	FE350080
8380	름	B7FE	9F53	FE370080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 16 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8381	뵘	B841	C9D6	FKEU0080*
8382	뵙	B842	C9D7	FKEV0080*
8383	뵚	B843	C9D8	FKEW0080*
8384	뵛	B844	C9D9	FKEX0080*
8385	뵜	B845	C9DA	FKEY0080*
8386	뵝	B846	C9DB	FKEZ0080*
8387	뵞	B847	C9DC	FKF00080*
8388	뵟	B848	C9DD	FKF10080*
8389	뵠	B849	C9E2	FKF60080*
8390	뵡	B84A	C9E3	FKF70080*
8391	뵢	B84B	C9E4	FKF80080*
8392	뵣	B84C	C9E5	FKF90080*
8393	뵤	B84D	C9E6	FKFA0080*
8394	뵥	B84E	C9E7	FKFB0080*
8395	뵦	B84F	C9E8	FKFC0080*
8396	뵧	B850	C9E9	FKFD0080*
8397	뵨	B851	C9EA	FKFE0080*
8398	뵩	B852	C9EB	FKFF0080*
8399	뵪	B853	C9EC	FKFG0080*
8400	뵫	B854	C9ED	FKFH0080*
8401	뵬	B855	C9EE	FKFI0080*
8402	뵭	B856	C9EF	FKFJ0080*
8403	뵮	B857	C9F0	FKFK0080*
8404	뵯	B858	C9F1	FKFL0080*
8405	뵰	B859	C9F3	FKFN0080*
8406	뵱	B85A	C9F4	FKFO0080*

Table 25 (Page 16 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8407	뵲	B861	C9F5	FKFP0080*
8408	뵳	B862	C9F6	FKFQ0080*
8409	뵴	B863	C9F7	FKFR0080*
8410	뵵	B864	C9F8	FKFS0080*
8411	뵶	B865	C9F9	FKFT0080*
8412	뵷	B866	C9FA	FKFU0080*
8413	뵸	B867	C9FB	FKFV0080*
8414	뵹	B868	C9FC	FKFW0080*
8415	뵺	B869	C9FD	FKFX0080*
8416	뵻	B86A	CA42	FKG20080*
8417	뵼	B86B	CA43	FKG30080*
8418	뵽	B86C	CA44	FKG40080*
8419	뵾	B86D	CA46	FKG60080*
8420	뵿	B86E	CA47	FKG70080*
8421	부	B86F	CA48	FKG80080*
8422	북	B870	CA49	FKG90080*
8423	붂	B871	CA4A	FKGA0080*
8424	붃	B872	CA4B	FKGB0080*
8425	분	B873	CA4C	FKGC0080*
8426	붅	B874	CA4D	FKGD0080*
8427	붆	B875	CA4E	FKGE0080*
8428	붇	B876	CA4F	FKGF0080*
8429	불	B877	CA50	FKGG0080*
8430	붉	B878	CA51	FKGH0080*
8431	붊	B879	CA53	FKGJ0080*
8432	붋	B87A	CA54	FKGK0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 17 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8433	뤼	B881	CA56	FKGM0080*
8434	뤻	B882	CA58	FKGO0080*
8435	뤼	B883	CA59	FKGP0080*
8436	뤼	B884	CA5A	FKGQ0080*
8437	뤼	B885	CA5B	FKGR0080*
8438	뤼	B886	CA5C	FKGS0080*
8439	뤼	B887	CA5D	FKGT0080*
8440	뤼	B888	CA62	FKGY0080*
8441	뤼	B889	CA63	FKGZ0080*
8442	뤼	B88A	CA64	FKH00080*
8443	뤼	B88B	CA65	FKH10080*
8444	뤼	B88C	CA66	FKH20080*
8445	뤼	B88D	CA67	FKH30080*
8446	뤼	B88E	CA68	FKH40080*
8447	뤼	B88F	CA69	FKH50080*
8448	뤼	B890	CA6A	FKH60080*
8449	뤼	B891	CA6B	FKH70080*
8450	뤼	B892	CA6C	FKH80080*
8451	뤼	B893	CA6D	FKH90080*
8452	뤼	B894	CA6E	FKHA0080*
8453	뤼	B895	CA6F	FKHB0080*
8454	뤼	B896	CA70	FKHC0080*
8455	뤼	B897	CA71	FKHD0080*
8456	뤼	B898	CA73	FKHF0080*
8457	뤼	B899	CA74	FKHG0080*
8458	뤼	B89A	CA75	FKHH0080*

Table 25 (Page 17 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8459	뤼	B89B	CA76	FKHI0080*
8460	뤼	B89C	CA77	FKHJ0080*
8461	뤼	B89D	CA78	FKHK0080*
8462	뤼	B89E	CA79	FKHL0080*
8463	뤼	B89F	CA7A	FKHM0080*
8464	뤼	B8A0	CA7B	FKHN0080*
8465	뤼	B8A1	9F55	FE390080
8466	뤼	B8A2	9F57	FE3B0080
8467	뤼	B8A3	9F61	FE3L0080
8468	뤼	B8A4	9F62	FE3M0080
8469	뤼	B8A5	9F65	FE3P0080
8470	뤼	B8A6	9F69	FE3T0080
8471	뤼	B8A7	9F71	FE410080
8472	뤼	B8A8	9F73	FE430080
8473	뤼	B8A9	9F75	FE450080
8474	뤼	B8AA	9F77	FE470080
8475	뤼	B8AB	9F78	FE480080
8476	뤼	B8AC	9F7B	FE4B0080
8477	뤼	B8AD	9F7C	FE4C0080
8478	뤼	B8AE	9FA1	FE5D0080
8479	뤼	B8AF	9FA2	FE5E0080
8480	뤼	B8B0	9FA5	FE5H0080
8481	뤼	B8B1	9FA9	FE5L0080
8482	뤼	B8B2	9FB1	FE5T0080
8483	뤼	B8B3	9FB3	FE5V0080
8484	뤼	B8B4	9FB5	FE5X0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8485	링	B8B5	9FB7	FE5Z0080
8486	마	B8B6	A061	FE8X0080
8487	막	B8B7	A062	FE8Y0080
8488	만	B8B8	A065	FE910080
8489	많	B8B9	A067	FE930080
8490	만	B8BA	A068	FE940080
8491	말	B8BB	A069	FE950080
8492	맑	B8BC	A06A	FE960080
8493	맑	B8BD	A06B	FE970080
8494	맘	B8BE	A071	FE9D0080
8495	맵	B8BF	A073	FE9F0080
8496	맛	B8C0	A075	FE9H0080
8497	망	B8C1	A077	FE9J0080
8498	맞	B8C2	A078	FE9K0080
8499	말	B8C3	A07B	FE9N0080
8500	망	B8C4	A07D	FE9P0080
8501	매	B8C5	A081	FE9T0080
8502	맥	B8C6	A082	FE9U0080
8503	맨	B8C7	A085	FE9X0080
8504	멜	B8C8	A089	FEA10080
8505	멤	B8C9	A091	FEA90080
8506	맵	B8CA	A093	FEAB0080
8507	멧	B8CB	A095	FEAD0080
8508	멧	B8CC	A096	FEAE0080
8509	멩	B8CD	A097	FEAF0080
8510	멧	B8CE	A098	FEAG0080

Line Number	Graphic	PC Code	Host Code	GCGID
8511	먀	B8CF	A0A1	FEAP0080
8512	먁	B8D0	A0A2	FEAQ0080
8513	먂	B8D1	A0A9	FEAX0080
8514	먃	B8D2	A0B7	FEBB0080
8515	머	B8D3	A0E1	FECH0080
8516	멕	B8D4	A0E2	FECI0080
8517	먼	B8D5	A0E5	FECL0080
8518	멜	B8D6	A0E9	FECP0080
8519	몃	B8D7	A0EB	FECR0080
8520	멤	B8D8	A0F1	FECX0080
8521	몵	B8D9	A0F3	FECZ0080
8522	멧	B8DA	A0F5	FED10080
8523	멩	B8DB	A0F7	FED30080
8524	멧	B8DC	A0F8	FED40080
8525	멩	B8DD	A0FD	FED90080
8526	메	B8DE	A141	FEDD0080
8527	멕	B8DF	A142	FEDE0080
8528	멘	B8E0	A145	FEDH0080
8529	멜	B8E1	A149	FEDL0080
8530	멤	B8E2	A151	FEDT0080
8531	몵	B8E3	A153	FEDV0080
8532	멧	B8E4	A155	FEDX0080
8533	멧	B8E5	A156	FEDY0080
8534	멩	B8E6	A157	FEDZ0080
8535	머	B8E7	A161	FEE90080
8536	멕	B8E8	A162	FEEA0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8537	면	B8E9	A165	FEED0080
8538	멸	B8EA	A169	FEEH0080
8539	멧	B8EB	A175	FEET0080
8540	몯	B8EC	A176	FEEU0080
8541	명	B8ED	A177	FEEV0080
8542	몯	B8EE	A179	FEEX0080
8543	폐	B8EF	A181	FEF50080
8544	모	B8F0	A1A1	FEG10080
8545	목	B8F1	A1A2	FEG20080
8546	몯	B8F2	A1A4	FEG40080
8547	몬	B8F3	A1A5	FEG50080
8548	몰	B8F4	A1A9	FEG90080
8549	몯	B8F5	A1AB	FEGB0080
8550	몸	B8F6	A1B1	FEGH0080
8551	몯	B8F7	A1B3	FEGJ0080
8552	몯	B8F8	A1B5	FEGL0080
8553	몽	B8F9	A1B7	FEGN0080
8554	과	B8FA	A1C1	FEGX0080
8555	관	B8FB	A1C5	FEH10080
8556	왔	B8FC	A1D6	FEH10080
8557	망	B8FD	A1D7	FEHJ0080
8558	피	B8FE	A241	FEIP0080
8559	툽	B941	CA7C	FKHO0080*
8560	통	B942	CA7D	FKHP0080*
8561	투	B943	CA83	FKHV0080*
8562	툽	B944	CA84	FKHW0080*

Table 25 (Page 19 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8563	툽	B945	CA86	FKHY0080*
8564	툽	B946	CA87	FKHZ0080*
8565	툽	B947	CA88	FKI00080*
8566	툽	B948	CA8A	FKI20080*
8567	툽	B949	CA8B	FKI30080*
8568	툽	B94A	CA8C	FKI40080*
8569	툽	B94B	CA8D	FKI50080*
8570	툽	B94C	CA8E	FKI60080*
8571	툽	B94D	CA8F	FKI70080*
8572	툽	B94E	CA90	FKI80080*
8573	툽	B94F	CA94	FKIC0080*
8574	툽	B950	CA96	FKIE0080*
8575	툽	B951	CA98	FKIG0080*
8576	툽	B952	CA99	FKIH0080*
8577	툽	B953	CA9A	FKII0080*
8578	툽	B954	CA9B	FKIJ0080*
8579	툽	B955	CA9C	FKIK0080*
8580	툽	B956	CA9D	FKIL0080*
8581	툽	B957	CAA2	FKIQ0080*
8582	툽	B958	CAA3	FKIR0080*
8583	툽	B959	CAA4	FKIS0080*
8584	툽	B95A	CAA5	FKIT0080*
8585	툽	B961	CAA6	FKIU0080*
8586	툽	B962	CAA7	FKIV0080*
8587	툽	B963	CAA8	FKIW0080*
8588	툽	B964	CAA9	FKIX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 20 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
8589	뵁	B965	CAAA	FKIY0080*
8590	뵁	B966	CAAB	FKIZ0080*
8591	뵁	B967	CAAC	FKJ00080*
8592	뵁	B968	CAAD	FKJ10080*
8593	뵁	B969	CAAE	FKJ20080*
8594	뵁	B96A	CAAF	FKJ30080*
8595	뵁	B96B	CAB0	FKJ40080*
8596	뵁	B96C	CAB1	FKJ50080*
8597	뵁	B96D	CAB3	FKJ70080*
8598	뵁	B96E	CAB4	FKJ80080*
8599	뵁	B96F	CAB5	FKJ90080*
8600	뵁	B970	CAB7	FKJB0080*
8601	뵁	B971	CAB8	FKJC0080*
8602	뵁	B972	CAB9	FKJD0080*
8603	뵁	B973	CABA	FKJE0080*
8604	뵁	B974	CABB	FKJF0080*
8605	뵁	B975	CABC	FKJG0080*
8606	뵁	B976	CABD	FKJH0080*
8607	뵁	B977	CAC2	FKJM0080*
8608	뵁	B978	CAC3	FKJN0080*
8609	뵁	B979	CAC4	FKJO0080*
8610	뵁	B97A	CAC5	FKJP0080*
8611	뵁	B981	CAC6	FKJQ0080*
8612	뵁	B982	CAC7	FKJR0080*
8613	뵁	B983	CAC8	FKJS0080*
8614	뵁	B984	CAC9	FKJT0080*

Table 25 (Page 20 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
8615	뵁	B985	CACA	FKJU0080*
8616	뵁	B986	CACB	FKJV0080*
8617	뵁	B987	CACC	FKJW0080*
8618	뵁	B988	CACD	FKJX0080*
8619	뵁	B989	CACE	FKJY0080*
8620	뵁	B98A	CACF	FKJZ0080*
8621	뵁	B98B	CAD0	FKK00080*
8622	뵁	B98C	CAD1	FKK10080*
8623	뵁	B98D	CAD3	FKK30080*
8624	뵁	B98E	CAD4	FKK40080*
8625	뵁	B98F	CAD5	FKK50080
8626	뵁	B990	CAD6	FKK60080*
8627	뵁	B991	CAD7	FKK70080*
8628	뵁	B992	CAD8	FKK80080*
8629	뵁	B993	CAD9	FKK90080*
8630	뵁	B994	CADA	FKKA0080*
8631	뵁	B995	CADB	FKKB0080*
8632	뵁	B996	CADC	FKKC0080*
8633	뵁	B997	CADD	FKKD0080*
8634	뵁	B998	CAE3	FKKJ0080*
8635	뵁	B999	CAE4	FKKK0080*
8636	뵁	B99A	CAE6	FKKM0080*
8637	뵁	B99B	CAE7	FKKN0080*
8638	뵁	B99C	CAE8	FKKO0080*
8639	뵁	B99D	CAEA	FKKQ0080*
8640	뵁	B99E	CAEB	FKKR0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 21 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8641	뽁	B99F	CAEC	FKKS0080*
8642	뽁	B9A0	CAED	FKKT0080*
8643	뽁	B9A1	A245	FEIT0080
8644	뽁	B9A2	A249	FEIX0080
8645	뽁	B9A3	A253	FEJ70080
8646	뽁	B9A4	A255	FEJ90080
8647	뽁	B9A5	A257	FEJB0080
8648	뽁	B9A6	A261	FEJL0080
8649	뽁	B9A7	A265	FEJP0080
8650	뽁	B9A8	A269	FEJT0080
8651	뽁	B9A9	A273	FEK30080
8652	뽁	B9AA	A275	FEK50080
8653	뽁	B9AB	A281	FEKH0080
8654	뽁	B9AC	A282	FEKI0080
8655	뽁	B9AD	A283	FEKJ0080
8656	뽁	B9AE	A285	FEKL0080
8657	뽁	B9AF	A288	FEKO0080
8658	뽁	B9B0	A289	FEKP0080
8659	뽁	B9B1	A28A	FEKQ0080
8660	뽁	B9B2	A28B	FEKR0080
8661	뽁	B9B3	A291	FEKX0080
8662	뽁	B9B4	A293	FEKZ0080
8663	뽁	B9B5	A295	FEL10080
8664	뽁	B9B6	A297	FEL30080
8665	뽁	B9B7	A29B	FEL70080
8666	뽁	B9B8	A29D	FEL90080

Table 25 (Page 21 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8667	뽁	B9B9	A2A1	FELD0080
8668	뽁	B9BA	A2A5	FELH0080
8669	뽁	B9BB	A2A9	FELL0080
8670	뽁	B9BC	A2B3	FELV0080
8671	뽁	B9BD	A2B5	FELX0080
8672	뽁	B9BE	A2C1	FEM90080
8673	뽁	B9BF	A2E1	FEN50080
8674	뽁	B9C0	A2E5	FEN90080
8675	뽁	B9C1	A2E9	FEND0080
8676	뽁	B9C2	A341	FEO10080
8677	뽁	B9C3	A345	FEO50080
8678	뽁	B9C4	A349	FEO90080
8679	뽁	B9C5	A351	FEOH0080
8680	뽁	B9C6	A355	FEOL0080
8681	뽁	B9C7	A361	FEOX0080
8682	뽁	B9C8	A365	FEP10080
8683	뽁	B9C9	A369	FEP50080
8684	뽁	B9CA	A371	FEPD0080
8685	뽁	B9CB	A375	FEPH0080
8686	뽁	B9CC	A3A1	FEQP0080
8687	뽁	B9CD	A3A2	FEQQ0080
8688	뽁	B9CE	A3A5	FEQT0080
8689	뽁	B9CF	A3A8	FEQW0080
8690	뽁	B9D0	A3A9	FEQX0080
8691	뽁	B9D1	A3AB	FEQZ0080
8692	뽁	B9D2	A3B1	FER50080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 22 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8693	몹	B9D3	A3B3	FER70080
8694	몹	B9D4	A3B5	FER90080
8695	몹	B9D5	A3B6	FERA0080
8696	몹	B9D6	A3B7	FERB0080
8697	몹	B9D7	A3B9	FERD0080
8698	몹	B9D8	A3BB	FERF0080
8699	바	B9D9	A461	FEU90080
8700	박	B9DA	A462	FEUA0080
8701	밖	B9DB	A463	FEUB0080
8702	밖	B9DC	A464	FEUC0080
8703	반	B9DD	A465	FEUD0080
8704	반	B9DE	A468	FEUG0080
8705	발	B9DF	A469	FEUH0080
8706	밖	B9E0	A46A	FEUI0080
8707	밖	B9E1	A46B	FEUJ0080
8708	밖	B9E2	A46C	FEUK0080
8709	밤	B9E3	A471	FEUP0080
8710	밖	B9E4	A473	FEUR0080
8711	밖	B9E5	A475	FEUT0080
8712	방	B9E6	A477	FEUV0080
8713	발	B9E7	A47B	FEUZ0080
8714	배	B9E8	A481	FEV50080
8715	백	B9E9	A482	FEV60080
8716	번	B9EA	A485	FEV90080
8717	벨	B9EB	A489	FEVD0080
8718	뱀	B9EC	A491	FEVL0080

Table 25 (Page 22 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8719	뱀	B9ED	A493	FEVN0080
8720	뱀	B9EE	A495	FEVP0080
8721	뱀	B9EF	A496	FEVQ0080
8722	뱀	B9F0	A497	FEVR0080
8723	뱀	B9F1	A49B	FEVV0080
8724	바	B9F2	A4A1	FEW10080
8725	박	B9F3	A4A2	FEW20080
8726	반	B9F4	A4A5	FEW50080
8727	밖	B9F5	A4B3	FEWJ0080
8728	버	B9F6	A4E1	FEXT0080
8729	벽	B9F7	A4E2	FEXU0080
8730	번	B9F8	A4E5	FEXX0080
8731	번	B9F9	A4E8	FEY00080
8732	벌	B9FA	A4E9	FEY10080
8733	벌	B9FB	A4EB	FEY30080
8734	범	B9FC	A4F1	FEY90080
8735	법	B9FD	A4F3	FEYB0080
8736	벗	B9FE	A4F5	FEYD0080
8737	뿔	BA41	CAEE	FKKU0080*
8738	뿔	BA42	CAEF	FKKV0080*
8739	뿔	BA43	CAF0	FKKW0080*
8740	뿔	BA44	CAF4	FKL00080*
8741	뿔	BA45	CAF5	FKL10080
8742	뿔	BA46	CAF6	FKL20080*
8743	뿔	BA47	CAF8	FKL40080*
8744	뿔	BA48	CAF9	FKL50080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 23 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8745	뵁	BA49	CAFA	FKL60080*
8746	뵁	BA4A	CAFB	FKL70080*
8747	뵁	BA4B	CAFC	FKL80080*
8748	뵁	BA4C	CAFD	FKL90080*
8749	뵁	BA4D	CB42	FKLE0080*
8750	뵁	BA4E	CB43	FKLF0080*
8751	뵁	BA4F	CB44	FKLG0080*
8752	뵁	BA50	CB46	FKLI0080*
8753	뵁	BA51	CB47	FKLJ0080*
8754	뵁	BA52	CB48	FKLK0080*
8755	뵁	BA53	CB4A	FKLM0080*
8756	뵁	BA54	CB4B	FKLN0080*
8757	뵁	BA55	CB4C	FKLO0080*
8758	뵁	BA56	CB4D	FKLP0080*
8759	뵁	BA57	CB4E	FKLQ0080*
8760	뵁	BA58	CB4F	FKLR0080*
8761	뵁	BA59	CB50	FKLS0080*
8762	뵁	BA5A	CB53	FKLV0080*
8763	뵁	BA61	CB54	FKLW0080*
8764	뵁	BA62	CB55	FKLX0080*
8765	뵁	BA63	CB56	FKLY0080*
8766	뵁	BA64	CB58	FKM00080*
8767	뵁	BA65	CB59	FKM10080*
8768	뵁	BA66	CB5A	FKM20080*
8769	뵁	BA67	CB5B	FKM30080*
8770	뵁	BA68	CB5C	FKM40080*

Table 25 (Page 23 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
8771	뵁	BA69	CB5D	FKM50080*
8772	뵁	BA6A	CB63	FKMB0080*
8773	뵁	BA6B	CB64	FKMC0080*
8774	뵁	BA6C	CB66	FKME0080*
8775	뵁	BA6D	CB67	FKMF0080*
8776	뵁	BA6E	CB6A	FKMI0080*
8777	뵁	BA6F	CB6C	FKMK0080*
8778	뵁	BA70	CB6D	FKML0080*
8779	뵁	BA71	CB6E	FKMM0080*
8780	뵁	BA72	CB6F	FKMN0080*
8781	뵁	BA73	CB70	FKMO0080*
8782	뵁	BA74	CB74	FKMS0080*
8783	뵁	BA75	CB76	FKMU0080*
8784	뵁	BA76	CB77	FKMV0080
8785	뵁	BA77	CB78	FKMW0080*
8786	뵁	BA78	CB79	FKMX0080*
8787	뵁	BA79	CB7A	FKMY0080*
8788	뵁	BA7A	CB7B	FKMZ0080*
8789	뵁	BA81	CB7C	FKN00080*
8790	뵁	BA82	CB7D	FKN10080*
8791	뵁	BA83	CB82	FKN60080*
8792	뵁	BA84	CB83	FKN70080*
8793	뵁	BA85	CB84	FKN80080*
8794	뵁	BA86	CB86	FKNA0080*
8795	뵁	BA87	CB87	FKNB0080*
8796	뵁	BA88	CB88	FKNC0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8797	북	BA89	CB8A	FKNE0080*
8798	붓	BA8A	CB8B	FKNF0080*
8799	붐	BA8B	CB8C	FKNG0080*
8800	붓	BA8C	CB8D	FKNH0080*
8801	붓	BA8D	CB8E	FKNI0080*
8802	붓	BA8E	CB8F	FKNJ0080*
8803	붓	BA8F	CB90	FKNK0080*
8804	붓	BA90	CB94	FKNO0080*
8805	붓	BA91	CB95	FKNP0080
8806	붓	BA92	CB96	FKNQ0080*
8807	붓	BA93	CB97	FKNR0080*
8808	붓	BA94	CB98	FKNS0080*
8809	붓	BA95	CB99	FKNT0080*
8810	붓	BA96	CB9A	FKNU0080*
8811	붓	BA97	CB9B	FKNV0080*
8812	붓	BA98	CB9C	FKNW0080*
8813	붓	BA99	CB9D	FKNX0080*
8814	붓	BA9A	CBA3	FKO30080*
8815	붓	BA9B	CBA4	FKO40080*
8816	붓	BA9C	CBA6	FKO60080*
8817	붓	BA9D	CBA7	FKO70080*
8818	붓	BA9E	CBA8	FKO80080*
8819	붓	BA9F	CBA A	FKOA0080*
8820	붓	BAA0	CBAB	FKOB0080*
8821	빙	BAA1	A4F7	FEYF0080
8822	벗	BAA2	A4F8	FEYG0080

Line Number	Graphic	PC Code	Host Code	GCGID
8823	베	BAA3	A541	FEYP0080
8824	벡	BAA4	A542	FEYQ0080
8825	벤	BAA5	A545	FEYT0080
8826	벨	BAA6	A548	FEYW0080
8827	벨	BAA7	A549	FEYX0080
8828	벨	BAA8	A551	FEZ50080
8829	벨	BAA9	A553	FEZ70080
8830	벨	BAAA	A555	FEZ90080
8831	벨	BAAB	A556	FEZA0080
8832	벨	BAAC	A557	FEZB0080
8833	벼	BAAD	A561	FEZL0080
8834	벨	BAAE	A562	FEZM0080
8835	변	BAAF	A565	FEZP0080
8836	별	BAB0	A569	FEZT0080
8837	별	BAB1	A573	FF030080
8838	벨	BAB2	A575	FF050080
8839	벨	BAB3	A576	FF060080
8840	병	BAB4	A577	FF070080
8841	별	BAB5	A57B	FF0B0080
8842	베	BAB6	A581	FF0H0080
8843	벤	BAB7	A585	FF0L0080
8844	보	BAB8	A5A1	FF1D0080
8845	부	BAB9	A5A2	FF1E0080
8846	부	BABA	A5A3	FF1F0080
8847	본	BABB	A5A5	FF1H0080
8848	불	BABC	A5A9	FF1L0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8849	븨	BABD	A5B1	FF1T0080
8850	븣	BABE	A5B3	FF1V0080
8851	븥	BABF	A5B5	FF1X0080
8852	븦	BAC0	A5B7	FF1Z0080
8853	븧	BAC1	A5C1	FF290080
8854	븨	BAC2	A5C5	FF2D0080
8855	븪	BAC3	A5D6	FF2U0080
8856	븫	BAC4	A5E1	FF350080
8857	븬	BAC5	A5F6	FF3Q0080
8858	븭	BAC6	A641	FF410080
8859	븮	BAC7	A642	FF420080
8860	븯	BAC8	A645	FF450080
8861	븰	BAC9	A649	FF490080
8862	븱	BACA	A651	FF4H0080
8863	븲	BACB	A653	FF4J0080
8864	븳	BACC	A661	FF4X0080
8865	븴	BACD	A665	FF510080
8866	븵	BACE	A681	FF5T0080
8867	븶	BACF	A682	FF5U0080
8868	븷	BAD0	A685	FF5X0080
8869	븸	BAD1	A688	FF600080
8870	븹	BAD2	A689	FF610080
8871	븺	BAD3	A68A	FF620080
8872	븻	BAD4	A68B	FF630080
8873	븼	BAD5	A691	FF690080
8874	븽	BAD6	A693	FF6B0080

Line Number	Graphic	PC Code	Host Code	GCGID
8875	븾	BAD7	A695	FF6D0080
8876	븿	BAD8	A697	FF6F0080
8877	븠	BAD9	A69B	FF6J0080
8878	븡	BADA	A69C	FF6K0080
8879	븢	BADB	A6A1	FF6P0080
8880	븣	BADC	A6A9	FF6X0080
8881	븤	BADD	A6B6	FF7A0080
8882	븥	BADE	A6C1	FF7L0080
8883	븦	BADF	A6E1	FF8H0080
8884	븧	BAE0	A6E2	FF8I0080
8885	븨	BAE1	A6E5	FF8L0080
8886	븪	BAE2	A6E9	FF8P0080
8887	븫	BAE3	A6F7	FF930080
8888	븬	BAE4	A741	FF9D0080
8889	븭	BAE5	A745	FF9H0080
8890	븮	BAE6	A749	FF9L0080
8891	븯	BAE7	A751	FF9T0080
8892	븰	BAE8	A755	FF9X0080
8893	븱	BAE9	A757	FF9Z0080
8894	븲	BAEA	A761	FFA90080
8895	븳	BAEB	A762	FFAA0080
8896	븴	BAEC	A765	FFAD0080
8897	븵	BAED	A769	FFAH0080
8898	븶	BAEE	A771	FFAP0080
8899	븷	BAEF	A773	FFAR0080
8900	븸	BAF0	A775	FFAT0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8901	비	BAF1	A7A1	FFC10080
8902	빅	BAF2	A7A2	FFC20080
8903	빈	BAF3	A7A5	FFC50080
8904	빌	BAF4	A7A9	FFC90080
8905	뵤	BAF5	A7AB	FFCB0080
8906	빔	BAF6	A7B1	FFCH0080
8907	빕	BAF7	A7B3	FFCJ0080
8908	빓	BAF8	A7B5	FFCL0080
8909	빙	BAF9	A7B7	FFCN0080
8910	빚	BAFA	A7B8	FFCO0080
8911	빛	BAFB	A7B9	FFCP0080
8912	빠	BAFC	A861	FFFL0080
8913	빱	BAFD	A862	FFFM0080
8914	빲	BAFE	A865	FFFP0080
8915	뵤	BB41	CBAC	FKOC0080*
8916	뵦	BB42	CBAD	FKOD0080*
8917	뵧	BB43	CBAE	FKOE0080*
8918	뵨	BB44	CBAF	FKOF0080*
8919	뵩	BB45	CBB0	FKOG0080*
8920	뵪	BB46	CBB4	FKOK0080*
8921	뵫	BB47	CBB6	FKOM0080*
8922	뵬	BB48	CBB8	FKOO0080*
8923	뵭	BB49	CBB9	FKOP0080*
8924	뵮	BB4A	CBBA	FKOQ0080*
8925	뵯	BB4B	CBBB	FKOR0080*
8926	뵰	BB4C	CBBC	FKOS0080

Line Number	Graphic	PC Code	Host Code	GCGID
8927	팅	BB4D	CBBD	FKOT0080*
8928	푨	BB4E	CC64	FKRO0080*
8929	푩	BB4F	CC66	FKRQ0080*
8930	푪	BB50	CC67	FKRR0080*
8931	푤	BB51	CC68	FKRS0080*
8932	푶	BB52	CC6A	FKRU0080*
8933	푷	BB53	CC6C	FKRW0080*
8934	푸	BB54	CC6D	FKRX0080*
8935	푹	BB55	CC6E	FKRY0080*
8936	푺	BB56	CC6F	FKRZ0080*
8937	푻	BB57	CC70	FKS00080*
8938	푼	BB58	CC74	FKS40080*
8939	푽	BB59	CC78	FKS80080*
8940	푼	BB5A	CC79	FKS90080*
8941	푷	BB61	CC7A	FKSA0080*
8942	푸	BB62	CC7C	FKSC0080
8943	푹	BB63	CC7D	FKSD0080*
8944	푺	BB64	CC83	FKSJ0080*
8945	푻	BB65	CC84	FKSK0080*
8946	푼	BB66	CC86	FKSM0080*
8947	푷	BB67	CC87	FKSN0080*
8948	푸	BB68	CC88	FKSO0080*
8949	푹	BB69	CC8A	FKSQ0080*
8950	푺	BB6A	CC8B	FKSR0080*
8951	푻	BB6B	CC8C	FKSS0080*
8952	푼	BB6C	CC8D	FKST0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
8953	꺄	BB6D	CC8E	FKSU0080*
8954	꺅	BB6E	CC8F	FKSV0080*
8955	꺆	BB6F	CC90	FKSW0080*
8956	꺇	BB70	CC94	FKT00080*
8957	꺈	BB71	CC98	FKT40080*
8958	꺉	BB72	CC99	FKT50080*
8959	꺊	BB73	CC9A	FKT60080*
8960	꺋	BB74	CC9B	FKT70080*
8961	꺌	BB75	CC9C	FKT80080*
8962	꺍	BB76	CC9D	FKT90080*
8963	꺎	BB77	CCA3	FKTF0080*
8964	꺏	BB78	CCA4	FKTG0080*
8965	꺐	BB79	CCA5	FKTH0080*
8966	꺑	BB7A	CCA6	FKTI0080*
8967	꺒	BB81	CCA7	FKTJ0080*
8968	꺓	BB82	CCA8	FKTK0080*
8969	꺔	BB83	CCA9	FKTL0080*
8970	꺕	BB84	CCAA	FKTM0080*
8971	꺖	BB85	CCAB	FKTN0080*
8972	꺗	BB86	CCAC	FKTO0080*
8973	꺘	BB87	CCAD	FKTP0080*
8974	꺙	BB88	CCAE	FKTQ0080*
8975	꺚	BB89	CCAF	FKTR0080*
8976	꺛	BB8A	CCB0	FKTS0080*
8977	꺜	BB8B	CCB1	FKTT0080*
8978	꺝	BB8C	CCB3	FKTV0080*

Line Number	Graphic	PC Code	Host Code	GCGID
8979	꺞	BB8D	CCB4	FKTW0080*
8980	꺟	BB8E	CCB5	FKTX0080*
8981	꺠	BB8F	CCB6	FKTY0080*
8982	꺡	BB90	CCB7	FKTZ0080
8983	꺢	BB91	CCB8	FKU00080*
8984	꺣	BB92	CCB9	FKU10080*
8985	꺤	BB93	CCBA	FKU20080*
8986	꺥	BB94	CCBB	FKU30080*
8987	꺦	BB95	CCBC	FKU40080*
8988	꺧	BB96	CCBD	FKU50080*
8989	꺨	BB97	CCC1	FKU90080
8990	꺩	BB98	CCC2	FKUA0080*
8991	꺪	BB99	CCC3	FKUB0080*
8992	꺫	BB9A	CCC4	FKUC0080*
8993	꺬	BB9B	CCC5	FKUD0080*
8994	꺭	BB9C	CCC6	FKUE0080*
8995	꺮	BB9D	CCC7	FKUF0080*
8996	꺯	BB9E	CCC8	FKUG0080*
8997	꺰	BB9F	CCC9	FKUH0080*
8998	꺱	BBA0	CCCA	FKUI0080*
8999	꺲	BBA1	A869	FFFT0080
9000	꺳	BBA2	A86B	FFFV0080
9001	꺴	BBA3	A871	FFG10080
9002	꺵	BBA4	A873	FFG30080
9003	꺶	BBA5	A875	FFG50080
9004	꺷	BBA6	A876	FFG60080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9005	뺑	BBA7	A877	FFG70080
9006	뺑	BBA8	A87D	FFGD0080
9007	뺑	BBA9	A881	FFGH0080
9008	뺑	BBAA	A882	FFGI0080
9009	뺑	BBAB	A885	FFGL0080
9010	뺑	BBAC	A889	FFGP0080
9011	뺑	BBAD	A891	FFGX0080
9012	뺑	BBAE	A893	FFGZ0080
9013	뺑	BBAF	A895	FFH10080
9014	뺑	BBB0	A896	FFH20080
9015	뺑	BBB1	A897	FFH30080
9016	뺑	BBB2	A8A1	FFHD0080
9017	뺑	BBB3	A8A2	FFHE0080
9018	뺑	BBB4	A8B1	FFHT0080
9019	뺑	BBB5	A8E1	FFJ50080
9020	뺑	BBB6	A8E2	FFJ60080
9021	뺑	BBB7	A8E5	FFJ90080
9022	뺑	BBB8	A8E8	FFJC0080
9023	뺑	BBB9	A8E9	FFJD0080
9024	뺑	BBBA	A8F1	FFJL0080
9025	뺑	BBBB	A8F5	FFJP0080
9026	뺑	BBBC	A8F6	FFJQ0080
9027	뺑	BBBD	A8F7	FFJR0080
9028	뺑	BBBE	A941	FFK10080
9029	뺑	BBBF	A957	FFKN0080
9030	뺑	BBC0	A961	FFKX0080

Table 25 (Page 28 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9031	뺑	BBC1	A962	FFKY0080
9032	뺑	BBC2	A971	FFLD0080
9033	뺑	BBC3	A973	FFLF0080
9034	뺑	BBC4	A975	FFLH0080
9035	뺑	BBC5	A976	FFLI0080
9036	뺑	BBC6	A977	FFLJ0080
9037	뺑	BBC7	A9A1	FFMP0080
9038	뺑	BBC8	A9A2	FFMQ0080
9039	뺑	BBC9	A9A5	FFMT0080
9040	뺑	BBCA	A9A9	FFMX0080
9041	뺑	BBCB	A9B1	FFN50080
9042	뺑	BBCB	A9B3	FFN70080
9043	뺑	BBCD	A9B7	FFNB0080
9044	뺑	BBCE	AA41	FFPD0080
9045	뺑	BBCF	AA61	FFQ90080
9046	뺑	BBD0	AA77	FFQV0080
9047	뺑	BBD1	AA81	FFR50080
9048	뺑	BBD2	AA82	FFR60080
9049	뺑	BBD3	AA85	FFR90080
9050	뺑	BBD4	AA89	FFRD0080
9051	뺑	BBD5	AA91	FFRL0080
9052	뺑	BBD6	AA95	FFRP0080
9053	뺑	BBD7	AA97	FFRR0080
9054	뺑	BBD8	AB41	FFUP0080
9055	뺑	BBD9	AB57	FFVB0080
9056	뺑	BBDA	AB61	FFVL0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
9057	뵀	BBDB	AB65	FFVP0080
9058	뵁	BBDC	AB69	FFVT0080
9059	뵂	BBDD	AB71	FFW10080
9060	뵃	BBDE	AB73	FFW30080
9061	뵄	BBDF	ABA1	FFXD0080
9062	뵅	BBE0	ABA2	FFXE0080
9063	뵆	BBE1	ABA5	FFXH0080
9064	뵇	BBE2	ABA9	FFXL0080
9065	뵈	BBE3	ABB1	FFXT0080
9066	뵉	BBE4	ABB3	FFXV0080
9067	뵊	BBE5	ABB5	FFXX0080
9068	뵋	BBE6	ABB7	FFXZ0080
9069	사	BBE7	AC61	FG0X0080
9070	삭	BBE8	AC62	FG0Y0080
9071	삐	BBE9	AC64	FG100080
9072	산	BBEA	AC65	FG110080
9073	삼	BBEB	AC68	FG140080
9074	살	BBEC	AC69	FG150080
9075	삼	BBED	AC6A	FG160080
9076	삼	BBEE	AC6B	FG170080
9077	삼	BBEF	AC71	FG1D0080
9078	삽	BBF0	AC73	FG1F0080
9079	삐	BBF1	AC75	FG1H0080
9080	삐	BBF2	AC76	FG1I0080
9081	상	BBF3	AC77	FG1J0080
9082	살	BBF4	AC7B	FG1N0080

Line Number	Graphic	PC Code	Host Code	GCGID
9083	새	BBF5	AC81	FG1T0080
9084	색	BBF6	AC82	FG1U0080
9085	샌	BBF7	AC85	FG1X0080
9086	셀	BBF8	AC89	FG210080
9087	셈	BBF9	AC91	FG290080
9088	삽	BBFA	AC93	FG2B0080
9089	셋	BBFB	AC95	FG2D0080
9090	셋	BBFC	AC96	FG2E0080
9091	생	BBFD	AC97	FG2F0080
9092	샤	BBFE	ACA1	FG2P0080
9093	팍	BC41	CCCB	FKUJ0080*
9094	팍	BC42	CCCC	FKUK0080*
9095	팍	BC43	CCCD	FKUL0080*
9096	팍	BC44	CCCE	FKUM0080*
9097	팍	BC45	CCCF	FKUN0080*
9098	팍	BC46	CCD0	FKUO0080*
9099	팍	BC47	CCD1	FKUP0080*
9100	팍	BC48	CCD3	FKUR0080*
9101	팍	BC49	CCD4	FKUS0080*
9102	팍	BC4A	CCD5	FKUT0080*
9103	팍	BC4B	CCD6	FKUU0080*
9104	팍	BC4C	CCD7	FKUV0080*
9105	팍	BC4D	CCD8	FKUW0080*
9106	팍	BC4E	CCD9	FKUX0080*
9107	팍	BC4F	CCDA	FKUY0080*
9108	팍	BC50	CCDB	FKUZ0080*




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 30 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
9109	꺾	BC51	CCDC	FKV00080*
9110	꺾	BC52	CCDD	FKV10080*
9111	꺾	BC53	CCE3	FKV70080*
9112	꺾	BC54	CCE4	FKV80080*
9113	꺾	BC55	CCE6	FKVA0080*
9114	꺾	BC56	CCE7	FKVB0080*
9115	꺾	BC57	CCE8	FKVC0080*
9116	꺾	BC58	CCEA	FKVE0080*
9117	꺾	BC59	CCEB	FKVF0080*
9118	꺾	BC5A	CCEC	FKVG0080*
9119	꺾	BC61	CCED	FKVH0080*
9120	꺾	BC62	CCEE	FKVI0080*
9121	꺾	BC63	CCEF	FKVJ0080*
9122	꺾	BC64	CCF0	FKVK0080*
9123	꺾	BC65	CCF4	FKVO0080*
9124	꺾	BC66	CCF8	FKVS0080*
9125	꺾	BC67	CCF9	FKVT0080*
9126	꺾	BC68	CCFA	FKVU0080*
9127	꺾	BC69	CCFB	FKVV0080*
9128	꺾	BC6A	CCFC	FKVW0080*
9129	꺾	BC6B	CCFD	FKVX0080*
9130	꺾	BC6C	CD43	FKW30080*
9131	꺾	BC6D	CD44	FKW40080*
9132	꺾	BC6E	CD46	FKW60080*
9133	꺾	BC6F	CD47	FKW70080*
9134	꺾	BC70	CD48	FKW80080*

Table 25 (Page 30 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
9135	꺾	BC71	CD4A	FKWA0080*
9136	꺾	BC72	CD4B	FKWB0080*
9137	꺾	BC73	CD4C	FKWC0080*
9138	꺾	BC74	CD4D	FKWD0080*
9139	꺾	BC75	CD4E	FKWE0080*
9140	꺾	BC76	CD4F	FKWF0080*
9141	꺾	BC77	CD50	FKWG0080*
9142	꺾	BC78	CD54	FKWK0080*
9143	꺾	BC79	CD56	FKWM0080*
9144	꺾	BC7A	CD58	FKWO0080*
9145	꺾	BC81	CD59	FKWP0080*
9146	꺾	BC82	CD5A	FKWQ0080*
9147	꺾	BC83	CD5B	FKWR0080*
9148	꺾	BC84	CD5C	FKWS0080
9149	꺾	BC85	CD5D	FKWT0080*
9150	꺾	BC86	CD62	FKWY0080
9151	꺾	BC87	CD63	FKWZ0080*
9152	꺾	BC88	CD64	FKX00080*
9153	꺾	BC89	CD66	FKX20080*
9154	꺾	BC8A	CD67	FKX30080*
9155	꺾	BC8B	CD68	FKX40080*
9156	꺾	BC8C	CD6A	FKX60080*
9157	꺾	BC8D	CD6B	FKX70080*
9158	꺾	BC8E	CD6C	FKX80080*
9159	꺾	BC8F	CD6D	FKX90080*
9160	꺾	BC90	CD6E	FKXA0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
9161	펼	BC91	CD6F	FKXB0080*
9162	펼	BC92	CD70	FKXC0080*
9163	펼	BC93	CD74	FKXG0080*
9164	펼	BC94	CD75	FKXH0080
9165	펼	BC95	CD78	FKXK0080*
9166	펼	BC96	CD79	FKXL0080*
9167	펼	BC97	CD7A	FKXM0080*
9168	펼	BC98	CD7B	FKXN0080*
9169	펼	BC99	CD7C	FKXO0080*
9170	펼	BC9A	CD7D	FKXP0080*
9171	펼	BC9B	CD82	FKXU0080*
9172	펼	BC9C	CD83	FKXV0080*
9173	펼	BC9D	CD84	FKXW0080*
9174	펼	BC9E	CD85	FKXX0080*
9175	펼	BC9F	CD86	FKXY0080*
9176	펼	BCA0	CD87	FKXZ0080*
9177	삭	BCA1	ACA2	FG2Q0080
9178	산	BCA2	ACA5	FG2T0080
9179	살	BCA3	ACA9	FG2X0080
9180	삼	BCA4	ACB1	FG350080
9181	샵	BCA5	ACB3	FG370080
9182	샷	BCA6	ACB5	FG390080
9183	상	BCA7	ACB7	FG3B0080
9184	새	BCA8	ACC1	FG3L0080
9185	센	BCA9	ACC5	FG3P0080
9186	셀	BCAA	ACC9	FG3T0080

Line Number	Graphic	PC Code	Host Code	GCGID
9187	셈	BCAB	ACD1	FG410080
9188	생	BCAC	ACD7	FG470080
9189	서	BCAD	ACE1	FG4H0080
9190	석	BCAE	ACE2	FG4I0080
9191	쉬	BCAF	ACE3	FG4J0080
9192	섯	BCB0	ACE4	FG4K0080
9193	선	BCB1	ACE5	FG4L0080
9194	설	BCB2	ACE8	FG4O0080
9195	설	BCB3	ACE9	FG4P0080
9196	섭	BCB4	ACEB	FG4R0080
9197	섭	BCB5	ACEC	FG4S0080
9198	섬	BCB6	ACF1	FG4X0080
9199	섭	BCB7	ACF3	FG4Z0080
9200	섯	BCB8	ACF5	FG510080
9201	섯	BCB9	ACF6	FG520080
9202	성	BCBA	ACF7	FG530080
9203	설	BCBB	ACFC	FG580080
9204	세	BCBC	AD41	FG5D0080
9205	섹	BCBD	AD42	FG5E0080
9206	센	BCBE	AD45	FG5H0080
9207	셀	BCBF	AD49	FG5L0080
9208	셈	BCC0	AD51	FG5T0080
9209	셈	BCC1	AD53	FG5V0080
9210	셋	BCC2	AD55	FG5X0080
9211	셋	BCC3	AD56	FG5Y0080
9212	생	BCC4	AD57	FG5Z0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 32 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
9213	서	BCC5	AD61	FG690080
9214	석	BCC6	AD62	FG6A0080
9215	선	BCC7	AD65	FG6D0080
9216	설	BCC8	AD69	FG6H0080
9217	섬	BCC9	AD71	FG6P0080
9218	섭	BCCA	AD73	FG6R0080
9219	섯	BCCB	AD75	FG6T0080
9220	섯	BCCC	AD76	FG6U0080
9221	성	BCCD	AD77	FG6V0080
9222	세	BCCE	AD81	FG750080
9223	센	BCCF	AD85	FG790080
9224	셀	BCD0	AD89	FG7D0080
9225	생	BCD1	AD97	FG7R0080
9226	소	BCD2	ADA1	FG810080
9227	속	BCD3	ADA2	FG820080
9228	숙	BCD4	ADA3	FG830080
9229	손	BCD5	ADA5	FG850080
9230	솔	BCD6	ADA9	FG890080
9231	숯	BCD7	ADAB	FG8B0080
9232	숨	BCD8	ADB1	FG8H0080
9233	습	BCD9	ADB3	FG8J0080
9234	숫	BCDA	ADB5	FG8L0080
9235	송	BCDB	ADB7	FG8N0080
9236	솔	BCDC	ADBB	FG8R0080
9237	쇠	BCDD	ADC1	FG8X0080
9238	삭	BCDE	ADC2	FG8Y0080

Table 25 (Page 32 of 37). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
9239	환	BCDF	ADC5	FG910080
9240	살	BCE0	ADC9	FG950080
9241	상	BCE1	ADD7	FG9J0080
9242	쇄	BCE2	ADE1	FG9T0080
9243	썬	BCE3	ADE5	FG9X0080
9244	셀	BCE4	ADE9	FGA10080
9245	셈	BCE5	ADF1	FGA90080
9246	셋	BCE6	ADF5	FGAD0080
9247	셋	BCE7	ADF6	FGAE0080
9248	쇠	BCE8	AE41	FGAP0080
9249	썬	BCE9	AE45	FGAT0080
9250	설	BCEA	AE49	FGAX0080
9251	쉽	BCEB	AE51	FGB50080
9252	쉽	BCEC	AE53	FGB70080
9253	셋	BCED	AE55	FGB90080
9254	소	BCEE	AE61	FGBL0080
9255	속	BCEF	AE62	FGBM0080
9256	손	BCF0	AE65	FGBP0080
9257	솔	BCF1	AE69	FGBT0080
9258	숨	BCF2	AE71	FGC10080
9259	습	BCF3	AE73	FGC30080
9260	숫	BCF4	AE75	FGC50080
9261	송	BCF5	AE77	FGC70080
9262	수	BCF6	AE81	FGCH0080
9263	숙	BCF7	AE82	FGCI0080
9264	순	BCF8	AE85	FGCL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9265	솔	BCF9	AE88	FGCO0080
9266	슬	BCFA	AE89	FGCP0080
9267	슴	BCFB	AE91	FGCX0080
9268	습	BCFC	AE93	FGCZ0080
9269	숫	BCFD	AE95	FGD10080
9270	승	BCFE	AE97	FGD30080
9271	펜	BD41	CD88	FKY00080*
9272	펄	BD42	CD8A	FKY20080*
9273	펠	BD43	CD8B	FKY30080*
9274	펄	BD44	CD8C	FKY40080*
9275	펄	BD45	CD8D	FKY50080*
9276	펄	BD46	CD8E	FKY60080*
9277	펄	BD47	CD8F	FKY70080*
9278	펄	BD48	CD90	FKY80080*
9279	펄	BD49	CD91	FKY90080*
9280	펄	BD4A	CD94	FKYC0080*
9281	펄	BD4B	CD96	FKYE0080*
9282	펄	BD4C	CD97	FKYF0080*
9283	펄	BD4D	CD98	FKYG0080*
9284	펄	BD4E	CD99	FKYH0080*
9285	펄	BD4F	CD9A	FKYI0080*
9286	펄	BD50	CD9B	FKYJ0080*
9287	펄	BD51	CD9C	FKYK0080*
9288	펄	BD52	CD9D	FKYL0080*
9289	푼	BD53	CDA3	FKYR0080*
9290	푼	BD54	CDA4	FKYS0080*

Table 25 (Page 33 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9291	푼	BD55	CDA6	FKYU0080*
9292	푼	BD56	CDA7	FKYV0080*
9293	푼	BD57	CDA8	FKYW0080*
9294	푼	BD58	CDAA	FKYY0080*
9295	푼	BD59	CDAB	FKYZ0080*
9296	푼	BD5A	CDAC	FKZ00080*
9297	푼	BD61	CDAD	FKZ10080*
9298	푼	BD62	CDAE	FKZ20080*
9299	푼	BD63	CDAF	FKZ30080*
9300	푼	BD64	CDB0	FKZ40080*
9301	푼	BD65	CDB4	FKZ80080*
9302	푼	BD66	CDB6	FKZA0080*
9303	푼	BD67	CDB8	FKZC0080*
9304	푼	BD68	CDB9	FKZD0080*
9305	푼	BD69	CDBA	FKZE0080*
9306	푼	BD6A	CDBB	FKZF0080*
9307	푼	BD6B	CDBC	FKZG0080*
9308	푼	BD6C	CDBD	FKZH0080*
9309	푼	BD6D	CDC2	FKZM0080*
9310	푼	BD6E	CDC3	FKZN0080*
9311	푼	BD6F	CDC4	FKZO0080*
9312	푼	BD70	CDC5	FKZP0080*
9313	푼	BD71	CDC6	FKZQ0080*
9314	푼	BD72	CDC7	FKZR0080*
9315	푼	BD73	CDC8	FKZS0080*
9316	푼	BD74	CDC9	FKZT0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 34 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9317	꺄	BD75	CDCA	FKZU0080*
9318	꺅	BD76	CDCB	FKZV0080*
9319	꺆	BD77	CDCC	FKZW0080*
9320	꺇	BD78	CDCD	FKZX0080*
9321	꺈	BD79	CDCE	FKZY0080*
9322	꺉	BD7A	CDCF	FKZZ0080*
9323	꺊	BD81	CDD0	FL000080*
9324	꺋	BD82	CDD1	FL010080*
9325	꺌	BD83	CDD3	FL030080*
9326	꺍	BD84	CDD4	FL040080*
9327	꺎	BD85	CDD5	FL050080*
9328	꺏	BD86	CDD6	FL060080*
9329	꺐	BD87	CDD8	FL080080*
9330	꺑	BD88	CDD9	FL090080*
9331	꺒	BD89	CDDA	FL0A0080*
9332	꺓	BD8A	Cddb	FL0B0080*
9333	꺔	BD8B	CDDC	FL0C0080*
9334	꺕	BD8C	CDDD	FL0D0080*
9335	꺖	BD8D	CDE1	FL0H0080
9336	꺗	BD8E	CDE2	FL0I0080*
9337	꺘	BD8F	CDE3	FL0J0080*
9338	꺙	BD90	CDE4	FL0K0080*
9339	꺚	BD91	CDE5	FL0L0080*
9340	꺛	BD92	CDE6	FL0M0080*
9341	꺜	BD93	CDE7	FL0N0080*
9342	꺝	BD94	CDE8	FL0O0080*

Table 25 (Page 34 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9343	꺞	BD95	CDE9	FL0P0080*
9344	꺟	BD96	CDEA	FL0Q0080*
9345	꺠	BD97	CDEB	FL0R0080*
9346	꺡	BD98	CDEC	FL0S0080*
9347	꺢	BD99	CDED	FL0T0080*
9348	꺣	BD9A	CDEE	FL0U0080*
9349	꺤	BD9B	CDEF	FL0V0080*
9350	꺥	BD9C	CDF0	FL0W0080*
9351	꺦	BD9D	CDF1	FL0X0080*
9352	꺧	BD9E	CDF3	FL0Z0080*
9353	꺨	BD9F	CDF4	FL100080*
9354	꺩	BDA0	CDF5	FL110080*
9355	꺪	BDA1	AE99	FGD50080
9356	꺫	BDA2	AE9B	FGD70080
9357	꺬	BDA3	AE9C	FGD80080
9358	꺭	BDA4	AEA1	FGDD0080
9359	꺮	BDA5	AEB6	FGDY0080
9360	꺯	BDA6	AEC1	FGE90080
9361	꺰	BDA7	AEC2	FGEA0080
9362	꺱	BDA8	AEC5	FGED0080
9363	꺲	BDA9	AEC9	FGEH0080
9364	꺳	BDAa	AED1	FGEP0080
9365	꺴	BDAB	AED7	FGEV0080
9366	꺵	BDAC	AEE1	FGF50080
9367	꺶	BDAD	AEE2	FGF60080
9368	꺷	BDAE	AEE5	FGF90080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9369	설	BDAF	AEE9	FGFD0080
9370	쉽	BDB0	AEF1	FGFL0080
9371	습	BDB1	AEF3	FGFN0080
9372	셋	BDB2	AEF5	FGFP0080
9373	씽	BDB3	AEF7	FGFR0080
9374	슈	BDB4	AF41	FGG10080
9375	숙	BDB5	AF42	FGG20080
9376	술	BDB6	AF49	FGG90080
9377	습	BDB7	AF51	FGGH0080
9378	숫	BDB8	AF55	FGGL0080
9379	승	BDB9	AF57	FGGN0080
9380	스	BDBA	AF61	FGGX0080
9381	숙	BDBB	AF62	FGGY0080
9382	슨	BDBC	AF65	FGH10080
9383	슬	BDBD	AF69	FGH50080
9384	슌	BDBE	AF6A	FGH60080
9385	슴	BDBF	AF71	FGHD0080
9386	습	BDC0	AF73	FGHF0080
9387	숫	BDC1	AF75	FGHH0080
9388	승	BDC2	AF77	FGHJ0080
9389	시	BDC3	AFA1	FGIP0080
9390	식	BDC4	AFA2	FGIQ0080
9391	신	BDC5	AFA5	FGIT0080
9392	실	BDC6	AFA8	FGIW0080
9393	실	BDC7	AFA9	FGIX0080
9394	싫	BDC8	AFB0	FGJ40080

Table 25 (Page 35 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9395	심	BDC9	AFB1	FGJ50080
9396	십	BDCA	AFB3	FGJ70080
9397	섯	BDCB	AFB5	FGJ90080
9398	싱	BDCC	AFB7	FGJB0080
9399	씰	BDCD	AFBC	FGJG0080
9400	싸	BDCE	B061	FGM90080
9401	쌉	BDCF	B062	FGMA0080
9402	쌌	BDD0	B064	FGMC0080
9403	싼	BDD1	B065	FGMD0080
9404	쌀	BDD2	B069	FGMH0080
9405	쌘	BDD3	B071	FGMP0080
9406	쌘	BDD4	B073	FGMR0080
9407	쌘	BDD5	B076	FGMU0080
9408	쌍	BDD6	B077	FGMV0080
9409	쌍	BDD7	B07D	FGN10080
9410	쌌	BDD8	B081	FGN50080
9411	쌌	BDD9	B082	FGN60080
9412	쌌	BDDA	B085	FGN90080
9413	쌌	Bddb	B089	FGND0080
9414	쌌	BDDC	B091	FGNL0080
9415	쌌	BDDD	B093	FGNN0080
9416	쌌	BDDE	B096	FGNQ0080
9417	쌌	BDDF	B097	FGNR0080
9418	쌍	BDE0	B0B7	FGON0080
9419	써	BDE1	B0E1	FGPT0080
9420	써	BDE2	B0E2	FGPU0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
9421	써	BDE3	B0E5	FGPX0080
9422	썩	BDE4	B0E9	FGQ10080
9423	썪	BDE5	B0EB	FGQ30080
9424	썫	BDE6	B0F1	FGQ90080
9425	썬	BDE7	B0F3	FGQB0080
9426	썭	BDE8	B0F6	FGQE0080
9427	썮	BDE9	B0F7	FGQF0080
9428	썯	BDEA	B141	FGQP0080
9429	썰	BDEB	B145	FGQT0080
9430	썰	BDEC	B149	FGQX0080
9431	썱	BDED	B185	FGSL0080
9432	썲	BDEE	B1A1	FGTD0080
9433	썳	BDEF	B1A2	FGTE0080
9434	썴	BDF0	B1A5	FGTH0080
9435	썵	BDF1	B1A8	FGTK0080
9436	썶	BDF2	B1A9	FGTL0080
9437	썷	BDF3	B1AB	FGTN0080
9438	썸	BDF4	B1B1	FGTT0080
9439	썹	BDF5	B1B3	FGTV0080
9440	썺	BDF6	B1B7	FGTZ0080
9441	썻	BDF7	B1C1	FGU90080
9442	썼	BDF8	B1C2	FGUA0080
9443	썽	BDF9	B1C5	FGUD0080
9444	썾	BDF A	B1D6	FGUU0080
9445	썿	BDFB	B1E1	FGV50080
9446	잀	BDFC	B1F6	FGVQ0080

Line Number	Graphic	PC Code	Host Code	GCGID
9447	잁	BDFD	B241	FGW10080
9448	잂	BDFE	B245	FGW50080
9449	잃	BE41	CDF6	FL120080*
9450	임	BE42	CDF7	FL130080*
9451	입	BE43	CDF8	FL140080*
9452	잆	BE44	CDF9	FL150080*
9453	잇	BE45	CDF A	FL160080*
9454	있	BE46	CDFB	FL170080*
9455	잉	BE47	CDFC	FL180080*
9456	잊	BE48	CDFD	FL190080*
9457	잋	BE49	CE42	FL1E0080*
9458	잌	BE4A	CE43	FL1F0080*
9459	잍	BE4B	CE44	FL1G0080*
9460	잎	BE4C	CE46	FL1I0080*
9461	잏	BE4D	CE47	FL1J0080*
9462	자	BE4E	CE48	FL1K0080*
9463	작	BE4F	CE49	FL1L0080*
9464	잒	BE50	CE4A	FL1M0080*
9465	잓	BE51	CE4B	FL1N0080*
9466	잔	BE52	CE4C	FL1O0080*
9467	잕	BE53	CE4D	FL1P0080*
9468	잖	BE54	CE4E	FL1Q0080*
9469	잗	BE55	CE4F	FL1R0080*
9470	잘	BE56	CE50	FL1S0080*
9471	잙	BE57	CE51	FL1T0080*
9472	잚	BE58	CE53	FL1V0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 25 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9473	꺾	BE59	CE54	FL1W0080*
9474	꺾	BE5A	CE55	FL1X0080*
9475	꺾	BE61	CE56	FL1Y0080*
9476	꺾	BE62	CE57	FL1Z0080*
9477	꺾	BE63	CE58	FL200080*
9478	꺾	BE64	CE59	FL210080*
9479	꺾	BE65	CE5A	FL220080*
9480	꺾	BE66	CE5B	FL230080*
9481	꺾	BE67	CE5C	FL240080*
9482	꺾	BE68	CE5D	FL250080*
9483	꺾	BE69	CE62	FL2A0080*
9484	꺾	BE6A	CE63	FL2B0080*
9485	꺾	BE6B	CE64	FL2C0080*
9486	꺾	BE6C	CE66	FL2E0080*
9487	꺾	BE6D	CE67	FL2F0080*
9488	꺾	BE6E	CE68	FL2G0080*
9489	꺾	BE6F	CE6A	FL2I0080*
9490	꺾	BE70	CE6B	FL2J0080*
9491	꺾	BE71	CE6C	FL2K0080*
9492	꺾	BE72	CE6D	FL2L0080*
9493	꺾	BE73	CE6E	FL2M0080*
9494	꺾	BE74	CE6F	FL2N0080*
9495	꺾	BE75	CE70	FL2O0080*
9496	꺾	BE76	CE71	FL2P0080*
9497	꺾	BE77	CE74	FL2S0080*
9498	꺾	BE78	CE76	FL2U0080*

Table 25 (Page 37 of 37). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9499	꺾	BE79	CE77	FL2V0080*
9500	꺾	BE7A	CE78	FL2W0080*

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 1 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9501	꽃	BE81	CE79	FL2X0080*
9502	꽃	BE82	CE7A	FL2Y0080*
9503	꽃	BE83	CE7B	FL2Z0080*
9504	꽃	BE84	CE7C	FL300080*
9505	꽃	BE85	CE7D	FL310080*
9506	꽃	BE86	CE83	FL370080*
9507	꽃	BE87	CE84	FL380080*
9508	꽃	BE88	CE86	FL3A0080*
9509	꽃	BE89	CE87	FL3B0080*
9510	꽃	BE8A	CE8A	FL3E0080*
9511	꽃	BE8B	CE8C	FL3G0080*
9512	꽃	BE8C	CE8D	FL3H0080*
9513	꽃	BE8D	CE8E	FL3I0080*
9514	꽃	BE8E	CE8F	FL3J0080*
9515	꽃	BE8F	CE90	FL3K0080*
9516	꽃	BE90	CE94	FL3O0080*
9517	꽃	BE91	CE96	FL3Q0080*
9518	꽃	BE92	CE98	FL3S0080*
9519	꽃	BE93	CE99	FL3T0080*
9520	꽃	BE94	CE9A	FL3U0080*
9521	꽃	BE95	CE9B	FL3V0080*
9522	꽃	BE96	CE9C	FL3W0080*
9523	꽃	BE97	CE9D	FL3X0080*
9524	꽃	BE98	CEA2	FL420080*
9525	꽃	BE99	CEA3	FL430080*
9526	꽃	BE9A	CEA4	FL440080*

Table 26 (Page 1 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9527	꽃	BE9B	CEA5	FL450080*
9528	꽃	BE9C	CEA6	FL460080*
9529	꽃	BE9D	CEA7	FL470080*
9530	꽃	BE9E	CEA8	FL480080*
9531	꽃	BE9F	CEA9	FL490080*
9532	꽃	BEA0	CEAA	FL4A0080*
9533	꽃	BEA1	B249	FGW90080
9534	꽃	BEA2	B251	FGWH0080
9535	꽃	BEA3	B253	FGWJ0080
9536	꽃	BEA4	B261	FGWX0080
9537	꽃	BEA5	B281	FGXT0080
9538	꽃	BEA6	B282	FGXU0080
9539	꽃	BEA7	B285	FGXX0080
9540	꽃	BEA8	B289	FGY10080
9541	꽃	BEA9	B291	FGY90080
9542	꽃	BEAA	B293	FGYB0080
9543	꽃	BEAB	B297	FGYF0080
9544	꽃	BEAC	B2A1	FGYP0080
9545	꽃	BEAD	B2B6	FGZA0080
9546	꽃	BEAE	B2C1	FGZL0080
9547	꽃	BEAF	B2E1	FH0H0080
9548	꽃	BEB0	B2E5	FH0L0080
9549	꽃	BEB1	B357	FH1Z0080
9550	꽃	BEB2	B361	FH290080
9551	꽃	BEB3	B362	FH2A0080
9552	꽃	BEB4	B365	FH2D0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
9553	쓸	BEB5	B369	FH2H0080
9554	쑤	BEB6	B36B	FH2J0080
9555	쑥	BEB7	B370	FH2O0080
9556	쑦	BEB8	B371	FH2P0080
9557	쑧	BEB9	B373	FH2R0080
9558	씩	BEBA	B381	FH350080
9559	쑨	BEBB	B385	FH390080
9560	쑩	BEEC	B389	FH3D0080
9561	쑪	BEBD	B391	FH3L0080
9562	씨	BEBE	B3A1	FH410080
9563	씩	BEBF	B3A2	FH420080
9564	쑬	BEC0	B3A5	FH450080
9565	쑭	BEC1	B3A9	FH490080
9566	쑮	BEC2	B3B1	FH4H0080
9567	쑯	BEC3	B3B3	FH4J0080
9568	쑰	BEC4	B3B5	FH4L0080
9569	쑱	BEC5	B3B7	FH4N0080
9570	아	BEC6	B461	FH7L0080
9571	악	BEC7	B462	FH7M0080
9572	안	BEC8	B465	FH7P0080
9573	앗	BEC9	B466	FH7Q0080
9574	았	BECA	B467	FH7R0080
9575	알	BECB	B469	FH7T0080
9576	압	BECC	B46A	FH7U0080
9577	앑	BECD	B46B	FH7V0080
9578	앒	BECE	B470	FH800080

Line Number	Graphic	PC Code	Host Code	GCGID
9579	압	BECF	B471	FH810080
9580	압	BED0	B473	FH830080
9581	앗	BED1	B475	FH850080
9582	앓	BED2	B476	FH860080
9583	앙	BED3	B477	FH870080
9584	알	BED4	B47B	FH8B0080
9585	암	BED5	B47C	FH8C0080
9586	애	BED6	B481	FH8H0080
9587	액	BED7	B482	FH8I0080
9588	앤	BED8	B485	FH8L0080
9589	앨	BED9	B489	FH8P0080
9590	앞	BEDA	B491	FH8X0080
9591	앟	BEDB	B493	FH8Z0080
9592	애	BEDC	B495	FH910080
9593	액	BEDD	B496	FH920080
9594	앵	BEDE	B497	FH930080
9595	야	BEDF	B4A1	FH9D0080
9596	약	BEE0	B4A2	FH9E0080
9597	얀	BEE1	B4A5	FH9H0080
9598	얏	BEE2	B4A9	FH9L0080
9599	양	BEE3	B4AC	FH9O0080
9600	얒	BEE4	B4B1	FH9T0080
9601	얓	BEE5	B4B3	FH9V0080
9602	얔	BEE6	B4B5	FH9X0080
9603	얕	BEE7	B4B7	FH9Z0080
9604	얖	BEE8	B4BB	FHA30080



IBM Korean Graphic Character Set


DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 3 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9605	양	BEE9	B4BD	FHA50080
9606	애	BEEA	B4C1	FHA90080
9607	앤	BEEB	B4C5	FHAD0080
9608	엘	BEEC	B4C9	FHAH0080
9609	엡	BEED	B4D3	FHAR0080
9610	어	BEEE	B4E1	FHB50080
9611	억	BEEF	B4E2	FHB60080
9612	언	BEF0	B4E5	FHB90080
9613	엣	BEF1	B4E6	FHBA0080
9614	언	BEF2	B4E8	FHBC0080
9615	얼	BEF3	B4E9	FHBD0080
9616	엣	BEF4	B4EA	FHBE0080
9617	엣	BEF5	B4EB	FHBF0080
9618	엄	BEF6	B4F1	FHBL0080
9619	업	BEF7	B4F3	FHBN0080
9620	엣	BEF8	B4F4	FHBO0080
9621	엇	BEF9	B4F5	FHBP0080
9622	엇	BEFA	B4F6	FHBQ0080
9623	영	BEFB	B4F7	FHBR0080
9624	엇	BEFC	B4F8	FHBS0080
9625	얼	BEFD	B4FA	FHBU0080
9626	엣	BEFE	B4FC	FHBW0080
9627	꺠	BF41	CEAB	FL4B0080*
9628	꺡	BF42	CEAC	FL4C0080*
9629	꺢	BF43	CEAD	FL4D0080*
9630	꺣	BF44	CEAE	FL4E0080*

Table 26 (Page 3 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9631	꺤	BF45	CEAF	FL4F0080*
9632	꺥	BF46	CEB0	FL4G0080*
9633	꺦	BF47	CEB1	FL4H0080*
9634	꺧	BF48	CEB3	FL4J0080*
9635	꺨	BF49	CEB4	FL4K0080*
9636	꺩	BF4A	CEB5	FL4L0080*
9637	꺪	BF4B	CEB6	FL4M0080*
9638	꺫	BF4C	CEB8	FL4O0080*
9639	꺬	BF4D	CEB9	FL4P0080*
9640	꺭	BF4E	CEBA	FL4Q0080*
9641	꺮	BF4F	CEBB	FL4R0080*
9642	꺯	BF50	CEBC	FL4S0080*
9643	꺰	BF51	CEBD	FL4T0080*
9644	꺱	BF52	CEC1	FL4X0080
9645	꺲	BF53	CEC2	FL4Y0080*
9646	꺳	BF54	CEC3	FL4Z0080*
9647	꺴	BF55	CEC4	FL500080*
9648	꺵	BF56	CEC5	FL510080*
9649	꺶	BF57	CEC6	FL520080*
9650	꺷	BF58	CEC7	FL530080*
9651	꺸	BF59	CEC8	FL540080*
9652	꺹	BF5A	CEC9	FL550080*
9653	꺺	BF61	CECA	FL560080*
9654	꺻	BF62	CECB	FL570080*
9655	꺼	BF63	CECC	FL580080*
9656	꺽	BF64	CECD	FL590080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
9657	꺾	BF65	CECE	FL5A0080*
9658	꺾	BF66	CECF	FL5B0080*
9659	꺾	BF67	CED0	FL5C0080*
9660	꺾	BF68	CED1	FL5D0080*
9661	꺾	BF69	CED3	FL5F0080*
9662	꺾	BF6A	CED4	FL5G0080*
9663	꺾	BF6B	CED5	FL5H0080*
9664	꺾	BF6C	CED6	FL5I0080*
9665	꺾	BF6D	CED7	FL5J0080*
9666	꺾	BF6E	CED8	FL5K0080*
9667	꺾	BF6F	CED9	FL5L0080*
9668	꺾	BF70	CEDA	FL5M0080*
9669	꺾	BF71	CEDB	FL5N0080*
9670	꺾	BF72	CEDC	FL5O0080*
9671	꺾	BF73	CEDD	FL5P0080*
9672	꺾	BF74	CEE2	FL5U0080*
9673	꺾	BF75	CEE3	FL5V0080*
9674	꺾	BF76	CEE4	FL5W0080*
9675	꺾	BF77	CEE6	FL5Y0080*
9676	꺾	BF78	CEE7	FL5Z0080*
9677	꺾	BF79	CEE8	FL600080*
9678	꺾	BF7A	CEEA	FL620080*
9679	꺾	BF81	CEEB	FL630080*
9680	꺾	BF82	CEEC	FL640080*
9681	꺾	BF83	CEED	FL650080*
9682	꺾	BF84	CEEE	FL660080*

Line Number	Graphic	PC Code	Host Code	GCGID
9683	꺾	BF85	CEEF	FL670080*
9684	꺾	BF86	CEF0	FL680080*
9685	꺾	BF87	CEF3	FL6B0080*
9686	꺾	BF88	CEF4	FL6C0080*
9687	꺾	BF89	CEF6	FL6E0080*
9688	꺾	BF8A	CEF7	FL6F0080*
9689	꺾	BF8B	CEF8	FL6G0080*
9690	꺾	BF8C	CEF9	FL6H0080*
9691	꺾	BF8D	CEFA	FL6I0080*
9692	꺾	BF8E	CEFB	FL6J0080*
9693	꺾	BF8F	CEFC	FL6K0080*
9694	꺾	BF90	CEFD	FL6L0080*
9695	꺾	BF91	CF42	FL6Q0080
9696	꺾	BF92	CF43	FL6R0080*
9697	꺾	BF93	CF44	FL6S0080*
9698	꺾	BF94	CF46	FL6U0080*
9699	꺾	BF95	CF47	FL6V0080*
9700	꺾	BF96	CF48	FL6W0080*
9701	꺾	BF97	CF4A	FL6Y0080*
9702	꺾	BF98	CF4B	FL6Z0080*
9703	꺾	BF99	CF4C	FL700080*
9704	꺾	BF9A	CF4D	FL710080*
9705	꺾	BF9B	CF4E	FL720080*
9706	꺾	BF9C	CF4F	FL730080*
9707	꺾	BF9D	CF50	FL740080*
9708	꺾	BF9E	CF53	FL770080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 5 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9709	꺾	BF9F	CF54	FL780080*
9710	꺾	BFA0	CF56	FL7A0080*
9711	예	BFA1	B541	FHC10080
9712	억	BFA2	B542	FHC20080
9713	엔	BFA3	B545	FHC50080
9714	엘	BFA4	B549	FHC90080
9715	엠	BFA5	B551	FHCH0080
9716	엡	BFA6	B553	FHCJ0080
9717	엇	BFA7	B555	FHCL0080
9718	잉	BFA8	B557	FHCN0080
9719	여	BFA9	B561	FHCX0080
9720	역	BFAA	B562	FHCY0080
9721	억	BFAB	B563	FHCZ0080
9722	연	BFAC	B565	FHD10080
9723	열	BFAD	B569	FHD50080
9724	열	BFAE	B56B	FHD70080
9725	열	BFAF	B56C	FHD80080
9726	엄	BFB0	B571	FHDD0080
9727	엡	BFB1	B573	FHDF0080
9728	열	BFB2	B574	FHDG0080
9729	엇	BFB3	B575	FHDH0080
9730	열	BFB4	B576	FHDI0080
9731	영	BFB5	B577	FHDJ0080
9732	열	BFB6	B57B	FHDN0080
9733	열	BFB7	B57C	FHDO0080
9734	영	BFB8	B57D	FHDP0080

Table 26 (Page 5 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9735	예	BFB9	B581	FHDT0080
9736	엔	BFBA	B585	FHDX0080
9737	엘	BFBB	B589	FHE10080
9738	엠	BFBC	B591	FHE90080
9739	엡	BFBD	B593	FHEB0080
9740	엇	BFBE	B595	FHED0080
9741	열	BFBF	B596	FHEE0080
9742	오	BFC0	B5A1	FHEP0080
9743	옥	BFC1	B5A2	FHEQ0080
9744	온	BFC2	B5A5	FHET0080
9745	올	BFC3	B5A9	FHEX0080
9746	옥	BFC4	B5AA	FHEY0080
9747	움	BFC5	B5AB	FHEZ0080
9748	웁	BFC6	B5AD	FHF10080
9749	웁	BFC7	B5B0	FHF40080
9750	움	BFC8	B5B1	FHF50080
9751	웁	BFC9	B5B3	FHF70080
9752	웁	BFCA	B5B5	FHF90080
9753	응	BFCB	B5B7	FHFB0080
9754	웁	BFCC	B5B9	FHFD0080
9755	와	BFCD	B5C1	FHFL0080
9756	웁	BFCE	B5C2	FHFM0080
9757	완	BFCF	B5C5	FHFP0080
9758	왈	BFD0	B5C9	FHFT0080
9759	왓	BFD1	B5D1	FHG10080
9760	왓	BFD2	B5D3	FHG30080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 6 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9761	왓	BFD3	B5D5	FHG50080
9762	왘	BFD4	B5D6	FHG60080
9763	왕	BFD5	B5D7	FHG70080
9764	왜	BFD6	B5E1	FHGH0080
9765	웁	BFD7	B5E2	FHGI0080
9766	웁	BFD8	B5E5	FHGL0080
9767	웁	BFD9	B5F1	FHGX0080
9768	왓	BFDA	B5F5	FHH10080
9769	웁	BFDB	B5F7	FHH30080
9770	외	BFDC	B641	FHHD0080
9771	웁	BFDD	B642	FHHE0080
9772	원	BFDE	B645	FHHH0080
9773	일	BDFD	B649	FHHL0080
9774	웁	BFE0	B651	FHHT0080
9775	웁	BFE1	B653	FHHV0080
9776	왓	BFE2	B655	FHHX0080
9777	웁	BFE3	B657	FHHZ0080
9778	요	BFE4	B661	FHI90080
9779	육	BFE5	B662	FHIA0080
9780	은	BFE6	B665	FHID0080
9781	을	BFE7	B669	FHIH0080
9782	음	BFE8	B671	FHIP0080
9783	음	BFE9	B673	FHIR0080
9784	웃	BFEA	B675	FHIT0080
9785	용	BFEB	B677	FHIV0080
9786	우	BFEC	B681	FHJ50080

Table 26 (Page 6 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9787	욱	BFED	B682	FHJ60080
9788	운	BFEE	B685	FHJ90080
9789	을	BFEF	B689	FHJD0080
9790	웁	BFF0	B68A	FHJE0080
9791	웁	BFF1	B68B	FHJF0080
9792	음	BFF2	B691	FHJL0080
9793	웁	BFF3	B693	FHJN0080
9794	웃	BFF4	B695	FHJP0080
9795	웅	BFF5	B697	FHJR0080
9796	위	BFF6	B6A1	FHK10080
9797	웁	BFF7	B6A2	FHK20080
9798	원	BFF8	B6A5	FHK50080
9799	일	BFF9	B6A9	FHK90080
9800	웁	BFFA	B6B1	FHKH0080
9801	웁	BFFB	B6B3	FHKJ0080
9802	왓	BFFC	B6B6	FHKM0080
9803	웁	BFFD	B6B7	FHKN0080
9804	웨	BFFE	B6C1	FHKX0080
9805	꽃	C041	CF58	FL7C0080*
9806	꽃	C042	CF59	FL7D0080*
9807	쪽	C043	CF5A	FL7E0080*
9808	플	C044	CF5B	FL7F0080*
9809	플	C045	CF5C	FL7G0080*
9810	풍	C046	CF5D	FL7H0080*
9811	푼	C047	CF62	FL7M0080
9812	푼	C048	CF63	FL7N0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 7 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9813	ㅍ	C049	CF64	FL7O0080*
9814	ㅑ	C04A	CF66	FL7Q0080*
9815	ㅓ	C04B	CF67	FL7R0080*
9816	ㅕ	C04C	CF68	FL7S0080*
9817	ㅗ	C04D	CF6A	FL7U0080*
9818	ㅛ	C04E	CF6B	FL7V0080*
9819	ㅜ	C04F	CF6C	FL7W0080*
9820	ㅝ	C050	CF6D	FL7X0080
9821	ㅞ	C051	CF6E	FL7Y0080*
9822	ㅟ	C052	CF6F	FL7Z0080*
9823	ㅠ	C053	CF70	FL800080*
9824	ㅡ	C054	CF74	FL840080*
9825	ㅢ	C055	CF76	FL860080*
9826	ㅣ	C056	CF77	FL870080
9827	ㅤ	C057	CF78	FL880080*
9828	ㅥ	C058	CF79	FL890080*
9829	ㅦ	C059	CF7A	FL8A0080*
9830	ㅧ	C05A	CF7B	FL8B0080*
9831	ㅨ	C061	CF7C	FL8C0080*
9832	ㅩ	C062	CF7D	FL8D0080*
9833	ㅪ	C063	CF81	FL8H0080
9834	ㅫ	C064	CF82	FL8I0080*
9835	ㅬ	C065	CF83	FL8J0080*
9836	ㅭ	C066	CF84	FL8K0080*
9837	ㅮ	C067	CF85	FL8L0080
9838	ㅯ	C068	CF86	FL8M0080*

Table 26 (Page 7 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9839	ㅰ	C069	CF87	FL8N0080*
9840	ㅱ	C06A	CF88	FL8O0080*
9841	ㅲ	C06B	CF89	FL8P0080*
9842	ㅳ	C06C	CF8A	FL8Q0080*
9843	ㅴ	C06D	CF8B	FL8R0080*
9844	ㅵ	C06E	CF8C	FL8S0080*
9845	ㅶ	C06F	CF8D	FL8T0080*
9846	ㅷ	C070	CF8E	FL8U0080*
9847	ㅸ	C071	CF8F	FL8V0080*
9848	ㅹ	C072	CF90	FL8W0080*
9849	ㅺ	C073	CF91	FL8X0080*
9850	ㅻ	C074	CF93	FL8Z0080*
9851	ㅼ	C075	CF94	FL900080*
9852	ㅽ	C076	CF95	FL910080*
9853	ㅿ	C077	CF96	FL920080*
9854	ㅾ	C078	CF97	FL930080*
9855	ㅿ	C079	CF98	FL940080*
9856	ㅿ	C07A	CF99	FL950080*
9857	ㅿ	C081	CF9A	FL960080*
9858	ㅿ	C082	CF9B	FL970080*
9859	ㅿ	C083	CF9C	FL980080*
9860	ㅿ	C084	CF9D	FL990080*
9861	ㅿ	C085	CFA3	FL9F0080*
9862	ㅿ	C086	CFA4	FL9G0080*
9863	ㅿ	C087	CFA6	FL9I0080*
9864	ㅿ	C088	CFA7	FL9J0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 8 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9865	핀	C089	CFA8	FL9K0080*
9866	퓌	C08A	CFAA	FL9M0080*
9867	퓌	C08B	CFAB	FL9N0080*
9868	퓌	C08C	CFAC	FL9O0080*
9869	퓌	C08D	CFAD	FL9P0080*
9870	퓌	C08E	CFAE	FL9Q0080*
9871	퓌	C08F	CFAF	FL9R0080*
9872	퓌	C090	CFB0	FL9S0080*
9873	퓌	C091	CFB4	FL9W0080*
9874	퓌	C092	CFB6	FL9Y0080*
9875	퓌	C093	CFB8	FLA00080*
9876	퓌	C094	CFB9	FLA10080*
9877	퓌	C095	CFBA	FLA20080*
9878	퓌	C096	CFBB	FLA30080*
9879	퓌	C097	CFBC	FLA40080*
9880	퓌	C098	CFBD	FLA50080*
9881	핍	C099	D063	FLCZ0080*
9882	핍	C09A	D064	FLD00080*
9883	핍	C09B	D066	FLD20080*
9884	핍	C09C	D067	FLD30080*
9885	핍	C09D	D068	FLD40080
9886	핍	C09E	D06A	FLD60080
9887	핍	C09F	D06B	FLD70080*
9888	핍	C0A0	D06C	FLD80080*
9889	웁	C0A1	B6C2	FHKY0080
9890	웁	C0A2	B6C5	FHL10080

Table 26 (Page 8 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9891	웁	C0A3	B6C9	FHL50080
9892	웁	C0A4	B6D1	FHLD0080
9893	웁	C0A5	B6D3	FHLF0080
9894	웁	C0A6	B6D7	FHLJ0080
9895	웁	C0A7	B6E1	FHLT0080
9896	웁	C0A8	B6E2	FHLU0080
9897	웁	C0A9	B6E5	FHLX0080
9898	웁	C0AA	B6E9	FHM10080
9899	웁	C0AB	B6F1	FHM90080
9900	웁	C0AC	B6F3	FHMB0080
9901	웁	C0AD	B6F5	FHMD0080
9902	웁	C0AE	B6F7	FHMF0080
9903	유	C0AF	B741	FHMP0080
9904	유	C0B0	B742	FHMQ0080
9905	유	C0B1	B745	FHMT0080
9906	유	C0B2	B749	FHMX0080
9907	유	C0B3	B751	FHN50080
9908	유	C0B4	B753	FHN70080
9909	유	C0B5	B755	FHN90080
9910	유	C0B6	B757	FHNB0080
9911	유	C0B7	B759	FHND0080
9912	유	C0B8	B761	FHNL0080
9913	유	C0B9	B762	FHNM0080
9914	유	C0BA	B765	FHNP0080
9915	유	C0BB	B769	FHNT0080
9916	유	C0BC	B76F	FHNZ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 9 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9917	음	C0BD	B771	FHO10080
9918	읍	C0BE	B773	FHO30080
9919	웃	C0BF	B775	FHO50080
9920	응	C0C0	B777	FHO70080
9921	웃	C0C1	B778	FHO80080
9922	웃	C0C2	B779	FHO90080
9923	욱	C0C3	B77A	FHOA0080
9924	을	C0C4	B77B	FHOB0080
9925	윙	C0C5	B77C	FHOC0080
9926	웅	C0C6	B77D	FHOD0080
9927	의	C0C7	B781	FHOH0080
9928	원	C0C8	B785	FHOL0080
9929	일	C0C9	B789	FHOP0080
9930	임	C0CA	B791	FHOX0080
9931	잇	C0CB	B795	FHP10080
9932	이	C0CC	B7A1	FHPD0080
9933	익	C0CD	B7A2	FHPE0080
9934	인	C0CE	B7A5	FHPH0080
9935	일	C0CF	B7A9	FHPL0080
9936	윙	C0D0	B7AA	FHPM0080
9937	을	C0D1	B7AB	FHPN0080
9938	읃	C0D2	B7B0	FHPS0080
9939	입	C0D3	B7B1	FHPT0080
9940	입	C0D4	B7B3	FHPV0080
9941	잇	C0D5	B7B5	FHPX0080
9942	있	C0D6	B7B6	FHPY0080

Table 26 (Page 9 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
9943	잉	C0D7	B7B7	FHPZ0080
9944	잇	C0D8	B7B8	FHQ00080
9945	을	C0D9	B7BC	FHQ40080
9946	자	C0DA	B861	FHSX0080
9947	작	C0DB	B862	FHSY0080
9948	잔	C0DC	B865	FHT10080
9949	쟈	C0DD	B867	FHT30080
9950	잔	C0DE	B868	FHT40080
9951	갈	C0DF	B869	FHT50080
9952	쟈	C0E0	B86B	FHT70080
9953	잡	C0E1	B871	FHTD0080
9954	잡	C0E2	B873	FHTF0080
9955	쟈	C0E3	B875	FHTH0080
9956	쟈	C0E4	B876	FHTI0080
9957	장	C0E5	B877	FHTJ0080
9958	쟈	C0E6	B878	FHTK0080
9959	재	C0E7	B881	FHTT0080
9960	재	C0E8	B882	FHTU0080
9961	젠	C0E9	B885	FHTX0080
9962	젤	C0EA	B889	FHU10080
9963	젼	C0EB	B891	FHU90080
9964	젼	C0EC	B893	FHUB0080
9965	젼	C0ED	B895	FHUD0080
9966	젼	C0EE	B896	FHUE0080
9967	쟁	C0EF	B897	FHUF0080
9968	쟈	C0F0	B8A1	FHUP0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
9969	작	C0F1	B8A2	FHUQ0080
9970	잔	C0F2	B8A5	FHUT0080
9971	쟝	C0F3	B8A7	FHUV0080
9972	잘	C0F4	B8A9	FHUX0080
9973	잠	C0F5	B8B1	FHV50080
9974	장	C0F6	B8B7	FHVB0080
9975	재	C0F7	B8C1	FHVL0080
9976	ぜん	C0F8	B8C5	FHVP0080
9977	젤	C0F9	B8C9	FHVT0080
9978	저	C0FA	B8E1	FHWH0080
9979	적	C0FB	B8E2	FHWI0080
9980	전	C0FC	B8E5	FHWL0080
9981	절	C0FD	B8E9	FHWP0080
9982	젊	C0FE	B8EB	FHWR0080
9983	핍	C141	D06D	FLD90080*
9984	핇	C142	D06F	FLDB0080*
9985	핉	C143	D070	FLDC0080*
9986	핊	C144	D074	FLDG0080*
9987	핋	C145	D076	FLDI0080
9988	핌	C146	D078	FLDK0080*
9989	핎	C147	D079	FLDL0080*
9990	핏	C148	D07A	FLDM0080*
9991	핑	C149	D07B	FLDN0080
9992	핒	C14A	D07C	FLDO0080*
9993	핓	C14B	D07D	FLDP0080*
9994	핔	C14C	D083	FLDV0080*

Line Number	Graphic	PC Code	Host Code	GCGID
9995	핕	C14D	D084	FLDW0080*
9996	핖	C14E	D086	FLDY0080*
9997	핗	C14F	D087	FLDZ0080*
9998	하	C150	D088	FLE00080*
9999	학	C151	D08A	FLE20080*
10000	핚	C152	D08B	FLE30080*
10001	핛	C153	D08C	FLE40080*
10002	한	C154	D08D	FLE50080*
10003	핝	C155	D08E	FLE60080*
10004	핞	C156	D08F	FLE70080*
10005	핟	C157	D090	FLE80080*
10006	할	C158	D094	FLEC0080*
10007	핡	C159	D098	FLEG0080*
10008	핢	C15A	D099	FLEH0080*
10009	핣	C161	D09A	FLEI0080*
10010	핤	C162	D09B	FLEJ0080*
10011	핥	C163	D09C	FLEK0080*
10012	핦	C164	D09D	FLEL0080*
10013	핧	C165	D0A2	FLEQ0080*
10014	함	C166	D0A3	FLE R0080*
10015	합	C167	D0A4	FLES0080*
10016	핪	C168	D0A5	FLET0080*
10017	핫	C169	D0A6	FLEU0080*
10018	핬	C16A	D0A7	FLEV0080*
10019	항	C16B	D0A8	FLEW0080*
10020	핮	C16C	D0A9	FLEX0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 11 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10021	학	C16D	D0AA	FLEY0080*
10022	학	C16E	D0AB	FLEZ0080*
10023	학	C16F	D0AC	FLF00080*
10024	학	C170	D0AD	FLF10080*
10025	학	C171	D0AE	FLF20080*
10026	학	C172	D0AF	FLF30080*
10027	학	C173	D0B0	FLF40080*
10028	학	C174	D0B1	FLF50080*
10029	학	C175	D0B3	FLF70080*
10030	학	C176	D0B4	FLF80080*
10031	학	C177	D0B5	FLF90080*
10032	학	C178	D0B6	FLFA0080*
10033	학	C179	D0B8	FLFC0080*
10034	학	C17A	D0B9	FLFD0080*
10035	학	C181	D0BA	FLFE0080*
10036	학	C182	D0BB	FLFF0080*
10037	학	C183	D0BC	FLFG0080*
10038	학	C184	D0BD	FLFH0080*
10039	해	C185	D0C1	FLFL0080
10040	학	C186	D0C2	FLFM0080*
10041	학	C187	D0C3	FLFN0080*
10042	학	C188	D0C4	FLFO0080*
10043	학	C189	D0C5	FLFP0080*
10044	학	C18A	D0C6	FLFQ0080*
10045	학	C18B	D0C7	FLFR0080*
10046	학	C18C	D0C8	FLFS0080*

Table 26 (Page 11 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10047	학	C18D	D0C9	FLFT0080*
10048	학	C18E	D0CA	FLFU0080*
10049	학	C18F	D0CB	FLFV0080*
10050	학	C190	D0CC	FLFW0080*
10051	학	C191	D0CD	FLFX0080*
10052	학	C192	D0CE	FLFY0080*
10053	학	C193	D0CF	FLFZ0080*
10054	학	C194	D0D0	FLG00080*
10055	학	C195	D0D1	FLG10080*
10056	학	C196	D0D3	FLG30080*
10057	학	C197	D0D4	FLG40080*
10058	학	C198	D0D5	FLG50080*
10059	학	C199	D0D6	FLG60080*
10060	학	C19A	D0D7	FLG70080*
10061	학	C19B	D0D8	FLG80080*
10062	학	C19C	D0D9	FLG90080*
10063	학	C19D	D0DA	FLGA0080*
10064	학	C19E	D0DB	FLGB0080*
10065	학	C19F	D0DC	FLGC0080*
10066	학	C1A0	D0DD	FLGD0080*
10067	점	C1A1	B8F1	FHWX0080
10068	점	C1A2	B8F3	FHWZ0080
10069	것	C1A3	B8F5	FHX10080
10070	정	C1A4	B8F7	FHX30080
10071	것	C1A5	B8F8	FHX40080
10072	제	C1A6	B941	FHXD0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10073	젝	C1A7	B942	FHXE0080
10074	젠	C1A8	B945	FHXH0080
10075	젤	C1A9	B949	FHXL0080
10076	젼	C1AA	B951	FHXT0080
10077	젹	C1AB	B953	FHXV0080
10078	젻	C1AC	B955	FHXX0080
10079	젼	C1AD	B957	FHXZ0080
10080	저	C1AE	B961	FHY90080
10081	전	C1AF	B965	FHYD0080
10082	절	C1B0	B969	FHYH0080
10083	점	C1B1	B971	FHYP0080
10084	접	C1B2	B973	FHYR0080
10085	젼	C1B3	B976	FHYU0080
10086	정	C1B4	B977	FHYV0080
10087	계	C1B5	B981	FHZ50080
10088	조	C1B6	B9A1	FI010080
10089	죽	C1B7	B9A2	FI020080
10090	존	C1B8	B9A5	FI050080
10091	졸	C1B9	B9A9	FI090080
10092	죵	C1BA	B9AB	FI0B0080
10093	죵	C1BB	B9B1	FI0H0080
10094	죵	C1BC	B9B3	FI0J0080
10095	죵	C1BD	B9B5	FI0L0080
10096	죵	C1BE	B9B7	FI0N0080
10097	죵	C1BF	B9B8	FI0O0080
10098	죵	C1C0	B9B9	FI0P0080

Line Number	Graphic	PC Code	Host Code	GCGID
10099	죵	C1C1	B9BD	FI0T0080
10100	죵	C1C2	B9C1	FI0X0080
10101	죵	C1C3	B9C2	FI0Y0080
10102	죵	C1C4	B9C9	FI150080
10103	죵	C1C5	B9D3	FI1F0080
10104	죵	C1C6	B9D5	FI1H0080
10105	죵	C1C7	B9D7	FI1J0080
10106	죵	C1C8	B9E1	FI1T0080
10107	죵	C1C9	B9F6	FI2E0080
10108	죵	C1CA	B9F7	FI2F0080
10109	죵	C1CB	BA41	FI2P0080
10110	죵	C1CC	BA45	FI2T0080
10111	죵	C1CD	BA49	FI2X0080
10112	죵	C1CE	BA51	FI350080
10113	죵	C1CF	BA53	FI370080
10114	죵	C1D0	BA55	FI390080
10115	죵	C1D1	BA57	FI3B0080
10116	죵	C1D2	BA61	FI3L0080
10117	죵	C1D3	BA62	FI3M0080
10118	죵	C1D4	BA65	FI3P0080
10119	죵	C1D5	BA77	FI470080
10120	죵	C1D6	BA81	FI4H0080
10121	죵	C1D7	BA82	FI4I0080
10122	죵	C1D8	BA85	FI4L0080
10123	죵	C1D9	BA89	FI4P0080
10124	죵	C1DA	BA8A	FI4Q0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10125	쭈	C1DB	BA8B	FI4R0080
10126	쭉	C1DC	BA91	FI4X0080
10127	쭊	C1DD	BA93	FI4Z0080
10128	쭋	C1DE	BA95	FI510080
10129	중	C1DF	BA97	FI530080
10130	쭌	C1E0	BAA1	FI5D0080
10131	쭍	C1E1	BAB6	FI5Y0080
10132	쭎	C1E2	BAC1	FI690080
10133	쭏	C1E3	BAE1	FI750080
10134	쭐	C1E4	BAE2	FI760080
10135	쭑	C1E5	BAE5	FI790080
10136	쭒	C1E6	BAE9	FI7D0080
10137	쭓	C1E7	BAF1	FI7L0080
10138	쭔	C1E8	BAF3	FI7N0080
10139	쭕	C1E9	BAF5	FI7P0080
10140	쭖	C1EA	BB41	FI810080
10141	쭗	C1EB	BB45	FI850080
10142	쭘	C1EC	BB49	FI890080
10143	쭙	C1ED	BB51	FI8H0080
10144	즈	C1EE	BB61	FI8X0080
10145	죽	C1EF	BB62	FI8Y0080
10146	즌	C1F0	BB65	FI910080
10147	즐	C1F1	BB69	FI950080
10148	쭚	C1F2	BB71	FI9D0080
10149	쭛	C1F3	BB73	FI9F0080
10150	쭜	C1F4	BB75	FI9H0080

Line Number	Graphic	PC Code	Host Code	GCGID
10151	중	C1F5	BB77	FI9J0080
10152	지	C1F6	BBA1	FIAP0080
10153	직	C1F7	BBA2	FIAQ0080
10154	진	C1F8	BBA5	FIAT0080
10155	긴	C1F9	BBA8	FIAW0080
10156	질	C1FA	BBA9	FIAX0080
10157	짚	C1FB	BBAB	FIAZ0080
10158	짐	C1FC	BBB1	FIB50080
10159	집	C1FD	BBB3	FIB70080
10160	짓	C1FE	BBB5	FIB90080
10161	휘	C241	D0E3	FLGJ0080*
10162	혔	C242	D0E4	FLGK0080*
10163	혔	C243	D0E6	FLGM0080*
10164	혔	C244	D0E7	FLGN0080*
10165	혔	C245	D0E8	FLGO0080
10166	혔	C246	D0EA	FLGQ0080*
10167	혔	C247	D0EC	FLGS0080*
10168	혔	C248	D0ED	FLGT0080*
10169	혔	C249	D0EE	FLGU0080*
10170	혔	C24A	D0EF	FLGV0080*
10171	혔	C24B	D0F0	FLGW0080*
10172	혔	C24C	D0F4	FLH00080*
10173	혔	C24D	D0F6	FLH20080*
10174	혔	C24E	D0F8	FLH40080*
10175	혔	C24F	D0F9	FLH50080*
10176	혔	C250	D0FA	FLH60080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 14 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10177	헐	C251	D0FB	FLH70080*
10178	헙	C252	D0FC	FLH80080*
10179	헚	C253	D0FD	FLH90080*
10180	헛	C254	D143	FLHF0080*
10181	헜	C255	D144	FLHG0080*
10182	헝	C256	D146	FLHI0080*
10183	헞	C257	D147	FLHJ0080*
10184	헟	C258	D148	FLHK0080*
10185	헠	C259	D14A	FLHM0080*
10186	헡	C25A	D14B	FLHN0080*
10187	헢	C261	D14C	FLHO0080*
10188	헣	C262	D14D	FLHP0080*
10189	헤	C263	D14E	FLHQ0080*
10190	헦	C264	D14F	FLHR0080*
10191	헧	C265	D150	FLHS0080*
10192	헨	C266	D154	FLHW0080*
10193	헩	C267	D156	FLHY0080*
10194	헪	C268	D158	FLI00080*
10195	헫	C269	D159	FLI10080*
10196	헬	C26A	D15A	FLI20080*
10197	헭	C26B	D15B	FLI30080*
10198	헮	C26C	D15C	FLI40080*
10199	헯	C26D	D15D	FLI50080*
10200	헰	C26E	D163	FLIB0080*
10201	헱	C26F	D164	FLIC0080*
10202	헲	C270	D166	FLIE0080*

Table 26 (Page 14 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10203	헳	C271	D167	FLIF0080*
10204	헴	C272	D168	FLIG0080*
10205	헵	C273	D16A	FLII0080*
10206	헶	C274	D16B	FLIJ0080*
10207	헷	C275	D16C	FLIK0080*
10208	헸	C276	D16D	FLIL0080*
10209	헹	C277	D16E	FLIM0080*
10210	헺	C278	D16F	FLIN0080*
10211	헻	C279	D170	FLIO0080*
10212	헼	C27A	D174	FLIS0080*
10213	헽	C281	D178	FLIW0080*
10214	헾	C282	D179	FLIX0080*
10215	헿	C283	D17A	FLIY0080*
10216	헠	C284	D17B	FLIZ0080*
10217	헡	C285	D17C	FLJ00080*
10218	헢	C286	D17D	FLJ10080*
10219	헣	C287	D182	FLJ60080*
10220	헤	C288	D183	FLJ70080*
10221	헥	C289	D184	FLJ80080*
10222	헦	C28A	D186	FLJA0080*
10223	헧	C28B	D187	FLJB0080*
10224	헨	C28C	D188	FLJC0080*
10225	헩	C28D	D18A	FLJE0080*
10226	헪	C28E	D18B	FLJF0080*
10227	헫	C28F	D18C	FLJG0080*
10228	헬	C290	D18D	FLJH0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 15 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10229	헨	C291	D18E	FLJI0080*
10230	헩	C292	D18F	FLJJ0080*
10231	헪	C293	D190	FLJK0080*
10232	헫	C294	D191	FLJL0080
10233	헬	C295	D194	FLJO0080*
10234	헭	C296	D195	FLJP0080*
10235	헮	C297	D196	FLJQ0080*
10236	헯	C298	D197	FLJR0080*
10237	헰	C299	D198	FLJS0080*
10238	헱	C29A	D199	FLJT0080*
10239	헲	C29B	D19A	FLJU0080*
10240	헳	C29C	D19B	FLJV0080*
10241	헴	C29D	D19C	FLJW0080*
10242	헵	C29E	D19D	FLJX0080*
10243	헶	C29F	D1A3	FLK30080*
10244	헷	C2A0	D1A4	FLK40080*
10245	징	C2A1	BBB7	FIBB0080
10246	짚	C2A2	BBB8	FIBC0080
10247	질	C2A3	BBBB	FIBF0080
10248	짚	C2A4	BBBC	FIBG0080
10249	짜	C2A5	BC61	FIE90080
10250	작	C2A6	BC62	FIEA0080
10251	잔	C2A7	BC65	FIED0080
10252	짙	C2A8	BC67	FIEF0080
10253	잘	C2A9	BC69	FIEH0080
10254	짧	C2AA	BC6C	FIEK0080

Table 26 (Page 15 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10255	잡	C2AB	BC71	FIEP0080
10256	작	C2AC	BC73	FIER0080
10257	작	C2AD	BC75	FIET0080
10258	작	C2AE	BC76	FIEU0080
10259	짱	C2AF	BC77	FIEV0080
10260	재	C2B0	BC81	FIF50080
10261	작	C2B1	BC82	FIF60080
10262	잔	C2B2	BC85	FIF90080
10263	잘	C2B3	BC89	FIFD0080
10264	짬	C2B4	BC91	FIFL0080
10265	작	C2B5	BC93	FIFN0080
10266	작	C2B6	BC95	FIFP0080
10267	작	C2B7	BC96	FIFQ0080
10268	쟁	C2B8	BC97	FIFR0080
10269	짜	C2B9	BCA1	FIG10080
10270	잔	C2BA	BCA5	FIG50080
10271	짱	C2BB	BCB7	FIGN0080
10272	저	C2BC	BCE1	FIHT0080
10273	적	C2BD	BCE2	FIHU0080
10274	전	C2BE	BCE5	FIHX0080
10275	절	C2BF	BCE9	FII10080
10276	점	C2C0	BCF1	FII90080
10277	점	C2C1	BCF3	FIIB0080
10278	젓	C2C2	BCF5	FIID0080
10279	젓	C2C3	BCF6	FIIE0080
10280	쟁	C2C4	BCF7	FIIF0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10281	째	C2C5	BD41	FIIP0080
10282	쟁	C2C6	BD57	FIJB0080
10283	찌	C2C7	BD61	FIJL0080
10284	졌	C2C8	BD76	FIK60080
10285	조	C2C9	BDA1	FILD0080
10286	쪽	C2CA	BDA2	FILE0080
10287	존	C2CB	BDA5	FILH0080
10288	졸	C2CC	BDA9	FILL0080
10289	좁	C2CD	BDB1	FILT0080
10290	좁	C2CE	BDB3	FILV0080
10291	쫏	C2CF	BDB5	FILX0080
10292	쫑	C2D0	BDB7	FILZ0080
10293	쫒	C2D1	BDB9	FIM10080
10294	짜	C2D2	BDC1	FIM90080
10295	작	C2D3	BDC2	FIMA0080
10296	잘	C2D4	BDC9	FIMH0080
10297	쟈	C2D5	BDD6	FIMU0080
10298	재	C2D6	BDE1	FIN50080
10299	쟈	C2D7	BDF6	FINQ0080
10300	죄	C2D8	BE41	FIO10080
10301	편	C2D9	BE45	FIO50080
10302	쥬	C2DA	BE49	FIO90080
10303	쥰	C2DB	BE51	FIOH0080
10304	쥱	C2DC	BE53	FIOJ0080
10305	쥲	C2DD	BE77	FIPJ0080
10306	쥳	C2DE	BE81	FIPT0080

Line Number	Graphic	PC Code	Host Code	GCGID
10307	쥴	C2DF	BE82	FIPU0080
10308	쥵	C2E0	BE85	FIPX0080
10309	쥶	C2E1	BE89	FIQ10080
10310	쥷	C2E2	BE91	FIQ90080
10311	쥸	C2E3	BE93	FIQB0080
10312	쥹	C2E4	BE97	FIQF0080
10313	쥺	C2E5	BEA1	FIQP0080
10314	쥻	C2E6	BEB6	FIRA0080
10315	쥼	C2E7	BEB7	FIRB0080
10316	쥽	C2E8	BEE1	FISH0080
10317	쥾	C2E9	BF41	FITD0080
10318	쥿	C2EA	BF61	FIU90080
10319	쥿	C2EB	BF71	FIUP0080
10320	쥿	C2EC	BF75	FIUT0080
10321	쥿	C2ED	BF77	FIUV0080
10322	피	C2EE	BFA1	FIW10080
10323	픽	C2EF	BFA2	FIW20080
10324	핀	C2F0	BFA5	FIW50080
10325	필	C2F1	BFA9	FIW90080
10326	핍	C2F2	BFB1	FIWH0080
10327	핇	C2F3	BFB3	FIWJ0080
10328	핑	C2F4	BFB7	FIWN0080
10329	핏	C2F5	BFB8	FIWO0080
10330	핑	C2F6	BFBD	FIWT0080
10331	차	C2F7	C061	FIZL0080
10332	착	C2F8	C062	FIZM0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 17 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10333	찬	C2F9	C065	FIZP0080
10334	창	C2FA	C067	FIZR0080
10335	찰	C2FB	C069	FIZT0080
10336	참	C2FC	C071	FJ010080
10337	참	C2FD	C073	FJ030080
10338	차	C2FE	C075	FJ050080
10339	차	C341	D1A6	FLK60080*
10340	차	C342	D1A7	FLK70080*
10341	차	C343	D1A8	FLK80080*
10342	차	C344	D1AA	FLKA0080*
10343	차	C345	D1AB	FLKB0080*
10344	차	C346	D1AC	FLKC0080*
10345	차	C347	D1AD	FLKD0080*
10346	차	C348	D1AF	FLKF0080*
10347	차	C349	D1B0	FLKG0080*
10348	차	C34A	D1B4	FLKK0080*
10349	차	C34B	D1B6	FLKM0080*
10350	차	C34C	D1B8	FLKO0080*
10351	차	C34D	D1B9	FLKP0080*
10352	차	C34E	D1BA	FLKQ0080*
10353	차	C34F	D1BC	FLKS0080*
10354	차	C350	D1BD	FLKT0080*
10355	찰	C351	D1C3	FLKZ0080*
10356	찰	C352	D1C4	FLL00080*
10357	찰	C353	D1C6	FLL20080*
10358	찰	C354	D1C7	FLL30080*

Table 26 (Page 17 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10359	환	C355	D1C8	FLL40080*
10360	환	C356	D1CA	FLL60080*
10361	환	C357	D1CB	FLL70080*
10362	환	C358	D1CC	FLL80080*
10363	환	C359	D1CD	FLL90080*
10364	환	C35A	D1CE	FLLA0080*
10365	환	C361	D1CF	FLLB0080*
10366	환	C362	D1D0	FLLC0080*
10367	환	C363	D1D1	FLLD0080*
10368	환	C364	D1D3	FLLF0080*
10369	환	C365	D1D4	FLLG0080*
10370	환	C366	D1D6	FLLI0080*
10371	환	C367	D1D8	FLLK0080*
10372	환	C368	D1D9	FLLL0080*
10373	환	C369	D1DA	FLLM0080*
10374	환	C36A	D1DB	FLLN0080*
10375	환	C36B	D1DC	FLL00080*
10376	환	C36C	D1DD	FLLP0080*
10377	환	C36D	D1E3	FLLV0080*
10378	환	C36E	D1E4	FLLW0080*
10379	환	C36F	D1E6	FLLY0080*
10380	환	C370	D1E7	FLLZ0080*
10381	환	C371	D1E8	FLM00080*
10382	환	C372	D1E9	FLM10080*
10383	환	C373	D1EA	FLM20080*
10384	환	C374	D1EB	FLM30080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10385	꺾	C375	D1EC	FLM40080*
10386	꺾	C376	D1ED	FLM50080*
10387	꺾	C377	D1EE	FLM60080*
10388	꺾	C378	D1EF	FLM70080*
10389	꺾	C379	D1F0	FLM80080*
10390	꺾	C37A	D1F1	FLM90080*
10391	꺾	C381	D1F3	FLMB0080*
10392	꺾	C382	D1F4	FLMC0080*
10393	꺾	C383	D1F6	FLME0080*
10394	꺾	C384	D1F8	FLMG0080*
10395	꺾	C385	D1F9	FLMH0080*
10396	꺾	C386	D1FA	FLMI0080*
10397	꺾	C387	D1FB	FLMJ0080*
10398	꺾	C388	D1FC	FLMK0080*
10399	꺾	C389	D1FD	FLML0080*
10400	꺾	C38A	D243	FLMR0080*
10401	꺾	C38B	D244	FLMS0080*
10402	꺾	C38C	D246	FLMU0080*
10403	꺾	C38D	D247	FLMV0080*
10404	꺾	C38E	D248	FLMW0080*
10405	꺾	C38F	D24A	FLMY0080*
10406	꺾	C390	D24B	FLMZ0080*
10407	꺾	C391	D24C	FLN00080*
10408	꺾	C392	D24D	FLN10080*
10409	꺾	C393	D24E	FLN20080*
10410	꺾	C394	D24F	FLN30080*

Line Number	Graphic	PC Code	Host Code	GCGID
10411	꺾	C395	D250	FLN40080*
10412	꺾	C396	D251	FLN50080*
10413	꺾	C397	D254	FLN80080*
10414	꺾	C398	D256	FLNA0080*
10415	꺾	C399	D258	FLNC0080*
10416	꺾	C39A	D259	FLND0080*
10417	꺾	C39B	D25A	FLNE0080*
10418	꺾	C39C	D25B	FLNF0080*
10419	꺾	C39D	D25C	FLNG0080*
10420	꺾	C39E	D25D	FLNH0080*
10421	꺾	C39F	D262	FLNM0080
10422	꺾	C3A0	D263	FLNN0080*
10423	꺾	C3A1	C076	FJ060080
10424	꺾	C3A2	C077	FJ070080
10425	꺾	C3A3	C078	FJ080080
10426	꺾	C3A4	C081	FJ0H0080
10427	꺾	C3A5	C082	FJ0I0080
10428	꺾	C3A6	C085	FJ0L0080
10429	꺾	C3A7	C089	FJ0P0080
10430	꺾	C3A8	C091	FJ0X0080
10431	꺾	C3A9	C093	FJ0Z0080
10432	꺾	C3AA	C095	FJ110080
10433	꺾	C3AB	C096	FJ120080
10434	꺾	C3AC	C097	FJ130080
10435	꺾	C3AD	C0A1	FJ1D0080
10436	꺾	C3AE	C0A5	FJ1H0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10437	창	C3AF	C0A7	FJ1J0080
10438	찰	C3B0	C0A9	FJ1L0080
10439	참	C3B1	C0B1	FJ1T0080
10440	창	C3B2	C0B7	FJ1Z0080
10441	처	C3B3	C0E1	FJ350080
10442	척	C3B4	C0E2	FJ360080
10443	천	C3B5	C0E5	FJ390080
10444	철	C3B6	C0E9	FJ3D0080
10445	침	C3B7	C0F1	FJ3L0080
10446	첩	C3B8	C0F3	FJ3N0080
10447	첫	C3B9	C0F5	FJ3P0080
10448	첻	C3BA	C0F6	FJ3Q0080
10449	칭	C3BB	C0F7	FJ3R0080
10450	체	C3BC	C141	FJ410080
10451	척	C3BD	C142	FJ420080
10452	첸	C3BE	C145	FJ450080
10453	첼	C3BF	C149	FJ490080
10454	첼	C3C0	C151	FJ4H0080
10455	첩	C3C1	C153	FJ4J0080
10456	첫	C3C2	C155	FJ4L0080
10457	챙	C3C3	C157	FJ4N0080
10458	처	C3C4	C161	FJ4X0080
10459	천	C3C5	C165	FJ510080
10460	첻	C3C6	C176	FJ5I0080
10461	체	C3C7	C181	FJ5T0080
10462	첸	C3C8	C185	FJ5X0080

Line Number	Graphic	PC Code	Host Code	GCGID
10463	챙	C3C9	C197	FJ6F0080
10464	초	C3CA	C1A1	FJ6P0080
10465	추	C3CB	C1A2	FJ6Q0080
10466	촌	C3CC	C1A5	FJ6T0080
10467	출	C3CD	C1A9	FJ6X0080
10468	춤	C3CE	C1B1	FJ750080
10469	춤	C3CF	C1B3	FJ770080
10470	춧	C3D0	C1B5	FJ790080
10471	총	C3D1	C1B7	FJ7B0080
10472	최	C3D2	C1C1	FJ7L0080
10473	환	C3D3	C1C5	FJ7P0080
10474	찰	C3D4	C1C9	FJ7T0080
10475	창	C3D5	C1D7	FJ870080
10476	최	C3D6	C241	FJ9D0080
10477	첸	C3D7	C245	FJ9H0080
10478	첼	C3D8	C249	FJ9L0080
10479	첼	C3D9	C251	FJ9T0080
10480	첼	C3DA	C253	FJ9V0080
10481	춧	C3DB	C255	FJ9X0080
10482	칭	C3DC	C257	FJ9Z0080
10483	초	C3DD	C261	FJA90080
10484	춤	C3DE	C271	FJAP0080
10485	추	C3DF	C281	FJB50080
10486	추	C3E0	C282	FJB60080
10487	촌	C3E1	C285	FJB90080
10488	출	C3E2	C289	FJBD0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 20 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10489	츄	C3E3	C291	FJBL0080
10490	츅	C3E4	C293	FJBN0080
10491	츆	C3E5	C295	FJBP0080
10492	츇	C3E6	C297	FJBR0080
10493	츈	C3E7	C2A1	FJC10080
10494	츉	C3E8	C2B6	FJCM0080
10495	츊	C3E9	C2C1	FJCX0080
10496	츋	C3EA	C2C5	FJD10080
10497	츌	C3EB	C2E1	FJDT0080
10498	츍	C3EC	C2E5	FJDX0080
10499	츎	C3ED	C2E9	FJE10080
10500	츏	C3EE	C2F1	FJE90080
10501	츐	C3EF	C2F3	FJEB0080
10502	츑	C3F0	C2F5	FJED0080
10503	츒	C3F1	C2F7	FJEF0080
10504	츓	C3F2	C341	FJEP0080
10505	츔	C3F3	C345	FJET0080
10506	츕	C3F4	C349	FJEX0080
10507	츖	C3F5	C351	FJF50080
10508	츗	C3F6	C357	FJFB0080
10509	츘	C3F7	C361	FJFL0080
10510	츙	C3F8	C362	FJFM0080
10511	츚	C3F9	C365	FJFP0080
10512	츛	C3FA	C369	FJFT0080
10513	츜	C3FB	C371	FJG10080
10514	츝	C3FC	C373	FJG30080

Table 26 (Page 20 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10515	츞	C3FD	C375	FJG50080
10516	츟	C3FE	C377	FJG70080
10517	츠	C441	D264	FLNO0080*
10518	측	C442	D266	FLNQ0080*
10519	츢	C443	D267	FLNR0080*
10520	츣	C444	D268	FLNS0080*
10521	츤	C445	D26A	FLNU0080*
10522	츥	C446	D26B	FLNV0080*
10523	츦	C447	D26C	FLNW0080*
10524	츧	C448	D26D	FLNX0080*
10525	츨	C449	D26E	FLNY0080*
10526	츩	C44A	D26F	FLNZ0080*
10527	츪	C44B	D270	FLO00080*
10528	츫	C44C	D271	FLO10080
10529	츬	C44D	D274	FLO40080*
10530	츭	C44E	D276	FLO60080*
10531	츮	C44F	D277	FLO70080*
10532	츯	C450	D278	FLO80080*
10533	츰	C451	D279	FLO90080*
10534	츱	C452	D27A	FLOA0080*
10535	츲	C453	D27B	FLOB0080*
10536	츳	C454	D27C	FLOC0080*
10537	츴	C455	D27D	FLOD0080*
10538	층	C456	D283	FLOJ0080*
10539	츶	C457	D284	FLOK0080*
10540	츷	C458	D286	FLOM0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 21 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10541	흥	C459	D287	FLON0080*
10542	훈	C45A	D288	FLOO0080*
10543	흠	C461	D28A	FLOQ0080*
10544	흙	C462	D28B	FLOR0080*
10545	흙	C463	D28C	FLOS0080*
10546	흙	C464	D28D	FLOT0080*
10547	흙	C465	D28F	FLOV0080*
10548	흙	C466	D290	FLOW0080*
10549	흙	C467	D293	FLOZ0080
10550	흙	C468	D294	FLP00080*
10551	흙	C469	D296	FLP20080*
10552	흙	C46A	D298	FLP40080*
10553	흙	C46B	D299	FLP50080*
10554	흙	C46C	D29A	FLP60080*
10555	흙	C46D	D29B	FLP70080*
10556	흙	C46E	D29C	FLP80080*
10557	흙	C46F	D29D	FLP90080*
10558	흙	C470	D2A2	FLPE0080*
10559	흙	C471	D2A3	FLPF0080*
10560	흙	C472	D2A4	FLPG0080*
10561	흙	C473	D2A6	FLPI0080*
10562	흙	C474	D2A7	FLPJ0080*
10563	흙	C475	D2A8	FLPK0080*
10564	흙	C476	D2AA	FLPM0080*
10565	흙	C477	D2AB	FLPN0080*
10566	흙	C478	D2AC	FLPO0080*

Table 26 (Page 21 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10567	흙	C479	D2AD	FLPP0080*
10568	흙	C47A	D2AE	FLPQ0080*
10569	흙	C481	D2AF	FLPR0080*
10570	흙	C482	D2B0	FLPS0080*
10571	흙	C483	D2B3	FLPV0080*
10572	흙	C484	D2B4	FLPW0080*
10573	흙	C485	D2B5	FLPX0080*
10574	흙	C486	D2B6	FLPY0080*
10575	흙	C487	D2B8	FLQ00080*
10576	흙	C488	D2B9	FLQ10080*
10577	흙	C489	D2BA	FLQ20080*
10578	흙	C48A	D2BB	FLQ30080*
10579	흙	C48B	D2BC	FLQ40080*
10580	흙	C48C	D2BD	FLQ50080*
10581	흙	C48D	D2C3	FLQB0080*
10582	흙	C48E	D2C4	FLQC0080*
10583	흙	C48F	D2C6	FLQE0080*
10584	흙	C490	D2C7	FLQF0080*
10585	흙	C491	D2C8	FLQG0080*
10586	흙	C492	D2CA	FLQI0080*
10587	흙	C493	D2CB	FLQJ0080*
10588	흙	C494	D2CC	FLQK0080*
10589	흙	C495	D2CD	FLQL0080*
10590	흙	C496	D2CE	FLQM0080*
10591	흙	C497	D2CF	FLQN0080*
10592	흙	C498	D2D0	FLQO0080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 22 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10593	웁	C499	D2D1	FLQP0080
10594	웑	C49A	D2D3	FLQR0080*
10595	웒	C49B	D2D4	FLQS0080*
10596	웓	C49C	D2D5	FLQT0080*
10597	월	C49D	D2D6	FLQU0080*
10598	웕	C49E	D2D8	FLQW0080*
10599	웖	C49F	D2D9	FLQX0080*
10600	웗	C4A0	D2DA	FLQY0080*
10601	치	C4A1	C3A1	FJHD0080
10602	척	C4A2	C3A2	FJHE0080
10603	친	C4A3	C3A5	FJHH0080
10604	칠	C4A4	C3A8	FJHK0080
10605	칠	C4A5	C3A9	FJHL0080
10606	츰	C4A6	C3AA	FJHM0080
10607	침	C4A7	C3B1	FJHT0080
10608	칩	C4A8	C3B3	FJHV0080
10609	чит	C4A9	C3B5	FJHX0080
10610	칭	C4AA	C3B7	FJHZ0080
10611	카	C4AB	C461	FJKX0080
10612	카	C4AC	C462	FJKY0080
10613	칸	C4AD	C465	FJL10080
10614	칼	C4AE	C469	FJL50080
10615	감	C4AF	C471	FJLD0080
10616	갑	C4B0	C473	FJLF0080
10617	갓	C4B1	C475	FJLH0080
10618	강	C4B2	C477	FJLJ0080

Table 26 (Page 22 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10619	캐	C4B3	C481	FJLT0080
10620	책	C4B4	C482	FJLU0080
10621	캔	C4B5	C485	FJLX0080
10622	캘	C4B6	C489	FJM10080
10623	캠	C4B7	C491	FJM90080
10624	캡	C4B8	C493	FJMB0080
10625	갓	C4B9	C495	FJMD0080
10626	갓	C4BA	C496	FJME0080
10627	갱	C4BB	C497	FJMF0080
10628	카	C4BC	C4A1	FJMP0080
10629	카	C4BD	C4A2	FJMQ0080
10630	강	C4BE	C4B7	FJNB0080
10631	커	C4BF	C4E1	FJOH0080
10632	척	C4C0	C4E2	FJOI0080
10633	컨	C4C1	C4E5	FJOL0080
10634	컨	C4C2	C4E8	FJOO0080
10635	컬	C4C3	C4E9	FJOP0080
10636	컴	C4C4	C4F1	FJOX0080
10637	컵	C4C5	C4F3	FJOZ0080
10638	컷	C4C6	C4F5	FJP10080
10639	컷	C4C7	C4F6	FJP20080
10640	경	C4C8	C4F7	FJP30080
10641	케	C4C9	C541	FJPD0080
10642	척	C4CA	C542	FJPE0080
10643	켄	C4CB	C545	FJPH0080
10644	켈	C4CC	C549	FJPL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 23 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10645	캠	C4CD	C551	FJPT0080
10646	캡	C4CE	C553	FJPV0080
10647	켓	C4CF	C555	FJPX0080
10648	켁	C4D0	C557	FJPZ0080
10649	켜	C4D1	C561	FJQ90080
10650	컨	C4D2	C565	FJQD0080
10651	켈	C4D3	C569	FJQH0080
10652	컴	C4D4	C571	FJQP0080
10653	컵	C4D5	C573	FJQR0080
10654	켓	C4D6	C575	FJQT0080
10655	켰	C4D7	C576	FJQU0080
10656	켁	C4D8	C577	FJQV0080
10657	케	C4D9	C581	FJR50080
10658	코	C4DA	C5A1	FJS10080
10659	콧	C4DB	C5A2	FJS20080
10660	콘	C4DC	C5A5	FJS50080
10661	콜	C4DD	C5A9	FJS90080
10662	콸	C4DE	C5B1	FJSH0080
10663	콹	C4DF	C5B3	FJSJ0080
10664	콻	C4E0	C5B5	FJSL0080
10665	콩	C4E1	C5B7	FJSN0080
10666	콰	C4E2	C5C1	FJSX0080
10667	콷	C4E3	C5C2	FJSY0080
10668	환	C4E4	C5C5	FJT10080
10669	왈	C4E5	C5C9	FJT50080
10670	왓	C4E6	C5D1	FJTD0080

Table 26 (Page 23 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10671	캁	C4E7	C5D7	FJTJ0080
10672	꽤	C4E8	C5E1	FJTT0080
10673	캁	C4E9	C5F7	FJUF0080
10674	콰	C4EA	C641	FJUP0080
10675	퀵	C4EB	C649	FJUX0080
10676	쿄	C4EC	C661	FJVL0080
10677	쿠	C4ED	C681	FJWH0080
10678	콧	C4EE	C682	FJWI0080
10679	쿤	C4EF	C685	FJWL0080
10680	쿨	C4F0	C689	FJWP0080
10681	콸	C4F1	C691	FJWX0080
10682	콹	C4F2	C693	FJWZ0080
10683	콻	C4F3	C695	FJX10080
10684	쿡	C4F4	C697	FJX30080
10685	퀴	C4F5	C6A1	FJXD0080
10686	퀸	C4F6	C6A5	FJXH0080
10687	퀼	C4F7	C6A9	FJXL0080
10688	퀸	C4F8	C6B7	FJXZ0080
10689	퀘	C4F9	C6C1	FJY90080
10690	퀸	C4FA	C6D7	FJYV0080
10691	퀴	C4FB	C6E1	FJZ50080
10692	퀼	C4FC	C6E2	FJZ60080
10693	퀸	C4FD	C6E5	FJZ90080
10694	퀼	C4FE	C6E9	FJZD0080
10695	퀼	C541	D2DB	FLQZ0080*
10696	퀼	C542	D2DC	FLR00080*

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 24 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10697	평	C543	D2DD	FLR10080*
10698	휘	C544	D2E3	FLR70080*
10699	훤	C545	D2E4	FLR80080*
10700	훗	C546	D2E6	FLRA0080*
10701	훘	C547	D2E7	FLRB0080*
10702	훙	C548	D2E8	FLRC0080*
10703	훚	C549	D2EA	FLRE0080*
10704	훜	C54A	D2EB	FLRF0080*
10705	훝	C54B	D2EC	FLRG0080*
10706	훞	C54C	D2ED	FLRH0080*
10707	훟	C54D	D2EE	FLRI0080*
10708	훠	C54E	D2EF	FLRJ0080*
10709	훡	C54F	D2F0	FLRK0080*
10710	훣	C550	D2F4	FLRO0080*
10711	훤	C551	D2F6	FLRQ0080*
10712	훥	C552	D2F8	FLRS0080*
10713	훦	C553	D2F9	FLRT0080*
10714	훧	C554	D2FA	FLRU0080*
10715	훨	C555	D2FB	FLRV0080*
10716	훩	C556	D2FC	FLRW0080*
10717	훪	C557	D2FD	FLRX0080*
10718	휴	C558	D343	FLS30080*
10719	훬	C559	D344	FLS40080*
10720	훭	C55A	D346	FLS60080*
10721	훮	C561	D347	FLS70080*
10722	훯	C562	D348	FLS80080*

Table 26 (Page 24 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10723	훰	C563	D34A	FLSA0080*
10724	훱	C564	D34B	FLSB0080*
10725	훲	C565	D34C	FLSC0080*
10726	훳	C566	D34D	FLSD0080*
10727	훴	C567	D34E	FLSE0080*
10728	훵	C568	D34F	FLSF0080*
10729	훶	C569	D350	FLSG0080*
10730	훷	C56A	D353	FLSJ0080*
10731	훸	C56B	D354	FLSK0080*
10732	훹	C56C	D356	FLSM0080*
10733	훺	C56D	D358	FLSO0080*
10734	훻	C56E	D359	FLSP0080*
10735	훼	C56F	D35A	FLSQ0080*
10736	훽	C570	D35B	FLSR0080*
10737	훾	C571	D35C	FLSS0080*
10738	훿	C572	D35D	FLST0080*
10739	휴	C573	D363	FLSZ0080*
10740	훿	C574	D364	FLT00080*
10741	훿	C575	D366	FLT20080*
10742	훿	C576	D36B	FLT70080*
10743	훿	C577	D36C	FLT80080*
10744	훿	C578	D36D	FLT90080*
10745	훿	C579	D36E	FLTA0080*
10746	훿	C57A	D36F	FLTB0080*
10747	훿	C581	D370	FLTC0080*
10748	훿	C582	D374	FLTG0080*



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10749	훤	C583	D376	FLTI0080*
10750	훤	C584	D378	FLTK0080*
10751	훤	C585	D379	FLTL0080*
10752	훤	C586	D37A	FLTM0080*
10753	훤	C587	D37C	FLTO0080*
10754	훤	C588	D37D	FLTP0080*
10755	훤	C589	D382	FLTU0080
10756	훤	C58A	D383	FLTV0080*
10757	훤	C58B	D384	FLTW0080*
10758	훤	C58C	D386	FLTY0080*
10759	훤	C58D	D387	FLTZ0080*
10760	훤	C58E	D388	FLU00080*
10761	훤	C58F	D38A	FLU20080*
10762	훤	C590	D38B	FLU30080*
10763	훤	C591	D38C	FLU40080*
10764	훤	C592	D38D	FLU50080*
10765	훤	C593	D38E	FLU60080*
10766	훤	C594	D38F	FLU70080*
10767	훤	C595	D390	FLU80080*
10768	훤	C596	D394	FLUC0080*
10769	훤	C597	D395	FLUD0080*
10770	훤	C598	D396	FLUE0080*
10771	훤	C599	D398	FLUG0080*
10772	훤	C59A	D399	FLUH0080*
10773	훤	C59B	D39A	FLUI0080*
10774	훤	C59C	D39B	FLUJ0080*

Line Number	Graphic	PC Code	Host Code	GCGID
10775	훤	C59D	D39C	FLUK0080*
10776	훤	C59E	D39D	FLUL0080*
10777	훤	C59F	D3A3	FLUR0080*
10778	훤	C5A0	D3A4	FLUS0080*
10779	훤	C5A1	C6F1	FJZL0080
10780	훤	C5A2	C6F3	FJZN0080
10781	훤	C5A3	C6F5	FJZP0080
10782	훤	C5A4	C6F7	FJZR0080
10783	훤	C5A5	C741	FK010080
10784	훤	C5A6	C745	FK050080
10785	훤	C5A7	C749	FK090080
10786	훤	C5A8	C751	FK0H0080
10787	훤	C5A9	C761	FK0X0080
10788	훤	C5AA	C762	FK0Y0080
10789	훤	C5AB	C765	FK110080
10790	훤	C5AC	C769	FK150080
10791	훤	C5AD	C771	FK1D0080
10792	훤	C5AE	C773	FK1F0080
10793	훤	C5AF	C777	FK1J0080
10794	훤	C5B0	C7A1	FK2P0080
10795	훤	C5B1	C7A2	FK2Q0080
10796	훤	C5B2	C7A5	FK2T0080
10797	훤	C5B3	C7A9	FK2X0080
10798	훤	C5B4	C7B1	FK350080
10799	훤	C5B5	C7B3	FK370080
10800	훤	C5B6	C7B5	FK390080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 26 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10801	킹	C5B7	C7B7	FK3B0080
10802	타	C5B8	C861	FK690080
10803	탁	C5B9	C862	FK6A0080
10804	탄	C5BA	C865	FK6D0080
10805	탈	C5BB	C869	FK6H0080
10806	탁	C5BC	C86A	FK6I0080
10807	탐	C5BD	C871	FK6P0080
10808	답	C5BE	C873	FK6R0080
10809	탓	C5BF	C875	FK6T0080
10810	랏	C5C0	C876	FK6U0080
10811	탕	C5C1	C877	FK6V0080
10812	태	C5C2	C881	FK750080
10813	택	C5C3	C882	FK760080
10814	텐	C5C4	C885	FK790080
10815	텔	C5C5	C889	FK7D0080
10816	탐	C5C6	C891	FK7L0080
10817	텡	C5C7	C893	FK7N0080
10818	텃	C5C8	C895	FK7P0080
10819	텃	C5C9	C896	FK7Q0080
10820	탱	C5CA	C897	FK7R0080
10821	타	C5CB	C8A1	FK810080
10822	탕	C5CC	C8B7	FK8N0080
10823	터	C5CD	C8E1	FK9T0080
10824	턱	C5CE	C8E2	FK9U0080
10825	턴	C5CF	C8E5	FK9X0080
10826	털	C5D0	C8E9	FKA10080

Table 26 (Page 26 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10827	털	C5D1	C8EB	FKA30080
10828	텡	C5D2	C8F1	FKA90080
10829	텡	C5D3	C8F3	FKAB0080
10830	텃	C5D4	C8F5	FKAD0080
10831	텃	C5D5	C8F6	FKAE0080
10832	텡	C5D6	C8F7	FKAF0080
10833	테	C5D7	C941	FKAP0080
10834	텍	C5D8	C942	FKAQ0080
10835	텐	C5D9	C945	FKAT0080
10836	텔	C5DA	C949	FKAX0080
10837	텡	C5DB	C951	FKB50080
10838	텡	C5DC	C953	FKB70080
10839	텃	C5DD	C955	FKB90080
10840	텡	C5DE	C957	FKBB0080
10841	터	C5DF	C961	FKBL0080
10842	턴	C5E0	C965	FKBP0080
10843	텃	C5E1	C976	FKC60080
10844	테	C5E2	C981	FKCH0080
10845	텐	C5E3	C985	FKCL0080
10846	토	C5E4	C9A1	FKDD0080
10847	투	C5E5	C9A2	FKDE0080
10848	톤	C5E6	C9A5	FKDH0080
10849	톨	C5E7	C9A9	FKDL0080
10850	툼	C5E8	C9B1	FKDT0080
10851	툼	C5E9	C9B3	FKDV0080
10852	툷	C5EA	C9B5	FKDX0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
10853	통	C5EB	C9B7	FKDZ0080
10854	툭	C5EC	C9BC	FKE40080
10855	툠	C5ED	C9C1	FKE90080
10856	툡	C5EE	C9C5	FKED0080
10857	툢	C5EF	C9E1	FKF50080
10858	툣	C5F0	CA41	FKG10080
10859	툤	C5F1	CA45	FKG50080
10860	툥	C5F2	CA55	FKGL0080
10861	툦	C5F3	CA57	FKGN0080
10862	툧	C5F4	CA61	FKGX0080
10863	툨	C5F5	CA81	FKHT0080
10864	툩	C5F6	CA82	FKHU0080
10865	툪	C5F7	CA85	FKHX0080
10866	툫	C5F8	CA89	FKI10080
10867	투	C5F9	CA91	FKI90080
10868	툭	C5FA	CA93	FKIB0080
10869	툮	C5FB	CA95	FKID0080
10870	툯	C5FC	CA97	FKIF0080
10871	툰	C5FD	CAA1	FKIP0080
10872	툱	C5FE	CAB6	FKJA0080
10873	헀	C641	D3A6	FLUU0080*
10874	헁	C642	D3A7	FLUV0080*
10875	헂	C643	D3A8	FLUW0080*
10876	헃	C644	D3AA	FLUY0080*
10877	헄	C645	D3AB	FLUZ0080*
10878	헅	C646	D3AC	FLV00080*

Line Number	Graphic	PC Code	Host Code	GCGID
10879	헆	C647	D3AD	FLV10080*
10880	헇	C648	D3AE	FLV20080*
10881	허	C649	D3AF	FLV30080*
10882	헉	C64A	D3B0	FLV40080*
10883	헊	C64B	D3B4	FLV80080*
10884	헋	C64C	D3B6	FLVA0080*
10885	헌	C64D	D3B8	FLVC0080*
10886	헍	C64E	D3B9	FLVD0080*
10887	헎	C64F	D3BA	FLVE0080*
10888	헏	C650	D3BB	FLVF0080*
10889	헐	C651	D3BC	FLVG0080*
10890	헑	C652	D3BD	FLVH0080*
10891	헒	C6A1	CAC1	FKJL0080
10892	헓	C6A2	CAE1	FKKH0080
10893	헔	C6A3	CAE2	FKKI0080
10894	헕	C6A4	CAE5	FKKL0080
10895	헖	C6A5	CAE9	FKKP0080
10896	헗	C6A6	CAF1	FKKX0080
10897	험	C6A7	CAF3	FKKZ0080
10898	헙	C6A8	CAF7	FKL30080
10899	헚	C6A9	CB41	FKLD0080
10900	헛	C6AA	CB45	FKLH0080
10901	헜	C6AB	CB49	FKLL0080
10902	헝	C6AC	CB51	FKLT0080
10903	헞	C6AD	CB57	FKLZ0080
10904	헟	C6AE	CB61	FKM90080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 28 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10905	특	C6AF	CB62	FKMA0080
10906	튼	C6B0	CB65	FKMD0080
10907	툼	C6B1	CB68	FKMG0080
10908	틀	C6B2	CB69	FKMH0080
10909	툼	C6B3	CB6B	FKMJ0080
10910	툼	C6B4	CB71	FKMP0080
10911	툼	C6B5	CB73	FKMR0080
10912	툼	C6B6	CB75	FKMT0080
10913	퓌	C6B7	CB81	FKN50080
10914	툼	C6B8	CB85	FKN90080
10915	툼	C6B9	CB89	FKND0080
10916	툼	C6BA	CB91	FKNL0080
10917	툼	C6BB	CB93	FKNN0080
10918	티	C6BC	CBA1	FKO10080
10919	퓌	C6BD	CBA2	FKO20080
10920	툼	C6BE	CBA5	FKO50080
10921	툼	C6BF	CBA9	FKO90080
10922	툼	C6C0	CBB1	FKOH0080
10923	툼	C6C1	CBB3	FKOJ0080
10924	툼	C6C2	CBB5	FKOL0080
10925	팅	C6C3	CBB7	FKON0080
10926	파	C6C4	CC61	FKRL0080
10927	곽	C6C5	CC62	FKRM0080
10928	곽	C6C6	CC63	FKRN0080
10929	관	C6C7	CC65	FKRP0080
10930	괄	C6C8	CC69	FKRT0080

Table 26 (Page 28 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
10931	뫼	C6C9	CC6B	FKRV0080
10932	괘	C6CA	CC71	FKS10080
10933	괘	C6CB	CC73	FKS30080
10934	괘	C6CC	CC75	FKS50080
10935	괘	C6CD	CC76	FKS60080
10936	괘	C6CE	CC77	FKS70080
10937	괘	C6CF	CC7B	FKSB0080
10938	괘	C6D0	CC81	FKSH0080
10939	괘	C6D1	CC82	FKSI0080
10940	괘	C6D2	CC85	FKSL0080
10941	괘	C6D3	CC89	FKSP0080
10942	괘	C6D4	CC91	FKSX0080
10943	괘	C6D5	CC93	FKSZ0080
10944	괘	C6D6	CC95	FKT10080
10945	괘	C6D7	CC96	FKT20080
10946	괘	C6D8	CC97	FKT30080
10947	괘	C6D9	CCA1	FKTD0080
10948	괘	C6DA	CCA2	FKTE0080
10949	괘	C6DB	CCE1	FKV50080
10950	괘	C6DC	CCE2	FKV60080
10951	괘	C6DD	CCE5	FKV90080
10952	괘	C6DE	CCE9	FKVD0080
10953	괘	C6DF	CCF1	FKVL0080
10954	괘	C6E0	CCF3	FKVN0080
10955	괘	C6E1	CCF5	FKVP0080
10956	괘	C6E2	CCF6	FKVQ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 29 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10957	평	C6E3	CCF7	FKVR0080
10958	폐	C6E4	CD41	FKW10080
10959	펙	C6E5	CD42	FKW20080
10960	펜	C6E6	CD45	FKW50080
10961	펠	C6E7	CD49	FKW90080
10962	웬	C6E8	CD51	FKWH0080
10963	웸	C6E9	CD53	FKWJ0080
10964	웻	C6EA	CD55	FKWL0080
10965	평	C6EB	CD57	FKWN0080
10966	퍼	C6EC	CD61	FKWX0080
10967	편	C6ED	CD65	FKX10080
10968	펄	C6EE	CD69	FKX50080
10969	웸	C6EF	CD71	FKXD0080
10970	핍	C6F0	CD73	FKXF0080
10971	ړ	C6F1	CD76	FKXI0080
10972	평	C6F2	CD77	FKXJ0080
10973	폐	C6F3	CD81	FKXT0080
10974	펠	C6F4	CD89	FKY10080
10975	웸	C6F5	CD93	FKYB0080
10976	웻	C6F6	CD95	FKYD0080
10977	포	C6F7	CDA1	FKYP0080
10978	푹	C6F8	CDA2	FKYQ0080
10979	폰	C6F9	CDA5	FKYT0080
10980	폴	C6FA	CDA9	FKYX0080
10981	품	C6FB	CDB1	FKZ50080
10982	플	C6FC	CDB3	FKZ70080

Table 26 (Page 29 of 33). Hangeul Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
10983	푹	C6FD	CDB5	FKZ90080
10984	푹	C6FE	CDB7	FKZB0080
10985	콰	C7A1	CDC1	FKZL0080
10986	꽁	C7A2	CDD7	FL070080
10987	콰	C7A3	CE41	FL1D0080
10988	퀸	C7A4	CE45	FL1H0080
10989	표	C7A5	CE61	FL290080
10990	폰	C7A6	CE65	FL2D0080
10991	플	C7A7	CE69	FL2H0080
10992	플	C7A8	CE73	FL2R0080
10993	푹	C7A9	CE75	FL2T0080
10994	푸	C7AA	CE81	FL350080
10995	푹	C7AB	CE82	FL360080
10996	폰	C7AC	CE85	FL390080
10997	플	C7AD	CE88	FL3C0080
10998	플	C7AE	CE89	FL3D0080
10999	플	C7AF	CE8B	FL3F0080
11000	플	C7B0	CE91	FL3L0080
11001	플	C7B1	CE93	FL3N0080
11002	푹	C7B2	CE95	FL3P0080
11003	푹	C7B3	CE97	FL3R0080
11004	퀴	C7B4	CEA1	FL410080
11005	푹	C7B5	CEB7	FL4N0080
11006	퀴	C7B6	CEE1	FL5T0080
11007	퀸	C7B7	CEE5	FL5X0080
11008	푹	C7B8	CEE9	FL610080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
11009	웁	C7B9	CEF1	FL690080
11010	윳	C7BA	CEF5	FL6D0080
11011	퓨	C7BB	CF41	FL6P0080
11012	푼	C7BC	CF45	FL6T0080
11013	푹	C7BD	CF49	FL6X0080
11014	푼	C7BE	CF51	FL750080
11015	푹	C7BF	CF55	FL790080
11016	푼	C7C0	CF57	FL7B0080
11017	프	C7C1	CF61	FL7L0080
11018	픈	C7C2	CF65	FL7P0080
11019	플	C7C3	CF69	FL7T0080
11020	플	C7C4	CF71	FL810080
11021	플	C7C5	CF73	FL830080
11022	푹	C7C6	CF75	FL850080
11023	피	C7C7	CFA1	FL9D0080
11024	픽	C7C8	CFA2	FL9E0080
11025	핀	C7C9	CFA5	FL9H0080
11026	필	C7CA	CFA9	FL9L0080
11027	핍	C7CB	CFB1	FL9T0080
11028	핍	C7CC	CFB3	FL9V0080
11029	핏	C7CD	CFB5	FL9X0080
11030	핑	C7CE	CFB7	FL9Z0080
11031	하	C7CF	D061	FLCX0080
11032	학	C7D0	D062	FLCY0080
11033	한	C7D1	D065	FLD10080
11034	할	C7D2	D069	FLD50080

Line Number	Graphic	PC Code	Host Code	GCGID
11035	활	C7D3	D06E	FLDA0080
11036	합	C7D4	D071	FLDD0080
11037	합	C7D5	D073	FLDF0080
11038	햇	C7D6	D075	FLDH0080
11039	항	C7D7	D077	FLDJ0080
11040	해	C7D8	D081	FLDT0080
11041	핵	C7D9	D082	FLDU0080
11042	헨	C7DA	D085	FLDX0080
11043	헬	C7DB	D089	FLE10080
11044	햄	C7DC	D091	FLE90080
11045	헝	C7DD	D093	FLEB0080
11046	햇	C7DE	D095	FLED0080
11047	햇	C7DF	D096	FLEE0080
11048	행	C7E0	D097	FLEF0080
11049	하	C7E1	D0A1	FLEP0080
11050	향	C7E2	D0B7	FLFB0080
11051	허	C7E3	D0E1	FLGH0080
11052	혁	C7E4	D0E2	FLGI0080
11053	헌	C7E5	D0E5	FLGL0080
11054	헐	C7E6	D0E9	FLGP0080
11055	헝	C7E7	D0EB	FLGR0080
11056	헝	C7E8	D0F1	FLGX0080
11057	헝	C7E9	D0F3	FLGZ0080
11058	헛	C7EA	D0F5	FLH10080
11059	형	C7EB	D0F7	FLH30080
11060	헤	C7EC	D141	FLHD0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
11061	헧	C7ED	D142	FLHE0080
11062	헨	C7EE	D145	FLHH0080
11063	헬	C7EF	D149	FLHL0080
11064	헴	C7F0	D151	FLHT0080
11065	헵	C7F1	D153	FLHV0080
11066	헧	C7F2	D155	FLHX0080
11067	헨	C7F3	D157	FLHZ0080
11068	헣	C7F4	D161	FLI90080
11069	헧	C7F5	D162	FLIA0080
11070	헨	C7F6	D165	FLID0080
11071	헬	C7F7	D169	FLIH0080
11072	헴	C7F8	D171	FLIP0080
11073	헵	C7F9	D173	FLIR0080
11074	헧	C7FA	D175	FLIT0080
11075	헧	C7FB	D176	FLIU0080
11076	헨	C7FC	D177	FLIV0080
11077	헣	C7FD	D181	FLJ50080
11078	헨	C7FE	D185	FLJ90080
11079	헬	C8A1	D189	FLJD0080
11080	헵	C8A2	D193	FLJN0080
11081	호	C8A3	D1A1	FLK10080
11082	후	C8A4	D1A2	FLK20080
11083	훈	C8A5	D1A5	FLK50080
11084	홀	C8A6	D1A9	FLK90080
11085	훈	C8A7	D1AE	FLKE0080
11086	흠	C8A8	D1B1	FLKH0080

Line Number	Graphic	PC Code	Host Code	GCGID
11087	흠	C8A9	D1B3	FLKJ0080
11088	흣	C8AA	D1B5	FLKL0080
11089	흡	C8AB	D1B7	FLKN0080
11090	흣	C8AC	D1BB	FLKR0080
11091	화	C8AD	D1C1	FLKX0080
11092	확	C8AE	D1C2	FLKY0080
11093	환	C8AF	D1C5	FLL10080
11094	활	C8B0	D1C9	FLL50080
11095	왓	C8B1	D1D5	FLLH0080
11096	황	C8B2	D1D7	FLLJ0080
11097	화	C8B3	D1E1	FLLT0080
11098	확	C8B4	D1E2	FLLU0080
11099	환	C8B5	D1E5	FLLX0080
11100	왓	C8B6	D1F5	FLMD0080
11101	황	C8B7	D1F7	FLMF0080
11102	회	C8B8	D241	FLMP0080
11103	획	C8B9	D242	FLMQ0080
11104	훤	C8BA	D245	FLMT0080
11105	훤	C8BB	D249	FLMX0080
11106	훣	C8BC	D253	FLN70080
11107	훣	C8BD	D255	FLN90080
11108	훡	C8BE	D257	FLNB0080
11109	호	C8BF	D261	FLNL0080
11110	훈	C8C0	D265	FLNP0080
11111	홀	C8C1	D269	FLNT0080
11112	흠	C8C2	D273	FLO30080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 32 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
11113	훗	C8C3	D275	FLO50080
11114	후	C8C4	D281	FLOH0080
11115	훙	C8C5	D282	FLOI0080
11116	훈	C8C6	D285	FLOL0080
11117	훤	C8C7	D289	FLOP0080
11118	훞	C8C8	D28E	FLOU0080
11119	훝	C8C9	D291	FLOX0080
11120	훗	C8CA	D295	FLP10080
11121	훝	C8CB	D297	FLP30080
11122	훗	C8CC	D2A1	FLPD0080
11123	훗	C8CD	D2A5	FLPH0080
11124	훗	C8CE	D2A9	FLPL0080
11125	훗	C8CF	D2B1	FLPT0080
11126	훗	C8D0	D2B7	FLPZ0080
11127	훗	C8D1	D2C1	FLQ90080
11128	훗	C8D2	D2C2	FLQA0080
11129	훗	C8D3	D2C5	FLQD0080
11130	훗	C8D4	D2C9	FLQH0080
11131	훗	C8D5	D2D7	FLQV0080
11132	훗	C8D6	D2E1	FLR50080
11133	훗	C8D7	D2E2	FLR60080
11134	훗	C8D8	D2E5	FLR90080
11135	훗	C8D9	D2E9	FLRD0080
11136	훗	C8DA	D2F1	FLRL0080
11137	훗	C8DB	D2F3	FLRN0080
11138	훗	C8DC	D2F5	FLRP0080

Table 26 (Page 32 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
11139	훗	C8DD	D2F7	FLRR0080
11140	훗	C8DE	D341	FLS10080
11141	훗	C8DF	D342	FLS20080
11142	훗	C8E0	D345	FLS50080
11143	훗	C8E1	D349	FLS90080
11144	훗	C8E2	D351	FLSH0080
11145	훗	C8E3	D355	FLSL0080
11146	훗	C8E4	D357	FLSN0080
11147	훗	C8E5	D361	FLSX0080
11148	훗	C8E6	D362	FLSY0080
11149	훗	C8E7	D365	FLT10080
11150	훗	C8E8	D367	FLT30080
11151	훗	C8E9	D368	FLT40080
11152	훗	C8EA	D369	FLT50080
11153	훗	C8EB	D36A	FLT60080
11154	훗	C8EC	D371	FLTD0080
11155	훗	C8ED	D373	FLTF0080
11156	훗	C8EE	D375	FLTH0080
11157	훗	C8EF	D377	FLTJ0080
11158	훗	C8F0	D37B	FLTN0080
11159	훗	C8F1	D381	FLTT0080
11160	훗	C8F2	D385	FLTX0080
11161	훗	C8F3	D389	FLU10080
11162	훗	C8F4	D391	FLU90080
11163	훗	C8F5	D393	FLUB0080
11164	훗	C8F6	D397	FLUF0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 26 (Page 33 of 33). Hangeul Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
11165	히	C8F7	D3A1	FLUP0080
11166	힉	C8F8	D3A2	FLUQ0080
11167	힌	C8F9	D3A5	FLUT0080
11168	힐	C8FA	D3A9	FLUX0080
11169	힘	C8FB	D3B1	FLV50080
11170	힉	C8FC	D3B3	FLV70080
11171	힉	C8FD	D3B5	FLV90080
11172	힉	C8FE	D3B7	FLVB0080

Note:
* These characters are the expanded Hangeul/Hangeul Jamo characters.

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

9.4 Hanja Set

Table 27 (Page 1 of 31). Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
1	伽	CAA1	5041	F2DD0080
2	佳	CAA2	5042	F2DE0080
3	假	CAA3	5043	F2DF0080
4	價	CAA4	5044	F2DG0080
5	加	CAA5	5045	F2DH0080
6	可	CAA6	5046	F2DI0080
7	呵	CAA7	5047	F2DJ0080
8	哥	CAA8	5048	F2DK0080
9	嘉	CAA9	5049	F2DL0080
10	嫁	CAAA	504A	F2DM0080
11	家	CAAB	504B	F2DN0080
12	暇	CAAC	504C	F2DO0080
13	架	CAAD	504E	F2DQ0080
14	枷	CAAE	6841	F5XD0080
15	柯	CAAF	504D	F2DP0080
16	歌	CAB0	504F	F2DR0080
17	珂	CAB1	6842	F5XE0080
18	痂	CAB2	6843	F5XF0080
19	稼	CAB3	5050	F2DS0080
20	苛	CAB4	5051	F2DT0080
21	茄	CAB5	5052	F2DU0080
22	街	CAB6	5053	F2DV0080
23	袈	CAB7	5054	F2DW0080
24	訶	CAB8	5055	F2DX0080
25	賈	CAB9	5056	F2DY0080

Table 27 (Page 1 of 31). Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
26	跏	CABA	5057	F2DZ0080
27	軻	CABB	5058	F2E00080
28	迦	CABC	5059	F2E10080
29	駕	CABD	505A	F2E20080
30	刻	CABE	505B	F2E30080
31	却	CABF	505C	F2E40080
32	各	CAC0	505D	F2E50080
33	恪	CAC1	505F	F2E70080
34	慤	CAC2	6844	F5XG0080
35	殼	CAC3	5061	F2E90080
36	珏	CAC4	5062	F2EA0080
37	脚	CAC5	5063	F2EB0080
38	覺	CAC6	5064	F2EC0080
39	角	CAC7	5065	F2ED0080
40	閣	CAC8	5066	F2EE0080
41	侃	CAC9	6845	F5XH0080
42	刊	CACA	5067	F2EF0080
43	壘	CACB	5068	F2EG0080
44	奸	CACC	5069	F2EH0080
45	姦	CACD	506A	F2EI0080
46	干	CACE	506B	F2EJ0080
47	幹	CACF	506C	F2EK0080
48	懇	CAD0	506D	F2EL0080
49	揀	CAD1	506E	F2EM0080
50	杆	CAD2	506F	F2EN0080
51	束	CAD3	6846	F5XI0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
52	桿	CAD4	6847	F5XJ0080
53	澗	CAD5	5070	F2EO0080
54	癩	CAD6	5071	F2EP0080
55	看	CAD7	5072	F2EQ0080
56	礪	CAD8	6848	F5XK0080
57	稈	CAD9	5073	F2ER0080
58	竿	CADA	5074	F2ES0080
59	簡	CADB	5075	F2ET0080
60	肝	CADC	5078	F2EW0080
61	良	CADD	5076	F2EU0080
62	艱	CADE	5077	F2EV0080
63	諫	CADF	5079	F2EX0080
64	間	CAE0	507A	F2EY0080
65	芑	CAE1	507B	F2EZ0080
66	喝	CAE2	507C	F2F00080
67	曷	CAE3	507D	F2F10080
68	渴	CAE4	507E	F2F20080
69	碣	CAE5	507F	F2F30080
70	竭	CAE6	5080	F2F40080
71	葛	CAE7	5083	F2F70080
72	褐	CAE8	5081	F2F50080
73	蝮	CAE9	6849	F5XL0080
74	鞞	CAEA	5084	F2F80080
75	勘	CAEB	5085	F2F90080
76	坎	CAEC	5086	F2FA0080
77	堪	CAED	5087	F2FB0080

Line Number	Graphic	PC Code	Host Code	GCGID
78	嵌	CAEE	5088	F2FC0080
79	感	CAEF	5089	F2FD0080
80	憾	CAF0	508A	F2FE0080
81	戡	CAF1	684A	F5XM0080
82	敢	CAF2	508B	F2FF0080
83	柑	CAF3	508C	F2FG0080
84	橄	CAF4	508D	F2FH0080
85	減	CAF5	508E	F2FI0080
86	甘	CAF6	508F	F2FJ0080
87	瘡	CAF7	5090	F2FK0080
88	監	CAF8	5091	F2FL0080
89	瞰	CAF9	684B	F5XN0080
90	紺	CAFA	5092	F2FM0080
91	邯	CAFB	684C	F5XO0080
92	鑑	CAFC	5094	F2FO0080
93	鑿	CAFD	684D	F5XP0080
94	龕	CAFE	5095	F2FP0080
95	匣	CBA1	5096	F2FQ0080
96	岬	CBA2	5097	F2FR0080
97	甲	CBA3	5098	F2FS0080
98	胛	CBA4	5099	F2FT0080
99	鉀	CBA5	509A	F2FU0080
100	闍	CBA6	509B	F2FV0080
101	剛	CBA7	509D	F2FX0080
102	塙	CBA8	684E	F5XQ0080
103	姜	CBA9	509E	F2FY0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
104	岡	CBAA	509C	F2FW0080
105	崗	CBAB	509F	F2FZ0080
106	康	CBAC	50A0	F2G00080
107	強	CBAD	50A1	F2G10080
108	疆	CBAE	50A2	F2G20080
109	慷	CBAF	50A3	F2G30080
110	江	CBB0	50A4	F2G40080
111	薑	CBB1	684F	F5XR0080
112	疆	CBB2	50A5	F2G50080
113	糠	CBB3	50A8	F2G80080
114	絳	CBB4	6850	F5XS0080
115	綱	CBB5	50A6	F2G60080
116	羌	CBB6	6851	F5XT0080
117	腔	CBB7	50A9	F2G90080
118	缸	CBB8	6852	F5XU0080
119	薑	CBB9	50AA	F2GA0080
120	襪	CBBA	50A7	F2G70080
121	講	CBBB	50AB	F2GB0080
122	鋼	CBBC	50AC	F2GC0080
123	降	CBBD	50AD	F2GD0080
124	鏟	CBBE	6853	F5XV0080
125	介	CBBF	50AE	F2GE0080
126	价	CBC0	50AF	F2GF0080
127	個	CBC1	50B0	F2GG0080
128	凱	CBC2	50B1	F2GH0080
129	塏	CBC3	6854	F5XW0080

Line Number	Graphic	PC Code	Host Code	GCGID
130	愷	CBC4	50B2	F2GI0080
131	愷	CBC5	50B3	F2GJ0080
132	慨	CBC6	50B4	F2GK0080
133	改	CBC7	50B5	F2GL0080
134	概	CBC8	50B6	F2GM0080
135	漑	CBC9	50B7	F2GN0080
136	疥	CBCA	50B8	F2GO0080
137	皆	CBCB	50B9	F2GP0080
138	盖	CBCC	50BA	F2GQ0080
139	箇	CBCD	50BB	F2GR0080
140	芥	CBCE	50BC	F2GS0080
141	蓋	CBCF	50BD	F2GT0080
142	豈	CBD0	6855	F5XX0080
143	鎧	CBD1	6856	F5XY0080
144	開	CBD2	50BE	F2GU0080
145	喀	CBD3	6857	F5XZ0080
146	客	CBD4	50BF	F2GV0080
147	坑	CBD5	50C0	F2GW0080
148	更	CBD6	50C1	F2GX0080
149	粳	CBD7	50C2	F2GY0080
150	羹	CBD8	50C3	F2GZ0080
151	醞	CBD9	50C4	F2H00080
152	倨	CBDA	6858	F5Y00080
153	去	CBDB	50C5	F2H10080
154	居	CBDC	50C6	F2H20080
155	巨	CBDD	50C7	F2H30080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
156	拒	CBDE	50C8	F2H40080
157	据	CBDF	50C9	F2H50080
158	據	CBE0	50CA	F2H60080
159	舉	CBE1	50CD	F2H90080
160	渠	CBE2	50CB	F2H70080
161	炬	CBE3	50CC	F2H80080
162	祛	CBE4	6859	F5Y10080
163	距	CBE5	50CE	F2HA0080
164	踞	CBE6	685A	F5Y20080
165	車	CBE7	50D0	F2HC0080
166	遽	CBE8	50CF	F2HB0080
167	鉅	CBE9	685B	F5Y30080
168	鋸	CBEA	50D2	F2HE0080
169	乾	CBEB	50D3	F2HF0080
170	件	CBEC	50D4	F2HG0080
171	健	CBED	50D5	F2HH0080
172	巾	CBEE	50D6	F2HI0080
173	建	CBEF	50D7	F2HJ0080
174	愆	CBF0	50D8	F2HK0080
175	楨	CBF1	685C	F5Y40080
176	臄	CBF2	685D	F5Y50080
177	虔	CBF3	50D9	F2HL0080
178	蹇	CBF4	50DA	F2HM0080
179	鍵	CBF5	50DB	F2HN0080
180	騫	CBF6	50DC	F2HO0080
181	乞	CBF7	50DD	F2HP0080

Line Number	Graphic	PC Code	Host Code	GCGID
182	傑	CBF8	50DE	F2HQ0080
183	杰	CBF9	50DF	F2HR0080
184	桀	CBFA	685E	F5Y60080
185	儉	CBFB	50E0	F2HS0080
186	劍	CBFC	50E1	F2HT0080
187	劒	CBFD	685F	F5Y70080
188	檢	CBFE	50E2	F2HU0080
189	臉	CCA1	50E3	F2HV0080
190	鈐	CCA2	6860	F5Y80080
191	黔	CCA3	50E4	F2HW0080
192	劫	CCA4	50E5	F2HX0080
193	怯	CCA5	50E6	F2HY0080
194	迭	CCA6	6861	F5Y90080
195	偈	CCA7	50E7	F2HZ0080
196	憇	CCA8	50E8	F2I00080
197	揭	CCA9	50E9	F2I10080
198	擊	CCAA	50EA	F2I20080
199	格	CCAB	50EB	F2I30080
200	檄	CCAC	50EC	F2I40080
201	激	CCAD	50ED	F2I50080
202	膈	CCAE	6862	F5YA0080
203	覘	CCAF	50EE	F2I60080
204	隔	CCB0	50EF	F2I70080
205	堅	CCB1	50F1	F2I90080
206	牽	CCB2	50F3	F2IB0080
207	犬	CCB3	50F4	F2IC0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
208	甄	CCB4	50F5	F2ID0080
209	絹	CCB5	50F6	F2IE0080
210	繭	CCB6	50F7	F2IF0080
211	肩	CCB7	50F2	F2IA0080
212	見	CCB8	50F8	F2IG0080
213	譴	CCB9	50F9	F2IH0080
214	遣	CCBA	50FA	F2II0080
215	鷓	CCBB	50FB	F2IJ0080
216	抉	CCBC	6863	F5YB0080
217	決	CCBD	50FD	F2IL0080
218	潔	CCBE	50FC	F2IK0080
219	結	CCBF	50FE	F2IM0080
220	缺	CCC0	5141	F2IP0080
221	訣	CCC1	5142	F2IQ0080
222	兼	CCC2	5143	F2IR0080
223	慊	CCC3	5144	F2IS0080
224	箝	CCC4	5145	F2IT0080
225	謙	CCC5	5147	F2IV0080
226	鉗	CCC6	6864	F5YC0080
227	鎌	CCC7	5148	F2IW0080
228	京	CCC8	5149	F2IX0080
229	徑	CCC9	6865	F5YD0080
230	惊	CCCA	6866	F5YE0080
231	傾	CCCB	514A	F2IY0080
232	徹	CCCC	6867	F5YF0080
233	勁	CCCD	514B	F2IZ0080

Line Number	Graphic	PC Code	Host Code	GCGID
234	勅	CCCE	514C	F2J00080
235	卿	CCCF	514D	F2J10080
236	垌	CCD0	6868	F5YG0080
237	境	CCD1	514F	F2J30080
238	庚	CCD2	5150	F2J40080
239	徑	CCD3	5151	F2J50080
240	慶	CCD4	5152	F2J60080
241	憬	CCD5	6869	F5YH0080
242	擎	CCD6	5155	F2J90080
243	敬	CCD7	5156	F2JA0080
244	景	CCD8	5157	F2JB0080
245	曠	CCD9	5153	F2J70080
246	更	CCDA	5158	F2JC0080
247	梗	CCDB	5159	F2JD0080
248	涇	CCDC	515B	F2JF0080
249	炅	CCDD	515C	F2JG0080
250	罔	CCDE	686A	F5YI0080
251	璟	CCDF	515E	F2JI0080
252	礲	CCE0	686B	F5YJ0080
253	瓊	CCE1	515F	F2JJ0080
254	瘞	CCE2	5161	F2JL0080
255	硬	CCE3	5162	F2JM0080
256	磬	CCE4	5163	F2JN0080
257	竟	CCE5	5164	F2JO0080
258	競	CCE6	5165	F2JP0080
259	綱	CCE7	5166	F2JQ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
260	經	CCE8	5167	F2JR0080
261	耕	CCE9	5168	F2JS0080
262	耿	CCEA	5169	F2JT0080
263	脛	CCEB	516A	F2JU0080
264	莖	CCEC	516B	F2JV0080
265	警	CCED	516C	F2JW0080
266	輕	CCEE	516D	F2JX0080
267	逕	CCEF	516E	F2JY0080
268	鏡	CCF0	516F	F2JZ0080
269	頃	CCF1	5170	F2K00080
270	頸	CCF2	5171	F2K10080
271	驚	CCF3	5172	F2K20080
272	鯨	CCF4	5173	F2K30080
273	係	CCF5	5174	F2K40080
274	啓	CCF6	5175	F2K50080
275	界	CCF7	686C	F5YK0080
276	契	CCF8	5176	F2K60080
277	季	CCF9	5177	F2K70080
278	屆	CCFA	5178	F2K80080
279	悻	CCFB	5179	F2K90080
280	戒	CCFC	517A	F2KA0080
281	桂	CCFD	517B	F2KB0080
282	械	CCFE	517C	F2KC0080
283	槩	CDA1	686D	F5YL0080
284	溪	CDA2	517D	F2KD0080
285	界	CDA3	517E	F2KE0080

Line Number	Graphic	PC Code	Host Code	GCGID
286	癸	CDA4	517F	F2KF0080
287	磳	CDA5	5180	F2KG0080
288	稽	CDA6	5182	F2KI0080
289	系	CDA7	5183	F2KJ0080
290	繫	CDA8	5184	F2KK0080
291	繼	CDA9	5185	F2KL0080
292	計	CDAA	5186	F2KM0080
293	誠	CDAB	5187	F2KN0080
294	谿	CDAC	5189	F2KP0080
295	階	CDAD	5188	F2KO0080
296	鷄	CDAE	518B	F2KR0080
297	古	CDAF	518D	F2KT0080
298	叩	CDB0	518C	F2KS0080
299	告	CDB1	518E	F2KU0080
300	呱	CDB2	518F	F2KV0080
301	固	CDB3	5190	F2KW0080
302	姑	CDB4	5191	F2KX0080
303	孤	CDB5	5192	F2KY0080
304	尻	CDB6	686E	F5YM0080
305	庫	CDB7	5193	F2KZ0080
306	拷	CDB8	5194	F2L00080
307	攷	CDB9	5195	F2L10080
308	故	CDBA	5196	F2L20080
309	敲	CDBB	5197	F2L30080
310	鬻	CDBC	686F	F5YN0080
311	枯	CDBD	5198	F2L40080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
312	稿	CDBE	6870	F5YO0080
313	沽	CDBF	519A	F2L60080
314	痼	CDC0	519B	F2L70080
315	皐	CDC1	519C	F2L80080
316	皐	CDC2	51A0	F2LC0080
317	稿	CDC3	519F	F2LB0080
318	羔	CDC4	6871	F5YP0080
319	考	CDC5	51A1	F2LD0080
320	股	CDC6	51A2	F2LE0080
321	膏	CDC7	51A3	F2LF0080
322	苦	CDC8	51A4	F2LG0080
323	苾	CDC9	6872	F5YQ0080
324	菰	CDCA	6873	F5YR0080
325	藁	CDCB	51A5	F2LH0080
326	蠱	CDCC	519D	F2L90080
327	袴	CDCD	51A6	F2LI0080
328	誥	CDCE	51A8	F2LK0080
329	賈	CDCF	51A9	F2LL0080
330	辜	CDD0	51AA	F2LM0080
331	鋼	CDD1	51AB	F2LN0080
332	雇	CDD2	51AC	F2LO0080
333	顧	CDD3	51AD	F2LP0080
334	高	CDD4	51AE	F2LQ0080
335	鼓	CDD5	51AF	F2LR0080
336	哭	CDD6	51B0	F2LS0080
337	斛	CDD7	51B1	F2LT0080

Line Number	Graphic	PC Code	Host Code	GCGID
338	曲	CDD8	51B2	F2LU0080
339	楛	CDD9	51B3	F2LV0080
340	穀	CDDA	51B4	F2LW0080
341	谷	Cddb	51B5	F2LX0080
342	鵠	CDDC	51B6	F2LY0080
343	困	CDDD	51B7	F2LZ0080
344	坤	CDDE	51B8	F2M00080
345	崑	CDDF	51B9	F2M10080
346	昆	CDE0	51BA	F2M20080
347	梱	CDE1	51BB	F2M30080
348	棍	CDE2	51BC	F2M40080
349	滾	CDE3	51BD	F2M50080
350	琨	CDE4	6874	F5YS0080
351	袞	CDE5	51BE	F2M60080
352	鯤	CDE6	6875	F5YT0080
353	汨	CDE7	51BF	F2M70080
354	滑	CDE8	51C0	F2M80080
355	骨	CDE9	51C1	F2M90080
356	供	CDEA	51C2	F2MA0080
357	公	CDEB	51C3	F2MB0080
358	共	CDEC	51C4	F2MC0080
359	功	CDED	51C5	F2MD0080
360	孔	CDEE	51C6	F2ME0080
361	工	CDEF	51C7	F2MF0080
362	恐	CDF0	51CA	F2MI0080
363	恭	CDF1	51C9	F2MH0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 27 (Page 8 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
364	拱	CDF2	51CB	F2MJ0080
365	控	CDF3	51CC	F2MK0080
366	攻	CDF4	51CD	F2ML0080
367	珙	CDF5	6876	F5YU0080
368	空	CDF6	51D0	F2MO0080
369	蚣	CDF7	6877	F5YV0080
370	貢	CDF8	51C8	F2MG0080
371	鞏	CDF9	6878	F5YW0080
372	串	CDFA	6879	F5YX0080
373	寡	CDFB	51D2	F2MQ0080
374	戈	CDFC	51D3	F2MR0080
375	果	CDFD	51D4	F2MS0080
376	瓜	CDFE	51D5	F2MT0080
377	科	CEA1	51D6	F2MU0080
378	菓	CEA2	51D7	F2MV0080
379	誇	CEA3	51D9	F2MX0080
380	課	CEA4	51DA	F2MY0080
381	跨	CEA5	687A	F5YY0080
382	過	CEA6	51DB	F2MZ0080
383	鍋	CEA7	687B	F5YZ0080
384	顛	CEA8	51DC	F2N00080
385	廓	CEA9	51DD	F2N10080
386	槲	CEAA	51DE	F2N20080
387	藿	CEAB	51DF	F2N30080
388	郭	CEAC	51E0	F2N40080
389	串	CEAD	51E2	F2N60080

Table 27 (Page 8 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
390	冠	CEAE	51E3	F2N70080
391	官	CEAF	51E4	F2N80080
392	寬	CEB0	51E5	F2N90080
393	慣	CEB1	51E6	F2NA0080
394	棺	CEB2	51E7	F2NB0080
395	款	CEB3	51E9	F2ND0080
396	灌	CEB4	51EA	F2NE0080
397	琯	CEB5	687C	F5Z00080
398	罐	CEB6	51E8	F2NC0080
399	管	CEB7	51EC	F2NG0080
400	罐	CEB8	51ED	F2NH0080
401	菅	CEB9	51EE	F2NI0080
402	觀	CEBA	51EF	F2NJ0080
403	貫	CEBB	51F0	F2NK0080
404	關	CEBC	51F1	F2NL0080
405	館	CEBD	51F2	F2NM0080
406	刮	CEBE	51F4	F2NO0080
407	忽	CEBF	51F5	F2NP0080
408	括	CEC0	51F6	F2NQ0080
409	适	CEC1	51F7	F2NR0080
410	恍	CEC2	687D	F5Z10080
411	光	CEC3	51F8	F2NS0080
412	匡	CEC4	51F9	F2NT0080
413	壙	CEC5	51FA	F2NU0080
414	廣	CEC6	51FB	F2NV0080
415	曠	CEC7	51FC	F2NW0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
416	洸	CEC8	51FD	F2NX0080
417	叒	CEC9	687E	F5Z20080
418	狂	CECA	51FE	F2NY0080
419	琯	CECB	5241	F2O10080
420	筐	CECC	5242	F2O20080
421	胱	CECD	5243	F2O30080
422	鑛	CECE	5244	F2O40080
423	卦	CECF	5245	F2O50080
424	掛	CED0	5246	F2O60080
425	罨	CED1	5247	F2O70080
426	乖	CED2	5248	F2O80080
427	傀	CED3	5249	F2O90080
428	塊	CED4	524A	F2OA0080
429	壞	CED5	524B	F2OB0080
430	怪	CED6	524C	F2OC0080
431	愧	CED7	524D	F2OD0080
432	拐	CED8	524E	F2OE0080
433	槐	CED9	524F	F2OF0080
434	魁	CEDA	5250	F2OG0080
435	宏	CEDB	5251	F2OH0080
436	紘	CEDC	5252	F2OI0080
437	肱	CEDD	5253	F2OJ0080
438	轟	CEDE	5254	F2OK0080
439	交	CEDF	5255	F2OL0080
440	僑	CEE0	5256	F2OM0080
441	咬	CEE1	5257	F2ON0080

Line Number	Graphic	PC Code	Host Code	GCGID
442	喬	CEE2	5258	F2OO0080
443	嬌	CEE3	5259	F2OP0080
444	嶠	CEE4	525A	F2OQ0080
445	巧	CEE5	525B	F2OR0080
446	攪	CEE6	525D	F2OT0080
447	教	CEE7	525C	F2OS0080
448	校	CEE8	525E	F2OU0080
449	橋	CEE9	525F	F2OV0080
450	狡	CEEA	5260	F2OW0080
451	皎	CEEB	5261	F2OX0080
452	矯	CEEC	5262	F2OY0080
453	絞	CEED	5263	F2OZ0080
454	翹	CEEE	5264	F2P00080
455	膠	CEEF	5265	F2P10080
456	蕎	CEF0	5266	F2P20080
457	蛟	CEF1	5267	F2P30080
458	較	CEF2	5268	F2P40080
459	轎	CEF3	5269	F2P50080
460	郊	CEF4	526A	F2P60080
461	餃	CEF5	526C	F2P80080
462	驕	CEF6	526D	F2P90080
463	鮫	CEF7	526E	F2PA0080
464	丘	CEF8	526F	F2PB0080
465	久	CEF9	5270	F2PC0080
466	九	CEFA	5271	F2PD0080
467	仇	CEFB	5272	F2PE0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
468	俱	CEFC	5274	F2PG0080
469	具	CEFD	5276	F2PI0080
470	勾	CEFE	5277	F2PJ0080
471	區	CFA1	5278	F2PK0080
472	口	CFA2	5279	F2PL0080
473	句	CFA3	527A	F2PM0080
474	咎	CFA4	527B	F2PN0080
475	嘔	CFA5	527C	F2PO0080
476	坵	CFA6	687F	F5Z30080
477	垢	CFA7	527D	F2PP0080
478	寇	CFA8	5280	F2PS0080
479	嶇	CFA9	5281	F2PT0080
480	廐	CFAA	5282	F2PU0080
481	懼	CFAB	5283	F2PV0080
482	拘	CFAC	5284	F2PW0080
483	救	CFAD	5285	F2PX0080
484	枸	CFAE	5287	F2PZ0080
485	柩	CFAF	5288	F2Q00080
486	構	CFB0	5289	F2Q10080
487	歐	CFB1	528A	F2Q20080
488	毆	CFB2	528B	F2Q30080
489	毳	CFB3	528C	F2Q40080
490	求	CFB4	528D	F2Q50080
491	溝	CFB5	528E	F2Q60080
492	灸	CFB6	528F	F2Q70080
493	狗	CFB7	5290	F2Q80080

Line Number	Graphic	PC Code	Host Code	GCGID
494	玖	CFB8	5291	F2Q90080
495	球	CFB9	5292	F2QA0080
496	瞿	CFBA	5294	F2QC0080
497	矩	CFBB	5295	F2QD0080
498	究	CFBC	5296	F2QE0080
499	絀	CFBD	5297	F2QF0080
500	考	CFBE	6880	F5Z40080
501	臼	CFBF	5299	F2QH0080
502	舅	CFC0	529A	F2QI0080
503	舊	CFC1	529B	F2QJ0080
504	苟	CFC2	529C	F2QK0080
505	衢	CFC3	529D	F2QL0080
506	謳	CFC4	529F	F2QN0080
507	購	CFC5	5298	F2QG0080
508	軀	CFC6	52A0	F2QO0080
509	逯	CFC7	52A1	F2QP0080
510	邱	CFC8	52A2	F2QQ0080
511	鉤	CFC9	52A3	F2QR0080
512	錄	CFCA	6881	F5Z50080
513	駒	CFCB	52A5	F2QT0080
514	驅	CFCC	52A6	F2QU0080
515	鳩	CFCD	52A7	F2QV0080
516	鷗	CFCE	52A8	F2QW0080
517	龜	CFCF	52A9	F2QX0080
518	國	CFD0	52AA	F2QY0080
519	局	CFD1	52AB	F2QZ0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
520	菊	CFD2	52AD	F2R10080
521	鞠	CFD3	52AE	F2R20080
522	鞫	CFD4	6882	F5Z60080
523	麴	CFD5	52AF	F2R30080
524	君	CFD6	52B3	F2R70080
525	睿	CFD7	52B0	F2R40080
526	群	CFD8	52B1	F2R50080
527	裙	CFD9	6883	F5Z70080
528	軍	CFDA	52B2	F2R60080
529	郡	CFDB	52B4	F2R80080
530	堀	CFDC	52B5	F2R90080
531	屈	CFDD	52B6	F2RA0080
532	掘	CFDE	52B7	F2RB0080
533	窟	CFDF	52B8	F2RC0080
534	宮	CFE0	52B9	F2RD0080
535	弓	CFE1	52BA	F2RE0080
536	穹	CFE2	52BB	F2RF0080
537	窮	CFE3	52BC	F2RG0080
538	芎	CFE4	6884	F5Z80080
539	躬	CFE5	52BD	F2RH0080
540	倦	CFE6	52BE	F2RI0080
541	券	CFE7	52BF	F2RJ0080
542	勸	CFE8	52C0	F2RK0080
543	卷	CFE9	52C1	F2RL0080
544	圈	CFEA	52C2	F2RM0080
545	拳	CFEB	52C3	F2RN0080

Line Number	Graphic	PC Code	Host Code	GCGID
546	捲	CFEC	6885	F5Z90080
547	權	CFED	52C4	F2RO0080
548	滙	CFEE	6886	F5ZA0080
549	眷	CFEF	52C5	F2RP0080
550	厥	CFF0	52C6	F2RQ0080
551	獮	CFF1	6887	F5ZB0080
552	厥	CFF2	6888	F5ZC0080
553	蹶	CFF3	52C7	F2RR0080
554	闕	CFF4	52C8	F2RS0080
555	机	CFF5	52C9	F2RT0080
556	櫃	CFF6	52CA	F2RU0080
557	潰	CFF7	52CB	F2RV0080
558	詭	CFF8	52CC	F2RW0080
559	軌	CFF9	52CE	F2RY0080
560	饋	CFFA	52CF	F2RZ0080
561	句	CFFB	6889	F5ZD0080
562	晷	CFFC	688A	F5ZE0080
563	歸	CFFD	52D0	F2S00080
564	貴	CFFE	52D1	F2S10080
565	鬼	D0A1	52D2	F2S20080
566	龜	D0A2	52D3	F2S30080
567	叫	D0A3	52D4	F2S40080
568	圭	D0A4	52D5	F2S50080
569	奎	D0A5	52D6	F2S60080
570	揆	D0A6	52D7	F2S70080
571	楫	D0A7	688B	F5ZF0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
572	珪	D0A8	52D8	F2S80080
573	硅	D0A9	52D9	F2S90080
574	窺	D0AA	52DA	F2SA0080
575	竅	D0AB	688C	F5ZG0080
576	糾	D0AC	52DC	F2SC0080
577	葵	D0AD	52DB	F2SB0080
578	規	D0AE	52DD	F2SD0080
579	赳	D0AF	52DE	F2SE0080
580	逵	D0B0	52DF	F2SF0080
581	閨	D0B1	52E0	F2SG0080
582	勻	D0B2	688D	F5ZH0080
583	均	D0B3	52E1	F2SH0080
584	昀	D0B4	688E	F5ZI0080
585	筠	D0B5	52E2	F2SI0080
586	菌	D0B6	52E3	F2SJ0080
587	鈞	D0B7	52E4	F2SK0080
588	龜	D0B8	52E5	F2SL0080
589	橘	D0B9	52E6	F2SM0080
590	克	D0BA	52E7	F2SN0080
591	剋	D0BB	52E8	F2SO0080
592	劇	D0BC	52E9	F2SP0080
593	戟	D0BD	52EA	F2SQ0080
594	棘	D0BE	52EC	F2SS0080
595	極	D0BF	52EB	F2SR0080
596	隙	D0C0	52ED	F2ST0080
597	僅	D0C1	52EE	F2SU0080

Line Number	Graphic	PC Code	Host Code	GCGID
598	勗	D0C2	688F	F5ZJ0080
599	勤	D0C3	52EF	F2SV0080
600	勲	D0C4	52F1	F2SX0080
601	斤	D0C5	52F2	F2SY0080
602	根	D0C6	52F3	F2SZ0080
603	槿	D0C7	52F4	F2T00080
604	瑾	D0C8	52F6	F2T20080
605	筋	D0C9	52F7	F2T30080
606	芹	D0CA	52F8	F2T40080
607	董	D0CB	52F9	F2T50080
608	覲	D0CC	52FA	F2T60080
609	謹	D0CD	52FB	F2T70080
610	近	D0CE	52FC	F2T80080
611	謹	D0CF	52FD	F2T90080
612	契	D0D0	52FE	F2TA0080
613	今	D0D1	5341	F2TD0080
614	矜	D0D2	6890	F5ZK0080
615	擒	D0D3	5342	F2TE0080
616	吟	D0D4	6891	F5ZL0080
617	檣	D0D5	5343	F2TF0080
618	琴	D0D6	5344	F2TG0080
619	禁	D0D7	5345	F2TH0080
620	禽	D0D8	5346	F2TI0080
621	芩	D0D9	6892	F5ZM0080
622	衾	D0DA	5348	F2TK0080
623	衿	D0DB	5347	F2TJ0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
624	襟	D0DC	5349	F2TL0080
625	金	D0DD	534A	F2TM0080
626	錦	D0DE	534B	F2TN0080
627	佞	D0DF	6893	F5ZN0080
628	及	D0E0	534C	F2TO0080
629	急	D0E1	534E	F2TQ0080
630	扱	D0E2	534F	F2TR0080
631	汲	D0E3	5350	F2TS0080
632	緞	D0E4	5352	F2TU0080
633	給	D0E5	5353	F2TV0080
634	亘	D0E6	5354	F2TW0080
635	兢	D0E7	5355	F2TX0080
636	矜	D0E8	5356	F2TY0080
637	肯	D0E9	5357	F2TZ0080
638	企	D0EA	5358	F2U00080
639	伎	D0EB	5359	F2U10080
640	其	D0EC	535A	F2U20080
641	冀	D0ED	535B	F2U30080
642	嗜	D0EE	535C	F2U40080
643	器	D0EF	535D	F2U50080
644	圻	D0F0	535E	F2U60080
645	基	D0F1	535F	F2U70080
646	埼	D0F2	6894	F5ZO0080
647	夔	D0F3	5360	F2U80080
648	奇	D0F4	5361	F2U90080
649	妓	D0F5	5362	F2UA0080

Line Number	Graphic	PC Code	Host Code	GCGID
650	寄	D0F6	5363	F2UB0080
651	岐	D0F7	5364	F2UC0080
652	崎	D0F8	5366	F2UE0080
653	己	D0F9	5368	F2UG0080
654	幾	D0FA	5367	F2UF0080
655	忌	D0FB	5369	F2UH0080
656	技	D0FC	536A	F2UI0080
657	旗	D0FD	536B	F2UJ0080
658	既	D0FE	536C	F2UK0080
659	朞	D1A1	5388	F2VC0080
660	期	D1A2	536D	F2UL0080
661	杞	D1A3	536E	F2UM0080
662	棋	D1A4	536F	F2UN0080
663	棄	D1A5	5370	F2UO0080
664	機	D1A6	5371	F2UP0080
665	欺	D1A7	5372	F2UQ0080
666	氣	D1A8	5373	F2UR0080
667	汽	D1A9	5374	F2US0080
668	沂	D1AA	5375	F2UT0080
669	淇	D1AB	5376	F2UU0080
670	玘	D1AC	6895	F5ZP0080
671	琦	D1AD	5377	F2UV0080
672	琪	D1AE	5378	F2UW0080
673	璦	D1AF	6896	F5ZQ0080
674	璣	D1B0	5379	F2UX0080
675	畸	D1B1	537A	F2UY0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
676	畿	D1B2	537B	F2UZ0080
677	碁	D1B3	537C	F2V00080
678	磯	D1B4	537D	F2V10080
679	祁	D1B5	6897	F5ZR0080
680	祇	D1B6	537E	F2V20080
681	祈	D1B7	537F	F2V30080
682	祺	D1B8	5380	F2V40080
683	箕	D1B9	5381	F2V50080
684	紀	D1BA	5382	F2V60080
685	綺	D1BB	5383	F2V70080
686	羈	D1BC	6898	F5ZS0080
687	耆	D1BD	5385	F2V90080
688	機	D1BE	5386	F2VA0080
689	肌	D1BF	5387	F2VB0080
690	記	D1C0	5389	F2VD0080
691	譏	D1C1	538A	F2VE0080
692	豈	D1C2	5365	F2UD0080
693	起	D1C3	538B	F2VF0080
694	錡	D1C4	538C	F2VG0080
695	鎰	D1C5	6899	F5ZT0080
696	飢	D1C6	538D	F2VH0080
697	饑	D1C7	538E	F2VI0080
698	騎	D1C8	538F	F2VJ0080
699	騏	D1C9	5390	F2VK0080
700	驥	D1CA	5391	F2VL0080
701	麒	D1CB	5393	F2VN0080

Line Number	Graphic	PC Code	Host Code	GCGID
702	緊	D1CC	5394	F2VO0080
703	佶	D1CD	5395	F2VP0080
704	吉	D1CE	5396	F2VQ0080
705	拮	D1CF	5397	F2VR0080
706	桔	D1D0	5398	F2VS0080
707	金	D1D1	5399	F2VT0080
708	喫	D1D2	539B	F2VV0080
709	讎	D1D3	539C	F2VW0080
710	喇	D1D4	689A	F5ZU0080
711	奈	D1D5	689B	F5ZV0080
712	娜	D1D6	689C	F5ZW0080
713	懦	D1D7	539D	F2VX0080
714	懶	D1D8	689D	F5ZX0080
715	拏	D1D9	539E	F2VY0080
716	拿	D1DA	539F	F2VZ0080
717	癩	D1DB	689E	F5ZY0080
718	羅	D1DC	689F	F5ZZ0080
719	蘿	D1DD	68A0	F6000080
720	螺	D1DE	68A1	F6010080
721	裸	D1DF	68A2	F6020080
722	邏	D1E0	68A3	F6030080
723	那	D1E1	53A1	F2W10080
724	樂	D1E2	68A4	F6040080
725	洛	D1E3	68A5	F6050080
726	烙	D1E4	68A6	F6060080
727	珞	D1E5	68A7	F6070080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
728	落	D1E6	68A8	F6080080
729	諾	D1E7	53A2	F2W20080
730	酪	D1E8	68A9	F6090080
731	略	D1E9	68AA	F60A0080
732	亂	D1EA	68AB	F60B0080
733	卵	D1EB	68AC	F60C0080
734	暖	D1EC	53A3	F2W30080
735	欄	D1ED	68AD	F60D0080
736	煖	D1EE	53A4	F2W40080
737	爛	D1EF	68AE	F60E0080
738	蘭	D1F0	68AF	F60F0080
739	難	D1F1	53A5	F2W50080
740	鸞	D1F2	68B0	F60G0080
741	捏	D1F3	53A7	F2W70080
742	捺	D1F4	53A6	F2W60080
743	南	D1F5	53A8	F2W80080
744	嵐	D1F6	68B1	F60H0080
745	柑	D1F7	68B2	F60I0080
746	楠	D1F8	68B3	F60J0080
747	滷	D1F9	68B4	F60K0080
748	濫	D1FA	68B5	F60L0080
749	男	D1FB	53AA	F2WA0080
750	藍	D1FC	68B6	F60M0080
751	檻	D1FD	68B7	F60N0080
752	拉	D1FE	68B8	F60O0080
753	納	D2A1	53AB	F2WB0080

Line Number	Graphic	PC Code	Host Code	GCGID
754	臘	D2A2	68B9	F60P0080
755	蠟	D2A3	68BA	F60Q0080
756	衲	D2A4	68BB	F60R0080
757	囊	D2A5	53AC	F2WC0080
758	娘	D2A6	53AD	F2WD0080
759	廊	D2A7	68BC	F60S0080
760	朗	D2A8	68BD	F60T0080
761	浪	D2A9	68BE	F60U0080
762	狼	D2AA	68BF	F60V0080
763	郎	D2AB	68C0	F60W0080
764	乃	D2AC	53AF	F2WF0080
765	來	D2AD	68C1	F60X0080
766	內	D2AE	53B0	F2WG0080
767	奈	D2AF	53B1	F2WH0080
768	柰	D2B0	53B2	F2WI0080
769	耐	D2B1	53B3	F2WJ0080
770	冷	D2B2	68C2	F60Y0080
771	女	D2B3	53B5	F2WL0080
772	年	D2B4	53B6	F2WM0080
773	撚	D2B5	68C3	F60Z0080
774	季	D2B6	53B7	F2WN0080
775	念	D2B7	53B8	F2WO0080
776	恬	D2B8	53B9	F2WP0080
777	拈	D2B9	53BA	F2WQ0080
778	捻	D2BA	53BB	F2WR0080
779	寧	D2BB	53BD	F2WT0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
780	審	D2BC	68C4	F6100080
781	努	D2BD	53BF	F2WV0080
782	勞	D2BE	68C5	F6110080
783	奴	D2BF	53C0	F2WW0080
784	弩	D2C0	53C2	F2WY0080
785	怒	D2C1	53C3	F2WZ0080
786	擄	D2C2	68C6	F6120080
787	櫓	D2C3	68C7	F6130080
788	爐	D2C4	68C8	F6140080
789	璫	D2C5	53C4	F2X00080
790	盧	D2C6	68C9	F6150080
791	老	D2C7	68CA	F6160080
792	蘆	D2C8	68CB	F6170080
793	虜	D2C9	68CC	F6180080
794	路	D2CA	68CD	F6190080
795	露	D2CB	68CE	F61A0080
796	駑	D2CC	68CF	F61B0080
797	魯	D2CD	68D0	F61C0080
798	鷺	D2CE	68D1	F61D0080
799	碌	D2CF	68D2	F61E0080
800	祿	D2D0	68D3	F61F0080
801	綠	D2D1	68D4	F61G0080
802	菘	D2D2	68D5	F61H0080
803	錄	D2D3	68D6	F61I0080
804	鹿	D2D4	68D7	F61J0080
805	論	D2D5	68D8	F61K0080

Line Number	Graphic	PC Code	Host Code	GCGID
806	壘	D2D6	68D9	F61L0080
807	弄	D2D7	68DA	F61M0080
808	濃	D2D8	53C5	F2X10080
809	籠	D2D9	68DB	F61N0080
810	聾	D2DA	68DC	F61O0080
811	膿	D2DB	53C6	F2X20080
812	農	D2DC	53C7	F2X30080
813	惱	D2DD	53C8	F2X40080
814	牢	D2DE	68DD	F61P0080
815	磊	D2DF	68DE	F61Q0080
816	腦	D2E0	53C9	F2X50080
817	賂	D2E1	68DF	F61R0080
818	雷	D2E2	68E0	F61S0080
819	尿	D2E3	53CA	F2X60080
820	壘	D2E4	68E1	F61T0080
821	屢	D2E5	68E2	F61U0080
822	樓	D2E6	68E3	F61V0080
823	淚	D2E7	68E4	F61W0080
824	漏	D2E8	68E5	F61X0080
825	累	D2E9	68E6	F61Y0080
826	縷	D2EA	68E7	F61Z0080
827	陋	D2EB	68E8	F6200080
828	嫩	D2EC	53CC	F2X80080
829	訥	D2ED	53CD	F2X90080
830	扭	D2EE	68E9	F6210080
831	紐	D2EF	53CE	F2XA0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
832	勒	D2F0	68EA	F6220080
833	肋	D2F1	68EB	F6230080
834	凜	D2F2	68EC	F6240080
835	凌	D2F3	68ED	F6250080
836	稜	D2F4	68EE	F6260080
837	綾	D2F5	68EF	F6270080
838	能	D2F6	53CF	F2XB0080
839	菱	D2F7	68F0	F6280080
840	陵	D2F8	68F1	F6290080
841	尼	D2F9	53D0	F2XC0080
842	泥	D2FA	53D1	F2XD0080
843	匿	D2FB	53D2	F2XE0080
844	溺	D2FC	53D3	F2XF0080
845	多	D2FD	53D4	F2XG0080
846	茶	D2FE	53D5	F2XH0080
847	丹	D3A1	53D6	F2XI0080
848	亘	D3A2	68F2	F62A0080
849	但	D3A3	53D7	F2XJ0080
850	單	D3A4	53D8	F2XK0080
851	團	D3A5	53D9	F2XL0080
852	壇	D3A6	53DA	F2XM0080
853	彖	D3A7	68F3	F62B0080
854	斷	D3A8	53DB	F2XN0080
855	旦	D3A9	53DC	F2XO0080
856	檀	D3AA	53DD	F2XP0080
857	段	D3AB	53DE	F2XQ0080

Line Number	Graphic	PC Code	Host Code	GCGID
858	湍	D3AC	53DF	F2XR0080
859	短	D3AD	53E0	F2XS0080
860	端	D3AE	53E1	F2XT0080
861	簞	D3AF	53E2	F2XU0080
862	緞	D3B0	53E3	F2XV0080
863	蛋	D3B1	53E4	F2XW0080
864	袒	D3B2	53E5	F2XX0080
865	鄆	D3B3	53E6	F2XY0080
866	鍛	D3B4	53E7	F2XZ0080
867	撻	D3B5	53EA	F2Y20080
868	澆	D3B6	68F4	F62C0080
869	獺	D3B7	53EB	F2Y30080
870	疸	D3B8	53EC	F2Y40080
871	達	D3B9	53ED	F2Y50080
872	啖	D3BA	53F0	F2Y80080
873	丹	D3BB	68F5	F62D0080
874	擔	D3BC	68F6	F62E0080
875	擔	D3BD	53F1	F2Y90080
876	曇	D3BE	53F2	F2YA0080
877	淡	D3BF	53F3	F2YB0080
878	澁	D3C0	68F7	F62F0080
879	潭	D3C1	53F4	F2YC0080
880	澹	D3C2	53F5	F2YD0080
881	痰	D3C3	53F6	F2YE0080
882	聃	D3C4	53F7	F2YF0080
883	膽	D3C5	53F8	F2YG0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
884	蕁	D3C6	68F8	F62G0080
885	覃	D3C7	53F9	F2YH0080
886	談	D3C8	53FA	F2YI0080
887	譚	D3C9	53FB	F2YJ0080
888	鎔	D3CA	68F9	F62H0080
889	沓	D3CB	53FC	F2YK0080
890	沓	D3CC	68FA	F62I0080
891	答	D3CD	53FD	F2YL0080
892	踏	D3CE	53FE	F2YM0080
893	逕	D3CF	5441	F2YP0080
894	唐	D3D0	5446	F2YU0080
895	堂	D3D1	5443	F2YR0080
896	塘	D3D2	5444	F2YS0080
897	幢	D3D3	5445	F2YT0080
898	羶	D3D4	68FB	F62J0080
899	撞	D3D5	5447	F2YV0080
900	棠	D3D6	5448	F2YW0080
901	當	D3D7	5449	F2YX0080
902	糖	D3D8	544A	F2YY0080
903	螳	D3D9	68FC	F62K0080
904	黨	D3DA	544C	F2Z00080
905	代	D3DB	544D	F2Z10080
906	垩	D3DC	544E	F2Z20080
907	垠	D3DD	68FD	F62L0080
908	大	D3DE	544F	F2Z30080
909	對	D3DF	5450	F2Z40080

Line Number	Graphic	PC Code	Host Code	GCGID
910	岱	D3E0	5451	F2Z50080
911	帶	D3E1	5452	F2Z60080
912	待	D3E2	5453	F2Z70080
913	戴	D3E3	5454	F2Z80080
914	擡	D3E4	5455	F2Z90080
915	玳	D3E5	5456	F2ZA0080
916	臺	D3E6	5458	F2ZC0080
917	袋	D3E7	5459	F2ZD0080
918	貸	D3E8	545A	F2ZE0080
919	隊	D3E9	545B	F2ZF0080
920	黛	D3EA	545C	F2ZG0080
921	宅	D3EB	545D	F2ZH0080
922	德	D3EC	545E	F2ZI0080
923	息	D3ED	545F	F2ZJ0080
924	倒	D3EE	5460	F2ZK0080
925	刀	D3EF	5461	F2ZL0080
926	到	D3F0	5462	F2ZM0080
927	圖	D3F1	5463	F2ZN0080
928	堵	D3F2	5464	F2ZO0080
929	塗	D3F3	5465	F2ZP0080
930	導	D3F4	5466	F2ZQ0080
931	屠	D3F5	5467	F2ZR0080
932	島	D3F6	5468	F2ZS0080
933	嶋	D3F7	68FE	F62M0080
934	度	D3F8	5469	F2ZT0080
935	徒	D3F9	546A	F2ZU0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
936	悼	D3FA	546B	F2ZV0080
937	挑	D3FB	546C	F2ZW0080
938	掉	D3FC	6941	F62P0080
939	搗	D3FD	546D	F2ZX0080
940	桃	D3FE	546E	F2ZY0080
941	棹	D4A1	546F	F2ZZ0080
942	擢	D4A2	6942	F62Q0080
943	淘	D4A3	5470	F3000080
944	渡	D4A4	5471	F3010080
945	滔	D4A5	5472	F3020080
946	濤	D4A6	5473	F3030080
947	燾	D4A7	5474	F3040080
948	盜	D4A8	5475	F3050080
949	睹	D4A9	5476	F3060080
950	禱	D4AA	5477	F3070080
951	稻	D4AB	5478	F3080080
952	萄	D4AC	5479	F3090080
953	覩	D4AD	6943	F62R0080
954	賭	D4AE	547B	F30B0080
955	跳	D4AF	547C	F30C0080
956	蹈	D4B0	547D	F30D0080
957	逃	D4B1	547E	F30E0080
958	途	D4B2	547F	F30F0080
959	道	D4B3	5480	F30G0080
960	都	D4B4	5481	F30H0080
961	鍍	D4B5	5482	F30I0080

Line Number	Graphic	PC Code	Host Code	GCGID
962	陶	D4B6	5483	F30J0080
963	韜	D4B7	5484	F30K0080
964	毒	D4B8	5485	F30L0080
965	瀆	D4B9	5486	F30M0080
966	牘	D4BA	5487	F30N0080
967	犢	D4BB	5488	F30O0080
968	獨	D4BC	5489	F30P0080
969	督	D4BD	548A	F30Q0080
970	禿	D4BE	548B	F30R0080
971	篤	D4BF	548C	F30S0080
972	燾	D4C0	548D	F30T0080
973	讀	D4C1	548E	F30U0080
974	墩	D4C2	548F	F30V0080
975	惇	D4C3	5490	F30W0080
976	敦	D4C4	5491	F30X0080
977	吨	D4C5	6944	F62S0080
978	噉	D4C6	5492	F30Y0080
979	沌	D4C7	5493	F30Z0080
980	焯	D4C8	6945	F62T0080
981	燉	D4C9	5494	F3100080
982	豚	D4CA	5495	F3110080
983	頓	D4CB	5496	F3120080
984	芎	D4CC	5498	F3140080
985	突	D4CD	5499	F3150080
986	仝	D4CE	549A	F3160080
987	冬	D4CF	549B	F3170080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
988	凍	D4D0	549C	F3180080
989	動	D4D1	549D	F3190080
990	同	D4D2	549E	F31A0080
991	懂	D4D3	54A0	F31C0080
992	東	D4D4	54A1	F31D0080
993	桐	D4D5	54A2	F31E0080
994	棟	D4D6	54A3	F31F0080
995	洞	D4D7	54A4	F31G0080
996	潼	D4D8	54A5	F31H0080
997	疼	D4D9	54A7	F31J0080
998	瞳	D4DA	54A8	F31K0080
999	童	D4DB	54A6	F31I0080
1000	胴	D4DC	54AA	F31M0080
1001	董	D4DD	54A9	F31L0080
1002	銅	D4DE	54AB	F31N0080
1003	兜	D4DF	54AC	F31O0080
1004	斗	D4E0	54AD	F31P0080
1005	杜	D4E1	54AE	F31Q0080
1006	料	D4E2	54AF	F31R0080
1007	痘	D4E3	54B0	F31S0080
1008	竇	D4E4	54B1	F31T0080
1009	荳	D4E5	54B2	F31U0080
1010	讀	D4E6	54B5	F31X0080
1011	豆	D4E7	54B6	F31Y0080
1012	逗	D4E8	6946	F62U0080
1013	頭	D4E9	54B7	F31Z0080

Line Number	Graphic	PC Code	Host Code	GCGID
1014	屯	D4EA	54B8	F3200080
1015	臀	D4EB	54B9	F3210080
1016	茈	D4EC	6947	F62V0080
1017	遁	D4ED	54BA	F3220080
1018	遯	D4EE	54BB	F3230080
1019	鈍	D4EF	54BC	F3240080
1020	得	D4F0	54BD	F3250080
1021	澄	D4F1	6948	F62W0080
1022	橙	D4F2	54BE	F3260080
1023	燈	D4F3	54C1	F3290080
1024	登	D4F4	54C2	F32A0080
1025	等	D4F5	54C3	F32B0080
1026	藤	D4F6	54C4	F32C0080
1027	膽	D4F7	54C5	F32D0080
1028	鄧	D4F8	54C6	F32E0080
1029	騰	D4F9	54C8	F32G0080
1030	喇	D4FA	54C9	F32H0080
1031	懶	D4FB	54CA	F32I0080
1032	拏	D4FC	6949	F62X0080
1033	癩	D4FD	54CB	F32J0080
1034	羅	D4FE	54CC	F32K0080
1035	蘿	D5A1	54CD	F32L0080
1036	螺	D5A2	54CE	F32M0080
1037	裸	D5A3	54CF	F32N0080
1038	邏	D5A4	54D0	F32O0080
1039	樂	D5A5	54D1	F32P0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1040	洛	D5A6	54D2	F32Q0080
1041	烙	D5A7	54D3	F32R0080
1042	珞	D5A8	54D5	F32T0080
1043	絡	D5A9	54D6	F32U0080
1044	落	D5AA	54D7	F32V0080
1045	諾	D5AB	694A	F62Y0080
1046	酪	D5AC	54D8	F32W0080
1047	駱	D5AD	54D9	F32X0080
1048	丹	D5AE	694B	F62Z0080
1049	亂	D5AF	54DA	F32Y0080
1050	卵	D5B0	54DB	F32Z0080
1051	欄	D5B1	54DD	F33I0080
1052	欒	D5B2	54DE	F3320080
1053	瀾	D5B3	54DF	F3330080
1054	爛	D5B4	54E0	F3340080
1055	蘭	D5B5	54E1	F3350080
1056	鸞	D5B6	54E2	F3360080
1057	刺	D5B7	54E3	F3370080
1058	辣	D5B8	54E5	F3390080
1059	嵐	D5B9	54E6	F33A0080
1060	擘	D5BA	54E7	F33B0080
1061	攬	D5BB	54E8	F33C0080
1062	攬	D5BC	54E9	F33D0080
1063	濫	D5BD	54EA	F33E0080
1064	籃	D5BE	54EB	F33F0080
1065	纜	D5BF	54EC	F33G0080

Line Number	Graphic	PC Code	Host Code	GCGID
1066	藍	D5C0	54ED	F33H0080
1067	襪	D5C1	54EE	F33I0080
1068	覽	D5C2	54EF	F33J0080
1069	拉	D5C3	54F0	F33K0080
1070	臘	D5C4	54F1	F33L0080
1071	蠟	D5C5	54F2	F33M0080
1072	廊	D5C6	54F3	F33N0080
1073	朗	D5C7	54F4	F33O0080
1074	浪	D5C8	54F6	F33Q0080
1075	狼	D5C9	54F7	F33R0080
1076	琅	D5CA	54F8	F33S0080
1077	瑯	D5CB	54F9	F33T0080
1078	螂	D5CC	54FA	F33U0080
1079	郎	D5CD	54FB	F33V0080
1080	來	D5CE	54FC	F33W0080
1081	峽	D5CF	694C	F6300080
1082	徠	D5D0	694D	F6310080
1083	萊	D5D1	54FD	F33X0080
1084	冷	D5D2	54FE	F33Y0080
1085	掠	D5D3	5541	F34I0080
1086	略	D5D4	5542	F3420080
1087	亮	D5D5	5543	F3430080
1088	倆	D5D6	5545	F3450080
1089	兩	D5D7	5544	F3440080
1090	涼	D5D8	5546	F3460080
1091	梁	D5D9	5547	F3470080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1092	稜	D5DA	5549	F3490080
1093	糧	D5DB	554A	F34A0080
1094	梁	D5DC	554B	F34B0080
1095	糧	D5DD	554C	F34C0080
1096	良	D5DE	554D	F34D0080
1097	諒	D5DF	554E	F34E0080
1098	輛	D5E0	554F	F34F0080
1099	量	D5E1	5550	F34G0080
1100	侶	D5E2	5552	F34I0080
1101	儷	D5E3	694E	F6320080
1102	勵	D5E4	5553	F34J0080
1103	呂	D5E5	5554	F34K0080
1104	廬	D5E6	5555	F34L0080
1105	慮	D5E7	555E	F34U0080
1106	戾	D5E8	5556	F34M0080
1107	旅	D5E9	5557	F34N0080
1108	櫛	D5EA	5558	F34O0080
1109	濾	D5EB	5559	F34P0080
1110	礪	D5EC	555B	F34R0080
1111	藜	D5ED	555D	F34T0080
1112	蠣	D5EE	555F	F34V0080
1113	閭	D5EF	5562	F34Y0080
1114	驢	D5F0	5563	F34Z0080
1115	驪	D5F1	5564	F3500080
1116	麗	D5F2	5565	F3510080
1117	黎	D5F3	5566	F3520080

Line Number	Graphic	PC Code	Host Code	GCGID
1118	力	D5F4	5567	F3530080
1119	曆	D5F5	5569	F3550080
1120	歷	D5F6	5568	F3540080
1121	瀝	D5F7	556B	F3570080
1122	礫	D5F8	556C	F3580080
1123	躒	D5F9	556D	F3590080
1124	霹	D5FA	556E	F35A0080
1125	憐	D5FB	556F	F35B0080
1126	戀	D5FC	5570	F35C0080
1127	攀	D5FD	5571	F35D0080
1128	漣	D5FE	5572	F35E0080
1129	煉	D6A1	5573	F35F0080
1130	璉	D6A2	694F	F6330080
1131	練	D6A3	5574	F35G0080
1132	聯	D6A4	5575	F35H0080
1133	蓮	D6A5	5576	F35I0080
1134	輦	D6A6	5577	F35J0080
1135	連	D6A7	5578	F35K0080
1136	鍊	D6A8	5579	F35L0080
1137	冽	D6A9	557A	F35M0080
1138	列	D6AA	557C	F35O0080
1139	劣	D6AB	557B	F35N0080
1140	洌	D6AC	557D	F35P0080
1141	烈	D6AD	557E	F35Q0080
1142	裂	D6AE	557F	F35R0080
1143	廉	D6AF	5580	F35S0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1144	斂	D6B0	5581	F35T0080
1145	殮	D6B1	5582	F35U0080
1146	濂	D6B2	5583	F35V0080
1147	簾	D6B3	5584	F35W0080
1148	獵	D6B4	5585	F35X0080
1149	令	D6B5	5587	F35Z0080
1150	伶	D6B6	5588	F3600080
1151	囿	D6B7	5589	F3610080
1152	寧	D6B8	6950	F6340080
1153	岑	D6B9	6951	F6350080
1154	嶺	D6BA	558A	F3620080
1155	伶	D6BB	558B	F3630080
1156	玲	D6BC	558E	F3660080
1157	苓	D6BD	6952	F6360080
1158	鈴	D6BE	558F	F3670080
1159	翎	D6BF	5590	F3680080
1160	聆	D6C0	6953	F6370080
1161	逞	D6C1	5593	F36B0080
1162	鈴	D6C2	5596	F36E0080
1163	零	D6C3	5594	F36C0080
1164	靈	D6C4	5595	F36D0080
1165	領	D6C5	5597	F36F0080
1166	齡	D6C6	5598	F36G0080
1167	例	D6C7	5599	F36H0080
1168	禮	D6C8	6954	F6380080
1169	禮	D6C9	559A	F36I0080

Line Number	Graphic	PC Code	Host Code	GCGID
1170	醴	D6CA	559B	F36J0080
1171	隸	D6CB	559C	F36K0080
1172	勞	D6CC	559D	F36L0080
1173	怒	D6CD	6955	F6390080
1174	撈	D6CE	559E	F36M0080
1175	擄	D6CF	6956	F63A0080
1176	槽	D6D0	559F	F36N0080
1177	踳	D6D1	6957	F63B0080
1178	瀘	D6D2	55A2	F36Q0080
1179	爐	D6D3	55A1	F36P0080
1180	盧	D6D4	55A3	F36R0080
1181	老	D6D5	55A4	F36S0080
1182	蘆	D6D6	55A6	F36U0080
1183	虜	D6D7	55A7	F36V0080
1184	路	D6D8	55A8	F36W0080
1185	輅	D6D9	55A9	F36X0080
1186	露	D6DA	55AB	F36Z0080
1187	魯	D6DB	55AC	F3700080
1188	鷺	D6DC	55AD	F3710080
1189	鹵	D6DD	55AE	F3720080
1190	碌	D6DE	55B0	F3740080
1191	祿	D6DF	6958	F63C0080
1192	綠	D6E0	55B2	F3760080
1193	萊	D6E1	6959	F63D0080
1194	錄	D6E2	55B4	F3780080
1195	鹿	D6E3	55B6	F37A0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1196	麓	D6E4	55B5	F3790080
1197	論	D6E5	55B7	F37B0080
1198	壘	D6E6	55B8	F37C0080
1199	弄	D6E7	55B9	F37D0080
1200	臚	D6E8	55BA	F37E0080
1201	瀧	D6E9	55BB	F37F0080
1202	瓏	D6EA	55BC	F37G0080
1203	籠	D6EB	55BD	F37H0080
1204	聳	D6EC	55BE	F37I0080
1205	儡	D6ED	55BF	F37J0080
1206	瀨	D6EE	695A	F63E0080
1207	牢	D6EF	55C0	F37K0080
1208	磊	D6F0	55C1	F37L0080
1209	賂	D6F1	55C6	F37Q0080
1210	賚	D6F2	695B	F63F0080
1211	賴	D6F3	55C5	F37P0080
1212	雷	D6F4	55C7	F37R0080
1213	了	D6F5	55C8	F37S0080
1214	僚	D6F6	55C9	F37T0080
1215	寮	D6F7	55CB	F37V0080
1216	廖	D6F8	55CC	F37W0080
1217	料	D6F9	55D0	F3800080
1218	療	D6FA	55CD	F37X0080
1219	療	D6FB	55CE	F37Y0080
1220	瞭	D6FC	55CF	F37Z0080
1221	聊	D6FD	55D1	F3810080

Line Number	Graphic	PC Code	Host Code	GCGID
1222	蓼	D6FE	55D2	F3820080
1223	遼	D7A1	55D3	F3830080
1224	鬧	D7A2	695C	F63G0080
1225	龍	D7A3	55D4	F3840080
1226	壘	D7A4	55D6	F3860080
1227	婁	D7A5	695D	F63H0080
1228	屢	D7A6	55D7	F3870080
1229	樓	D7A7	55D8	F3880080
1230	淚	D7A8	55D9	F3890080
1231	漏	D7A9	55DA	F38A0080
1232	癩	D7AA	695E	F63I0080
1233	累	D7AB	55DB	F38B0080
1234	縷	D7AC	55DC	F38C0080
1235	藁	D7AD	695F	F63J0080
1236	樓	D7AE	55DD	F38D0080
1237	鏤	D7AF	6960	F63K0080
1238	陋	D7B0	55DE	F38E0080
1239	劉	D7B1	55E0	F38G0080
1240	旒	D7B2	6961	F63L0080
1241	柳	D7B3	55E1	F38H0080
1242	榴	D7B4	55E2	F38I0080
1243	流	D7B5	55E3	F38J0080
1244	溜	D7B6	55E4	F38K0080
1245	瀏	D7B7	6962	F63M0080
1246	琉	D7B8	55E5	F38L0080
1247	瑠	D7B9	55E6	F38M0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1248	留	D7BA	55E7	F38N0080
1249	瘤	D7BB	55E8	F38O0080
1250	硫	D7BC	55E9	F38P0080
1251	謬	D7BD	55EA	F38Q0080
1252	類	D7BE	55EB	F38R0080
1253	六	D7BF	55EC	F38S0080
1254	戮	D7C0	55ED	F38T0080
1255	陸	D7C1	55EE	F38U0080
1256	侖	D7C2	6963	F63N0080
1257	倫	D7C3	55EF	F38V0080
1258	崙	D7C4	55F0	F38W0080
1259	淪	D7C5	55F1	F38X0080
1260	綸	D7C6	55F2	F38Y0080
1261	輪	D7C7	55F3	F38Z0080
1262	律	D7C8	55F4	F3900080
1263	慄	D7C9	55F5	F3910080
1264	栗	D7CA	55F6	F3920080
1265	率	D7CB	55F7	F3930080
1266	隆	D7CC	55F9	F3950080
1267	勒	D7CD	55FB	F3970080
1268	肋	D7CE	55FA	F3960080
1269	凜	D7CF	6964	F63O0080
1270	凌	D7D0	55FE	F39A0080
1271	楞	D7D1	5641	F39D0080
1272	稜	D7D2	5642	F39E0080
1273	綾	D7D3	5643	F39F0080

Line Number	Graphic	PC Code	Host Code	GCGID
1274	菱	D7D4	5644	F39G0080
1275	陵	D7D5	5645	F39H0080
1276	俚	D7D6	5646	F39I0080
1277	利	D7D7	5647	F39J0080
1278	厘	D7D8	5648	F39K0080
1279	吏	D7D9	5649	F39L0080
1280	喇	D7DA	6965	F63P0080
1281	履	D7DB	564A	F39M0080
1282	惻	D7DC	564B	F39N0080
1283	李	D7DD	564D	F39P0080
1284	梨	D7DE	564E	F39Q0080
1285	湮	D7DF	6966	F63Q0080
1286	犁	D7E0	5650	F39S0080
1287	狸	D7E1	5651	F39T0080
1288	理	D7E2	5652	F39U0080
1289	璃	D7E3	5653	F39V0080
1290	異	D7E4	6967	F63R0080
1291	痢	D7E5	5654	F39W0080
1292	籬	D7E6	5657	F39Z0080
1293	罹	D7E7	5656	F39Y0080
1294	羸	D7E8	6968	F63S0080
1295	莉	D7E9	6969	F63T0080
1296	裏	D7EA	5659	F3A10080
1297	裡	D7EB	696A	F63U0080
1298	里	D7EC	565A	F3A20080
1299	釐	D7ED	565B	F3A30080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1300	離	D7EE	565C	F3A40080
1301	鯉	D7EF	565E	F3A60080
1302	吝	D7F0	565F	F3A70080
1303	潑	D7F1	696B	F63V0080
1304	燐	D7F2	5660	F3A80080
1305	璘	D7F3	5661	F3A90080
1306	蘭	D7F4	5662	F3AA0080
1307	躡	D7F5	5663	F3AB0080
1308	隣	D7F6	5664	F3AC0080
1309	鱗	D7F7	5665	F3AD0080
1310	麟	D7F8	5666	F3AE0080
1311	林	D7F9	5667	F3AF0080
1312	淋	D7FA	5668	F3AG0080
1313	琳	D7FB	5669	F3AH0080
1314	臨	D7FC	566B	F3AJ0080
1315	霖	D7FD	566C	F3AK0080
1316	砒	D7FE	566E	F3AM0080
1317	立	D8A1	566F	F3AN0080
1318	笠	D8A2	5670	F3AO0080
1319	粒	D8A3	5671	F3AP0080
1320	摩	D8A4	5673	F3AR0080
1321	瑪	D8A5	5674	F3AS0080
1322	痲	D8A6	5675	F3AT0080
1323	碼	D8A7	696C	F63W0080
1324	磨	D8A8	5676	F3AU0080
1325	馬	D8A9	5678	F3AW0080

Line Number	Graphic	PC Code	Host Code	GCGID
1326	魔	D8AA	5679	F3AX0080
1327	麻	D8AB	567A	F3AY0080
1328	寞	D8AC	567B	F3AZ0080
1329	幕	D8AD	567C	F3B00080
1330	漠	D8AE	567D	F3B10080
1331	膜	D8AF	567E	F3B20080
1332	莫	D8B0	567F	F3B30080
1333	邈	D8B1	696D	F63X0080
1334	万	D8B2	696E	F63Y0080
1335	卂	D8B3	696F	F63Z0080
1336	媿	D8B4	5680	F3B40080
1337	巒	D8B5	5681	F3B50080
1338	彎	D8B6	5682	F3B60080
1339	慢	D8B7	5683	F3B70080
1340	挽	D8B8	5684	F3B80080
1341	晚	D8B9	5685	F3B90080
1342	曼	D8BA	5686	F3BA0080
1343	滿	D8BB	5687	F3BB0080
1344	漫	D8BC	5688	F3BC0080
1345	灣	D8BD	5689	F3BD0080
1346	瞞	D8BE	568A	F3BE0080
1347	萬	D8BF	568B	F3BF0080
1348	蔓	D8C0	568C	F3BG0080
1349	蠻	D8C1	568D	F3BH0080
1350	輓	D8C2	568F	F3BJ0080
1351	饅	D8C3	5691	F3BL0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1352	鰻	D8C4	5693	F3BN0080
1353	禿	D8C5	6970	F6400080
1354	抹	D8C6	5694	F3BO0080
1355	末	D8C7	5695	F3BP0080
1356	沫	D8C8	5696	F3BQ0080
1357	茱	D8C9	6971	F6410080
1358	襪	D8CA	5697	F3BR0080
1359	鞅	D8CB	5698	F3BS0080
1360	亡	D8CC	5699	F3BT0080
1361	妄	D8CD	569A	F3BU0080
1362	忘	D8CE	569B	F3BV0080
1363	忙	D8CF	569C	F3BW0080
1364	望	D8D0	569D	F3BX0080
1365	網	D8D1	569E	F3BY0080
1366	罔	D8D2	569F	F3BZ0080
1367	芒	D8D3	56A0	F3C00080
1368	茫	D8D4	56A1	F3C10080
1369	莽	D8D5	56A2	F3C20080
1370	輜	D8D6	6972	F6420080
1371	邛	D8D7	56A3	F3C30080
1372	埋	D8D8	56A5	F3C50080
1373	妹	D8D9	56A6	F3C60080
1374	媒	D8DA	56A7	F3C70080
1375	寐	D8DB	56A8	F3C80080
1376	昧	D8DC	56A9	F3C90080
1377	枚	D8DD	56AA	F3CA0080

Line Number	Graphic	PC Code	Host Code	GCGID
1378	梅	D8DE	56AB	F3CB0080
1379	每	D8DF	56AC	F3CC0080
1380	煤	D8E0	56AD	F3CD0080
1381	罵	D8E1	56AF	F3CF0080
1382	買	D8E2	56B1	F3CH0080
1383	賣	D8E3	56B2	F3CI0080
1384	邁	D8E4	56B3	F3CJ0080
1385	魅	D8E5	56B4	F3CK0080
1386	脈	D8E6	56B5	F3CL0080
1387	貂	D8E7	56B7	F3CN0080
1388	陌	D8E8	56B8	F3CO0080
1389	蕎	D8E9	56B9	F3CP0080
1390	麥	D8EA	56BA	F3CQ0080
1391	孟	D8EB	56BB	F3CR0080
1392	氓	D8EC	56BC	F3CS0080
1393	猛	D8ED	56BD	F3CT0080
1394	盲	D8EE	56BF	F3CV0080
1395	盟	D8EF	56BE	F3CU0080
1396	萌	D8F0	56C0	F3CW0080
1397	冪	D8F1	56C1	F3CX0080
1398	覓	D8F2	56C2	F3CY0080
1399	兔	D8F3	56C4	F3D00080
1400	冕	D8F4	56C6	F3D20080
1401	勉	D8F5	56C5	F3D10080
1402	棉	D8F6	56C7	F3D30080
1403	沔	D8F7	6973	F6430080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1404	眇	D8F8	56C8	F3D40080
1405	眠	D8F9	56C9	F3D50080
1406	綿	D8FA	56CA	F3D60080
1407	緬	D8FB	56CB	F3D70080
1408	面	D8FC	56CC	F3D80080
1409	麵	D8FD	56CD	F3D90080
1410	滅	D8FE	56CE	F3DA0080
1411	蔑	D9A1	56CF	F3DB0080
1412	冥	D9A2	56D1	F3DD0080
1413	名	D9A3	56D2	F3DE0080
1414	命	D9A4	56D0	F3DC0080
1415	明	D9A5	56D4	F3DG0080
1416	暝	D9A6	56D5	F3DH0080
1417	桷	D9A7	6974	F6440080
1418	溟	D9A8	56D6	F3DI0080
1419	皿	D9A9	56D7	F3DJ0080
1420	暝	D9AA	6975	F6450080
1421	茗	D9AB	56D8	F3DK0080
1422	莫	D9AC	6976	F6460080
1423	螟	D9AD	56D9	F3DL0080
1424	酩	D9AE	56DA	F3DM0080
1425	銘	D9AF	56DB	F3DN0080
1426	鳴	D9B0	56D3	F3DF0080
1427	袂	D9B1	56DC	F3DO0080
1428	侮	D9B2	56DD	F3DP0080
1429	冒	D9B3	56E4	F3DW0080

Line Number	Graphic	PC Code	Host Code	GCGID
1430	募	D9B4	56DE	F3DQ0080
1431	姆	D9B5	56E0	F3DS0080
1432	帽	D9B6	56DF	F3DR0080
1433	慕	D9B7	56E1	F3DT0080
1434	摸	D9B8	56E2	F3DU0080
1435	摹	D9B9	6977	F6470080
1436	暮	D9BA	56E3	F3DV0080
1437	某	D9BB	56E5	F3DX0080
1438	模	D9BC	56E6	F3DY0080
1439	母	D9BD	56E7	F3DZ0080
1440	毛	D9BE	56E8	F3E00080
1441	牟	D9BF	56E9	F3E10080
1442	牡	D9C0	56EA	F3E20080
1443	瑁	D9C1	6978	F6480080
1444	眸	D9C2	56EB	F3E30080
1445	矛	D9C3	56EC	F3E40080
1446	耗	D9C4	56EE	F3E60080
1447	毫	D9C5	6979	F6490080
1448	茅	D9C6	56EF	F3E70080
1449	謀	D9C7	56F0	F3E80080
1450	謨	D9C8	56F1	F3E90080
1451	貌	D9C9	56F2	F3EA0080
1452	木	D9CA	56F4	F3EC0080
1453	沐	D9CB	56F5	F3ED0080
1454	牧	D9CC	56F6	F3EE0080
1455	目	D9CD	56F7	F3EF0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1456	睦	D9CE	56F8	F3EG0080
1457	穆	D9CF	56F9	F3EH0080
1458	鶩	D9D0	697A	F64A0080
1459	歿	D9D1	56FA	F3EI0080
1460	沒	D9D2	56FB	F3EJ0080
1461	夢	D9D3	56FC	F3EK0080
1462	朦	D9D4	56FD	F3EL0080
1463	蒙	D9D5	5742	F3EQ0080
1464	卯	D9D6	5743	F3ER0080
1465	墓	D9D7	5744	F3ES0080
1466	妙	D9D8	5745	F3ET0080
1467	廟	D9D9	5746	F3EU0080
1468	描	D9DA	5747	F3EV0080
1469	昴	D9DB	5748	F3EW0080
1470	杳	D9DC	5749	F3EX0080
1471	渺	D9DD	574A	F3EY0080
1472	猫	D9DE	574B	F3EZ0080
1473	妙	D9DF	697B	F64B0080
1474	苗	D9E0	574C	F3F00080
1475	锚	D9E1	574D	F3F10080
1476	務	D9E2	574E	F3F20080
1477	瓜	D9E3	574F	F3F30080
1478	憮	D9E4	697C	F64C0080
1479	懋	D9E5	5750	F3F40080
1480	戊	D9E6	5751	F3F50080
1481	拇	D9E7	5752	F3F60080

Line Number	Graphic	PC Code	Host Code	GCGID
1482	撫	D9E8	5753	F3F70080
1483	无	D9E9	5754	F3F80080
1484	楸	D9EA	697D	F64D0080
1485	武	D9EB	5755	F3F90080
1486	母	D9EC	5756	F3FA0080
1487	無	D9ED	5757	F3FB0080
1488	珣	D9EE	697E	F64E0080
1489	畝	D9EF	5758	F3FC0080
1490	繆	D9F0	5759	F3FD0080
1491	舞	D9F1	575A	F3FE0080
1492	茂	D9F2	575B	F3FF0080
1493	蕪	D9F3	575C	F3FG0080
1494	誣	D9F4	575D	F3FH0080
1495	貿	D9F5	575E	F3FI0080
1496	霧	D9F6	575F	F3FJ0080
1497	鷓	D9F7	5760	F3FK0080
1498	墨	D9F8	5761	F3FL0080
1499	默	D9F9	5762	F3FM0080
1500	們	D9FA	697F	F64F0080
1501	芻	D9FB	5763	F3FN0080
1502	吻	D9FC	5764	F3FO0080
1503	問	D9FD	576B	F3FV0080
1504	文	D9FE	5765	F3FP0080
1505	汶	DAA1	5766	F3FQ0080
1506	紊	DAA2	5768	F3FS0080
1507	紋	DAA3	5767	F3FR0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 27 (Page 30 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1508	聞	DAA4	576C	F3FW0080
1509	蚊	DAA5	5769	F3FT0080
1510	門	DAA6	576A	F3FU0080
1511	雯	DAA7	6980	F64G0080
1512	勿	DAA8	576D	F3FX0080
1513	沕	DAA9	6981	F64H0080
1514	物	DAAA	576E	F3FY0080
1515	味	DAAB	576F	F3FZ0080
1516	媚	DAAC	5770	F3G00080
1517	尾	DAAD	5771	F3G10080
1518	媚	DAAE	5772	F3G20080
1519	彌	DAAF	5774	F3G40080
1520	微	DAB0	5775	F3G50080
1521	未	DAB1	5776	F3G60080
1522	梶	DAB2	6982	F64I0080
1523	楣	DAB3	6983	F64J0080
1524	泮	DAB4	5777	F3G70080
1525	湄	DAB5	6984	F64K0080
1526	眉	DAB6	5779	F3G90080
1527	米	DAB7	577A	F3GA0080
1528	美	DAB8	577C	F3GC0080
1529	薇	DAB9	577D	F3GD0080
1530	謎	DABA	577E	F3GE0080
1531	迷	DABB	577F	F3GF0080
1532	靡	DABC	5773	F3G30080
1533	微	DABD	6985	F64L0080

Table 27 (Page 30 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1534	岷	DABE	6986	F64M0080
1535	悶	DABF	5780	F3GG0080
1536	愍	DAC0	5781	F3GH0080
1537	憫	DAC1	5782	F3GI0080
1538	敏	DAC2	5783	F3GJ0080
1539	旻	DAC3	5785	F3GL0080
1540	旻	DAC4	5784	F3GK0080
1541	民	DAC5	5786	F3GM0080
1542	泯	DAC6	5787	F3GN0080
1543	玟	DAC7	5788	F3GO0080
1544	珉	DAC8	5789	F3GP0080
1545	緡	DAC9	6987	F64N0080
1546	閔	DACA	578A	F3GQ0080
1547	密	DACB	578C	F3GS0080
1548	蜜	DACC	578D	F3GT0080
1549	謚	DACD	578E	F3GU0080
1550	剝	DACE	5790	F3GW0080
1551	博	DACF	5791	F3GX0080
1552	拍	DAD0	5792	F3GY0080
1553	搏	DAD1	5793	F3GZ0080
1554	撲	DAD2	5794	F3H00080
1555	朴	DAD3	5795	F3H10080
1556	樸	DAD4	5796	F3H20080
1557	泊	DAD5	5798	F3H40080
1558	珀	DAD6	579A	F3H60080
1559	璞	DAD7	579B	F3H70080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1560	箔	DAD8	579C	F3H80080
1561	粕	DAD9	579E	F3HA0080
1562	縛	DADA	579D	F3H90080
1563	膊	DADB	579F	F3HB0080
1564	舶	DADC	57A0	F3HC0080
1565	薄	DADD	57A1	F3HD0080
1566	迫	DADE	57A2	F3HE0080
1567	雹	DADF	57A3	F3HF0080
1568	駁	DAE0	57A4	F3HG0080
1569	伴	DAE1	57A5	F3HH0080
1570	半	DAE2	57A6	F3HI0080
1571	反	DAE3	57A7	F3HJ0080
1572	叛	DAE4	57A8	F3HK0080
1573	拌	DAE5	57A9	F3HL0080
1574	搬	DAE6	57AA	F3HM0080
1575	攀	DAE7	57AB	F3HN0080
1576	斑	DAE8	57AC	F3HO0080
1577	槃	DAE9	57AD	F3HP0080
1578	泮	DAEA	57AF	F3HR0080
1579	潘	DAEB	57AE	F3HQ0080
1580	班	DAEC	57B0	F3HS0080
1581	畔	DAED	57B1	F3HT0080
1582	癩	DAEE	6988	F64O0080
1583	盤	DAEF	57B2	F3HU0080
1584	盼	DAF0	6989	F64P0080
1585	磐	DAF1	698A	F64Q0080

Line Number	Graphic	PC Code	Host Code	GCGID
1586	磻	DAF2	57B3	F3HV0080
1587	攀	DAF3	57B4	F3HW0080
1588	絆	DAF4	57B5	F3HX0080
1589	般	DAF5	57B8	F3I00080
1590	蟠	DAF6	57B7	F3HZ0080
1591	返	DAF7	57B9	F3I10080
1592	頒	DAF8	57BA	F3I20080
1593	飯	DAF9	57BB	F3I30080
1594	勃	DAFA	57BC	F3I40080
1595	拔	DAFB	57BD	F3I50080
1596	撥	DAFC	57BF	F3I70080
1597	渤	DAFD	698B	F64R0080
1598	潑	DAFE	57BE	F3I60080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 1 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1599	發	DBA1	57C0	F3I80080
1600	跋	DBA2	57C1	F3I90080
1601	醜	DBA3	57C2	F3IA0080
1602	鉢	DBA4	57C3	F3IB0080
1603	髮	DBA5	57C4	F3IC0080
1604	魃	DBA6	57C5	F3ID0080
1605	倣	DBA7	57C6	F3IE0080
1606	傍	DBA8	57C7	F3IF0080
1607	坊	DBA9	57C8	F3IG0080
1608	妨	DBAA	57C9	F3IH0080
1609	尪	DBAB	57CA	F3II0080
1610	幫	DBAC	57CB	F3IJ0080
1611	彷彿	DBAD	57CC	F3IK0080
1612	房	DBAE	57CD	F3IL0080
1613	放	DBAF	57CE	F3IM0080
1614	方	DBB0	57CF	F3IN0080
1615	旁	DBB1	57D0	F3IO0080
1616	昉	DBB2	57D1	F3IP0080
1617	枋	DBB3	698C	F64S0080
1618	榜	DBB4	57D2	F3IQ0080
1619	滂	DBB5	698D	F64T0080
1620	磅	DBB6	698E	F64U0080
1621	紡	DBB7	57D3	F3IR0080
1622	肪	DBB8	57D4	F3IS0080
1623	勝	DBB9	57D5	F3IT0080
1624	舫	DBBA	57D6	F3IU0080

Table 28 (Page 1 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1625	芳	DBBB	57D7	F3IV0080
1626	莠	DBBC	57D8	F3IW0080
1627	蚌	DBBD	57D9	F3IX0080
1628	訪	DBBE	57DA	F3IY0080
1629	誘	DBBF	57DB	F3IZ0080
1630	邦	DBC0	57DC	F3J00080
1631	防	DBC1	57DD	F3J10080
1632	龐	DBC2	57E0	F3J40080
1633	倍	DBC3	57E2	F3J60080
1634	俳	DBC4	57E1	F3J50080
1635	北	DBC5	57E3	F3J70080
1636	培	DBC6	57E4	F3J80080
1637	徘	DBC7	57E5	F3J90080
1638	拜	DBC8	57E6	F3JA0080
1639	排	DBC9	57E7	F3JB0080
1640	杯	DBCA	57E8	F3JC0080
1641	湃	DBCB	57E9	F3JD0080
1642	焙	DBCC	698F	F64V0080
1643	盃	DBCD	57EA	F3JE0080
1644	背	DBCE	57EC	F3JG0080
1645	胚	DBCF	57EB	F3JF0080
1646	裴	DBD0	57EE	F3JI0080
1647	斐	DBD1	57ED	F3JH0080
1648	褸	DBD2	57EF	F3JJ0080
1649	賠	DBD3	57F0	F3JK0080
1650	輩	DBD4	57F1	F3JL0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1651	配	DBD5	57F2	F3JM0080
1652	陪	DBD6	57F3	F3JN0080
1653	伯	DBD7	57F4	F3JO0080
1654	佰	DBD8	57F5	F3JP0080
1655	帛	DBD9	57F6	F3JQ0080
1656	柏	DBDA	57F7	F3JR0080
1657	栢	DBDB	57F8	F3JS0080
1658	白	DBDC	57F9	F3JT0080
1659	百	DBDD	57FA	F3JU0080
1660	魄	DBDE	57FB	F3JV0080
1661	幡	DBDF	6990	F64W0080
1662	樊	DBE0	57FC	F3JW0080
1663	煩	DBE1	57FE	F3JY0080
1664	燻	DBE2	6991	F64X0080
1665	番	DBE3	5841	F3K10080
1666	磻	DBE4	5842	F3K20080
1667	繁	DBE5	5843	F3K30080
1668	蕃	DBE6	5845	F3K50080
1669	藩	DBE7	5846	F3K60080
1670	黻	DBE8	5847	F3K70080
1671	伐	DBE9	5848	F3K80080
1672	筏	DBEA	5849	F3K90080
1673	罰	DBEB	584A	F3KA0080
1674	閥	DBEC	584B	F3KB0080
1675	凡	DBED	584C	F3KC0080
1676	帆	DBEE	584D	F3KD0080

Line Number	Graphic	PC Code	Host Code	GCGID
1677	梵	DBEF	584E	F3KE0080
1678	汜	DBF0	584F	F3KF0080
1679	汎	DBF1	5850	F3KG0080
1680	泛	DBF2	5851	F3KH0080
1681	犯	DBF3	5852	F3KI0080
1682	範	DBF4	5853	F3KJ0080
1683	范	DBF5	5854	F3KK0080
1684	法	DBF6	5855	F3KL0080
1685	珞	DBF7	5856	F3KM0080
1686	僻	DBF8	5857	F3KN0080
1687	劈	DBF9	5858	F3KO0080
1688	壁	DBFA	5859	F3KP0080
1689	擘	DBFB	585A	F3KQ0080
1690	檠	DBFC	6992	F64Y0080
1691	璧	DBFD	585B	F3KR0080
1692	癖	DBFE	585C	F3KS0080
1693	碧	DCA1	585D	F3KT0080
1694	藁	DCA2	6993	F64Z0080
1695	關	DCA3	585F	F3KV0080
1696	霹	DCA4	5860	F3KW0080
1697	便	DCA5	5861	F3KX0080
1698	卞	DCA6	5862	F3KY0080
1699	弁	DCA7	5863	F3KZ0080
1700	變	DCA8	5866	F3L20080
1701	辨	DCA9	5867	F3L30080
1702	辯	DCAA	5868	F3L40080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1703	邊	DCAB	586A	F3L60080
1704	別	DCAC	586C	F3L80080
1705	瞥	DCAD	586E	F3LA0080
1706	鰲	DCAE	586F	F3LB0080
1707	鼈	DCAF	5870	F3LC0080
1708	丙	DCB0	5871	F3LD0080
1709	併	DCB1	5872	F3LE0080
1710	兵	DCB2	5873	F3LF0080
1711	屏	DCB3	5874	F3LG0080
1712	并	DCB4	5875	F3LH0080
1713	晒	DCB5	5876	F3LI0080
1714	昷	DCB6	5877	F3LJ0080
1715	柄	DCB7	5878	F3LK0080
1716	棟	DCB8	6994	F6500080
1717	炳	DCB9	5879	F3LL0080
1718	瓶	DCBA	587A	F3LM0080
1719	病	DCBB	587B	F3LN0080
1720	秉	DCBC	587D	F3LP0080
1721	並	DCBD	587C	F3LO0080
1722	駢	DCBE	587E	F3LQ0080
1723	餅	DCBF	5880	F3LS0080
1724	駢	DCC0	6995	F6510080
1725	保	DCC1	5881	F3LT0080
1726	堡	DCC2	5882	F3LU0080
1727	報	DCC3	5883	F3LV0080
1728	寶	DCC4	5884	F3LW0080

Line Number	Graphic	PC Code	Host Code	GCGID
1729	普	DCC5	5885	F3LX0080
1730	步	DCC6	5886	F3LY0080
1731	洑	DCC7	5888	F3M00080
1732	溱	DCC8	5887	F3LZ0080
1733	潛	DCC9	5889	F3M10080
1734	瑤	DCCA	6996	F6520080
1735	甫	DCCB	588A	F3M20080
1736	菩	DCCC	6997	F6530080
1737	補	DCCD	588B	F3M30080
1738	裸	DCCE	588C	F3M40080
1739	譜	DCCF	588D	F3M50080
1740	輔	DCD0	588E	F3M60080
1741	伏	DCD1	5891	F3M90080
1742	僕	DCD2	5892	F3MA0080
1743	匍	DCD3	5893	F3MB0080
1744	卜	DCD4	5894	F3MC0080
1745	宀	DCD5	5895	F3MD0080
1746	復	DCD6	5896	F3ME0080
1747	服	DCD7	5898	F3MG0080
1748	福	DCD8	5897	F3MF0080
1749	腹	DCD9	5899	F3MH0080
1750	茯	DCDA	589A	F3MI0080
1751	荀	DCDB	589B	F3MJ0080
1752	複	DCDC	589E	F3MM0080
1753	覆	DCDD	589C	F3MK0080
1754	輶	DCDE	6998	F6540080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1755	輻	DCDF	589F	F3MN0080
1756	馥	DCE0	58A0	F3MO0080
1757	馥	DCE1	58A1	F3MP0080
1758	本	DCE2	58A2	F3MQ0080
1759	芑	DCE3	58A3	F3MR0080
1760	俸	DCE4	58A5	F3MT0080
1761	奉	DCE5	58A6	F3MU0080
1762	封	DCE6	58A7	F3MV0080
1763	峯	DCE7	58A9	F3MX0080
1764	峰	DCE8	58A8	F3MW0080
1765	捧	DCE9	58AA	F3MY0080
1766	棒	DCEA	58AC	F3N00080
1767	烽	DCEB	58AD	F3N10080
1768	燧	DCEC	6999	F6550080
1769	琫	DCED	58AB	F3MZ0080
1770	縫	DCEE	58AE	F3N20080
1771	蓬	DCEF	58B0	F3N40080
1772	蜂	DCF0	58B1	F3N50080
1773	逢	DCF1	58B2	F3N60080
1774	鋒	DCF2	58B3	F3N70080
1775	鳳	DCF3	58B4	F3N80080
1776	不	DCF4	699A	F6560080
1777	付	DCF5	58B6	F3NA0080
1778	俯	DCF6	699B	F6570080
1779	傅	DCF7	58B7	F3NB0080
1780	剖	DCF8	58B8	F3NC0080

Line Number	Graphic	PC Code	Host Code	GCGID
1781	副	DCF9	58B9	F3ND0080
1782	否	DCFA	58BA	F3NE0080
1783	咐	DCFB	699C	F6580080
1784	埠	DCFC	58BB	F3NF0080
1785	夫	DCFD	58BC	F3NG0080
1786	婦	DCFE	58BD	F3NH0080
1787	孚	DDA1	699D	F6590080
1788	孵	DDA2	58BE	F3NI0080
1789	富	DDA3	58BF	F3NJ0080
1790	府	DDA4	58C0	F3NK0080
1791	復	DDA5	58C1	F3NL0080
1792	扶	DDA6	58C2	F3NM0080
1793	敷	DDA7	58C3	F3NN0080
1794	斧	DDA8	58C4	F3NO0080
1795	浮	DDA9	58C5	F3NP0080
1796	溥	DDAA	58C6	F3NQ0080
1797	父	DDAB	58C7	F3NR0080
1798	符	DDAC	58CA	F3NU0080
1799	簿	DDAD	58C8	F3NS0080
1800	缶	DDAE	58C9	F3NT0080
1801	腐	DDAF	58CD	F3NX0080
1802	臍	DDB0	58CC	F3NW0080
1803	膚	DDB1	58CE	F3NY0080
1804	孵	DDB2	699E	F65A0080
1805	芙	DDB3	58CF	F3NZ0080
1806	孛	DDB4	699F	F65B0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 5 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1807	訃	DDB5	58D2	F3O20080
1808	負	DDB6	58D3	F3O30080
1809	賦	DDB7	58D4	F3O40080
1810	賻	DDB8	58D5	F3O50080
1811	赴	DDB9	58D6	F3O60080
1812	跌	DDBA	58D7	F3O70080
1813	部	DDBB	58D8	F3O80080
1814	釜	DDBC	58D9	F3O90080
1815	阜	DDBD	58DA	F3OA0080
1816	附	DDBE	58DB	F3OB0080
1817	駙	DDBF	58DD	F3OD0080
1818	鳧	DDC0	58DF	F3OF0080
1819	北	DDC1	58E0	F3OG0080
1820	分	DDC2	58E1	F3OH0080
1821	吩	DDC3	69A0	F65C0080
1822	噴	DDC4	58E2	F3OI0080
1823	墳	DDC5	58E4	F3OK0080
1824	奔	DDC6	58E5	F3OL0080
1825	奮	DDC7	58E6	F3OM0080
1826	忿	DDC8	58E7	F3ON0080
1827	憤	DDC9	58E8	F3OO0080
1828	扮	DDCA	58E9	F3OP0080
1829	盼	DDCB	69A1	F65D0080
1830	汾	DDCC	58EA	F3OQ0080
1831	焚	DDCD	58EB	F3OR0080
1832	盆	DDCE	58EC	F3OS0080

Table 28 (Page 5 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
1833	粉	DDCF	58ED	F3OT0080
1834	糞	DDD0	58EE	F3OU0080
1835	紛	DDD1	58EF	F3OV0080
1836	芬	DDD2	58F0	F3OW0080
1837	賁	DDD3	69A2	F65E0080
1838	雰	DDD4	58F2	F3OY0080
1839	不	DDD5	58F3	F3OZ0080
1840	佛	DDD6	58F4	F3P00080
1841	弗	DDD7	58F6	F3P20080
1842	彿	DDD8	69A3	F65F0080
1843	拂	DDD9	58F7	F3P30080
1844	崩	DDDA	58FA	F3P60080
1845	朋	DDDB	58FB	F3P70080
1846	棚	DDDC	58FC	F3P80080
1847	礪	DDDD	58FD	F3P90080
1848	繡	DDDE	58FE	F3PA0080
1849	鵬	DDDF	5941	F3PD0080
1850	丕	DDE0	5942	F3PE0080
1851	備	DDE1	5943	F3PF0080
1852	匕	DDE2	5944	F3PG0080
1853	匪	DDE3	5945	F3PH0080
1854	卑	DDE4	5946	F3PI0080
1855	妃	DDE5	5947	F3PJ0080
1856	婢	DDE6	5949	F3PL0080
1857	庇	DDE7	594A	F3PM0080
1858	悲	DDE8	594B	F3PN0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1859	億	DDE9	594C	F3PO0080
1860	扉	DDEA	594D	F3PP0080
1861	批	DDEB	594E	F3PQ0080
1862	斐	DDEC	594F	F3PR0080
1863	枇	DDED	69A4	F65G0080
1864	樞	DDEE	5951	F3PT0080
1865	比	DDEF	5955	F3PX0080
1866	秘	DDF0	69A5	F65H0080
1867	毗	DDF1	69A6	F65I0080
1868	毘	DDF2	5956	F3PY0080
1869	沸	DDF3	5954	F3PW0080
1870	泌	DDF4	5953	F3PV0080
1871	毳	DDF5	5957	F3PZ0080
1872	痺	DDF6	5958	F3Q00080
1873	砒	DDF7	595A	F3Q20080
1874	碑	DDF8	595B	F3Q30080
1875	秕	DDF9	69A7	F65J0080
1876	秘	DDFA	595C	F3Q40080
1877	粃	DDFB	69A8	F65K0080
1878	緋	DDFC	595E	F3Q60080
1879	翡	DDFD	595F	F3Q70080
1880	肥	DDFE	5960	F3Q80080
1881	脾	DEA1	5962	F3QA0080
1882	臂	DEA2	5963	F3QB0080
1883	菲	DEA3	5964	F3QC0080
1884	蜚	DEA4	5965	F3QD0080

Line Number	Graphic	PC Code	Host Code	GCGID
1885	裨	DEA5	5966	F3QE0080
1886	誹	DEA6	5967	F3QF0080
1887	譬	DEA7	5968	F3QG0080
1888	費	DEA8	5969	F3QH0080
1889	鄙	DEA9	596B	F3QJ0080
1890	非	DEAA	596C	F3QK0080
1891	飛	DEAB	596D	F3QL0080
1892	鼻	DEAC	596F	F3QN0080
1893	噸	DEAD	69A9	F65L0080
1894	嬪	DEAE	5970	F3QO0080
1895	彬	DEAF	5972	F3QQ0080
1896	斌	DEB0	5974	F3QS0080
1897	檳	DEB1	5975	F3QT0080
1898	殯	DEB2	5976	F3QU0080
1899	浜	DEB3	69AA	F65M0080
1900	濱	DEB4	5977	F3QV0080
1901	瀕	DEB5	5978	F3QW0080
1902	牝	DEB6	5979	F3QX0080
1903	玼	DEB7	69AB	F65N0080
1904	貧	DEB8	597B	F3QZ0080
1905	賓	DEB9	5971	F3QP0080
1906	頻	DEBA	597D	F3R10080
1907	憑	DEBB	5980	F3R40080
1908	氷	DEBC	5981	F3R50080
1909	聘	DEBD	5982	F3R60080
1910	騁	DEBE	5983	F3R70080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1911	乍	DEBF	5984	F3R80080
1912	事	DEC0	5985	F3R90080
1913	些	DEC1	5986	F3RA0080
1914	仕	DEC2	5987	F3RB0080
1915	伺	DEC3	5989	F3RD0080
1916	似	DEC4	5988	F3RC0080
1917	使	DEC5	598B	F3RF0080
1918	俟	DEC6	69AC	F65O0080
1919	僂	DEC7	598C	F3RG0080
1920	史	DEC8	598D	F3RH0080
1921	司	DEC9	598E	F3RI0080
1922	峻	DECA	5990	F3RK0080
1923	嗣	DECB	5991	F3RL0080
1924	四	DECC	598F	F3RJ0080
1925	士	DECD	5992	F3RM0080
1926	奢	DECE	5993	F3RN0080
1927	娑	DECF	5995	F3RP0080
1928	寫	DED0	5996	F3RQ0080
1929	寺	DED1	5997	F3RR0080
1930	射	DED2	59BD	F3ST0080
1931	巳	DED3	5998	F3RS0080
1932	師	DED4	5999	F3RT0080
1933	徙	DED5	599B	F3RV0080
1934	思	DED6	599C	F3RW0080
1935	捨	DED7	599D	F3RX0080
1936	斜	DED8	59A0	F3S00080

Line Number	Graphic	PC Code	Host Code	GCGID
1937	斯	DED9	599F	F3RZ0080
1938	栖	DEDA	69AD	F65P0080
1939	查	DEDB	59A1	F3S10080
1940	梭	DEDC	59A2	F3S20080
1941	死	DEDD	59AE	F3SE0080
1942	沙	DEDE	59A5	F3S50080
1943	泗	DEDF	59A6	F3S60080
1944	渣	DEE0	59A7	F3S70080
1945	瀉	DEE1	59A8	F3S80080
1946	獅	DEE2	59AA	F3SA0080
1947	砂	DEE3	59AF	F3SF0080
1948	社	DEE4	59AC	F3SC0080
1949	祀	DEE5	59AB	F3SB0080
1950	祠	DEE6	59AD	F3SD0080
1951	私	DEE7	59B0	F3SG0080
1952	篩	DEE8	59B2	F3SI0080
1953	紗	DEE9	59B4	F3SK0080
1954	絲	DEEA	59B5	F3SL0080
1955	肆	DEEB	59BF	F3SV0080
1956	舍	DEEC	598A	F3RE0080
1957	莎	DEED	59B6	F3SM0080
1958	蓑	DEEE	59B3	F3SJ0080
1959	蛇	DEEF	59B7	F3SN0080
1960	裘	DEF0	59B8	F3SO0080
1961	詐	DEF1	59B9	F3SP0080
1962	詞	DEF2	59BA	F3SQ0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
1963	謝	DEF3	59BB	F3SR0080
1964	賜	DEF4	59BC	F3SS0080
1965	赦	DEF5	599E	F3RY0080
1966	辭	DEF6	59BE	F3SU0080
1967	邪	DEF7	59A9	F3S90080
1968	飼	DEF8	59C0	F3SW0080
1969	駟	DEF9	59C1	F3SX0080
1970	麝	DEFA	69AE	F65Q0080
1971	削	DEFB	59C2	F3SY0080
1972	數	DEFC	59C3	F3SZ0080
1973	朔	DEFD	59C5	F3T10080
1974	索	DEFE	59C6	F3T20080
1975	傘	DFA1	59C8	F3T40080
1976	刪	DFA2	59C9	F3T50080
1977	山	DFA3	59CA	F3T60080
1978	散	DFA4	59CB	F3T70080
1979	汕	DFA5	59CC	F3T80080
1980	珊	DFA6	59CD	F3T90080
1981	産	DFA7	59CE	F3TA0080
1982	疝	DFA8	59CF	F3TB0080
1983	算	DFA9	59D0	F3TC0080
1984	蒜	DFAA	59D1	F3TD0080
1985	酸	DFAB	59D2	F3TE0080
1986	霰	DFAC	69AF	F65R0080
1987	邕	DFAD	59D5	F3TH0080
1988	撒	DFAE	59D3	F3TF0080

Line Number	Graphic	PC Code	Host Code	GCGID
1989	殺	DFAF	59D4	F3TG0080
1990	煞	DFB0	69B0	F65S0080
1991	薩	DFB1	59D6	F3TI0080
1992	三	DFB2	59D7	F3TJ0080
1993	參	DFB3	59D8	F3TK0080
1994	杉	DFB4	59D9	F3TL0080
1995	森	DFB5	59DA	F3TM0080
1996	滲	DFB6	59DB	F3TN0080
1997	芟	DFB7	59DD	F3TP0080
1998	蔘	DFB8	59DE	F3TQ0080
1999	衫	DFB9	59DC	F3TO0080
2000	插	DFBA	59E0	F3TS0080
2001	澁	DFBB	59E1	F3TT0080
2002	鋏	DFBC	69B1	F65T0080
2003	颯	DFBD	59E2	F3TU0080
2004	上	DFBE	59E5	F3TX0080
2005	傷	DFBF	59E6	F3TY0080
2006	像	DFC0	59E7	F3TZ0080
2007	償	DFC1	59E8	F3U00080
2008	商	DFC2	59E9	F3U10080
2009	喪	DFC3	59EA	F3U20080
2010	嘗	DFC4	59EB	F3U30080
2011	孀	DFC5	59ED	F3U50080
2012	尙	DFC6	59EE	F3U60080
2013	峙	DFC7	69B2	F65U0080
2014	常	DFC8	59F2	F3UA0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2015	床	DFC9	59EF	F3U70080
2016	庠	DFCA	59F0	F3U80080
2017	廂	DFCB	59F1	F3U90080
2018	想	DFCC	59F3	F3UB0080
2019	桑	DFCD	59F5	F3UD0080
2020	橡	DFCE	59F6	F3UE0080
2021	湘	DFCF	59F8	F3UG0080
2022	爽	DFD0	59EC	F3U40080
2023	牀	DFD1	59FA	F3UI0080
2024	狀	DFD2	59F9	F3UH0080
2025	相	DFD3	59F4	F3UC0080
2026	祥	DFD4	59FB	F3UJ0080
2027	箱	DFD5	59FC	F3UK0080
2028	翔	DFD6	59FD	F3UL0080
2029	裳	DFD7	59FE	F3UM0080
2030	鳩	DFD8	5A41	F3UP0080
2031	詳	DFD9	5A44	F3US0080
2032	象	DFDA	5A42	F3UQ0080
2033	賞	DFDB	5A43	F3UR0080
2034	霜	DFDC	5A45	F3UT0080
2035	塞	DFDD	5A46	F3UU0080
2036	璽	DFDE	5A47	F3UV0080
2037	賽	DFDF	5A48	F3UW0080
2038	嗇	DFE0	69B3	F65V0080
2039	塞	DFE1	5A4A	F3UY0080
2040	穢	DFE2	5A4B	F3UZ0080

Line Number	Graphic	PC Code	Host Code	GCGID
2041	索	DFE3	5A4C	F3V00080
2042	色	DFE4	5A4D	F3V10080
2043	牲	DFE5	5A4E	F3V20080
2044	生	DFE6	5A4F	F3V30080
2045	甥	DFE7	5A50	F3V40080
2046	省	DFE8	5A51	F3V50080
2047	笙	DFE9	5A52	F3V60080
2048	墅	DFEA	5A55	F3V90080
2049	壻	DFEB	5A54	F3V80080
2050	嶼	DFEC	5A58	F3VC0080
2051	序	DFED	5A59	F3VD0080
2052	庶	DFEE	5A5A	F3VE0080
2053	徐	DFEF	5A5B	F3VF0080
2054	恕	DFF0	5A5C	F3VG0080
2055	抒	DFF1	5A5D	F3VH0080
2056	棲	DFF2	69B4	F65W0080
2057	敝	DFF3	5A5E	F3VI0080
2058	暑	DFF4	5A5F	F3VJ0080
2059	曙	DFF5	5A60	F3VK0080
2060	書	DFF6	5A61	F3VL0080
2061	栖	DFF7	5A62	F3VM0080
2062	棲	DFF8	5A63	F3VN0080
2063	犀	DFF9	5A57	F3VB0080
2064	瑞	DFFA	5A64	F3VO0080
2065	筮	DFFB	69B5	F65X0080
2066	絮	DFFC	5A65	F3VP0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2067	緒	DFFD	5A66	F3VQ0080
2068	署	DFFE	5A67	F3VR0080
2069	胥	E0A1	5A68	F3VS0080
2070	舒	E0A2	5A69	F3VT0080
2071	薯	E0A3	5A6A	F3VU0080
2072	西	E0A4	5A6B	F3VV0080
2073	誓	E0A5	5A6C	F3VW0080
2074	逝	E0A6	5A6E	F3VY0080
2075	鋤	E0A7	5A6D	F3VX0080
2076	黍	E0A8	5A6F	F3VZ0080
2077	鼠	E0A9	5A71	F3W10080
2078	夕	E0AA	5A72	F3W20080
2079	爽	E0AB	5A73	F3W30080
2080	席	E0AC	5A75	F3W50080
2081	惜	E0AD	5A76	F3W60080
2082	昔	E0AE	5A77	F3W70080
2083	皙	E0AF	5A78	F3W80080
2084	析	E0B0	5A79	F3W90080
2085	汐	E0B1	5A7A	F3WA0080
2086	浙	E0B2	5A7B	F3WB0080
2087	瀉	E0B3	5A7C	F3WC0080
2088	石	E0B4	5A7D	F3WD0080
2089	碩	E0B5	5A7E	F3WE0080
2090	蓆	E0B6	5A7F	F3WF0080
2091	釋	E0B7	5A80	F3WG0080
2092	錫	E0B8	5A81	F3WH0080

Line Number	Graphic	PC Code	Host Code	GCGID
2093	仙	E0B9	5A83	F3WJ0080
2094	僊	E0BA	5A84	F3WK0080
2095	先	E0BB	5A82	F3WI0080
2096	善	E0BC	5A86	F3WM0080
2097	嬋	E0BD	69B6	F65Y0080
2098	宣	E0BE	5A87	F3WN0080
2099	扇	E0BF	5A8A	F3WQ0080
2100	斂	E0C0	69B7	F65Z0080
2101	旋	E0C1	5A8B	F3WR0080
2102	渲	E0C2	69B8	F6600080
2103	煽	E0C3	5A8D	F3WT0080
2104	璇	E0C4	69B9	F6610080
2105	瑄	E0C5	5A90	F3WW0080
2106	璇	E0C6	5A91	F3WX0080
2107	璿	E0C7	5A92	F3WY0080
2108	癩	E0C8	5A93	F3WZ0080
2109	禪	E0C9	5A8F	F3WV0080
2110	線	E0CA	5A94	F3X00080
2111	繕	E0CB	5A95	F3X10080
2112	羨	E0CC	5A96	F3X20080
2113	腺	E0CD	5A97	F3X30080
2114	膳	E0CE	5A98	F3X40080
2115	船	E0CF	5A99	F3X50080
2116	薜	E0D0	5A9A	F3X60080
2117	蟬	E0D1	5A9B	F3X70080
2118	詵	E0D2	5A9C	F3X80080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 11 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2119	跣	E0D3	5A9D	F3X90080
2120	選	E0D4	5A9E	F3XA0080
2121	銑	E0D5	5A9F	F3XB0080
2122	鐸	E0D6	69BA	F6620080
2123	鐸	E0D7	69BB	F6630080
2124	鮮	E0D8	5AA1	F3XD0080
2125	尙	E0D9	5AA3	F3XF0080
2126	屑	E0DA	5AA6	F3XI0080
2127	楔	E0DB	5AA8	F3XK0080
2128	泄	E0DC	69BC	F6640080
2129	洩	E0DD	5AA9	F3XL0080
2130	漑	E0DE	5AAA	F3XM0080
2131	舌	E0DF	5AA4	F3XG0080
2132	薛	E0E0	5AAB	F3XN0080
2133	藝	E0E1	69BD	F6650080
2134	設	E0E2	5AAC	F3XO0080
2135	說	E0E3	5AAD	F3XP0080
2136	雪	E0E4	5AAE	F3XQ0080
2137	齧	E0E5	69BE	F6660080
2138	剡	E0E6	69BF	F6670080
2139	暹	E0E7	5AB3	F3XV0080
2140	殲	E0E8	5AAF	F3XR0080
2141	織	E0E9	5AB0	F3XS0080
2142	蟾	E0EA	5AB1	F3XT0080
2143	瞻	E0EB	5AB2	F3XU0080
2144	閃	E0EC	5AB4	F3XW0080

Table 28 (Page 11 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2145	陝	E0ED	69C0	F6680080
2146	攝	E0EE	5AB6	F3XY0080
2147	涉	E0EF	5AB7	F3XZ0080
2148	變	E0F0	5AB5	F3XX0080
2149	葉	E0F1	5AB8	F3Y00080
2150	城	E0F2	5AB9	F3Y10080
2151	姓	E0F3	5ABA	F3Y20080
2152	歲	E0F4	69C1	F6690080
2153	性	E0F5	5ABB	F3Y30080
2154	惺	E0F6	5ABC	F3Y40080
2155	成	E0F7	5ABD	F3Y50080
2156	星	E0F8	5ABE	F3Y60080
2157	晟	E0F9	5ABF	F3Y70080
2158	猩	E0FA	5AC0	F3Y80080
2159	城	E0FB	69C2	F66A0080
2160	盛	E0FC	5AC1	F3Y90080
2161	省	E0FD	5AC2	F3YA0080
2162	箴	E0FE	5AC3	F3YB0080
2163	聖	E1A1	5AC4	F3YC0080
2164	聲	E1A2	5AC5	F3YD0080
2165	腥	E1A3	5AC6	F3YE0080
2166	誠	E1A4	5AC7	F3YF0080
2167	醒	E1A5	5AC8	F3YG0080
2168	世	E1A6	5AC9	F3YH0080
2169	勢	E1A7	5ACA	F3YI0080
2170	歲	E1A8	5ACB	F3YJ0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2171	洗	E1A9	5ACC	F3YK0080
2172	税	E1AA	5ACD	F3YL0080
2173	笹	E1AB	5ACE	F3YM0080
2174	細	E1AC	5ACF	F3YN0080
2175	説	E1AD	5AD0	F3YO0080
2176	貰	E1AE	5AD1	F3YP0080
2177	召	E1AF	5AD2	F3YQ0080
2178	嘯	E1B0	5AD3	F3YR0080
2179	塑	E1B1	5AD4	F3YS0080
2180	宵	E1B2	5AD7	F3YV0080
2181	小	E1B3	5AD5	F3YT0080
2182	少	E1B4	5AD6	F3YU0080
2183	巢	E1B5	5AD8	F3YW0080
2184	所	E1B6	5ADB	F3YZ0080
2185	掃	E1B7	5AD9	F3YX0080
2186	搔	E1B8	5ADA	F3YY0080
2187	昭	E1B9	5ADC	F3Z00080
2188	梳	E1BA	5ADD	F3Z10080
2189	沼	E1BB	5ADE	F3Z20080
2190	消	E1BC	5ADF	F3Z30080
2191	溯	E1BD	5AE0	F3Z40080
2192	瀟	E1BE	5AE1	F3Z50080
2193	炤	E1BF	5AE2	F3Z60080
2194	燒	E1C0	5AE3	F3Z70080
2195	甦	E1C1	5AE4	F3Z80080
2196	疏	E1C2	5AE6	F3ZA0080

Line Number	Graphic	PC Code	Host Code	GCGID
2197	疎	E1C3	5AE5	F3Z90080
2198	瘙	E1C4	69C3	F66B0080
2199	笑	E1C5	5AE7	F3ZB0080
2200	篠	E1C6	69C4	F66C0080
2201	簫	E1C7	5AE8	F3ZC0080
2202	素	E1C8	5AE9	F3ZD0080
2203	紹	E1C9	5AEA	F3ZE0080
2204	蔬	E1CA	5AEC	F3ZG0080
2205	蕭	E1CB	5AED	F3ZH0080
2206	蘇	E1CC	5AEE	F3ZI0080
2207	訴	E1CD	5AEF	F3ZJ0080
2208	迨	E1CE	5AF0	F3ZK0080
2209	遡	E1CF	5AF1	F3ZL0080
2210	邵	E1D0	5AF2	F3ZM0080
2211	銷	E1D1	5AF3	F3ZN0080
2212	韶	E1D2	5AF5	F3ZP0080
2213	騷	E1D3	5AF6	F3ZQ0080
2214	俗	E1D4	5AF7	F3ZR0080
2215	屬	E1D5	5AF8	F3ZS0080
2216	束	E1D6	5AF9	F3ZT0080
2217	涑	E1D7	69C5	F66D0080
2218	粟	E1D8	5AFA	F3ZU0080
2219	續	E1D9	5AFB	F3ZV0080
2220	謾	E1DA	69C6	F66E0080
2221	贖	E1DB	69C7	F66F0080
2222	速	E1DC	5AFC	F3ZW0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2223	孫	E1DD	5AFD	F3ZX0080
2224	巽	E1DE	69C8	F66G0080
2225	損	E1DF	5AFE	F3ZY0080
2226	蓀	E1E0	69C9	F66H0080
2227	遜	E1E1	5B41	F40I0080
2228	飡	E1E2	69CA	F66I0080
2229	率	E1E3	5B42	F40J0080
2230	宋	E1E4	5B44	F40K0080
2231	悚	E1E5	69CB	F66J0080
2232	松	E1E6	5B45	F40L0080
2233	淞	E1E7	69CC	F66K0080
2234	訟	E1E8	5B46	F40M0080
2235	誦	E1E9	5B47	F40N0080
2236	送	E1EA	5B48	F40O0080
2237	頌	E1EB	5B49	F40P0080
2238	刷	E1EC	5B4A	F40Q0080
2239	殺	E1ED	5B4B	F40R0080
2240	灑	E1EE	5B4C	F40S0080
2241	碎	E1EF	5B4E	F40T0080
2242	鎖	E1F0	5B4F	F40U0080
2243	衰	E1F1	5B50	F40V0080
2244	釧	E1F2	5B51	F40W0080
2245	修	E1F3	5B52	F40X0080
2246	受	E1F4	5B53	F40Y0080
2247	嗽	E1F5	5B56	F40Z0080
2248	囚	E1F6	5B55	F40A0080

Line Number	Graphic	PC Code	Host Code	GCGID
2249	垂	E1F7	5B57	F40N0080
2250	壽	E1F8	5B58	F40O0080
2251	嫂	E1F9	5B59	F40P0080
2252	守	E1FA	5B5A	F40Q0080
2253	岫	E1FB	5B5C	F40S0080
2254	岯	E1FC	69CD	F66L0080
2255	帥	E1FD	5B5D	F40T0080
2256	愁	E1FE	5B5F	F40V0080
2257	戍	E2A1	5B5E	F40U0080
2258	手	E2A2	5B60	F40W0080
2259	授	E2A3	5B61	F40X0080
2260	搜	E2A4	5B62	F40Y0080
2261	收	E2A5	5B63	F40Z0080
2262	數	E2A6	5B64	F4100080
2263	樹	E2A7	5B66	F4120080
2264	殊	E2A8	5B67	F4130080
2265	水	E2A9	5B69	F4150080
2266	洙	E2AA	5B6A	F4160080
2267	漱	E2AB	5B6C	F4180080
2268	燧	E2AC	5B68	F4140080
2269	狩	E2AD	5B6D	F4190080
2270	獸	E2AE	5B6E	F41A0080
2271	琇	E2AF	69CE	F66M0080
2272	瓠	E2B0	69CF	F66N0080
2273	瘦	E2B1	5B70	F41C0080
2274	睡	E2B2	5B71	F41D0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2275	秀	E2B3	5B73	F41F0080
2276	穗	E2B4	5B74	F41G0080
2277	豎	E2B5	5B75	F41H0080
2278	粹	E2B6	5B76	F41I0080
2279	綬	E2B7	5B77	F41J0080
2280	綬	E2B8	5B78	F41K0080
2281	繡	E2B9	5B79	F41L0080
2282	羞	E2BA	5B7A	F41M0080
2283	脩	E2BB	5B7B	F41N0080
2284	茱	E2BC	5B7C	F41O0080
2285	菟	E2BD	5B7D	F41P0080
2286	蓆	E2BE	5B7E	F41Q0080
2287	藪	E2BF	5B7F	F41R0080
2288	袖	E2C0	5B80	F41S0080
2289	誰	E2C1	5B81	F41T0080
2290	讐	E2C2	69D0	F66O0080
2291	輪	E2C3	5B82	F41U0080
2292	邃	E2C4	5B83	F41V0080
2293	邃	E2C5	5B84	F41W0080
2294	酬	E2C6	5B85	F41X0080
2295	銖	E2C7	5B86	F41Y0080
2296	銹	E2C8	5B87	F41Z0080
2297	隋	E2C9	5B88	F4200080
2298	隄	E2CA	69D1	F66P0080
2299	隨	E2CB	5B89	F4210080
2300	雖	E2CC	5B8A	F4220080

Line Number	Graphic	PC Code	Host Code	GCGID
2301	需	E2CD	5B8B	F4230080
2302	須	E2CE	5B8C	F4240080
2303	首	E2CF	5B8D	F4250080
2304	髓	E2D0	5B8E	F4260080
2305	鬚	E2D1	5B8F	F4270080
2306	叔	E2D2	5B90	F4280080
2307	塾	E2D3	5B91	F4290080
2308	夙	E2D4	5B92	F42A0080
2309	孰	E2D5	5B93	F42B0080
2310	宿	E2D6	5B94	F42C0080
2311	淑	E2D7	5B95	F42D0080
2312	瀟	E2D8	69D2	F66Q0080
2313	熟	E2D9	5B96	F42E0080
2314	琬	E2DA	69D3	F66R0080
2315	璫	E2DB	69D4	F66S0080
2316	肅	E2DC	5B97	F42F0080
2317	菽	E2DD	5B98	F42G0080
2318	巡	E2DE	5BA9	F42X0080
2319	徇	E2DF	69D5	F66T0080
2320	循	E2E0	5B99	F42H0080
2321	恂	E2E1	5B9A	F42I0080
2322	旬	E2E2	5B9B	F42J0080
2323	柁	E2E3	69D6	F66U0080
2324	楯	E2E4	5B9C	F42K0080
2325	櫛	E2E5	69D7	F66V0080
2326	殉	E2E6	5B9D	F42L0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2327	洵	E2E7	5B9E	F42M0080
2328	淳	E2E8	5B9F	F42N0080
2329	珣	E2E9	5BA0	F42O0080
2330	盾	E2EA	5BA1	F42P0080
2331	瞬	E2EB	5BA2	F42Q0080
2332	筍	E2EC	5BA3	F42R0080
2333	純	E2ED	5BA4	F42S0080
2334	脣	E2EE	5BA5	F42T0080
2335	舜	E2EF	5BA6	F42U0080
2336	荀	E2F0	5BA7	F42V0080
2337	蕁	E2F1	69D8	F66W0080
2338	蕁	E2F2	69D9	F66X0080
2339	詢	E2F3	5BA8	F42W0080
2340	諄	E2F4	69DA	F66Y0080
2341	醇	E2F5	5BAA	F42Y0080
2342	鎔	E2F6	5BAB	F42Z0080
2343	順	E2F7	5BAC	F4300080
2344	馴	E2F8	5BAD	F4310080
2345	戍	E2F9	5BAF	F4330080
2346	術	E2FA	5BB0	F4340080
2347	述	E2FB	5BB1	F4350080
2348	鉦	E2FC	69DB	F66Z0080
2349	崇	E2FD	5BB2	F4360080
2350	崧	E2FE	5BB3	F4370080
2351	嵩	E3A1	5BB4	F4380080
2352	瑟	E3A2	5BB5	F4390080

Line Number	Graphic	PC Code	Host Code	GCGID
2353	膝	E3A3	5BB6	F43A0080
2354	蝨	E3A4	5BB8	F43C0080
2355	濕	E3A5	5BBA	F43E0080
2356	拾	E3A6	5BB9	F43D0080
2357	習	E3A7	5BBB	F43F0080
2358	褶	E3A8	5BBC	F43G0080
2359	襲	E3A9	5BBD	F43H0080
2360	丞	E3AA	5BBE	F43I0080
2361	乘	E3AB	5BBF	F43J0080
2362	僧	E3AC	5BC0	F43K0080
2363	勝	E3AD	5BC4	F43O0080
2364	升	E3AE	5BC1	F43L0080
2365	承	E3AF	5BC2	F43M0080
2366	昇	E3B0	5BC3	F43N0080
2367	繩	E3B1	5BC5	F43P0080
2368	蠅	E3B2	5BC6	F43Q0080
2369	陞	E3B3	5BC7	F43R0080
2370	侍	E3B4	5BC8	F43S0080
2371	匙	E3B5	5BC9	F43T0080
2372	嘶	E3B6	5BCB	F43V0080
2373	始	E3B7	5BCC	F43W0080
2374	媿	E3B8	5BCD	F43X0080
2375	尸	E3B9	5BCF	F43Z0080
2376	屎	E3BA	69DC	F6700080
2377	屍	E3BB	5BD0	F4400080
2378	市	E3BC	5BD1	F4410080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2379	絨	E3BD	5BD2	F4420080
2380	恃	E3BE	5BD3	F4430080
2381	施	E3BF	5BD4	F4440080
2382	是	E3C0	5BD5	F4450080
2383	時	E3C1	5BD6	F4460080
2384	柿	E3C2	5BD7	F4470080
2385	柴	E3C3	5BD8	F4480080
2386	猜	E3C4	5BD9	F4490080
2387	矢	E3C5	5BDA	F44A0080
2388	示	E3C6	5BDB	F44B0080
2389	翅	E3C7	5BDE	F44E0080
2390	蔣	E3C8	5BDF	F44F0080
2391	著	E3C9	5BE0	F44G0080
2392	視	E3CA	5BDC	F44C0080
2393	試	E3CB	5BE2	F44I0080
2394	詩	E3CC	5BE1	F44H0080
2395	諡	E3CD	5BE3	F44J0080
2396	豕	E3CE	69DD	F6710080
2397	豺	E3CF	5BE4	F44K0080
2398	埴	E3D0	5BE5	F44L0080
2399	寔	E3D1	5BE6	F44M0080
2400	式	E3D2	5BE7	F44N0080
2401	息	E3D3	5BE8	F44O0080
2402	拭	E3D4	5BE9	F44P0080
2403	植	E3D5	5BEA	F44Q0080
2404	殖	E3D6	5BEB	F44R0080

Line Number	Graphic	PC Code	Host Code	GCGID
2405	湜	E3D7	5BEC	F44S0080
2406	熄	E3D8	5BED	F44T0080
2407	簋	E3D9	69DE	F6720080
2408	蝕	E3DA	69DF	F6730080
2409	識	E3DB	5BEE	F44U0080
2410	軾	E3DC	5BEF	F44V0080
2411	食	E3DD	5BF0	F44W0080
2412	飾	E3DE	5BF1	F44X0080
2413	伸	E3DF	5BF2	F44Y0080
2414	侏	E3E0	69E0	F6740080
2415	信	E3E1	5BF3	F44Z0080
2416	呻	E3E2	5BF4	F4500080
2417	娠	E3E3	5BF5	F4510080
2418	宸	E3E4	5BF6	F4520080
2419	慎	E3E5	5BF7	F4530080
2420	新	E3E6	5BF8	F4540080
2421	晨	E3E7	5BF9	F4550080
2422	燼	E3E8	5BFA	F4560080
2423	申	E3E9	5BFB	F4570080
2424	神	E3EA	5BFD	F4590080
2425	紳	E3EB	5BFE	F45A0080
2426	腎	E3EC	5C41	F45D0080
2427	臣	E3ED	5C42	F45E0080
2428	莘	E3EE	5C43	F45F0080
2429	薪	E3EF	5C44	F45G0080
2430	藎	E3F0	69E1	F6750080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2431	蜃	E3F1	5C45	F45H0080
2432	訊	E3F2	5C46	F45I0080
2433	身	E3F3	5C47	F45J0080
2434	辛	E3F4	5C48	F45K0080
2435	辰	E3F5	5C49	F45L0080
2436	迅	E3F6	5C4A	F45M0080
2437	失	E3F7	5C4B	F45N0080
2438	室	E3F8	5C4C	F45O0080
2439	實	E3F9	5C4D	F45P0080
2440	悉	E3FA	5C4E	F45Q0080
2441	審	E3FB	5C50	F45S0080
2442	尋	E3FC	5C51	F45T0080
2443	心	E3FD	5C52	F45U0080
2444	沁	E3FE	5C54	F45W0080
2445	沈	E4A1	5C53	F45V0080
2446	深	E4A2	5C55	F45X0080
2447	藩	E4A3	5C56	F45Y0080
2448	甚	E4A4	5C57	F45Z0080
2449	芯	E4A5	5C58	F4600080
2450	諶	E4A6	69E2	F6760080
2451	什	E4A7	5C59	F4610080
2452	十	E4A8	5C5A	F4620080
2453	拾	E4A9	5C5B	F4630080
2454	雙	E4AA	5C5C	F4640080
2455	氏	E4AB	5C5D	F4650080
2456	亞	E4AC	5C5E	F4660080

Line Number	Graphic	PC Code	Host Code	GCGID
2457	俄	E4AD	5C5F	F4670080
2458	兒	E4AE	5C60	F4680080
2459	啞	E4AF	69E3	F6770080
2460	娥	E4B0	5C61	F4690080
2461	峨	E4B1	5C62	F46A0080
2462	我	E4B2	5C63	F46B0080
2463	牙	E4B3	5C64	F46C0080
2464	芽	E4B4	5C65	F46D0080
2465	莪	E4B5	69E4	F6780080
2466	蛾	E4B6	5C66	F46E0080
2467	衙	E4B7	5C67	F46F0080
2468	訝	E4B8	5C68	F46G0080
2469	阿	E4B9	5C69	F46H0080
2470	雅	E4BA	5C6A	F46I0080
2471	餓	E4BB	5C6B	F46J0080
2472	鴉	E4BC	5C6C	F46K0080
2473	鵝	E4BD	5C6D	F46L0080
2474	堊	E4BE	5C6E	F46M0080
2475	岳	E4BF	5C6F	F46N0080
2476	嶽	E4C0	5C70	F46O0080
2477	幄	E4C1	69E5	F6790080
2478	惡	E4C2	5C72	F46Q0080
2479	愕	E4C3	5C71	F46P0080
2480	握	E4C4	5C73	F46R0080
2481	樂	E4C5	5C74	F46S0080
2482	渥	E4C6	5C75	F46T0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2483	鄂	E4C7	69E6	F67A0080
2484	鐳	E4C8	69E7	F67B0080
2485	顎	E4C9	5C77	F46V0080
2486	鰐	E4CA	69E8	F67C0080
2487	齷	E4CB	5C78	F46W0080
2488	安	E4CC	5C79	F46X0080
2489	岸	E4CD	5C7A	F46Y0080
2490	按	E4CE	5C7B	F46Z0080
2491	晏	E4CF	5C7C	F4700080
2492	案	E4D0	5C7D	F4710080
2493	眼	E4D1	5C7E	F4720080
2494	雁	E4D2	5C7F	F4730080
2495	鞍	E4D3	5C81	F4750080
2496	顏	E4D4	5C82	F4760080
2497	鮫	E4D5	69E9	F67D0080
2498	幹	E4D6	5C85	F4790080
2499	謁	E4D7	5C86	F47A0080
2500	軋	E4D8	5C87	F47B0080
2501	闕	E4D9	5C89	F47D0080
2502	唵	E4DA	69EA	F67E0080
2503	岩	E4DB	69EB	F67F0080
2504	巖	E4DC	5C8B	F47F0080
2505	庵	E4DD	5C8C	F47G0080
2506	暗	E4DE	5C8D	F47H0080
2507	癌	E4DF	5C8E	F47I0080
2508	菴	E4E0	5C8F	F47J0080

Line Number	Graphic	PC Code	Host Code	GCGID
2509	閻	E4E1	5C91	F47L0080
2510	壓	E4E2	5C93	F47N0080
2511	押	E4E3	5C94	F47O0080
2512	狎	E4E4	5C95	F47P0080
2513	鴨	E4E5	5C96	F47Q0080
2514	仰	E4E6	5C97	F47R0080
2515	央	E4E7	5C98	F47S0080
2516	快	E4E8	5C99	F47T0080
2517	昂	E4E9	5C9A	F47U0080
2518	殃	E4EA	5C9B	F47V0080
2519	秧	E4EB	5C9C	F47W0080
2520	鴛	E4EC	5C9E	F47Y0080
2521	厓	E4ED	5C9F	F47Z0080
2522	哀	E4EE	5CAA	F48A0080
2523	埃	E4EF	5CA0	F4800080
2524	崖	E4F0	5CA1	F4810080
2525	愛	E4F1	5CA2	F4820080
2526	曖	E4F2	5CA6	F4860080
2527	涯	E4F3	5CA4	F4840080
2528	碍	E4F4	5CA7	F4870080
2529	艾	E4F5	5CA9	F4890080
2530	隘	E4F6	5CAB	F48B0080
2531	霽	E4F7	5CAC	F48C0080
2532	厄	E4F8	5CAE	F48E0080
2533	扼	E4F9	69EC	F67G0080
2534	掖	E4FA	5CAF	F48F0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2535	液	E4FB	5CB0	F48G0080
2536	縊	E4FC	69ED	F67H0080
2537	腋	E4FD	5CB1	F48H0080
2538	額	E4FE	5CB3	F48J0080
2539	櫻	E5A1	5CB4	F48K0080
2540	罍	E5A2	5CB5	F48L0080
2541	鶯	E5A3	5CB6	F48M0080
2542	鸚	E5A4	5CB7	F48N0080
2543	也	E5A5	5CB8	F48O0080
2544	椰	E5A6	5CB9	F48P0080
2545	冶	E5A7	5CBA	F48Q0080
2546	夜	E5A8	5CBB	F48R0080
2547	惹	E5A9	5CC2	F48Y0080
2548	挪	E5AA	5CBD	F48T0080
2549	椰	E5AB	5CBE	F48U0080
2550	爺	E5AC	5CBF	F48V0080
2551	耶	E5AD	5CC0	F48W0080
2552	若	E5AE	5CC1	F48X0080
2553	野	E5AF	5CC3	F48Z0080
2554	弱	E5B0	5CC4	F4900080
2555	掠	E5B1	69EE	F67I0080
2556	略	E5B2	69EF	F67J0080
2557	約	E5B3	5CC7	F4930080
2558	若	E5B4	5CC8	F4940080
2559	葯	E5B5	5CC9	F4950080
2560	弱	E5B6	69F0	F67K0080

Line Number	Graphic	PC Code	Host Code	GCGID
2561	藥	E5B7	5CCA	F4960080
2562	躍	E5B8	5CCB	F4970080
2563	亮	E5B9	69F1	F67L0080
2564	佯	E5BA	5CCC	F4980080
2565	兩	E5BB	69F2	F67M0080
2566	涼	E5BC	69F3	F67N0080
2567	壤	E5BD	5CCD	F4990080
2568	孃	E5BE	5CCE	F49A0080
2569	恙	E5BF	5CCF	F49B0080
2570	揚	E5C0	5CD0	F49C0080
2571	攘	E5C1	5CD1	F49D0080
2572	敷	E5C2	5CD2	F49E0080
2573	暘	E5C3	5CD3	F49F0080
2574	梁	E5C4	69F4	F67O0080
2575	楊	E5C5	5CD4	F49G0080
2576	樣	E5C6	5CD5	F49H0080
2577	洋	E5C7	5CD6	F49I0080
2578	漾	E5C8	5CD7	F49J0080
2579	煬	E5C9	5CD8	F49K0080
2580	痒	E5CA	5CDA	F49M0080
2581	瘍	E5CB	5CDB	F49N0080
2582	禳	E5CC	69F5	F67P0080
2583	穰	E5CD	5CD9	F49L0080
2584	糧	E5CE	69F6	F67Q0080
2585	羊	E5CF	5CDC	F49O0080
2586	良	E5D0	69F7	F67R0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2587	裏	E5D1	5CDE	F49Q0080
2588	諒	E5D2	69F8	F67S0080
2589	讓	E5D3	5CDF	F49R0080
2590	釀	E5D4	5CE0	F49S0080
2591	陽	E5D5	5CE1	F49T0080
2592	量	E5D6	69F9	F67T0080
2593	養	E5D7	5CE2	F49U0080
2594	圀	E5D8	5CE3	F49V0080
2595	御	E5D9	5CE4	F49W0080
2596	於	E5DA	5CE6	F49Y0080
2597	漁	E5DB	5CE7	F49Z0080
2598	瘵	E5DC	69FA	F67U0080
2599	禦	E5DD	5CE8	F4A00080
2600	語	E5DE	5CE9	F4A10080
2601	馭	E5DF	5CEA	F4A20080
2602	魚	E5E0	5CEB	F4A30080
2603	齷	E5E1	5CEC	F4A40080
2604	億	E5E2	5CED	F4A50080
2605	憶	E5E3	5CEE	F4A60080
2606	抑	E5E4	5CEF	F4A70080
2607	櫛	E5E5	5CF0	F4A80080
2608	臆	E5E6	5CF1	F4A90080
2609	偃	E5E7	5CF2	F4AA0080
2610	堰	E5E8	5CF3	F4AB0080
2611	彥	E5E9	5CF4	F4AC0080
2612	焉	E5EA	5CF5	F4AD0080

Line Number	Graphic	PC Code	Host Code	GCGID
2613	言	E5EB	5CF6	F4AE0080
2614	諺	E5EC	5CF7	F4AF0080
2615	孽	E5ED	5CF8	F4AG0080
2616	藥	E5EE	69FB	F67V0080
2617	俺	E5EF	69FC	F67W0080
2618	儼	E5F0	5CF9	F4AH0080
2619	嚴	E5F1	5CFA	F4AI0080
2620	奄	E5F2	5CFB	F4AJ0080
2621	掩	E5F3	5CFC	F4AK0080
2622	淹	E5F4	5CFD	F4AL0080
2623	嶮	E5F5	5CFE	F4AM0080
2624	業	E5F6	5D41	F4AP0080
2625	円	E5F7	69FD	F67X0080
2626	予	E5F8	5D43	F4AR0080
2627	余	E5F9	5D44	F4AS0080
2628	勵	E5FA	69FE	F67Y0080
2629	呂	E5FB	6A41	F6810080
2630	女	E5FC	6A42	F6820080
2631	如	E5FD	5D45	F4AT0080
2632	廬	E5FE	6A43	F6830080
2633	旅	E6A1	6A44	F6840080
2634	歟	E6A2	5D46	F4AU0080
2635	汝	E6A3	5D47	F4AV0080
2636	濾	E6A4	6A45	F6850080
2637	璵	E6A5	6A46	F6860080
2638	璵	E6A6	6A47	F6870080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 21 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2639	礪	E6A7	6A48	F6880080
2640	與	E6A8	5D48	F4AW0080
2641	餘	E6A9	6A49	F6890080
2642	茹	E6AA	6A4A	F68A0080
2643	輿	E6AB	6A4B	F68B0080
2644	舉	E6AC	6A4C	F68C0080
2645	閭	E6AD	6A4D	F68D0080
2646	餘	E6AE	5D49	F4AX0080
2647	驪	E6AF	6A4E	F68E0080
2648	麗	E6B0	6A4F	F68F0080
2649	黎	E6B1	6A50	F68G0080
2650	亦	E6B2	5D4A	F4AY0080
2651	力	E6B3	6A51	F68H0080
2652	域	E6B4	5D4B	F4AZ0080
2653	役	E6B5	5D4D	F4B10080
2654	易	E6B6	5D4E	F4B20080
2655	曆	E6B7	6A52	F68I0080
2656	歷	E6B8	6A53	F68J0080
2657	疫	E6B9	5D4F	F4B30080
2658	繹	E6BA	5D50	F4B40080
2659	譯	E6BB	5D51	F4B50080
2660	輓	E6BC	6A54	F68K0080
2661	逆	E6BD	5D52	F4B60080
2662	驛	E6BE	5D53	F4B70080
2663	嚙	E6BF	5D54	F4B80080
2664	堧	E6C0	5D55	F4B90080

Table 28 (Page 21 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2665	妍	E6C1	5D56	F4BA0080
2666	娟	E6C2	5D57	F4BB0080
2667	宴	E6C3	5D58	F4BC0080
2668	年	E6C4	6A55	F68L0080
2669	延	E6C5	5D59	F4BD0080
2670	憐	E6C6	6A56	F68M0080
2671	戀	E6C7	6A57	F68N0080
2672	捐	E6C8	5D5A	F4BE0080
2673	挺	E6C9	6A58	F68O0080
2674	撚	E6CA	5D5B	F4BF0080
2675	椽	E6CB	5D5C	F4BG0080
2676	沆	E6CC	6A59	F68P0080
2677	沿	E6CD	5D5D	F4BH0080
2678	涎	E6CE	5D5F	F4BJ0080
2679	涓	E6CF	5D5E	F4BI0080
2680	淵	E6D0	5D60	F4BK0080
2681	演	E6D1	5D61	F4BL0080
2682	漣	E6D2	6A5A	F68Q0080
2683	烟	E6D3	5D62	F4BM0080
2684	然	E6D4	5D63	F4BN0080
2685	煙	E6D5	5D64	F4BO0080
2686	煉	E6D6	6A5B	F68R0080
2687	燃	E6D7	5D65	F4BP0080
2688	燕	E6D8	5D66	F4BQ0080
2689	璉	E6D9	6A5C	F68S0080
2690	研	E6DA	5D67	F4BR0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2691	硯	E6DB	5D68	F4BS0080
2692	季	E6DC	6A5D	F68T0080
2693	筵	E6DD	5D69	F4BT0080
2694	緣	E6DE	5D6A	F4BU0080
2695	練	E6DF	6A5E	F68U0080
2696	續	E6E0	6A5F	F68V0080
2697	聯	E6E1	6A60	F68W0080
2698	衍	E6E2	5D6E	F4BY0080
2699	軟	E6E3	5D70	F4C00080
2700	輦	E6E4	6A61	F68X0080
2701	蓮	E6E5	6A62	F68Y0080
2702	連	E6E6	6A63	F68Z0080
2703	鉛	E6E7	5D71	F4C10080
2704	鍊	E6E8	6A64	F6900080
2705	鳶	E6E9	5D72	F4C20080
2706	列	E6EA	6A65	F6910080
2707	劣	E6EB	6A66	F6920080
2708	咽	E6EC	5D73	F4C30080
2709	悅	E6ED	5D74	F4C40080
2710	涅	E6EE	5D75	F4C50080
2711	烈	E6EF	6A67	F6930080
2712	熱	E6F0	5D76	F4C60080
2713	裂	E6F1	6A68	F6940080
2714	說	E6F2	5D77	F4C70080
2715	閱	E6F3	5D78	F4C80080
2716	厭	E6F4	5D79	F4C90080

Line Number	Graphic	PC Code	Host Code	GCGID
2717	廉	E6F5	6A69	F6950080
2718	念	E6F6	6A6A	F6960080
2719	捻	E6F7	6A6B	F6970080
2720	染	E6F8	5D7B	F4CB0080
2721	殮	E6F9	6A6C	F6980080
2722	炎	E6FA	5D7C	F4CC0080
2723	焰	E6FB	5D7D	F4CD0080
2724	琰	E6FC	6A6D	F6990080
2725	艷	E6FD	5D80	F4CG0080
2726	苒	E6FE	5D7F	F4CF0080
2727	簾	E7A1	6A6E	F69A0080
2728	閤	E7A2	5D81	F4CH0080
2729	髻	E7A3	5D83	F4CJ0080
2730	鹽	E7A4	5D7E	F4CE0080
2731	曄	E7A5	5D84	F4CK0080
2732	獵	E7A6	6A6F	F69B0080
2733	燁	E7A7	5D85	F4CL0080
2734	葉	E7A8	5D86	F4CM0080
2735	令	E7A9	6A70	F69C0080
2736	囧	E7AA	6A71	F69D0080
2737	塋	E7AB	5D87	F4CN0080
2738	寧	E7AC	6A72	F69E0080
2739	嶺	E7AD	6A73	F69F0080
2740	嶸	E7AE	6A74	F69G0080
2741	影	E7AF	5D89	F4CP0080
2742	伶	E7B0	6A75	F69H0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2743	映	E7B1	5D8A	F4CQ0080
2744	暎	E7B2	5D8B	F4CR0080
2745	楹	E7B3	5D8C	F4CS0080
2746	榮	E7B4	5D8D	F4CT0080
2747	永	E7B5	5D8E	F4CU0080
2748	泳	E7B6	5D8F	F4CV0080
2749	漠	E7B7	6A76	F69I0080
2750	穎	E7B8	5D90	F4CW0080
2751	溱	E7B9	6A77	F69J0080
2752	瀛	E7BA	5D91	F4CX0080
2753	潛	E7BB	6A78	F69K0080
2754	煥	E7BC	6A79	F69L0080
2755	營	E7BD	5D92	F4CY0080
2756	獰	E7BE	6A7A	F69M0080
2757	玲	E7BF	6A7B	F69N0080
2758	瑛	E7C0	5D93	F4CZ0080
2759	瑩	E7C1	5D94	F4D00080
2760	瓔	E7C2	5D95	F4D10080
2761	盈	E7C3	5D96	F4D20080
2762	穎	E7C4	6A7C	F69O0080
2763	纓	E7C5	5D97	F4D30080
2764	矜	E7C6	6A7D	F69P0080
2765	聆	E7C7	6A7E	F69Q0080
2766	英	E7C8	5D98	F4D40080
2767	詠	E7C9	5D99	F4D50080
2768	迎	E7CA	5D9A	F4D60080

Line Number	Graphic	PC Code	Host Code	GCGID
2769	鈴	E7CB	6A7F	F69R0080
2770	鎂	E7CC	6A80	F69S0080
2771	零	E7CD	6A81	F69T0080
2772	囊	E7CE	6A82	F69U0080
2773	靈	E7CF	6A83	F69V0080
2774	領	E7D0	6A84	F69W0080
2775	乂	E7D1	6A85	F69X0080
2776	倪	E7D2	5D9B	F4D70080
2777	例	E7D3	6A86	F69Y0080
2778	刈	E7D4	5D9C	F4D80080
2779	叡	E7D5	5D9D	F4D90080
2780	曳	E7D6	5D9E	F4DA0080
2781	汨	E7D7	6A87	F69Z0080
2782	滅	E7D8	5D9F	F4DB0080
2783	貌	E7D9	5DA0	F4DC0080
2784	睿	E7DA	5DA2	F4DE0080
2785	穢	E7DB	6A88	F6A00080
2786	芮	E7DC	5DA4	F4DG0080
2787	藝	E7DD	5DA6	F4DI0080
2788	藥	E7DE	5DA7	F4DJ0080
2789	禮	E7DF	6A89	F6A10080
2790	裔	E7E0	5DA8	F4DK0080
2791	詣	E7E1	5DA9	F4DL0080
2792	譽	E7E2	5DAA	F4DM0080
2793	豫	E7E3	5DAB	F4DN0080
2794	醴	E7E4	6A8A	F6A20080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 24 of 31). Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2795	銳	E7E5	5DAC	F4DO0080
2796	隸	E7E6	6A8B	F6A30080
2797	靄	E7E7	5DAD	F4DP0080
2798	預	E7E8	5DAE	F4DQ0080
2799	五	E7E9	5DAF	F4DR0080
2800	伍	E7EA	5DB0	F4DS0080
2801	伍	E7EB	6A8C	F6A40080
2802	傲	E7EC	5DB1	F4DT0080
2803	午	E7ED	5DB2	F4DU0080
2804	吾	E7EE	5DC4	F4EC0080
2805	吳	E7EF	5DB3	F4DV0080
2806	鳴	E7F0	5DB4	F4DW0080
2807	塢	E7F1	6A8D	F6A50080
2808	塢	E7F2	5DB5	F4DX0080
2809	奧	E7F3	5DB6	F4DY0080
2810	娛	E7F4	5DB7	F4DZ0080
2811	寤	E7F5	5DB8	F4E00080
2812	悟	E7F6	5DB9	F4E10080
2813	惡	E7F7	5DBA	F4E20080
2814	懊	E7F8	6A8E	F6A60080
2815	敖	E7F9	6A8F	F6A70080
2816	昨	E7FA	5DBB	F4E30080
2817	晤	E7FB	5DBC	F4E40080
2818	梧	E7FC	5DBD	F4E50080
2819	汚	E7FD	5DBE	F4E60080
2820	澳	E7FE	6A90	F6A80080

Table 28 (Page 24 of 31). Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
2821	烏	E8A1	5DBF	F4E70080
2822	熬	E8A2	6A91	F6A90080
2823	熬	E8A3	5DC0	F4E80080
2824	奠	E8A4	6A92	F6AA0080
2825	蜈	E8A5	5DC1	F4E90080
2826	誤	E8A6	5DC2	F4EA0080
2827	鰲	E8A7	6A93	F6AB0080
2828	龍	E8A8	6A94	F6AC0080
2829	屋	E8A9	5DC5	F4ED0080
2830	沃	E8AA	5DC6	F4EE0080
2831	獄	E8AB	5DC7	F4EF0080
2832	玉	E8AC	5DC8	F4EG0080
2833	鈺	E8AD	5DC9	F4EH0080
2834	溫	E8AE	5DCB	F4EJ0080
2835	璦	E8AF	5DCC	F4EK0080
2836	癩	E8B0	5DCD	F4EL0080
2837	穩	E8B1	5DCE	F4EM0080
2838	縵	E8B2	6A95	F6AD0080
2839	蘊	E8B3	5DD0	F4EO0080
2840	兀	E8B4	5DD2	F4EQ0080
2841	壅	E8B5	5DD3	F4ER0080
2842	擁	E8B6	5DD6	F4EU0080
2843	瓮	E8B7	5DD4	F4ES0080
2844	甕	E8B8	5DD7	F4EV0080
2845	癰	E8B9	5DD5	F4ET0080
2846	翁	E8BA	5DD8	F4EW0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 25 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2847	邕	E8BB	5DD9	F4EX0080
2848	雍	E8BC	5DDA	F4EY0080
2849	夔	E8BD	6A96	F6AE0080
2850	渦	E8BE	5DDB	F4EZ0080
2851	瓦	E8BF	5DDC	F4F00080
2852	窩	E8C0	5DDD	F4F10080
2853	窪	E8C1	6A97	F6AF0080
2854	臥	E8C2	5DE1	F4F50080
2855	蛙	E8C3	5DDE	F4F20080
2856	蝸	E8C4	5DDF	F4F30080
2857	訛	E8C5	5DE0	F4F40080
2858	婉	E8C6	5DE2	F4F60080
2859	完	E8C7	5DE3	F4F70080
2860	宛	E8C8	5DE4	F4F80080
2861	椀	E8C9	6A98	F6AG0080
2862	椀	E8CA	6A99	F6AH0080
2863	浣	E8CB	5DE5	F4F90080
2864	玩	E8CC	5DE6	F4FA0080
2865	琬	E8CD	6A9A	F6AI0080
2866	琬	E8CE	5DE7	F4FB0080
2867	碗	E8CF	5DE8	F4FC0080
2868	緩	E8D0	5DE9	F4FD0080
2869	翫	E8D1	5DEA	F4FE0080
2870	腕	E8D2	6A9B	F6AJ0080
2871	腕	E8D3	5DEB	F4FF0080
2872	莞	E8D4	5DEC	F4FG0080

Table 28 (Page 25 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2873	腕	E8D5	5DED	F4FH0080
2874	阮	E8D6	5DEE	F4FI0080
2875	頑	E8D7	5DEF	F4FJ0080
2876	臼	E8D8	5DF0	F4FK0080
2877	往	E8D9	5DF1	F4FL0080
2878	旺	E8DA	5DF2	F4FM0080
2879	枉	E8DB	5DF3	F4FN0080
2880	汪	E8DC	5DF4	F4FO0080
2881	王	E8DD	5DF5	F4FP0080
2882	倭	E8DE	5DF6	F4FQ0080
2883	娃	E8DF	6A9C	F6AK0080
2884	歪	E8E0	5DF7	F4FR0080
2885	矮	E8E1	5DF8	F4FS0080
2886	外	E8E2	5DF9	F4FT0080
2887	嵬	E8E3	6A9D	F6AL0080
2888	巍	E8E4	5DFA	F4FU0080
2889	猥	E8E5	5DFB	F4FV0080
2890	畏	E8E6	5DFC	F4FW0080
2891	了	E8E7	6A9E	F6AM0080
2892	僚	E8E8	6A9F	F6AN0080
2893	僥	E8E9	5DFD	F4FX0080
2894	凹	E8EA	5DFE	F4FY0080
2895	堯	E8EB	5E41	F4G10080
2896	夭	E8EC	5E42	F4G20080
2897	妖	E8ED	5E43	F4G30080
2898	姚	E8EE	5E44	F4G40080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
2899	寥	E8EF	6AA0	F6AO0080
2900	寮	E8F0	6AA1	F6AP0080
2901	尿	E8F1	6AA2	F6AQ0080
2902	嶢	E8F2	5E45	F4G50080
2903	拗	E8F3	5E46	F4G60080
2904	搖	E8F4	5E47	F4G70080
2905	撓	E8F5	6AA3	F6AR0080
2906	擾	E8F6	5E48	F4G80080
2907	料	E8F7	6AA4	F6AS0080
2908	曜	E8F8	5E49	F4G90080
2909	樂	E8F9	5E4B	F4GB0080
2910	橈	E8FA	5E4C	F4GC0080
2911	療	E8FB	6AA5	F6AT0080
2912	耀	E8FC	6AA6	F6AU0080
2913	瑤	E8FD	5E4D	F4GD0080
2914	療	E8FE	6AA7	F6AV0080
2915	窈	E9A1	5E4E	F4GE0080
2916	窯	E9A2	5E4F	F4GF0080
2917	繇	E9A3	5E50	F4GG0080
2918	繞	E9A4	5E51	F4GH0080
2919	耀	E9A5	5E52	F4GI0080
2920	腰	E9A6	5E4A	F4GA0080
2921	蓼	E9A7	6AA8	F6AW0080
2922	嶢	E9A8	5E54	F4GK0080
2923	要	E9A9	5E55	F4GL0080
2924	謠	E9AA	5E56	F4GM0080

Line Number	Graphic	PC Code	Host Code	GCGID
2925	遙	E9AB	5E57	F4GN0080
2926	遼	E9AC	6AA9	F6AX0080
2927	邀	E9AD	5E58	F4GO0080
2928	饒	E9AE	5E59	F4GP0080
2929	慾	E9AF	5E5B	F4GR0080
2930	欲	E9B0	5E5C	F4GS0080
2931	浴	E9B1	5E5D	F4GT0080
2932	縲	E9B2	6AAA	F6AY0080
2933	褥	E9B3	5E5E	F4GU0080
2934	辱	E9B4	5E5A	F4GQ0080
2935	俑	E9B5	6AAB	F6AZ0080
2936	傭	E9B6	5E5F	F4GV0080
2937	冗	E9B7	5E63	F4GZ0080
2938	勇	E9B8	5E60	F4GW0080
2939	埶	E9B9	6AAC	F6B00080
2940	壩	E9BA	6AAD	F6B10080
2941	容	E9BB	5E61	F4GX0080
2942	庸	E9BC	5E62	F4GY0080
2943	滂	E9BD	6AAE	F6B20080
2944	榕	E9BE	5E64	F4H00080
2945	涌	E9BF	6AAF	F6B30080
2946	湧	E9C0	5E65	F4H10080
2947	溶	E9C1	5E66	F4H20080
2948	熔	E9C2	5E67	F4H30080
2949	瑤	E9C3	5E68	F4H40080
2950	用	E9C4	5E69	F4H50080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 28 (Page 27 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2951	甬	E9C5	6AB0	F6B40080
2952	聳	E9C6	5E6A	F4H60080
2953	茸	E9C7	5E6C	F4H80080
2954	蓉	E9C8	5E6D	F4H90080
2955	踊	E9C9	5E6F	F4HB0080
2956	鎔	E9CA	5E70	F4HC0080
2957	鏞	E9CB	5E71	F4HD0080
2958	龍	E9CC	6AB1	F6B50080
2959	于	E9CD	5E7C	F4HO0080
2960	佑	E9CE	5E72	F4HE0080
2961	偶	E9CF	5E73	F4HF0080
2962	優	E9D0	5E74	F4HG0080
2963	又	E9D1	5E75	F4HH0080
2964	友	E9D2	5E76	F4HI0080
2965	右	E9D3	5E77	F4HJ0080
2966	宇	E9D4	5E79	F4HL0080
2967	寓	E9D5	5E7A	F4HM0080
2968	尢	E9D6	5E7B	F4HN0080
2969	愚	E9D7	5E7D	F4HP0080
2970	憂	E9D8	5E7E	F4HQ0080
2971	吁	E9D9	6AB2	F6B60080
2972	牛	E9DA	5E7F	F4HR0080
2973	玆	E9DB	6AB3	F6B70080
2974	瑀	E9DC	6AB4	F6B80080
2975	孟	E9DD	5E80	F4HS0080
2976	祐	E9DE	5E81	F4HT0080

Table 28 (Page 27 of 31). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
2977	禍	E9DF	5E82	F4HU0080
2978	禹	E9E0	5E83	F4HV0080
2979	紆	E9E1	6AB5	F6B90080
2980	羽	E9E2	5E84	F4HW0080
2981	芋	E9E3	5E85	F4HX0080
2982	藕	E9E4	6AB6	F6BA0080
2983	虞	E9E5	5E86	F4HY0080
2984	迂	E9E6	5E87	F4HZ0080
2985	遇	E9E7	5E88	F4I00080
2986	郵	E9E8	5E89	F4I10080
2987	釘	E9E9	6AB7	F6BB0080
2988	隅	E9EA	5E8A	F4I20080
2989	雨	E9EB	5E8B	F4I30080
2990	零	E9EC	5E8C	F4I40080
2991	勛	E9ED	6AB8	F6BC0080
2992	噫	E9EE	6AB9	F6BD0080
2993	旭	E9EF	5E8D	F4I50080
2994	昱	E9F0	5E8E	F4I60080
2995	梢	E9F1	6ABA	F6BE0080
2996	煜	E9F2	5E8F	F4I70080
2997	穢	E9F3	5E90	F4I80080
2998	郁	E9F4	5E91	F4I90080
2999	頊	E9F5	5E92	F4IA0080
3000	云	E9F6	5E93	F4IB0080
3001	暈	E9F7	5E94	F4IC0080
3002	標	E9F8	6ABB	F6BF0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3003	殞	E9F9	5E95	F4ID0080
3004	漚	E9FA	6ABC	F6BG0080
3005	煩	E9FB	6ABD	F6BH0080
3006	耘	E9FC	5E96	F4IE0080
3007	芸	E9FD	5E97	F4IF0080
3008	蕓	E9FE	6ABE	F6BI0080
3009	運	EAA1	5E98	F4IG0080
3010	隕	EAA2	5E99	F4IH0080
3011	雲	EAA3	5E9A	F4II0080
3012	韻	EAA4	5E9B	F4IJ0080
3013	蔚	EAA5	5E9D	F4IL0080
3014	鬱	EAA6	5E9E	F4IM0080
3015	亏	EAA7	6ABF	F6BJ0080
3016	熊	EAA8	5E9F	F4IN0080
3017	雄	EAA9	5EA0	F4IO0080
3018	元	EAAA	5EA1	F4IP0080
3019	原	EAAB	5EA2	F4IQ0080
3020	員	EAAC	5EA3	F4IR0080
3021	圓	EAAD	5EA5	F4IT0080
3022	園	EAAE	5EA4	F4IS0080
3023	垣	EAAF	5EA7	F4IV0080
3024	媛	EAB0	5EA8	F4IW0080
3025	嫵	EAB1	6AC0	F6BK0080
3026	冤	EAB2	5EA9	F4IX0080
3027	怨	EAB3	5EAA	F4IY0080
3028	愿	EAB4	5EAB	F4IZ0080

Line Number	Graphic	PC Code	Host Code	GCGID
3029	援	EAB5	5EAC	F4J00080
3030	沅	EAB6	6AC1	F6BL0080
3031	洹	EAB7	6AC2	F6BM0080
3032	浚	EAB8	6AC3	F6BN0080
3033	源	EAB9	5EAD	F4J10080
3034	爰	EABA	5EA6	F4IU0080
3035	猿	EABB	5EAE	F4J20080
3036	瑗	EABC	5EAF	F4J30080
3037	苑	EABD	5EB0	F4J40080
3038	袁	EABE	5EB2	F4J60080
3039	轅	EABF	5EB3	F4J70080
3040	遠	EAC0	5EB4	F4J80080
3041	阮	EAC1	6AC4	F6BO0080
3042	院	EAC2	5EB5	F4J90080
3043	願	EAC3	5EB6	F4JA0080
3044	鴛	EAC4	5EB7	F4JB0080
3045	月	EAC5	5EB8	F4JC0080
3046	越	EAC6	5EB9	F4JD0080
3047	鉞	EAC7	5EBA	F4JE0080
3048	位	EAC8	5EBB	F4JF0080
3049	偉	EAC9	5EBC	F4JG0080
3050	僞	EACA	5EBD	F4JH0080
3051	危	EACB	5EBE	F4JI0080
3052	圍	EACC	5EBF	F4JJ0080
3053	委	EACD	5EC0	F4JK0080
3054	威	EACE	5EC4	F4JO0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3055	尉	EACF	5EC1	F4JL0080
3056	慰	EAD0	5EC3	F4JN0080
3057	暉	EAD1	6AC5	F6BP0080
3058	渭	EAD2	5EC5	F4JP0080
3059	爲	EAD3	5EC6	F4JQ0080
3060	瑋	EAD4	5EC7	F4JR0080
3061	緯	EAD5	5EC8	F4JS0080
3062	胃	EAD6	5EC9	F4JT0080
3063	菱	EAD7	5ECA	F4JU0080
3064	葦	EAD8	5ECB	F4JV0080
3065	薦	EAD9	6AC6	F6BQ0080
3066	蝟	EADA	5ECC	F4JW0080
3067	衛	EADB	5ECD	F4JX0080
3068	禕	EADC	6AC7	F6BR0080
3069	謂	EADD	5ECF	F4JZ0080
3070	違	EADE	5ED0	F4K00080
3071	韋	EADF	5ED1	F4K10080
3072	魏	EAE0	5ED2	F4K20080
3073	乳	EAE1	5ED3	F4K30080
3074	侑	EAE2	5ED5	F4K50080
3075	儒	EAE3	5ED6	F4K60080
3076	兪	EAE4	5ED7	F4K70080
3077	劉	EAE5	6AC8	F6BS0080
3078	唯	EAE6	5ED9	F4K90080
3079	喻	EAE7	5EDA	F4KA0080
3080	孺	EAE8	5EDC	F4KC0080

Line Number	Graphic	PC Code	Host Code	GCGID
3081	宥	EAE9	5EDD	F4KD0080
3082	幼	EAEA	5ED8	F4K80080
3083	幽	EAEB	5EDF	F4KF0080
3084	庾	EAEC	5EE0	F4KG0080
3085	悠	EAED	5EE1	F4KH0080
3086	惟	EAEF	5EE2	F4KI0080
3087	愈	EAEF	5EE4	F4KK0080
3088	愉	EAF0	5EE3	F4KJ0080
3089	揄	EAF1	5EE5	F4KL0080
3090	攸	EAF2	5ED4	F4K40080
3091	有	EAF3	5EE6	F4KM0080
3092	扭	EAF4	6AC9	F6BT0080
3093	柔	EAF5	5EE7	F4KN0080
3094	柚	EAF6	5EE8	F4KO0080
3095	柳	EAF7	6ACA	F6BU0080
3096	榆	EAF8	5EE9	F4KP0080
3097	檣	EAF9	6ACB	F6BV0080
3098	油	EAF9	5EEA	F4KQ0080
3099	洧	EAFB	6ACC	F6BW0080
3100	流	EAFB	6ACD	F6BX0080
3101	游	EAFD	5EEB	F4KR0080
3102	溜	EAFE	6ACE	F6BY0080
3103	濡	EBA1	5EEC	F4KS0080
3104	猶	EBA2	5EED	F4KT0080
3105	猷	EBA3	6ACF	F6BZ0080
3106	琉	EBA4	6AD0	F6C00080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3107	瑜	EBA5	5EEE	F4KU0080
3108	由	EBA6	5EEF	F4KV0080
3109	留	EBA7	6AD1	F6C10080
3110	癒	EBA8	5EF0	F4KW0080
3111	硫	EBA9	6AD2	F6C20080
3112	紐	EBAA	6AD3	F6C30080
3113	維	EBAB	5EF1	F4KX0080
3114	臾	EBAC	5EF2	F4KY0080
3115	莢	EBAD	5EF3	F4KZ0080
3116	裕	EBAE	5EF5	F4L10080
3117	誘	EBAF	5EF6	F4L20080
3118	諛	EBB0	5EF7	F4L30080
3119	諭	EBB1	5EF8	F4L40080
3120	踰	EBB2	5EFA	F4L60080
3121	蹂	EBB3	5EF9	F4L50080
3122	遊	EBB4	5EFB	F4L70080
3123	逾	EBB5	5EFC	F4L80080
3124	遺	EBB6	5EFD	F4L90080
3125	酉	EBB7	5EFE	F4LA0080
3126	釉	EBB8	5F41	F4LD0080
3127	鋤	EBB9	5F42	F4LE0080
3128	類	EBBA	6AD4	F6C40080
3129	六	EBBB	6AD5	F6C50080
3130	埴	EBBC	6AD6	F6C60080
3131	戮	EBBD	6AD7	F6C70080
3132	毓	EBBE	5F44	F4LG0080

Line Number	Graphic	PC Code	Host Code	GCGID
3133	肉	EBBF	5F45	F4LH0080
3134	育	EBC0	5F46	F4LI0080
3135	陸	EBC1	6AD8	F6C80080
3136	倫	EBC2	6AD9	F6C90080
3137	允	EBC3	5F48	F4LK0080
3138	齏	EBC4	5F49	F4LL0080
3139	尹	EBC5	5F4A	F4LM0080
3140	崙	EBC6	6ADA	F6CA0080
3141	淪	EBC7	6ADB	F6CB0080
3142	潤	EBC8	5F4B	F4LN0080
3143	玕	EBC9	5F4C	F4LO0080
3144	胤	EBCA	5F4D	F4LP0080
3145	贛	EBCB	6ADC	F6CC0080
3146	輪	EBCC	6ADD	F6CD0080
3147	鈹	EBCD	6ADE	F6CE0080
3148	閏	EBCE	5F4E	F4LQ0080
3149	律	EBCF	6ADF	F6CF0080
3150	慄	EBD0	6AE0	F6CG0080
3151	栗	EBD1	6AE1	F6CH0080
3152	率	EBD2	6AE2	F6CI0080
3153	聿	EBD3	5F4F	F4LR0080
3154	戎	EBD4	5F50	F4LS0080
3155	灑	EBD5	6AE3	F6CJ0080
3156	絨	EBD6	5F51	F4LT0080
3157	融	EBD7	5F52	F4LU0080
3158	隆	EBD8	6AE4	F6CK0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3159	垠	EBD9	5F53	F4LV0080
3160	恩	EBDA	5F54	F4LW0080
3161	慇	EBDB	5F55	F4LX0080
3162	殷	EBDC	5F57	F4LZ0080
3163	閻	EBDD	5F5A	F4M20080
3164	銀	EBDE	5F59	F4M10080
3165	隱	EBDF	5F5B	F4M30080
3166	乙	EBE0	5F5D	F4M50080
3167	吟	EBE1	5F5E	F4M60080
3168	淫	EBE2	5F5F	F4M70080
3169	蔭	EBE3	5F60	F4M80080
3170	陰	EBE4	5F61	F4M90080
3171	音	EBE5	5F63	F4MB0080
3172	飲	EBE6	5F62	F4MA0080
3173	捐	EBE7	5F65	F4MD0080
3174	泣	EBE8	5F66	F4ME0080
3175	邑	EBE9	5F67	F4MF0080
3176	凝	EBEA	5F68	F4MG0080
3177	應	EBEB	5F69	F4MH0080
3178	膺	EBEC	5F6A	F4MI0080
3179	鷹	EBED	5F6B	F4MJ0080
3180	依	EBEE	5F6C	F4MK0080
3181	倚	EBEF	5F6D	F4ML0080
3182	儀	EBF0	5F6E	F4MM0080
3183	宜	EBF1	5F71	F4MP0080
3184	意	EBF2	5F72	F4MQ0080

Line Number	Graphic	PC Code	Host Code	GCGID
3185	懿	EBF3	5F73	F4MR0080
3186	擬	EBF4	5F74	F4MS0080
3187	椅	EBF5	6AE5	F6CL0080
3188	毅	EBF6	5F75	F4MT0080
3189	疑	EBF7	5F6F	F4MN0080
3190	矣	EBF8	5F70	F4MO0080
3191	義	EBF9	5F76	F4MU0080
3192	艤	EBFA	5F77	F4MV0080
3193	惹	EBFB	6AE6	F6CM0080
3194	蟻	EBFC	5F78	F4MW0080
3195	衣	EBFD	5F79	F4MX0080
3196	誼	EBFE	5F7A	F4MY0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3197	議	ECA1	5F7B	F4MZ0080
3198	醫	ECA2	5F7C	F4N00080
3199	二	ECA3	5F7D	F4N10080
3200	以	ECA4	5F7E	F4N20080
3201	伊	ECA5	5F7F	F4N30080
3202	利	ECA6	6AE7	F6CN0080
3203	吏	ECA7	6AE8	F6CO0080
3204	夷	ECA8	5F80	F4N40080
3205	姨	ECA9	5F81	F4N50080
3206	履	ECAA	6AE9	F6CP0080
3207	已	ECAB	5F82	F4N60080
3208	弛	ECAC	5F84	F4N80080
3209	彝	ECAD	5F85	F4N90080
3210	怡	ECAE	5F86	F4NA0080
3211	易	ECAF	5F87	F4NB0080
3212	李	ECB0	6AEA	F6CQ0080
3213	梨	ECB1	6AEB	F6CR0080
3214	泥	ECB2	6AEC	F6CS0080
3215	爾	ECB3	5F89	F4ND0080
3216	珥	ECB4	5F8A	F4NE0080
3217	理	ECB5	6AED	F6CT0080
3218	異	ECB6	5F8B	F4NF0080
3219	瘕	ECB7	5F8C	F4NG0080
3220	痢	ECB8	6AEE	F6CU0080
3221	移	ECB9	5F8D	F4NH0080
3222	罹	ECBA	6AEF	F6CV0080

Line Number	Graphic	PC Code	Host Code	GCGID
3223	而	ECBB	5F8E	F4NI0080
3224	耳	ECBC	5F8F	F4NJ0080
3225	肆	ECBD	6AF0	F6CW0080
3226	苡	ECBE	6AF1	F6CX0080
3227	蕘	ECBF	5F90	F4NK0080
3228	裏	ECC0	6AF2	F6CY0080
3229	裡	ECC1	6AF3	F6CZ0080
3230	貽	ECC2	6AF4	F6D00080
3231	貳	ECC3	5F83	F4N70080
3232	邇	ECC4	6AF5	F6D10080
3233	里	ECC5	6AF6	F6D20080
3234	離	ECC6	6AF7	F6D30080
3235	飴	ECC7	5F91	F4NL0080
3236	餌	ECC8	5F92	F4NM0080
3237	匿	ECC9	6AF8	F6D40080
3238	溺	ECCA	6AF9	F6D50080
3239	漢	ECCB	5F94	F4NO0080
3240	益	ECCC	5F96	F4NQ0080
3241	翊	ECCD	5F97	F4NR0080
3242	翌	ECCE	5F98	F4NS0080
3243	翼	ECCF	5F95	F4NP0080
3244	諡	ECD0	6AFA	F6D60080
3245	人	ECD1	5F99	F4NT0080
3246	仁	ECD2	5F9A	F4NU0080
3247	刃	ECD3	5F9C	F4NW0080
3248	印	ECD4	5F9D	F4NX0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 29 (Page 2 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3249	吝	ECD5	6AFB	F6D70080
3250	咽	ECD6	5F9E	F4NY0080
3251	因	ECD7	5F9F	F4NZ0080
3252	姻	ECD8	5FA0	F4O00080
3253	寅	ECD9	5FA1	F4O10080
3254	引	ECDA	5FA2	F4O20080
3255	忍	ECDB	5FA3	F4O30080
3256	湮	ECDC	5FA4	F4O40080
3257	燐	ECDD	6AFC	F6D80080
3258	璘	ECDE	6AFD	F6D90080
3259	網	ECDF	6AFE	F6DA0080
3260	茵	ECE0	6B41	F6DD0080
3261	蔞	ECE1	6B42	F6DE0080
3262	蚓	ECE2	6B43	F6DF0080
3263	認	ECE3	5FA5	F4O50080
3264	隣	ECE4	6B44	F6DG0080
3265	鞞	ECE5	5FA6	F4O60080
3266	鞞	ECE6	5FA7	F4O70080
3267	鱗	ECE7	6B45	F6DH0080
3268	麟	ECE8	6B46	F6DI0080
3269	一	ECE9	5FA8	F4O80080
3270	佚	ECEA	6B47	F6DJ0080
3271	佾	ECEB	5FA9	F4O90080
3272	壹	ECEC	5FAA	F4OA0080
3273	日	ECED	5FAB	F4OB0080
3274	溢	ECEE	5FAC	F4OC0080

Table 29 (Page 2 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3275	逸	ECEF	5FAD	F4OD0080
3276	鎰	ECF0	5FAE	F4OE0080
3277	駟	ECF1	5FAF	F4OF0080
3278	任	ECF2	5FB0	F4OG0080
3279	壬	ECF3	5FB1	F4OH0080
3280	妊	ECF4	5FB2	F4OI0080
3281	姪	ECF5	5FB3	F4OJ0080
3282	恁	ECF6	6B48	F6DK0080
3283	林	ECF7	6B49	F6DL0080
3284	淋	ECF8	6B4A	F6DM0080
3285	稔	ECF9	5FB4	F4OK0080
3286	臨	ECFA	6B4B	F6DN0080
3287	莅	ECFB	5FB5	F4OL0080
3288	賃	ECFC	5FB6	F4OM0080
3289	入	ECFD	5FB7	F4ON0080
3290	卅	ECFE	6B4C	F6DO0080
3291	立	EDA1	6B4D	F6DP0080
3292	笠	EDA2	6B4E	F6DQ0080
3293	粒	EDA3	6B4F	F6DR0080
3294	仍	EDA4	5FB8	F4OO0080
3295	剩	EDA5	5FBA	F4OQ0080
3296	孕	EDA6	5FB9	F4OP0080
3297	仍	EDA7	6B50	F6DS0080
3298	仔	EDA8	5FBB	F4OR0080
3299	刺	EDA9	5FBC	F4OS0080
3300	咨	EDAA	5FBD	F4OT0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3301	姊	EDAB	5FBE	F4OU0080
3302	姿	EDAC	5FBF	F4OV0080
3303	子	EDAD	5FC0	F4OW0080
3304	字	EDAE	5FC2	F4OY0080
3305	孜	EDAF	5FC1	F4OX0080
3306	恣	EDB0	5FC3	F4OZ0080
3307	慈	EDB1	5FC4	F4P00080
3308	滋	EDB2	5FC5	F4P10080
3309	炙	EDB3	5FC6	F4P20080
3310	煮	EDB4	5FC7	F4P30080
3311	玆	EDB5	5FC8	F4P40080
3312	瓷	EDB6	5FC9	F4P50080
3313	疵	EDB7	5FCA	F4P60080
3314	磁	EDB8	5FCC	F4P80080
3315	紫	EDB9	5FCE	F4PA0080
3316	者	EDBA	5FCF	F4PB0080
3317	自	EDBB	5FD1	F4PD0080
3318	茨	EDBC	6B51	F6DT0080
3319	蔗	EDBD	5FD2	F4PE0080
3320	藉	EDBE	5FD3	F4PF0080
3321	諮	EDBF	5FD5	F4PH0080
3322	資	EDC0	5FD6	F4PI0080
3323	雌	EDC1	5FD8	F4PK0080
3324	作	EDC2	5FD9	F4PL0080
3325	勺	EDC3	5FDA	F4PM0080
3326	嚼	EDC4	5FDB	F4PN0080

Line Number	Graphic	PC Code	Host Code	GCGID
3327	斫	EDC5	5FDC	F4PO0080
3328	昨	EDC6	5FDD	F4PP0080
3329	灼	EDC7	5FDF	F4PR0080
3330	炸	EDC8	5FE0	F4PS0080
3331	爵	EDC9	5FE1	F4PT0080
3332	綽	EDCA	5FE2	F4PU0080
3333	芍	EDCB	5FE3	F4PV0080
3334	酌	EDCC	5FE4	F4PW0080
3335	雀	EDCD	5FE5	F4PX0080
3336	鵲	EDCE	5FE6	F4PY0080
3337	孱	EDCF	6B52	F6DU0080
3338	棧	EDD0	5FE7	F4PZ0080
3339	殘	EDD1	5FE8	F4Q00080
3340	潺	EDD2	5FE9	F4Q10080
3341	盞	EDD3	5FEA	F4Q20080
3342	岑	EDD4	5FEB	F4Q30080
3343	暫	EDD5	5FEC	F4Q40080
3344	潛	EDD6	5FED	F4Q50080
3345	箴	EDD7	5FEF	F4Q70080
3346	簪	EDD8	5FF0	F4Q80080
3347	蠶	EDD9	5FF2	F4QA0080
3348	雜	EDDA	5FF3	F4QB0080
3349	丈	EDDB	5FF4	F4QC0080
3350	仗	EDDC	5FF5	F4QD0080
3351	匠	EDDD	5FF6	F4QE0080
3352	場	EDDE	5FF7	F4QF0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3353	墻	EDDF	5FF8	F4QG0080
3354	壯	EDE0	6047	F4QV0080
3355	獎	EDE1	5FF9	F4QH0080
3356	將	EDE2	6048	F4QW0080
3357	帳	EDE3	5FFB	F4QJ0080
3358	庄	EDE4	5FFC	F4QK0080
3359	張	EDE5	5FFD	F4QL0080
3360	掌	EDE6	5FFE	F4QM0080
3361	障	EDE7	6041	F4QP0080
3362	杖	EDE8	6042	F4QQ0080
3363	樟	EDE9	6043	F4QR0080
3364	檣	EDEA	6044	F4QS0080
3365	櫛	EDEB	6045	F4QT0080
3366	漿	EDEC	6046	F4QU0080
3367	牆	EDED	6049	F4QX0080
3368	狀	EDEE	604A	F4QY0080
3369	獐	EDEF	604B	F4QZ0080
3370	璋	EDF0	604C	F4R00080
3371	章	EDF1	604E	F4R20080
3372	粧	EDF2	604F	F4R30080
3373	腸	EDF3	6050	F4R40080
3374	臟	EDF4	6051	F4R50080
3375	臧	EDF5	6B53	F6DV0080
3376	莊	EDF6	6052	F4R60080
3377	葬	EDF7	6053	F4R70080
3378	蔣	EDF8	6054	F4R80080

Line Number	Graphic	PC Code	Host Code	GCGID
3379	蓄	EDF9	6055	F4R90080
3380	藏	EDFA	6056	F4RA0080
3381	裝	EDFB	6058	F4RC0080
3382	贓	EDFC	6059	F4RD0080
3383	醬	EDFD	605A	F4RE0080
3384	長	EDFE	605B	F4RF0080
3385	障	EEA1	605C	F4RG0080
3386	再	EEA2	605D	F4RH0080
3387	哉	EEA3	605E	F4RI0080
3388	在	EEA4	605F	F4RJ0080
3389	宰	EEA5	6060	F4RK0080
3390	才	EEA6	6061	F4RL0080
3391	材	EEA7	6062	F4RM0080
3392	栽	EEA8	6063	F4RN0080
3393	梓	EEA9	6064	F4RO0080
3394	澱	EEAA	6B54	F6DW0080
3395	滓	EEAB	6065	F4RP0080
3396	災	EEAC	6066	F4RQ0080
3397	緯	EEAD	6B55	F6DX0080
3398	裁	EEAE	6068	F4RS0080
3399	財	EEAF	6069	F4RT0080
3400	載	EEB0	606A	F4RU0080
3401	齋	EEB1	606B	F4RV0080
3402	齎	EEB2	606C	F4RW0080
3403	爭	EEB3	606D	F4RX0080
3404	箏	EEB4	606E	F4RY0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3405	諍	EEB5	606F	F4RZ0080
3406	錚	EEB6	6070	F4S00080
3407	佇	EEB7	6072	F4S20080
3408	低	EEB8	6071	F4S10080
3409	儲	EEB9	6073	F4S30080
3410	咀	EEBA	6074	F4S40080
3411	姐	EEBB	6075	F4S50080
3412	底	EEBC	6076	F4S60080
3413	抵	EEBD	6077	F4S70080
3414	杵	EEBE	6078	F4S80080
3415	楮	EEBF	607A	F4SA0080
3416	樗	EEC0	607B	F4SB0080
3417	沮	EEC1	607C	F4SC0080
3418	渚	EEC2	607D	F4SD0080
3419	狙	EEC3	607E	F4SE0080
3420	猪	EEC4	607F	F4SF0080
3421	疽	EEC5	6080	F4SG0080
3422	箸	EEC6	6081	F4SH0080
3423	紵	EEC7	6B56	F6DY0080
3424	苧	EEC8	6082	F4SI0080
3425	洎	EEC9	6B57	F6DZ0080
3426	著	EECA	6083	F4SJ0080
3427	諸	EECB	6084	F4SK0080
3428	詛	EECC	6086	F4SM0080
3429	貯	EECD	6088	F4SO0080
3430	躅	EECE	6089	F4SP0080

Line Number	Graphic	PC Code	Host Code	GCGID
3431	這	EECF	608A	F4SQ0080
3432	邸	EED0	608B	F4SR0080
3433	睢	EED1	6B58	F6E00080
3434	齟	EED2	6B59	F6E10080
3435	勛	EED3	608C	F4SS0080
3436	吊	EED4	6B5A	F6E20080
3437	嫡	EED5	608D	F4ST0080
3438	寂	EED6	608E	F4SU0080
3439	摘	EED7	608F	F4SV0080
3440	敵	EED8	6090	F4SW0080
3441	滴	EED9	6091	F4SX0080
3442	狄	EEDA	6092	F4SY0080
3443	炙	EEDB	6B5B	F6E30080
3444	的	EEDC	6093	F4SZ0080
3445	積	EEDD	6094	F4T00080
3446	笛	EEDE	6095	F4T10080
3447	籍	EEDF	6096	F4T20080
3448	績	EEE0	6098	F4T40080
3449	翟	EEE1	6B5C	F6E40080
3450	荻	EEE2	6099	F4T50080
3451	謫	EEE3	609A	F4T60080
3452	賊	EEE4	609B	F4T70080
3453	赤	EEE5	609C	F4T80080
3454	跡	EEE6	609D	F4T90080
3455	蹟	EEE7	609E	F4TA0080
3456	迪	EEE8	609F	F4TB0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 29 (Page 6 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3457	迹	EEE9	60A0	F4TC0080
3458	適	EEEA	60A1	F4TD0080
3459	鎬	EEEB	6B5D	F6E50080
3460	佃	EEEC	6B5E	F6E60080
3461	佺	EEED	6B5F	F6E70080
3462	傳	EEEE	60A2	F4TE0080
3463	全	EEEF	60A3	F4TF0080
3464	典	EEF0	60A4	F4TG0080
3465	前	EEF1	60A5	F4TH0080
3466	剪	EEF2	60A6	F4TI0080
3467	墳	EEF3	60A8	F4TK0080
3468	搏	EEF4	6B60	F6E80080
3469	奠	EEF5	60A9	F4TL0080
3470	專	EEF6	60AA	F4TM0080
3471	展	EEF7	60AB	F4TN0080
3472	廛	EEF8	60AD	F4TP0080
3473	悛	EEF9	60AE	F4TQ0080
3474	戰	EEFA	60AF	F4TR0080
3475	栓	EEFB	60B0	F4TS0080
3476	殿	EEFC	60B1	F4TT0080
3477	氈	EEFD	60B2	F4TU0080
3478	澗	EEFE	60B3	F4TV0080
3479	煎	EFA1	60B4	F4TW0080
3480	典	EFA2	6B61	F6E90080
3481	田	EFA3	60B5	F4TX0080
3482	甸	EFA4	60B6	F4TY0080

Table 29 (Page 6 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3483	畑	EFA5	6B62	F6EA0080
3484	癩	EFA6	60B7	F4TZ0080
3485	筌	EFA7	6B63	F6EB0080
3486	箋	EFA8	60B9	F4U10080
3487	箭	EFA9	60BA	F4U20080
3488	篆	EFAA	60BB	F4U30080
3489	纏	EFAB	60BC	F4U40080
3490	詮	EFAC	60BE	F4U60080
3491	輓	EFAD	60BF	F4U70080
3492	轉	EFAE	60C0	F4U80080
3493	鈿	EFAF	60C1	F4U90080
3494	銓	EFB0	60C2	F4UA0080
3495	錢	EFB1	60C3	F4UB0080
3496	鐫	EFB2	6B64	F6EC0080
3497	電	EFB3	60C4	F4UC0080
3498	顛	EFB4	60C5	F4UD0080
3499	顛	EFB5	60C6	F4UE0080
3500	餞	EFB6	60C7	F4UF0080
3501	切	EFB7	60C8	F4UG0080
3502	截	EFB8	60C9	F4UH0080
3503	折	EFB9	60CA	F4UI0080
3504	浙	EFBA	60CB	F4UJ0080
3505	癩	EFBB	6B65	F6ED0080
3506	竊	EFBC	60CD	F4UL0080
3507	節	EFBD	60CE	F4UM0080
3508	絕	EFBE	60CF	F4UN0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 29 (Page 7 of 33). Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3509	占	EFBF	60D0	F4UO0080
3510	帖	EFC0	60D1	F4UP0080
3511	店	EFC1	60D2	F4UQ0080
3512	漸	EFC2	60D3	F4UR0080
3513	点	EFC3	60D4	F4US0080
3514	粘	EFC4	60D6	F4UU0080
3515	霑	EFC5	60D7	F4UV0080
3516	帖	EFC6	6B66	F6EE0080
3517	點	EFC7	60D5	F4UT0080
3518	接	EFC8	60D8	F4UW0080
3519	摺	EFC9	60D9	F4UX0080
3520	蝶	EFCA	60DB	F4UZ0080
3521	丁	EFCB	60DC	F4V00080
3522	井	EFCC	60DD	F4V10080
3523	亭	EFCD	60DE	F4V20080
3524	停	EFCE	60DF	F4V30080
3525	偵	EFCF	60E0	F4V40080
3526	呈	EFD0	60E1	F4V50080
3527	妊	EFD1	60E2	F4V60080
3528	定	EFD2	60E6	F4VA0080
3529	幘	EFD3	60E3	F4V70080
3530	庭	EFD4	60E7	F4VB0080
3531	廷	EFD5	60E4	F4V80080
3532	征	EFD6	60E5	F4V90080
3533	情	EFD7	60E8	F4VC0080
3534	挺	EFD8	60E9	F4VD0080

Table 29 (Page 7 of 33). Hanja Set, DBCS-PC

Line Number	Graphic	PC Code	Host Code	GCGID
3535	政	EFD9	60EA	F4VE0080
3536	整	EFDA	60EB	F4VF0080
3537	旌	EFDB	60EC	F4VG0080
3538	晶	EFDC	60ED	F4VH0080
3539	晷	EFDD	60EE	F4VI0080
3540	柁	EFDE	6B67	F6EF0080
3541	楨	EFDF	60F0	F4VK0080
3542	櫟	EFE0	6B68	F6EG0080
3543	正	EFE1	60F1	F4VL0080
3544	汀	EFE2	60F2	F4VM0080
3545	淀	EFE3	6B69	F6EH0080
3546	淨	EFE4	60F3	F4VN0080
3547	渟	EFE5	60F4	F4VO0080
3548	瀆	EFE6	6B6A	F6EI0080
3549	澗	EFE7	6B6B	F6EJ0080
3550	炆	EFE8	6B6C	F6EK0080
3551	玎	EFE9	6B6D	F6EL0080
3552	玳	EFEA	6B6E	F6EM0080
3553	町	EFEB	60F5	F4VP0080
3554	睛	EFEC	60F6	F4VQ0080
3555	碇	EFED	60F7	F4VR0080
3556	禎	EFEE	60F8	F4VS0080
3557	程	EFEF	60F9	F4VT0080
3558	辵	EFF0	60FA	F4VU0080
3559	精	EFF1	60FC	F4VW0080
3560	縱	EFF2	6B6F	F6EN0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 29 (Page 8 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3561	艇	EFF3	60FD	F4VX0080
3562	訂	EFF4	60FE	F4VY0080
3563	諄	EFF5	6141	F4W10080
3564	貞	EFF6	6142	F4W20080
3565	鄭	EFF7	6143	F4W30080
3566	酌	EFF8	6144	F4W40080
3567	釘	EFF9	6145	F4W50080
3568	鉦	EFFA	6146	F4W60080
3569	鋌	EFFB	6B70	F6EO0080
3570	錠	EFFC	6147	F4W70080
3571	霆	EFFD	6148	F4W80080
3572	靖	EFFE	60FB	F4VV0080
3573	靜	F0A1	6149	F4W90080
3574	頂	F0A2	614A	F4WA0080
3575	鼎	F0A3	614B	F4WB0080
3576	制	F0A4	614C	F4WC0080
3577	劑	F0A5	614D	F4WD0080
3578	啼	F0A6	614E	F4WE0080
3579	堤	F0A7	614F	F4WF0080
3580	帝	F0A8	6150	F4WG0080
3581	弟	F0A9	6151	F4WH0080
3582	悌	F0AA	6152	F4WI0080
3583	提	F0AB	6153	F4WJ0080
3584	梯	F0AC	6155	F4WL0080
3585	濟	F0AD	6156	F4WM0080
3586	祭	F0AE	6159	F4WP0080

Table 29 (Page 8 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
3587	第	F0AF	615A	F4WQ0080
3588	臍	F0B0	6158	F4WO0080
3589	薺	F0B1	615B	F4WR0080
3590	製	F0B2	615C	F4WS0080
3591	諸	F0B3	615D	F4WT0080
3592	蹄	F0B4	615F	F4WV0080
3593	醜	F0B5	6160	F4WW0080
3594	除	F0B6	6161	F4WX0080
3595	際	F0B7	6162	F4WY0080
3596	霽	F0B8	6163	F4WZ0080
3597	題	F0B9	6164	F4X00080
3598	齊	F0BA	6165	F4X10080
3599	俎	F0BB	6166	F4X20080
3600	兆	F0BC	6168	F4X40080
3601	凋	F0BD	6167	F4X30080
3602	助	F0BE	6169	F4X50080
3603	嘲	F0BF	616B	F4X70080
3604	弔	F0C0	616D	F4X90080
3605	彫	F0C1	616E	F4XA0080
3606	措	F0C2	616F	F4XB0080
3607	操	F0C3	6170	F4XC0080
3608	早	F0C4	6171	F4XD0080
3609	晁	F0C5	6172	F4XE0080
3610	曹	F0C6	6173	F4XF0080
3611	曹	F0C7	6174	F4XG0080
3612	朝	F0C8	6175	F4XH0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3613	條	F0C9	6176	F4XI0080
3614	棗	F0CA	6177	F4XJ0080
3615	槽	F0CB	6178	F4XK0080
3616	漕	F0CC	6179	F4XL0080
3617	潮	F0CD	617A	F4XM0080
3618	照	F0CE	617B	F4XN0080
3619	燥	F0CF	617C	F4XO0080
3620	爪	F0D0	617D	F4XP0080
3621	皁	F0D1	6B71	F6EP0080
3622	眺	F0D2	617F	F4XR0080
3623	祖	F0D3	6180	F4XS0080
3624	祚	F0D4	6181	F4XT0080
3625	租	F0D5	6182	F4XU0080
3626	稠	F0D6	6183	F4XV0080
3627	窀	F0D7	6184	F4XW0080
3628	粗	F0D8	6187	F4XZ0080
3629	槽	F0D9	6188	F4Y00080
3630	組	F0DA	618A	F4Y20080
3631	繰	F0DB	618C	F4Y40080
3632	肇	F0DC	618D	F4Y50080
3633	藻	F0DD	618E	F4Y60080
3634	蚤	F0DE	618F	F4Y70080
3635	詔	F0DF	6190	F4Y80080
3636	調	F0E0	6191	F4Y90080
3637	趙	F0E1	6192	F4YA0080
3638	躁	F0E2	6193	F4YB0080

Line Number	Graphic	PC Code	Host Code	GCGID
3639	造	F0E3	6194	F4YC0080
3640	遭	F0E4	6195	F4YD0080
3641	釣	F0E5	6196	F4YE0080
3642	阻	F0E6	6197	F4YF0080
3643	雕	F0E7	6B72	F6EQ0080
3644	鳥	F0E8	6199	F4YH0080
3645	族	F0E9	619A	F4YI0080
3646	簇	F0EA	619B	F4YJ0080
3647	足	F0EB	619C	F4YK0080
3648	鏃	F0EC	619D	F4YL0080
3649	存	F0ED	619E	F4YM0080
3650	尊	F0EE	619F	F4YN0080
3651	卒	F0EF	61A0	F4YO0080
3652	拙	F0F0	61A1	F4YP0080
3653	猝	F0F1	61A2	F4YQ0080
3654	倥	F0F2	61A3	F4YR0080
3655	宗	F0F3	61A4	F4YS0080
3656	從	F0F4	61A5	F4YT0080
3657	悰	F0F5	6B73	F6ER0080
3658	傕	F0F6	61A6	F4YU0080
3659	棕	F0F7	61A7	F4YV0080
3660	淙	F0F8	61A9	F4YX0080
3661	琮	F0F9	61AA	F4YY0080
3662	種	F0FA	61AB	F4YZ0080
3663	終	F0FB	61AC	F4Z00080
3664	綜	F0FC	61AD	F4Z10080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3665	縱	F0FD	61AE	F4Z20080
3666	腫	F0FE	61AF	F4Z30080
3667	踪	F1A1	6B74	F6ES0080
3668	踵	F1A2	61B0	F4Z40080
3669	鍾	F1A3	61B2	F4Z60080
3670	鐘	F1A4	61B3	F4Z70080
3671	佐	F1A5	61B4	F4Z80080
3672	坐	F1A6	61B5	F4Z90080
3673	左	F1A7	61B6	F4ZA0080
3674	座	F1A8	61B7	F4ZB0080
3675	挫	F1A9	61B8	F4ZC0080
3676	罪	F1AA	61B9	F4ZD0080
3677	主	F1AB	61BA	F4ZE0080
3678	住	F1AC	61BB	F4ZF0080
3679	侏	F1AD	61BC	F4ZG0080
3680	做	F1AE	61BD	F4ZH0080
3681	姝	F1AF	6B75	F6ET0080
3682	冑	F1B0	61D5	F5050080
3683	呪	F1B1	61BF	F4ZJ0080
3684	周	F1B2	61C0	F4ZK0080
3685	喉	F1B3	61C1	F4ZL0080
3686	奏	F1B4	61C2	F4ZM0080
3687	宙	F1B5	61C3	F4ZN0080
3688	州	F1B6	61C4	F4ZO0080
3689	廚	F1B7	61BE	F4ZI0080
3690	晝	F1B8	61C5	F4ZP0080

Line Number	Graphic	PC Code	Host Code	GCGID
3691	朱	F1B9	61C6	F4ZQ0080
3692	柱	F1BA	61C7	F4ZR0080
3693	株	F1BB	61C8	F4ZS0080
3694	注	F1BC	61CA	F4ZU0080
3695	洲	F1BD	61CB	F4ZV0080
3696	湊	F1BE	6B76	F6EU0080
3697	澍	F1BF	6B77	F6EV0080
3698	炷	F1C0	61C9	F4ZT0080
3699	珠	F1C1	61CD	F4ZX0080
3700	疇	F1C2	61CE	F4ZY0080
3701	籌	F1C3	61D0	F5000080
3702	紂	F1C4	61D1	F5010080
3703	紬	F1C5	61D2	F5020080
3704	綢	F1C6	61D3	F5030080
3705	舟	F1C7	61D6	F5060080
3706	蛛	F1C8	61D7	F5070080
3707	註	F1C9	61D8	F5080080
3708	誅	F1CA	61D9	F5090080
3709	走	F1CB	61DA	F50A0080
3710	躊	F1CC	61DB	F50B0080
3711	輳	F1CD	61DC	F50C0080
3712	週	F1CE	61DE	F50E0080
3713	耐	F1CF	61DD	F50D0080
3714	酒	F1D0	61CC	F4ZW0080
3715	鑄	F1D1	61DF	F50F0080
3716	駐	F1D2	61E0	F50G0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3717	竹	F1D3	61E1	F50H0080
3718	粥	F1D4	61E2	F50I0080
3719	俊	F1D5	61E3	F50J0080
3720	備	F1D6	61E4	F50K0080
3721	准	F1D7	61E5	F50L0080
3722	竣	F1D8	61E6	F50M0080
3723	窩	F1D9	6B78	F6EW0080
3724	峻	F1DA	61E7	F50N0080
3725	峻	F1DB	61E8	F50O0080
3726	樽	F1DC	61E9	F50P0080
3727	浚	F1DD	61EA	F50Q0080
3728	準	F1DE	61EB	F50R0080
3729	濬	F1DF	61EC	F50S0080
3730	竣	F1E0	6B79	F6EX0080
3731	峻	F1E1	61ED	F50T0080
3732	竣	F1E2	61EE	F50U0080
3733	蠢	F1E3	61EF	F50V0080
3734	逡	F1E4	61F0	F50W0080
3735	遵	F1E5	61F1	F50X0080
3736	雋	F1E6	6B7A	F6EY0080
3737	駿	F1E7	61F3	F50Z0080
3738	茁	F1E8	61F4	F5100080
3739	中	F1E9	61F5	F5110080
3740	仲	F1EA	61F6	F5120080
3741	衆	F1EB	61F7	F5130080
3742	重	F1EC	61F8	F5140080

Line Number	Graphic	PC Code	Host Code	GCGID
3743	卽	F1ED	61FA	F5160080
3744	櫛	F1EE	61FB	F5170080
3745	楫	F1EF	61FC	F5180080
3746	汁	F1F0	61FD	F5190080
3747	蒼	F1F1	61FE	F51A0080
3748	增	F1F2	6241	F51D0080
3749	憎	F1F3	6242	F51E0080
3750	曾	F1F4	6245	F51H0080
3751	拯	F1F5	6243	F51F0080
3752	烝	F1F6	6244	F51G0080
3753	飭	F1F7	6246	F51I0080
3754	症	F1F8	6247	F51J0080
3755	繪	F1F9	6B7B	F6EZ0080
3756	蒸	F1FA	6248	F51K0080
3757	證	F1FB	624A	F51M0080
3758	贈	F1FC	624B	F51N0080
3759	之	F1FD	624C	F51O0080
3760	只	F1FE	624D	F51P0080
3761	咫	F2A1	624E	F51Q0080
3762	地	F2A2	624F	F51R0080
3763	址	F2A3	6250	F51S0080
3764	志	F2A4	6251	F51T0080
3765	持	F2A5	6252	F51U0080
3766	指	F2A6	6253	F51V0080
3767	摯	F2A7	6254	F51W0080
3768	支	F2A8	6255	F51X0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3769	旨	F2A9	6256	F51Y0080
3770	智	F2AA	6257	F51Z0080
3771	枝	F2AB	6258	F5200080
3772	枳	F2AC	6259	F5210080
3773	止	F2AD	625A	F5220080
3774	池	F2AE	625B	F5230080
3775	沚	F2AF	6B7C	F6F00080
3776	漬	F2B0	625C	F5240080
3777	知	F2B1	625E	F5260080
3778	砥	F2B2	625F	F5270080
3779	祉	F2B3	6261	F5290080
3780	祗	F2B4	6260	F5280080
3781	紙	F2B5	6262	F52A0080
3782	肢	F2B6	6263	F52B0080
3783	脂	F2B7	6264	F52C0080
3784	至	F2B8	6265	F52D0080
3785	芝	F2B9	6266	F52E0080
3786	芷	F2BA	6B7D	F6F10080
3787	蜘	F2BB	6267	F52F0080
3788	誌	F2BC	6268	F52G0080
3789	識	F2BD	6269	F52H0080
3790	贄	F2BE	626A	F52I0080
3791	趾	F2BF	626B	F52J0080
3792	遲	F2C0	626C	F52K0080
3793	直	F2C1	626D	F52L0080
3794	植	F2C2	626E	F52M0080

Line Number	Graphic	PC Code	Host Code	GCGID
3795	稷	F2C3	626F	F52N0080
3796	織	F2C4	6270	F52O0080
3797	職	F2C5	6271	F52P0080
3798	昏	F2C6	6B7E	F6F20080
3799	噴	F2C7	6273	F52R0080
3800	塵	F2C8	6274	F52S0080
3801	振	F2C9	6275	F52T0080
3802	摺	F2CA	6B7F	F6F30080
3803	晉	F2CB	6276	F52U0080
3804	晋	F2CC	6B80	F6F40080
3805	振	F2CD	6B81	F6F50080
3806	榛	F2CE	6277	F52V0080
3807	殄	F2CF	6B82	F6F60080
3808	津	F2D0	6278	F52W0080
3809	漆	F2D1	6279	F52X0080
3810	珍	F2D2	627A	F52Y0080
3811	璫	F2D3	627B	F52Z0080
3812	璉	F2D4	627C	F5300080
3813	疹	F2D5	6B83	F6F70080
3814	疹	F2D6	627D	F5310080
3815	盡	F2D7	627E	F5320080
3816	眞	F2D8	627F	F5330080
3817	瞋	F2D9	6280	F5340080
3818	秦	F2DA	6281	F5350080
3819	縉	F2DB	6282	F5360080
3820	纈	F2DC	6B84	F6F80080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3821	臻	F2DD	6B85	F6F90080
3822	陳	F2DE	6B86	F6FA0080
3823	衫	F2DF	6B87	F6FB0080
3824	診	F2E0	6283	F5370080
3825	賑	F2E1	6284	F5380080
3826	軫	F2E2	6285	F5390080
3827	辰	F2E3	6272	F52Q0080
3828	進	F2E4	6286	F53A0080
3829	鎭	F2E5	6287	F53B0080
3830	陣	F2E6	6288	F53C0080
3831	陳	F2E7	6289	F53D0080
3832	震	F2E8	628A	F53E0080
3833	侄	F2E9	6B88	F6FC0080
3834	叱	F2EA	628B	F53F0080
3835	姪	F2EB	628D	F53H0080
3836	嫉	F2EC	628E	F53I0080
3837	帙	F2ED	628F	F53J0080
3838	桎	F2EE	6290	F53K0080
3839	瓊	F2EF	6B89	F6FD0080
3840	疾	F2F0	6291	F53L0080
3841	秩	F2F1	6292	F53M0080
3842	窒	F2F2	628C	F53G0080
3843	膾	F2F3	6293	F53N0080
3844	蛭	F2F4	6294	F53O0080
3845	質	F2F5	6295	F53P0080
3846	跌	F2F6	6296	F53Q0080

Line Number	Graphic	PC Code	Host Code	GCGID
3847	送	F2F7	6297	F53R0080
3848	斟	F2F8	6298	F53S0080
3849	朕	F2F9	6299	F53T0080
3850	什	F2FA	6B8A	F6FE0080
3851	執	F2FB	629A	F53U0080
3852	灑	F2FC	6B8B	F6FF0080
3853	緝	F2FD	629C	F53W0080
3854	輯	F2FE	629D	F53X0080
3855	鑠	F3A1	6B8C	F6FG0080
3856	集	F3A2	629B	F53V0080
3857	徵	F3A3	629E	F53Y0080
3858	懲	F3A4	629F	F53Z0080
3859	澄	F3A5	62A0	F5400080
3860	且	F3A6	62A1	F5410080
3861	侏	F3A7	6B8D	F6FH0080
3862	借	F3A8	62A2	F5420080
3863	叉	F3A9	62A4	F5440080
3864	嗟	F3AA	62A5	F5450080
3865	嗟	F3AB	62A7	F5470080
3866	差	F3AC	62A6	F5460080
3867	次	F3AD	62A8	F5480080
3868	此	F3AE	62A9	F5490080
3869	磋	F3AF	62AA	F54A0080
3870	筍	F3B0	62A3	F5430080
3871	茶	F3B1	62AB	F54B0080
3872	蹉	F3B2	62AC	F54C0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3873	車	F3B3	62AE	F54E0080
3874	遮	F3B4	62AD	F54D0080
3875	捉	F3B5	62AF	F54F0080
3876	搾	F3B6	62B0	F54G0080
3877	着	F3B7	62B1	F54H0080
3878	窄	F3B8	62B2	F54I0080
3879	錯	F3B9	62B3	F54J0080
3880	鑿	F3BA	62B4	F54K0080
3881	齷	F3BB	62B5	F54L0080
3882	撰	F3BC	62B6	F54M0080
3883	濼	F3BD	62B7	F54N0080
3884	燦	F3BE	62B8	F54O0080
3885	璨	F3BF	62B9	F54P0080
3886	瓚	F3C0	62BA	F54Q0080
3887	竄	F3C1	62BB	F54R0080
3888	篡	F3C2	6B8E	F6FI0080
3889	篡	F3C3	62BC	F54S0080
3890	粲	F3C4	62BD	F54T0080
3891	纘	F3C5	62BE	F54U0080
3892	讚	F3C6	62BF	F54V0080
3893	贊	F3C7	62C0	F54W0080
3894	鑽	F3C8	62C1	F54X0080
3895	餐	F3C9	62C3	F54Z0080
3896	饌	F3CA	62C4	F5500080
3897	刹	F3CB	62C5	F5510080
3898	察	F3CC	62C6	F5520080

Line Number	Graphic	PC Code	Host Code	GCGID
3899	擦	F3CD	62C7	F5530080
3900	札	F3CE	62C8	F5540080
3901	紮	F3CF	6B8F	F6FJ0080
3902	僭	F3D0	62C9	F5550080
3903	參	F3D1	62CA	F5560080
3904	塹	F3D2	62CB	F5570080
3905	慘	F3D3	62CC	F5580080
3906	慙	F3D4	62CD	F5590080
3907	饑	F3D5	62CF	F55B0080
3908	斬	F3D6	62D0	F55C0080
3909	站	F3D7	62D1	F55D0080
3910	讒	F3D8	62D2	F55E0080
3911	讖	F3D9	6B90	F6FK0080
3912	倉	F3DA	62D4	F55G0080
3913	倡	F3DB	62D3	F55F0080
3914	創	F3DC	62D6	F55I0080
3915	唱	F3DD	62D7	F55J0080
3916	娼	F3DE	62D8	F55K0080
3917	廠	F3DF	62D9	F55L0080
3918	彰	F3E0	62DA	F55M0080
3919	愴	F3E1	6B91	F6FL0080
3920	敞	F3E2	62DC	F55O0080
3921	昌	F3E3	62DD	F55P0080
3922	昶	F3E4	62DE	F55Q0080
3923	暢	F3E5	62DF	F55R0080
3924	槍	F3E6	62E0	F55S0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3925	滄	F3E7	62E2	F55U0080
3926	漲	F3E8	62E3	F55V0080
3927	狷	F3E9	6B92	F6FM0080
3928	瘡	F3EA	62E4	F55W0080
3929	窓	F3EB	62E5	F55X0080
3930	脹	F3EC	62E6	F55Y0080
3931	艙	F3ED	62E7	F55Z0080
3932	莒	F3EE	62E8	F5600080
3933	蒼	F3EF	62E9	F5610080
3934	債	F3F0	62EA	F5620080
3935	塚	F3F1	62EB	F5630080
3936	冢	F3F2	6B93	F6FN0080
3937	寨	F3F3	6B94	F6FO0080
3938	彩	F3F4	62EC	F5640080
3939	採	F3F5	62ED	F5650080
3940	砦	F3F6	62EE	F5660080
3941	綵	F3F7	62EF	F5670080
3942	菜	F3F8	62F0	F5680080
3943	蔡	F3F9	62F1	F5690080
3944	采	F3FA	62F2	F56A0080
3945	釵	F3FB	62F3	F56B0080
3946	册	F3FC	62F4	F56C0080
3947	柵	F3FD	62F5	F56D0080
3948	策	F3FE	62F6	F56E0080
3949	責	F4A1	62F8	F56G0080
3950	淒	F4A2	62F9	F56H0080

Line Number	Graphic	PC Code	Host Code	GCGID
3951	妻	F4A3	62FA	F56I0080
3952	悽	F4A4	62FB	F56J0080
3953	處	F4A5	62FC	F56K0080
3954	倜	F4A6	6B95	F6FP0080
3955	刺	F4A7	62FD	F56L0080
3956	剔	F4A8	62FE	F56M0080
3957	尺	F4A9	6341	F56P0080
3958	憾	F4AA	6342	F56Q0080
3959	戚	F4AB	6343	F56R0080
3960	拓	F4AC	6344	F56S0080
3961	擲	F4AD	6345	F56T0080
3962	斥	F4AE	6346	F56U0080
3963	滌	F4AF	6347	F56V0080
3964	瘡	F4B0	6348	F56W0080
3965	脊	F4B1	6349	F56X0080
3966	蹠	F4B2	6B96	F6FQ0080
3967	陟	F4B3	634C	F5700080
3968	隻	F4B4	634D	F5710080
3969	仟	F4B5	634E	F5720080
3970	千	F4B6	634F	F5730080
3971	喘	F4B7	6350	F5740080
3972	天	F4B8	6351	F5750080
3973	川	F4B9	6352	F5760080
3974	擅	F4BA	6353	F5770080
3975	泉	F4BB	6354	F5780080
3976	淺	F4BC	6355	F5790080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
3977	玼	F4BD	6B97	F6FR0080
3978	穿	F4BE	6357	F57B0080
3979	舛	F4BF	6358	F57C0080
3980	薦	F4C0	6359	F57D0080
3981	賤	F4C1	635A	F57E0080
3982	踐	F4C2	635B	F57F0080
3983	遷	F4C3	635C	F57G0080
3984	釧	F4C4	635D	F57H0080
3985	闡	F4C5	635E	F57I0080
3986	阡	F4C6	635F	F57J0080
3987	韃	F4C7	6360	F57K0080
3988	凸	F4C8	6361	F57L0080
3989	哲	F4C9	6363	F57N0080
3990	喆	F4CA	6364	F57O0080
3991	徹	F4CB	6362	F57M0080
3992	撤	F4CC	6365	F57P0080
3993	澈	F4CD	6366	F57Q0080
3994	綴	F4CE	6367	F57R0080
3995	輟	F4CF	6B98	F6FS0080
3996	轍	F4D0	6368	F57S0080
3997	鐵	F4D1	6369	F57T0080
3998	僉	F4D2	636A	F57U0080
3999	尖	F4D3	636B	F57V0080
4000	沾	F4D4	636C	F57W0080
4001	添	F4D5	636D	F57X0080
4002	甜	F4D6	636E	F57Y0080

Line Number	Graphic	PC Code	Host Code	GCGID
4003	瞻	F4D7	636F	F57Z0080
4004	簽	F4D8	6B99	F6FT0080
4005	籤	F4D9	6371	F5810080
4006	詹	F4DA	6B9A	F6FU0080
4007	諂	F4DB	6372	F5820080
4008	堞	F4DC	6B9B	F6FV0080
4009	妥	F4DD	6373	F5830080
4010	帖	F4DE	6374	F5840080
4011	捷	F4DF	6375	F5850080
4012	牒	F4E0	6376	F5860080
4013	疊	F4E1	6377	F5870080
4014	睫	F4E2	6378	F5880080
4015	諜	F4E3	6379	F5890080
4016	貼	F4E4	637A	F58A0080
4017	輒	F4E5	637B	F58B0080
4018	廳	F4E6	637C	F58C0080
4019	晴	F4E7	637D	F58D0080
4020	清	F4E8	637E	F58E0080
4021	聽	F4E9	637F	F58F0080
4022	菁	F4EA	6380	F58G0080
4023	請	F4EB	6382	F58I0080
4024	青	F4EC	6383	F58J0080
4025	鯖	F4ED	6384	F58K0080
4026	切	F4EE	6385	F58L0080
4027	剃	F4EF	6386	F58M0080
4028	替	F4F0	6387	F58N0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4029	涕	F4F1	6388	F58O0080
4030	滯	F4F2	6389	F58P0080
4031	締	F4F3	638B	F58R0080
4032	諦	F4F4	638C	F58S0080
4033	逮	F4F5	638D	F58T0080
4034	遞	F4F6	638E	F58U0080
4035	體	F4F7	6390	F58W0080
4036	初	F4F8	6391	F58X0080
4037	剿	F4F9	6B9C	F6FW0080
4038	哨	F4FA	6392	F58Y0080
4039	憔	F4FB	6394	F5900080
4040	抄	F4FC	6395	F5910080
4041	招	F4FD	6396	F5920080
4042	梢	F4FE	6397	F5930080
4043	椒	F5A1	6398	F5940080
4044	楚	F5A2	6399	F5950080
4045	樵	F5A3	639A	F5960080
4046	炒	F5A4	639B	F5970080
4047	焦	F5A5	639C	F5980080
4048	硝	F5A6	639D	F5990080
4049	礁	F5A7	639E	F59A0080
4050	礎	F5A8	639F	F59B0080
4051	秒	F5A9	63A0	F59C0080
4052	稍	F5AA	63A1	F59D0080
4053	肖	F5AB	63A3	F59F0080
4054	艸	F5AC	6B9D	F6FX0080

Line Number	Graphic	PC Code	Host Code	GCGID
4055	苔	F5AD	6B9E	F6FY0080
4056	草	F5AE	63A4	F59G0080
4057	蕉	F5AF	63A5	F59H0080
4058	貂	F5B0	63A6	F59I0080
4059	超	F5B1	63A7	F59J0080
4060	酢	F5B2	63A8	F59K0080
4061	醋	F5B3	63A9	F59L0080
4062	醮	F5B4	63AA	F59M0080
4063	促	F5B5	63AD	F59P0080
4064	囑	F5B6	63AE	F59Q0080
4065	燭	F5B7	63B0	F59S0080
4066	矗	F5B8	63B1	F59T0080
4067	蜀	F5B9	63B2	F59U0080
4068	觸	F5BA	63B3	F59V0080
4069	寸	F5BB	63B6	F59Y0080
4070	付	F5BC	63B7	F59Z0080
4071	村	F5BD	63B8	F5A00080
4072	邨	F5BE	6B9F	F6FZ0080
4073	叢	F5BF	63B9	F5A10080
4074	塚	F5C0	63BA	F5A20080
4075	寵	F5C1	63BB	F5A30080
4076	恧	F5C2	6BA0	F6G00080
4077	慥	F5C3	6BA1	F6G10080
4078	摠	F5C4	63BD	F5A50080
4079	總	F5C5	63BE	F5A60080
4080	聰	F5C6	63BF	F5A70080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4081	蔥	F5C7	6BA2	F6G20080
4082	銃	F5C8	63C1	F5A90080
4083	撮	F5C9	63C2	F5AA0080
4084	催	F5CA	63C3	F5AB0080
4085	崔	F5CB	63C4	F5AC0080
4086	最	F5CC	63C6	F5AE0080
4087	墜	F5CD	63C7	F5AF0080
4088	抽	F5CE	63C8	F5AG0080
4089	推	F5CF	63C9	F5AH0080
4090	椎	F5D0	63CA	F5AI0080
4091	楸	F5D1	63CB	F5AJ0080
4092	樞	F5D2	63CD	F5AL0080
4093	湫	F5D3	63CE	F5AM0080
4094	皺	F5D4	63D0	F5AO0080
4095	秋	F5D5	63D1	F5AP0080
4096	芻	F5D6	63D3	F5AR0080
4097	萩	F5D7	63D4	F5AS0080
4098	諏	F5D8	6BA3	F6G30080
4099	趨	F5D9	63D5	F5AT0080
4100	追	F5DA	63D6	F5AU0080
4101	鄒	F5DB	63D7	F5AV0080
4102	酋	F5DC	63D8	F5AW0080
4103	醜	F5DD	63D9	F5AX0080
4104	錐	F5DE	63DB	F5AZ0080
4105	錘	F5DF	63DA	F5AY0080
4106	鎚	F5E0	6BA4	F6G40080

Line Number	Graphic	PC Code	Host Code	GCGID
4107	雛	F5E1	63DC	F5B00080
4108	騶	F5E2	6BA5	F6G50080
4109	鰵	F5E3	63DE	F5B20080
4110	丑	F5E4	63E1	F5B50080
4111	畜	F5E5	63E4	F5B80080
4112	祝	F5E6	63E3	F5B70080
4113	竺	F5E7	63E5	F5B90080
4114	筑	F5E8	63E6	F5BA0080
4115	築	F5E9	63E7	F5BB0080
4116	縮	F5EA	63E8	F5BC0080
4117	蓄	F5EB	63EA	F5BE0080
4118	蹙	F5EC	6BA6	F6G60080
4119	蹴	F5ED	63EB	F5BF0080
4120	軸	F5EE	63EC	F5BG0080
4121	逐	F5EF	63ED	F5BH0080
4122	春	F5F0	63EE	F5BI0080
4123	椿	F5F1	63EF	F5BJ0080
4124	瑋	F5F2	6BA7	F6G70080
4125	出	F5F3	63F0	F5BK0080
4126	朮	F5F4	6BA8	F6G80080
4127	黜	F5F5	63F1	F5BL0080
4128	充	F5F6	63F2	F5BM0080
4129	忠	F5F7	63F4	F5BO0080
4130	冲	F5F8	63F5	F5BP0080
4131	蟲	F5F9	63F6	F5BQ0080
4132	衝	F5FA	63F7	F5BR0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4133	衷	F5FB	63F8	F5BS0080
4134	悴	F5FC	63F9	F5BT0080
4135	臍	F5FD	63FA	F5BU0080
4136	萃	F5FE	63FB	F5BV0080
4137	贅	F6A1	6BA9	F6G90080
4138	取	F6A2	63FC	F5BW0080
4139	吹	F6A3	63FD	F5BX0080
4140	嘴	F6A4	63FE	F5BY0080
4141	娶	F6A5	6441	F5C10080
4142	就	F6A6	6442	F5C20080
4143	炊	F6A7	6444	F5C40080
4144	翠	F6A8	6445	F5C50080
4145	聚	F6A9	6446	F5C60080
4146	脆	F6AA	6447	F5C70080
4147	臭	F6AB	6448	F5C80080
4148	趣	F6AC	644A	F5CA0080
4149	醉	F6AD	644B	F5CB0080
4150	驟	F6AE	644C	F5CC0080
4151	鶩	F6AF	644D	F5CD0080
4152	側	F6B0	644F	F5CF0080
4153	仄	F6B1	644E	F5CE0080
4154	厠	F6B2	6BAA	F6GA0080
4155	惻	F6B3	6450	F5CG0080
4156	測	F6B4	6451	F5CH0080
4157	層	F6B5	6452	F5CI0080
4158	侈	F6B6	6453	F5CJ0080

Line Number	Graphic	PC Code	Host Code	GCGID
4159	值	F6B7	6454	F5CK0080
4160	嗤	F6B8	6455	F5CL0080
4161	峙	F6B9	6456	F5CM0080
4162	幟	F6BA	6458	F5CO0080
4163	恥	F6BB	6466	F5D20080
4164	梔	F6BC	645A	F5CQ0080
4165	治	F6BD	645B	F5CR0080
4166	淄	F6BE	645C	F5CS0080
4167	熾	F6BF	645D	F5CT0080
4168	痔	F6C0	645E	F5CU0080
4169	痴	F6C1	645F	F5CV0080
4170	癡	F6C2	6460	F5CW0080
4171	稚	F6C3	6462	F5CY0080
4172	穉	F6C4	6BAB	F6GB0080
4173	緇	F6C5	6463	F5CZ0080
4174	緻	F6C6	6464	F5D00080
4175	置	F6C7	6465	F5D10080
4176	致	F6C8	6467	F5D30080
4177	蚩	F6C9	6BAC	F6GC0080
4178	輜	F6CA	6468	F5D40080
4179	雉	F6CB	6461	F5CX0080
4180	馳	F6CC	6469	F5D50080
4181	齒	F6CD	646B	F5D70080
4182	則	F6CE	646C	F5D80080
4183	勅	F6CF	646D	F5D90080
4184	飭	F6D0	646E	F5DA0080




IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4185	親	F6D1	646F	F5DB0080
4186	七	F6D2	6470	F5DC0080
4187	柒	F6D3	6471	F5DD0080
4188	漆	F6D4	6472	F5DE0080
4189	侵	F6D5	6473	F5DF0080
4190	寢	F6D6	6474	F5DG0080
4191	枕	F6D7	6476	F5DI0080
4192	沈	F6D8	6477	F5DJ0080
4193	浸	F6D9	6478	F5DK0080
4194	琛	F6DA	6BAD	F6GD0080
4195	砧	F6DB	6479	F5DL0080
4196	針	F6DC	647A	F5DM0080
4197	鍼	F6DD	647B	F5DN0080
4198	蟄	F6DE	647C	F5DO0080
4199	秤	F6DF	647D	F5DP0080
4200	稱	F6E0	647E	F5DQ0080
4201	快	F6E1	647F	F5DR0080
4202	他	F6E2	6480	F5DS0080
4203	咤	F6E3	6BAE	F6GE0080
4204	唾	F6E4	6481	F5DT0080
4205	墮	F6E5	6482	F5DU0080
4206	妥	F6E6	6483	F5DV0080
4207	惰	F6E7	6484	F5DW0080
4208	打	F6E8	6485	F5DX0080
4209	拖	F6E9	6BAF	F6GF0080
4210	朶	F6EA	6486	F5DY0080

Line Number	Graphic	PC Code	Host Code	GCGID
4211	橈	F6EB	6487	F5DZ0080
4212	舵	F6EC	6488	F5E00080
4213	陀	F6ED	6489	F5E10080
4214	馱	F6EE	6BB0	F6GG0080
4215	駝	F6EF	648A	F5E20080
4216	倬	F6F0	648B	F5E30080
4217	卓	F6F1	648C	F5E40080
4218	啄	F6F2	648D	F5E50080
4219	坼	F6F3	6BB1	F6GH0080
4220	度	F6F4	648E	F5E60080
4221	托	F6F5	648F	F5E70080
4222	拓	F6F6	6491	F5E90080
4223	擢	F6F7	6492	F5EA0080
4224	皞	F6F8	6BB2	F6GI0080
4225	柝	F6F9	6493	F5EB0080
4226	濁	F6FA	6495	F5ED0080
4227	濯	F6FB	6496	F5EE0080
4228	琢	F6FC	6497	F5EF0080
4229	瑋	F6FD	6BB3	F6GJ0080
4230	託	F6FE	6498	F5EG0080
4231	鐸	F7A1	6499	F5EH0080
4232	吞	F7A2	649A	F5EI0080
4233	嘆	F7A3	649B	F5EJ0080
4234	坦	F7A4	649C	F5EK0080
4235	彈	F7A5	649D	F5EL0080
4236	憚	F7A6	649E	F5EM0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4237	歎	F7A7	649F	F5EN0080
4238	灘	F7A8	64A0	F5EO0080
4239	炭	F7A9	64A1	F5EP0080
4240	綻	F7AA	64A2	F5EQ0080
4241	誕	F7AB	64A3	F5ER0080
4242	奪	F7AC	64A4	F5ES0080
4243	脫	F7AD	64A5	F5ET0080
4244	探	F7AE	64A6	F5EU0080
4245	眈	F7AF	6BB4	F6GK0080
4246	耽	F7B0	64A7	F5EV0080
4247	貪	F7B1	64A8	F5EW0080
4248	塔	F7B2	64A9	F5EX0080
4249	搭	F7B3	64AA	F5EY0080
4250	榻	F7B4	64AB	F5EZ0080
4251	宕	F7B5	64AC	F5F00080
4252	帑	F7B6	64AD	F5F10080
4253	湯	F7B7	64AE	F5F20080
4254	糖	F7B8	6BB5	F6GL0080
4255	蕩	F7B9	64AF	F5F30080
4256	兌	F7BA	64B0	F5F40080
4257	台	F7BB	64B1	F5F50080
4258	太	F7BC	64B2	F5F60080
4259	怠	F7BD	64B3	F5F70080
4260	態	F7BE	64B4	F5F80080
4261	殆	F7BF	64B5	F5F90080
4262	汰	F7C0	64B6	F5FA0080

Line Number	Graphic	PC Code	Host Code	GCGID
4263	泰	F7C1	64B7	F5FB0080
4264	筭	F7C2	64B8	F5FC0080
4265	胎	F7C3	64B9	F5FD0080
4266	苔	F7C4	64BA	F5FE0080
4267	跽	F7C5	64BB	F5FF0080
4268	郤	F7C6	64BC	F5FG0080
4269	颯	F7C7	64BD	F5FH0080
4270	宅	F7C8	64BF	F5FJ0080
4271	擇	F7C9	64C0	F5FK0080
4272	澤	F7CA	64C1	F5FL0080
4273	撐	F7CB	64C3	F5FN0080
4274	攄	F7CC	64C4	F5FO0080
4275	兔	F7CD	64C5	F5FP0080
4276	吐	F7CE	64C6	F5FQ0080
4277	土	F7CF	64C7	F5FR0080
4278	討	F7D0	64C8	F5FS0080
4279	慟	F7D1	64C9	F5FT0080
4280	桶	F7D2	64CA	F5FU0080
4281	洞	F7D3	64CB	F5FV0080
4282	痛	F7D4	64CC	F5FW0080
4283	筒	F7D5	64CD	F5FX0080
4284	統	F7D6	64CE	F5FY0080
4285	通	F7D7	64CF	F5FZ0080
4286	堆	F7D8	64D0	F5G00080
4287	槌	F7D9	6BB6	F6GM0080
4288	腿	F7DA	64D1	F5G10080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4289	褪	F7DB	64D2	F5G20080
4290	退	F7DC	64D3	F5G30080
4291	頰	F7DD	64D4	F5G40080
4292	偷	F7DE	64D5	F5G50080
4293	套	F7DF	64D6	F5G60080
4294	妬	F7E0	64D7	F5G70080
4295	投	F7E1	64D8	F5G80080
4296	透	F7E2	64D9	F5G90080
4297	鬪	F7E3	64DA	F5GA0080
4298	慝	F7E4	64DB	F5GB0080
4299	特	F7E5	64DC	F5GC0080
4300	闖	F7E6	6BB7	F6GN0080
4301	坡	F7E7	64DE	F5GE0080
4302	婆	F7E8	64DD	F5GD0080
4303	巴	F7E9	64DF	F5GF0080
4304	把	F7EA	64E0	F5GG0080
4305	播	F7EB	64E1	F5GH0080
4306	擺	F7EC	6BB8	F6GO0080
4307	杷	F7ED	64E2	F5GI0080
4308	波	F7EE	64E3	F5GJ0080
4309	派	F7EF	64E4	F5GK0080
4310	爬	F7F0	64E5	F5GL0080
4311	琶	F7F1	64E6	F5GM0080
4312	破	F7F2	64E7	F5GN0080
4313	罷	F7F3	64E8	F5GO0080
4314	芭	F7F4	64E9	F5GP0080

Line Number	Graphic	PC Code	Host Code	GCGID
4315	跛	F7F5	64EA	F5GQ0080
4316	頗	F7F6	64EB	F5GR0080
4317	判	F7F7	64ED	F5GT0080
4318	坂	F7F8	64EC	F5GS0080
4319	板	F7F9	64EE	F5GU0080
4320	版	F7FA	64EF	F5GV0080
4321	瓣	F7FB	64F2	F5GY0080
4322	販	F7FC	64F0	F5GW0080
4323	辦	F7FD	64F1	F5GX0080
4324	販	F7FE	6BB9	F6GP0080
4325	阪	F8A1	64F3	F5GZ0080
4326	八	F8A2	64F4	F5H00080
4327	叭	F8A3	64F5	F5H10080
4328	捌	F8A4	64F6	F5H20080
4329	佩	F8A5	64F7	F5H30080
4330	唄	F8A6	64F8	F5H40080
4331	悖	F8A7	64F9	F5H50080
4332	敗	F8A8	6542	F5HE0080
4333	沛	F8A9	64FA	F5H60080
4334	涓	F8AA	64FB	F5H70080
4335	牌	F8AB	64FC	F5H80080
4336	狽	F8AC	64FD	F5H90080
4337	稗	F8AD	64FE	F5HA0080
4338	霸	F8AE	6543	F5HF0080
4339	貝	F8AF	6541	F5HD0080
4340	彭	F8B0	6544	F5HG0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4341	澎	F8B1	6545	F5HH0080
4342	烹	F8B2	6546	F5HI0080
4343	膨	F8B3	6547	F5HJ0080
4344	復	F8B4	6548	F5HK0080
4345	便	F8B5	6549	F5HL0080
4346	偏	F8B6	654A	F5HM0080
4347	扁	F8B7	654B	F5HN0080
4348	片	F8B8	654C	F5HO0080
4349	篇	F8B9	654D	F5HP0080
4350	編	F8BA	654E	F5HQ0080
4351	翩	F8BB	654F	F5HR0080
4352	遍	F8BC	6551	F5HT0080
4353	鞭	F8BD	6552	F5HU0080
4354	騙	F8BE	6BBA	F6GQ0080
4355	眨	F8BF	6553	F5HV0080
4356	坪	F8C0	6554	F5HW0080
4357	平	F8C1	6555	F5HX0080
4358	枰	F8C2	6BBB	F6GR0080
4359	萍	F8C3	6556	F5HY0080
4360	評	F8C4	6557	F5HZ0080
4361	吠	F8C5	6558	F5I00080
4362	嬖	F8C6	6559	F5I10080
4363	幣	F8C7	655A	F5I20080
4364	廢	F8C8	655B	F5I30080
4365	弊	F8C9	655C	F5I40080
4366	斃	F8CA	655D	F5I50080

Line Number	Graphic	PC Code	Host Code	GCGID
4367	肺	F8CB	655E	F5I60080
4368	蔽	F8CC	655F	F5I70080
4369	閉	F8CD	6560	F5I80080
4370	陞	F8CE	6561	F5I90080
4371	佈	F8CF	6562	F5IA0080
4372	包	F8D0	6563	F5IB0080
4373	匍	F8D1	6564	F5IC0080
4374	匏	F8D2	6565	F5ID0080
4375	咆	F8D3	6566	F5IE0080
4376	哺	F8D4	6567	F5IF0080
4377	圃	F8D5	6568	F5IG0080
4378	布	F8D6	656A	F5II0080
4379	怖	F8D7	656B	F5IJ0080
4380	拋	F8D8	656D	F5IL0080
4381	抱	F8D9	656C	F5IK0080
4382	捕	F8DA	656E	F5IM0080
4383	暴	F8DB	6BBC	F6GS0080
4384	泡	F8DC	656F	F5IN0080
4385	浦	F8DD	6570	F5IO0080
4386	庖	F8DE	6572	F5IQ0080
4387	砲	F8DF	6573	F5IR0080
4388	胞	F8E0	6574	F5IS0080
4389	脯	F8E1	6575	F5IT0080
4390	苞	F8E2	6BBD	F6GT0080
4391	葡	F8E3	6577	F5IV0080
4392	蒲	F8E4	6578	F5IW0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4393	袍	F8E5	6579	F5IX0080
4394	褒	F8E6	657A	F5IY0080
4395	逋	F8E7	6BBE	F6GU0080
4396	鋪	F8E8	657C	F5J00080
4397	飽	F8E9	657E	F5J20080
4398	鮑	F8EA	657F	F5J30080
4399	幅	F8EB	6580	F5J40080
4400	暴	F8EC	6581	F5J50080
4401	曝	F8ED	6BBF	F6GV0080
4402	瀑	F8EE	6582	F5J60080
4403	爆	F8EF	6583	F5J70080
4404	輻	F8F0	6BC0	F6GW0080
4405	倭	F8F1	6584	F5J80080
4406	剽	F8F2	6585	F5J90080
4407	彪	F8F3	6586	F5JA0080
4408	慄	F8F4	6587	F5JB0080
4409	杓	F8F5	6588	F5JC0080
4410	標	F8F6	6589	F5JD0080
4411	漂	F8F7	658A	F5JE0080
4412	瓢	F8F8	658B	F5JF0080
4413	票	F8F9	658C	F5JG0080
4414	表	F8FA	658D	F5JH0080
4415	豹	F8FB	658E	F5JI0080
4416	飈	F8FC	6BC1	F6GX0080
4417	飄	F8FD	658F	F5JJ0080
4418	驃	F8FE	6BC2	F6GY0080

Line Number	Graphic	PC Code	Host Code	GCGID
4419	品	F9A1	6591	F5JL0080
4420	稟	F9A2	6592	F5JM0080
4421	楓	F9A3	6594	F5JO0080
4422	諷	F9A4	6595	F5JP0080
4423	豐	F9A5	6596	F5JQ0080
4424	風	F9A6	6597	F5JR0080
4425	馮	F9A7	6593	F5JN0080
4426	彼	F9A8	6598	F5JS0080
4427	披	F9A9	6599	F5JT0080
4428	疲	F9AA	659A	F5JU0080
4429	皮	F9AB	659B	F5JV0080
4430	被	F9AC	659D	F5JX0080
4431	避	F9AD	659E	F5JY0080
4432	陂	F9AE	6BC3	F6GZ0080
4433	匹	F9AF	659F	F5JZ0080
4434	弼	F9B0	65A0	F5K00080
4435	必	F9B1	65A1	F5K10080
4436	泌	F9B2	65A2	F5K20080
4437	秘	F9B3	6BC4	F6H00080
4438	畢	F9B4	65A3	F5K30080
4439	疋	F9B5	65A4	F5K40080
4440	筆	F9B6	65A5	F5K50080
4441	苾	F9B7	6BC5	F6H10080
4442	秘	F9B8	6BC6	F6H20080
4443	乏	F9B9	65A7	F5K70080
4444	逼	F9BA	65A8	F5K80080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4445	下	F9BB	65A9	F5K90080
4446	何	F9BC	65AA	F5KA0080
4447	厦	F9BD	6BC7	F6H30080
4448	夏	F9BE	65AB	F5KB0080
4449	廈	F9BF	65AC	F5KC0080
4450	昷	F9C0	65AD	F5KD0080
4451	河	F9C1	65AE	F5KE0080
4452	瑕	F9C2	65AF	F5KF0080
4453	荷	F9C3	65B1	F5KH0080
4454	蝦	F9C4	65B0	F5KG0080
4455	賀	F9C5	65B2	F5KI0080
4456	遐	F9C6	65B3	F5KJ0080
4457	霞	F9C7	65B4	F5KK0080
4458	蝦	F9C8	65B5	F5KL0080
4459	壑	F9C9	65B6	F5KM0080
4460	學	F9CA	65B7	F5KN0080
4461	虐	F9CB	65B9	F5KP0080
4462	諺	F9CC	65BA	F5KQ0080
4463	鶴	F9CD	65BB	F5KR0080
4464	寒	F9CE	65BC	F5KS0080
4465	恨	F9CF	65BD	F5KT0080
4466	悍	F9D0	65BE	F5KU0080
4467	旱	F9D1	65BF	F5KV0080
4468	汗	F9D2	65C0	F5KW0080
4469	漢	F9D3	65C1	F5KX0080
4470	澣	F9D4	65C2	F5KY0080

Line Number	Graphic	PC Code	Host Code	GCGID
4471	瀚	F9D5	6BC8	F6H40080
4472	罕	F9D6	65C3	F5KZ0080
4473	翰	F9D7	65C4	F5L00080
4474	閑	F9D8	65C7	F5L30080
4475	閒	F9D9	65C6	F5L20080
4476	限	F9DA	65C8	F5L40080
4477	韓	F9DB	65C9	F5L50080
4478	割	F9DC	65CB	F5L70080
4479	轄	F9DD	65CC	F5L80080
4480	函	F9DE	65CD	F5L90080
4481	含	F9DF	65CE	F5LA0080
4482	咸	F9E0	65CF	F5LB0080
4483	啣	F9E1	65D0	F5LC0080
4484	喊	F9E2	65D1	F5LD0080
4485	檻	F9E3	65D2	F5LE0080
4486	涵	F9E4	65D3	F5LF0080
4487	緘	F9E5	65D4	F5LG0080
4488	艦	F9E6	65D5	F5LH0080
4489	銜	F9E7	6BC9	F6H50080
4490	陷	F9E8	65D6	F5LI0080
4491	鹹	F9E9	6BCA	F6H60080
4492	合	F9EA	65D7	F5LJ0080
4493	哈	F9EB	65D8	F5LK0080
4494	盒	F9EC	65D9	F5LL0080
4495	蛤	F9ED	65DA	F5LM0080
4496	閣	F9EE	65DB	F5LN0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 29 (Page 26 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4497	闖	F9EF	6BCB	F6H70080
4498	陝	F9F0	65DC	F5LO0080
4499	亢	F9F1	65DD	F5LP0080
4500	仇	F9F2	65DE	F5LQ0080
4501	姪	F9F3	65DF	F5LR0080
4502	嫦	F9F4	6BCC	F6H80080
4503	巷	F9F5	65E0	F5LS0080
4504	恒	F9F6	65E1	F5LT0080
4505	抗	F9F7	65E2	F5LU0080
4506	杭	F9F8	65E3	F5LV0080
4507	桁	F9F9	65E4	F5LW0080
4508	沆	F9FA	65E5	F5LX0080
4509	港	F9FB	65E6	F5LY0080
4510	缸	F9FC	65E8	F5M00080
4511	肛	F9FD	65E9	F5M10080
4512	航	F9FE	65EA	F5M20080
4513	行	FAA1	6BCD	F6H90080
4514	降	FAA2	65EB	F5M30080
4515	項	FAA3	65EC	F5M40080
4516	亥	FAA4	65ED	F5M50080
4517	偕	FAA5	65EE	F5M60080
4518	咳	FAA6	65EF	F5M70080
4519	垓	FAA7	65F1	F5M90080
4520	奚	FAA8	65F0	F5M80080
4521	孩	FAA9	65F2	F5MA0080
4522	害	FAAA	65F3	F5MB0080

Table 29 (Page 26 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4523	懈	FAAB	65F5	F5MD0080
4524	楷	FAAC	65F6	F5ME0080
4525	海	FAAD	65F7	F5MF0080
4526	漉	FAAE	6BCE	F6HA0080
4527	蟹	FAAF	65F8	F5MG0080
4528	解	FAB0	65F9	F5MH0080
4529	該	FAB1	65FA	F5MI0080
4530	諧	FAB2	65FB	F5MJ0080
4531	邂	FAB3	65FC	F5MK0080
4532	駭	FAB4	65FD	F5ML0080
4533	骸	FAB5	65FE	F5MM0080
4534	劾	FAB6	6641	F5MP0080
4535	核	FAB7	6642	F5MQ0080
4536	倖	FAB8	6643	F5MR0080
4537	幸	FAB9	6644	F5MS0080
4538	杏	FABA	6645	F5MT0080
4539	荇	FABB	6BCF	F6HB0080
4540	行	FABC	6646	F5MU0080
4541	享	FABD	6647	F5MV0080
4542	向	FABE	6648	F5MW0080
4543	嚮	FABF	6649	F5MX0080
4544	珣	FAC0	664B	F5MZ0080
4545	鄉	FAC1	664A	F5MY0080
4546	響	FAC2	664C	F5N00080
4547	餉	FAC3	664D	F5N10080
4548	饗	FAC4	664E	F5N20080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4549	香	FAC5	664F	F5N30080
4550	嘘	FAC6	6650	F5N40080
4551	墟	FAC7	6651	F5N50080
4552	虚	FAC8	6652	F5N60080
4553	許	FAC9	6653	F5N70080
4554	憲	FACA	6654	F5N80080
4555	德	FACB	6BD0	F6HC0080
4556	獻	FACC	6656	F5NA0080
4557	軒	FACD	6655	F5N90080
4558	歇	FACE	6657	F5NB0080
4559	險	FACF	6658	F5NC0080
4560	驗	FAD0	6659	F5ND0080
4561	奕	FAD1	665A	F5NE0080
4562	赫	FAD2	665B	F5NF0080
4563	赫	FAD3	665C	F5NG0080
4564	革	FAD4	665D	F5NH0080
4565	俚	FAD5	6BD1	F6HD0080
4566	峴	FAD6	665E	F5NI0080
4567	弦	FAD7	665F	F5NJ0080
4568	懸	FAD8	6660	F5NK0080
4569	睨	FAD9	6BD5	F6HH0080
4570	洫	FADA	6BD3	F6HF0080
4571	炫	FADB	6661	F5NL0080
4572	玄	FADC	6663	F5NN0080
4573	玆	FADD	6BD4	F6HG0080
4574	現	FADE	6662	F5NM0080

Line Number	Graphic	PC Code	Host Code	GCGID
4575	眩	FADF	6664	F5NO0080
4576	睨	FAE0	6BD2	F6HE0080
4577	絃	FAE1	6665	F5NP0080
4578	絢	FAE2	6666	F5NQ0080
4579	縣	FAE3	6667	F5NR0080
4580	舷	FAE4	6668	F5NS0080
4581	銜	FAE5	6669	F5NT0080
4582	見	FAE6	666A	F5NU0080
4583	賢	FAE7	666B	F5NV0080
4584	鉉	FAE8	666C	F5NW0080
4585	顯	FAE9	666D	F5NX0080
4586	子	FAEA	666E	F5NY0080
4587	穴	FAEB	666F	F5NZ0080
4588	血	FAEC	6670	F5O00080
4589	頁	FAED	6671	F5O10080
4590	嫌	FAEE	6672	F5O20080
4591	俠	FAEF	6674	F5O40080
4592	協	FAF0	6675	F5O50080
4593	夾	FAF1	6676	F5O60080
4594	峽	FAF2	6677	F5O70080
4595	挾	FAF3	6678	F5O80080
4596	浹	FAF4	6679	F5O90080
4597	狹	FAF5	667A	F5OA0080
4598	脅	FAF6	667D	F5OD0080
4599	脇	FAF7	667C	F5OC0080
4600	莢	FAF8	667E	F5OE0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4601	缺	FAF9	6680	F5OG0080
4602	颊	FAFA	6681	F5OH0080
4603	亨	FAFB	6682	F5OI0080
4604	兄	FAFC	6686	F5OM0080
4605	刑	FAFD	6683	F5OJ0080
4606	型	FAFE	6684	F5OK0080
4607	形	FBA1	6685	F5OL0080
4608	洞	FBA2	6BD6	F6HI0080
4609	荣	FBA3	6BD7	F6HJ0080
4610	澄	FBA4	6687	F5ON0080
4611	澄	FBA5	6BD8	F6HK0080
4612	炯	FBA6	6688	F5OO0080
4613	荧	FBA7	6BD9	F6HL0080
4614	珩	FBA8	6689	F5OP0080
4615	莹	FBA9	6BDA	F6HM0080
4616	荇	FBAA	668A	F5OQ0080
4617	萤	FBAB	668B	F5OR0080
4618	衡	FBAC	668C	F5OS0080
4619	迥	FBAD	6BDB	F6HN0080
4620	邢	FBAE	668D	F5OT0080
4621	筌	FBAF	668E	F5OU0080
4622	馨	FBB0	668F	F5OV0080
4623	兮	FBB1	6690	F5OW0080
4624	彗	FBB2	6691	F5OX0080
4625	惠	FBB3	6692	F5OY0080
4626	慧	FBB4	6693	F5OZ0080

Line Number	Graphic	PC Code	Host Code	GCGID
4627	嗜	FBB5	6BDC	F6HO0080
4628	蕙	FBB6	6694	F5P00080
4629	蹊	FBB7	6BDD	F6HP0080
4630	醯	FBB8	6695	F5P10080
4631	鞋	FBB9	6696	F5P20080
4632	乎	FBBA	6697	F5P30080
4633	互	FBBB	6698	F5P40080
4634	呼	FBBC	669A	F5P60080
4635	壕	FBBD	669C	F5P80080
4636	壺	FBBE	669B	F5P70080
4637	好	FBBF	669D	F5P90080
4638	岫	FBC0	6BDE	F6HQ0080
4639	弧	FBC1	669E	F5PA0080
4640	户	FBC2	66A0	F5PC0080
4641	扈	FBC3	66B8	F5Q00080
4642	昊	FBC4	669F	F5PB0080
4643	皓	FBC5	6BDF	F6HR0080
4644	毫	FBC6	66A1	F5PD0080
4645	浩	FBC7	66A2	F5PE0080
4646	溟	FBC8	66A3	F5PF0080
4647	湖	FBC9	66A4	F5PG0080
4648	澌	FBCA	66A5	F5PH0080
4649	澍	FBCB	66A6	F5PI0080
4650	濠	FBCD	66A8	F5PK0080
4651	濩	FBCD	66A7	F5PJ0080
4652	灏	FBCE	66A9	F5PL0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4653	狐	FBCF	66AA	F5PM0080
4654	琥	FBD0	6BE0	F6HS0080
4655	瑚	FBD1	66AB	F5PN0080
4656	瓠	FBD2	66AC	F5PO0080
4657	皓	FBD3	66AD	F5PP0080
4658	枯	FBD4	66AF	F5PR0080
4659	糊	FBD5	66B0	F5PS0080
4660	縞	FBD6	66B1	F5PT0080
4661	胡	FBD7	66B2	F5PU0080
4662	芦	FBD8	6BE1	F6HT0080
4663	葫	FBD9	66B3	F5PV0080
4664	蒿	FBDA	6BE2	F6HU0080
4665	虎	FBDB	66B4	F5PW0080
4666	號	FBDC	66B5	F5PX0080
4667	蝴	FBDD	66B6	F5PY0080
4668	護	FBDE	66B7	F5PZ0080
4669	豪	FBDF	6699	F5P50080
4670	鎬	FBE0	66BA	F5Q20080
4671	護	FBE1	66BB	F5Q30080
4672	顛	FBE2	66BC	F5Q40080
4673	惑	FBE3	66BD	F5Q50080
4674	或	FBE4	66BE	F5Q60080
4675	酷	FBE5	66BF	F5Q70080
4676	婚	FBE6	66C0	F5Q80080
4677	昏	FBE7	66C1	F5Q90080
4678	混	FBE8	66C2	F5QA0080

Line Number	Graphic	PC Code	Host Code	GCGID
4679	渾	FBE9	66C3	F5QB0080
4680	瓊	FBEA	66C4	F5QC0080
4681	魂	FBEB	66C5	F5QD0080
4682	忽	FBEC	66C6	F5QE0080
4683	惚	FBED	66C7	F5QF0080
4684	笏	FBEE	66C8	F5QG0080
4685	哄	FBEF	66CB	F5QJ0080
4686	弘	FBF0	66CA	F5QI0080
4687	汞	FBF1	66CC	F5QK0080
4688	泓	FBF2	66CD	F5QL0080
4689	洪	FBF3	66CE	F5QM0080
4690	烘	FBF4	6BE3	F6HV0080
4691	紅	FBF5	66D0	F5QO0080
4692	虹	FBF6	66D1	F5QP0080
4693	訃	FBF7	66D2	F5QQ0080
4694	鴻	FBF8	66CF	F5QN0080
4695	化	FBF9	66D3	F5QR0080
4696	和	FBFA	66DA	F5QY0080
4697	嬋	FBFB	66D4	F5QS0080
4698	樺	FBFC	66D5	F5QT0080
4699	火	FBFD	66D6	F5QU0080
4700	畫	FBFE	66D8	F5QW0080
4701	禍	FCA1	66D7	F5QV0080
4702	禾	FCA2	66D9	F5QX0080
4703	花	FCA3	66DB	F5QZ0080
4704	華	FCA4	66DC	F5R00080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4705	話	FCA5	66DD	F5R10080
4706	譁	FCA6	6BE4	F6HW0080
4707	貨	FCA7	66DF	F5R30080
4708	靴	FCA8	66DE	F5R20080
4709	廓	FCA9	66E0	F5R40080
4710	擴	FCAA	66E1	F5R50080
4711	攪	FCAB	66E2	F5R60080
4712	確	FCAC	66E3	F5R70080
4713	碯	FCAD	66E4	F5R80080
4714	穫	FCAE	66E5	F5R90080
4715	丸	FCAF	66E7	F5RB0080
4716	喚	FCB0	66E8	F5RC0080
4717	奩	FCB1	6BE5	F6HX0080
4718	宦	FCB2	66EA	F5RE0080
4719	幻	FCB3	66EB	F5RF0080
4720	患	FCB4	66EC	F5RG0080
4721	換	FCB5	66EE	F5RI0080
4722	歡	FCB6	66F0	F5RK0080
4723	皖	FCB7	6BE6	F6HY0080
4724	桓	FCB8	66EF	F5RJ0080
4725	渙	FCB9	66F1	F5RL0080
4726	煥	FCBA	66F2	F5RM0080
4727	環	FCBB	66F3	F5RN0080
4728	紈	FCBC	66F4	F5RO0080
4729	還	FCBD	66F5	F5RP0080
4730	驩	FCBE	66F6	F5RQ0080

Line Number	Graphic	PC Code	Host Code	GCGID
4731	鰥	FCCF	66F7	F5RR0080
4732	活	FCC0	66F9	F5RT0080
4733	滑	FCC1	66FA	F5RU0080
4734	猾	FCC2	66FB	F5RV0080
4735	豁	FCC3	66FC	F5RW0080
4736	闊	FCC4	66FD	F5RX0080
4737	風	FCC5	66FE	F5RY0080
4738	幌	FCC6	6BE7	F6HZ0080
4739	徨	FCC7	6742	F5S20080
4740	恍	FCC8	6744	F5S40080
4741	惶	FCC9	6746	F5S60080
4742	愧	FCCA	6BE8	F6I00080
4743	慌	FCCB	6745	F5S50080
4744	晃	FCCC	6747	F5S70080
4745	眈	FCCD	6BE9	F6I10080
4746	槐	FCCE	6BEA	F6I20080
4747	況	FCCF	6748	F5S80080
4748	惶	FCD0	6BEB	F6I30080
4749	滉	FCD1	6749	F5S90080
4750	潢	FCD2	6BEC	F6I40080
4751	煌	FCD3	674A	F5SA0080
4752	璜	FCD4	6BED	F6I50080
4753	皇	FCD5	674B	F5SB0080
4754	篁	FCD6	674C	F5SC0080
4755	簧	FCD7	6BEE	F6I60080
4756	荒	FCD8	674D	F5SD0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4757	蝗	FCD9	674E	F5SE0080
4758	遑	FCDA	674F	F5SF0080
4759	隍	FCDB	6750	F5SG0080
4760	黃	FCDC	6751	F5SH0080
4761	匯	FCDD	6BEF	F6I70080
4762	回	FCDE	6752	F5SI0080
4763	廻	FCDF	6753	F5SJ0080
4764	徊	FCE0	6754	F5SK0080
4765	恢	FCE1	6755	F5SL0080
4766	悔	FCE2	6756	F5SM0080
4767	懷	FCE3	6757	F5SN0080
4768	晦	FCE4	6758	F5SO0080
4769	會	FCE5	6759	F5SP0080
4770	檜	FCE6	675A	F5SQ0080
4771	淮	FCE7	675B	F5SR0080
4772	滄	FCE8	675C	F5SS0080
4773	灰	FCE9	675D	F5ST0080
4774	獫	FCEA	675E	F5SU0080
4775	繪	FCEB	675F	F5SV0080
4776	膾	FCEC	6760	F5SW0080
4777	茴	FCED	6BF0	F6I80080
4778	蛔	FCEE	6761	F5SX0080
4779	誨	FCEF	6762	F5SY0080
4780	賄	FCF0	6763	F5SZ0080
4781	劃	FCF1	6764	F5T00080
4782	獲	FCF2	6765	F5T10080

Line Number	Graphic	PC Code	Host Code	GCGID
4783	弘	FCF3	6BF1	F6I90080
4784	橫	FCF4	6766	F5T20080
4785	鑽	FCF5	6BF2	F6IA0080
4786	哮	FCF6	6767	F5T30080
4787	嘯	FCF7	6768	F5T40080
4788	孝	FCF8	676A	F5T60080
4789	效	FCF9	676B	F5T70080
4790	斂	FCFA	6BF3	F6IB0080
4791	曉	FCFB	676C	F5T80080
4792	梟	FCFC	676D	F5T90080
4793	濼	FCFD	6BF4	F6IC0080
4794	濬	FCFE	6BF5	F6ID0080
4795	爻	FDA1	676E	F5TA0080
4796	肴	FDA2	676F	F5TB0080
4797	醇	FDA3	6770	F5TC0080
4798	驍	FDA4	6BF6	F6IE0080
4799	侯	FDA5	6771	F5TD0080
4800	候	FDA6	6772	F5TE0080
4801	厚	FDA7	6773	F5TF0080
4802	后	FDA8	6774	F5TG0080
4803	吼	FDA9	6775	F5TH0080
4804	喉	FDAA	6776	F5TI0080
4805	嗅	FDAB	6777	F5TJ0080
4806	喉	FDAC	6BF7	F6IF0080
4807	後	FDAD	6778	F5TK0080
4808	朽	FDAE	6779	F5TL0080



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Table 29 (Page 32 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4809	煦	FDAF	6BF8	F6IG0080
4810	翊	FDB0	6BF9	F6IH0080
4811	逅	FDB1	677B	F5TN0080
4812	勛	FDB2	6BFA	F6II0080
4813	勳	FDB3	677D	F5TP0080
4814	塤	FDB4	677E	F5TQ0080
4815	堦	FDB5	677F	F5TR0080
4816	焄	FDB6	6781	F5TT0080
4817	熏	FDB7	6782	F5TU0080
4818	燠	FDB8	6783	F5TV0080
4819	薰	FDB9	6784	F5TW0080
4820	訓	FDBA	6785	F5TX0080
4821	暈	FDBB	6780	F5TS0080
4822	蕘	FDBC	6786	F5TY0080
4823	暄	FDBD	6787	F5TZ0080
4824	暄	FDBE	6BFB	F6IJ0080
4825	煊	FDBF	6BFC	F6IK0080
4826	萱	FDC0	6788	F5U00080
4827	卉	FDC1	6789	F5U10080
4828	喙	FDC2	678A	F5U20080
4829	毀	FDC3	678B	F5U30080
4830	彙	FDC4	678C	F5U40080
4831	徽	FDC5	678D	F5U50080
4832	揮	FDC6	678E	F5U60080
4833	暉	FDC7	678F	F5U70080
4834	燁	FDC8	6790	F5U80080

Table 29 (Page 32 of 33). Hanja Set, DBCS-PC				
Line Number	Graphic	PC Code	Host Code	GCGID
4835	諱	FDC9	6791	F5U90080
4836	輝	FDCA	6792	F5UA0080
4837	麾	FDCB	6793	F5UB0080
4838	休	FDCC	6794	F5UC0080
4839	携	FDCD	6795	F5UD0080
4840	侏	FDCE	6796	F5UE0080
4841	畦	FDCF	6797	F5UF0080
4842	虧	FDD0	6798	F5UG0080
4843	恤	FDD1	6799	F5UH0080
4844	譎	FDD2	679A	F5UI0080
4845	鵠	FDD3	679B	F5UJ0080
4846	兇	FDD4	679E	F5UM0080
4847	凶	FDD5	679C	F5UK0080
4848	匈	FDD6	679D	F5UL0080
4849	洵	FDD7	679F	F5UN0080
4850	胸	FDD8	67A0	F5UO0080
4851	黑	FDD9	67A1	F5UP0080
4852	昕	FDDA	67A3	F5UR0080
4853	欣	Fddb	67A4	F5US0080
4854	炘	FDDC	6BFD	F6IL0080
4855	痕	FDDD	67A5	F5UT0080
4856	吃	FDDE	67A6	F5UU0080
4857	屹	FDDF	67A7	F5UV0080
4858	紘	FDE0	67A8	F5UW0080
4859	訖	FDE1	6BFE	F6IM0080
4860	欠	FDE2	67AA	F5UY0080

**IBM Korean Graphic Character Set**

DBCS-Host and DBCS-PC (For Windows Environment)

Line Number	Graphic	PC Code	Host Code	GCGID
4861	欽	FDE3	67AC	F5V00080
4862	歆	FDE4	67AB	F5UZ0080
4863	吸	FDE5	67AD	F5V10080
4864	恰	FDE6	67AE	F5V20080
4865	洽	FDE7	67AF	F5V30080
4866	翕	FDE8	6C41	F6IP0080
4867	興	FDE9	67B0	F5V40080
4868	僖	FDEA	67B1	F5V50080
4869	熙	FDEB	67BC	F5VG0080
4870	喜	FDEC	67B2	F5V60080
4871	噫	FDED	67B3	F5V70080
4872	囍	FDEE	6C42	F6IQ0080
4873	姬	FDEF	67B4	F5V80080
4874	嬉	FDF0	67B5	F5V90080
4875	希	FDF1	67B6	F5VA0080
4876	憲	FDF2	67B8	F5VC0080
4877	愔	FDF3	6C43	F6IR0080
4878	戲	FDF4	67B9	F5VD0080
4879	晞	FDF5	6C44	F6IS0080
4880	曦	FDF6	67B7	F5VB0080
4881	熙	FDF7	67BB	F5VF0080
4882	烹	FDF8	67BD	F5VH0080
4883	焙	FDF9	6C45	F6IT0080
4884	犧	FDF A	67BA	F5VE0080
4885	禧	FDFB	67BE	F5VI0080
4886	稀	FDFC	67BF	F5VJ0080

Line Number	Graphic	PC Code	Host Code	GCGID
4887	羲	FDFD	67C0	F5VK0080
4888	詰	FDFE	67C1	F5VL0080

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Supplementary Information

10. Definition of Terms

The following terms are defined for the purposes of this document.

10.1 Product

A hardware or software unit that is individually packaged, that is marketable, and to which a type number/program number or equivalence has been assigned.

10.2 Graphic Character

A graphic symbol, such as a numeric, alphabetic, special, Hangeul or Hanja character.

10.3 User Definable Character

A *graphic character* whose graphic shape is definable by users.

10.4 Graphic Character Global Identifier (GCGID)

An up to eight-character identifier assigned to each *graphic character*. See C-H 3-3220-055.

10.5 Graphic Character UCS Identifier (GCUID)

An eight-character identifier assigned to each *graphic character* that is defined based on UCS specification. For the character corresponding to UCS-2 character, it takes the form 'U000xxxx' (xxxx: UCS-2 code point). See C-H 3-3220-055.

10.6 Universal Multiple-Octet Coded Character Set (UCS)

A *graphic character set* defined in ISO/IEC 10646-1

10.7 Graphic Character Set

A set of *graphic characters*, treated as an entity.

10.8 Byte

A unit of string consisting of 8 bits.

10.9 Unrestricted Graphic Character Set

A registered *graphic character set* that has been approved by all operating units, and has been placed in the category of “*unrestricted*.”

10.10 Restricted Graphic Character Set

A registered *graphic character set* that has not been approved by all operating units, or that is obsolete, and has been placed in the category of “*restricted*.”

10.11 Graphic Character Set Global Identifier (GCSGID)

A 5-digit decimal identifier assigned to a *graphic character set*. See C-H 3-3220-050.

10.12 Code

A system of bit-patterns to which specific *graphic* or control meanings have been assigned.

10.13 Code Point

One of the bit-patterns specified by a *code*.

10.14 Code Page

A specification of *code points* for each *graphic character* in a set, or in a collection of *graphic character sets*. Within a given *code page*, a *code point* can have only one specific meaning.

10.15 Registered Code Page

A *code page* that has been registered and assigned a *CPGID*.

10.16 Unrestricted Code Page

A *registered code page* that has been approved by all affected operating units, and has been placed in the category of “*unrestricted*.”

10.17 Restricted Code Page

A *registered code page* that has not been approved by all operating units, or that is obsolete, and that has been placed in the category of “*restricted*.”

10.18 Code Page Global Identifier (CPGID)

A 5-digit decimal identifier assigned to a *code page*. See C-H 3-3220-050.

10.19 Coded Graphic Character

A *graphic character* with its assigned *code point*.

10.20 Coded Graphic Character Set

A set of *graphic characters* with their assigned *code points*.

IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

10.21 Registered Coded Graphic Character Set

A coded graphic character set, whose graphic character set and code page have both been registered.

10.22 Registered Code Page Translation Correspondences

The bit-patterns used to translate code points on one code page to another code page.

10.23 Coded Graphic Character Set Global Identifier (CGCSGID)

A 10-digit decimal identifier consisting of the concatenation of a graphic character set global identifier (GCSGID) and a code page global identifier (CPGID). The CGCSGID is also represented as the concatenation of the hexadecimal representations of the GCSGID and CPGID. See C-H 3-3220-050.

10.23.1 EBCDIC. Abbreviation of Extended BCD Interchange Code which is defined in C-S 3-3220-002, EBCDIC.

10.23.2 PC Code. A single-byte code page which is primarily used in the personal computer environment. PC Code are usually based on ISO 646.

10.23.3 SBCS. Abbreviation of Single-Byte Character Set. Single-Byte Character Set is a graphic character set in which each character is represented by one byte.

10.24 DBCS

Abbreviation of a Double-Byte Character Set. It is a graphic character set in which each character is represented by two bytes. See C-S 3-3220-102 for detailed explanation.

10.25 DBCS-Host

A DBCS code page which is mainly used in conjunction with EBCDIC.

10.26 DBCS-PC

A DBCS code page which is mainly used in conjunction with PC code.

10.27 Ward

A section of a Double-Byte Character Set where the first bytes of all the code points belonging to it are the same. A ward has a unique numerical value which represents the first byte of the code point belonging to that ward.

11. History of KS X 1001 (former KS C 5601)

KS X 1001, Code for Information Interchange, was originally defined in 1974 as KS C 5601. In its first revision in 1982, a total of 3455 characters were defined, but this standard was not accepted by computer industry because the number of characters was not enough to cover information processing by computers. Thus the second revision was necessary in 1987, with a total of 8224 characters. In 1987, KS C 5601 was amended by addition of 4769 characters with no consideration of downward compatibility in terms of code points defined in 1982 when KS C 5601 was first revised. In 1989, Korean government announced KSC 5842 which specified KS C 5601 as PC internal code and mandated it as the basic procurement condition for the government related information systems. In 1998, Korean government revised KS C 5601 to add two characters (Euro currency sign and registered sign), then renumbered this standard from KS C 5601 to KS X 1001.

	1982	Added	1987	1998
Special	447	539	986	988
Hangeul	1316	1034	2350	2350
Hanja	1692	3198	4888	4888
Total	3455	4769	8224	8226

12. History of KS X 1005-1 (former KS C 5700)

KS X 1005-1, Code for Information Interchange, was announced by government in December 1995 as KS C 5700. It accommodates ISO/IEC 10646-1 Amendment 5 and includes 11172 Hangeul characters, 240 Jamo characters and 94 KS X 1001 compatible Jamo characters. In 1998, this standard was renumbered from KS C 5700 to KS X 1005-1.



IBM Korean Graphic Character Set

DBCS-Host and DBCS-PC (For Windows Environment)

Row - Octet	Content	Number of character
1100 - 11FF	Jamo	240
3130 - 318F	Compatible Jamo	94
AC00 - D7A3	Hangeul	11 172

13.2 From the revision 1997-09 of C-H 3-3220-030 to this revision 1999-03

13.2.1 Abstract. DBCS-PC and DBCS-HOST code are the extension of previous specification. The following is the changes to the previous specification.

13.2.2 Character Coverage. This DBCS-PC specification defines a total of 17048 DBCS-PC characters, which adds two special symbols(Euro currency sign and Registered sign) from previous DBCS-PC specification. This DBCS-Host specification also defines a total of 17671 DBCS-Host characters, which adds two special symbols(Euro currency sign and Registered sign) from previous DBCS-HOST specification.

13. Difference from the Former Specification

13.1 From the C-H 3-3220-125 1992-09 to C-H 3-3220-030 1997-09

13.1.1 Abstract. This specification defines DBCS-PC code to be the same as Microsoft 949 Extension, in terms of the graphic character set and code points. DBCS-Host code is the extension of previous specification. The following summarizes the changes to the previous specification.

13.1.2 Character Coverage. This DBCS-PC specification defines a total of 17046 DBCS-PC characters, which is the same as Microsoft 949 Extension and does not provide 1692 UDCs of previous DBCS-PC specification. This DBCS-Host specification also defines a total of 17669 DBCS-Host characters, which adds 8552 Hangeul characters and 240 Jamo characters from previous DBCS-Host specification which contained 8877 characters, which are 8224 characters of KS X 1001 and 653 additional characters.

Note: 1692 UDCs code point (Hex) : 8FA1 to A0FE

14. Graphic Character Representation

Although character graphics are inserted as sample graphics of the coded graphic characters in the specification tables, Table 8 to Table 29, a graphic character is independent of actual size or shape in which it may appear.

This specification does not restrict the style of font design. However, it is recommended that the font design of graphic characters for products follow the graphic representation in this document as close as possible to avoid confusion in identification of graphic characters. On questions about the font design to be implemented, the Standards Project Authority for DBCS (SIRS 029) may be consulted.



© Copyright IBM Corp. 1999

International Business Machines Corporation
IBM Standards Program
Old Orchard Road
Armonk, New York 10504, USA

Tables

<u>id</u>	<u>File</u>	<u>Page</u>	<u>References</u>
CGCSGID	CUSCBM01	4	1
STRUCTH	CUSCBM02	5	3 2
STRUCTP	CUSCBM03	6	4, 4, 4, 4, 4, 4, 5 3
PCHAN	33220030 SCRIPT	6	4, 4, 4, 6, 7
UHOST	33220030 SCRIPT	8	4
UDCCOR	33220030 SCRIPT	8	5
FORMHO	33220030 SCRIPT	8	8
NONHHO	33220030 SCRIPT	9	6 7 8, 354
NONHJO	33220030 SCRIPT	27	8 5, 5, 5, 688
HNJHO1	33220030 SCRIPT	32	9 5
HNJHO2	33220030 SCRIPT	65	10 5
HNJHO3	33220030 SCRIPT	102	11 5
HNGLHO1	33220030 SCRIPT	134	12 5
HNGLHO2	33220030 SCRIPT	171	13 5
HNGLHO3	33220030 SCRIPT	208	14 5
HNGLHO4	33220030 SCRIPT	245	15
HNGLHO5	33220030 SCRIPT	282	16
HNGLHO6	33220030 SCRIPT	319	17
52JAMO	33220030 SCRIPT	352	18 5
NONHPC	33220030 SCRIPT	354	19 5
HNGLPC1	33220030 SCRIPT	373	20 6, 6, 354
HNGLPC2	33220030 SCRIPT	410	21 6
HNGLPC3	33220030 SCRIPT	447	22
HNGLPC4	33220030 SCRIPT	484	23
HNGLPC5	33220030 SCRIPT	521	24
HNGLPC6	33220030 SCRIPT	558	25
HNJPC1	33220030 SCRIPT	591	26 6
HNJPC2	33220030 SCRIPT	622	27 6
HNJPC3	33220030 SCRIPT	653	28 6 6, 6, 354, 688

Processing Options

Runtime values:

Document fileid	33220030 SCRIPT
Document type	STDDOC
Document style	IBMS1PL
Profile	EDFPRF40
Service Level	0009
SCRIPT/VS Release	4.0.0
Date	99.04.27
Time	17:28:16
Device	3820A
Number of Passes	3
Index	YES
SYSVAR A	NO
SYSVAR D	YES
SYSVAR S	OFFSET
SYSVAR X	YES

Formatting values used:

Annotation	NO
Cross reference listing	YES
Cross reference head prefix only	YES
Dialog	LABEL
Duplex	YES
DVCF conditions file	(none)
DVCF value 1	(none)
DVCF value 2	(none)
DVCF value 3	(none)
DVCF value 4	(none)
DVCF value 5	(none)
DVCF value 6	(none)
DVCF value 7	(none)
DVCF value 8	(none)
DVCF value 9	(none)
Explode	NO
Figure list on new page	NO
Figure/table number separation	YES
Folio-by-chapter	NO
Head 0 body text	(none)
Head 1 body text	(none)
Head 1 appendix text	Appendix
Hyphenation	YES
Justification	YES
Language	ENGL
Keyboard	395
Layout	OFF
Leader dots	YES
Master index	(none)
Partial TOC (maximum level)	4
Partial TOC (new page after)	INLINE
Print example id's	NO
Print cross reference page numbers	YES
Process value	(none)
Punctuation move characters
Read cross-reference file	(none)
Running heading/footer rule	NONE
Show index entries	NO
Table of Contents (maximum level)	5
Table list on new page	NO
Title page (draft) alignment	RIGHT
Write cross-reference file	(none)

Imbed Trace

Page 3	CUSCBM01
Page 5	CUSCBM02
Page 6	CUSCBM03
Page 9	CUSCBM11
Page 27	CUSCBM1C
Page 32	CUSCBM12
Page 65	CUSCBM13
Page 102	CUSCBM14
Page 134	CUSCBM15
Page 171	CUSCBM16
Page 208	CUSCBM17
Page 245	CUSCBM18
Page 282	CUSCBM19
Page 319	CUSCBM1A
Page 352	CUSCBM1B
Page 354	CUSCBM21
Page 373	CUSCBM22
Page 410	CUSCBM23
Page 447	CUSCBM24
Page 484	CUSCBM25
Page 521	CUSCBM26
Page 558	CUSCBM27
Page 591	CUSCBM28
Page 622	CUSCBM29
Page 653	CUSCBM2A